



## 5 A, 1200 V, low drop internally clamped IGBT



### Features

- Low on-voltage drop ( $V_{CE(sat)}$ )
- High current capability
- Off losses include tail current
- High voltage clamping

### Applications

- Switching applications

### Description

These devices are low drop internally clamped IGBTs developed using advanced PowerMESH™ technology. This process guarantees an excellent trade-off between switching performance and low on-state behavior.



Product status link

[STGD5NB120SZ](#)

# 1 Electrical ratings

**Table 1. Absolute maximum ratings**

| Symbol         | Parameter                                              | Value      | Unit |
|----------------|--------------------------------------------------------|------------|------|
| $V_{CES}$      | Collector-emitter voltage ( $V_{GE} = 0\text{ V}$ )    | 1200       | V    |
| $I_C$          | Continuous collector current at $T_C = 25\text{ °C}$   | 10         | A    |
|                | Continuous collector current at $T_C = 100\text{ °C}$  | 5          |      |
| $I_{CP}^{(1)}$ | Pulsed collector current                               | 10         | A    |
| $I_{CL}^{(2)}$ | Turn-off latching current                              | 10         | A    |
| $V_{GE}$       | Gate-emitter voltage                                   | $\pm 20$   | V    |
| $V_{ECR}$      | Emitter-collector voltage                              | 20         | V    |
| $E_{AS}^{(3)}$ | Single pulse avalanche energy at $T_C = 25\text{ °C}$  | 10         | mJ   |
|                | Single pulse avalanche energy at $T_C = 100\text{ °C}$ | 7          | mJ   |
| $P_{TOT}$      | Total power dissipation at $T_C = 25\text{ °C}$        | 75         | W    |
| $T_J$          | Operating junction temperature range                   | -55 to 150 | °C   |
| $T_{stg}$      | Storage temperature range                              |            |      |

1. Pulse width is limited by maximum junction temperature
2.  $V_{CLAMP} = 80\% V_{CES}$ ,  $V_{GE} = 15\text{ V}$ ,  $R_G = 10\text{ }\Omega$ ,  $T_J = 150\text{ °C}$
3.  $V_{CE} = 50\text{ V}$ ,  $I_{AV} = 3.3\text{ A}$

**Table 2. Thermal data**

| Symbol         | Parameter                           | Value | Unit |
|----------------|-------------------------------------|-------|------|
| $R_{thj-case}$ | Thermal resistance junction-case    | 1.67  | °C/W |
| $R_{thj-amb}$  | Thermal resistance junction-ambient | 100   | °C/W |

## 2 Electrical characteristics

$T_C = 25\text{ °C}$  unless otherwise specified

**Table 3. Static characteristics**

| Symbol        | Parameter                            | Test conditions                                                                        | Min. | Typ. | Max.      | Unit          |
|---------------|--------------------------------------|----------------------------------------------------------------------------------------|------|------|-----------|---------------|
| $V_{(BR)CES}$ | Collector-emitter breakdown voltage  | $V_{GE} = 0\text{ V}$ , $I_C = 10\text{ mA}$                                           | 1200 |      |           | V             |
| $V_{CE(sat)}$ | Collector-emitter saturation voltage | $V_{GE} = 15\text{ V}$ , $I_C = 5\text{ A}$                                            |      | 1.3  | 2.0       | V             |
|               |                                      | $V_{GE} = 15\text{ V}$ , $I_C = 5\text{ A}$ , $T_C = 125\text{ °C}$                    |      | 1.2  |           |               |
| $V_{GE(th)}$  | Gate threshold voltage               | $V_{CE} = V_{GE}$ , $I_C = 250\text{ }\mu\text{A}$                                     | 2    |      | 5         | V             |
| $V_{GE}$      | Gate emitter voltage                 | $V_{CE} = 2.5\text{ V}$ , $I_C = 2\text{ A}$ ,<br>$T_C = 25\text{ to }125\text{ °C}$   |      |      | 6.5       | V             |
| $I_{CES}$     | Collector cut-off current            | $V_{GE} = 0\text{ V}$ , $V_{CE} = 900\text{ V}$                                        |      |      | 50        | $\mu\text{A}$ |
|               |                                      | $V_{GE} = 0\text{ V}$ , $V_{CE} = 900\text{ V}$ , $T_C = 125\text{ °C}$ <sup>(1)</sup> |      |      | 250       | $\mu\text{A}$ |
| $I_{GES}$     | Gate-emitter leakage current         | $V_{GE} = \pm 20\text{ V}$ , $V_{CE} = 0\text{ V}$                                     |      |      | $\pm 100$ | nA            |
| $R_G$         | Gate resistance                      |                                                                                        |      | 4    |           | k $\Omega$    |

1. Defined by design, not subject to production test.

**Table 4. Dynamic characteristics**

| Symbol    | Parameter                    | Test conditions                                                     | Min. | Typ. | Max. | Unit |
|-----------|------------------------------|---------------------------------------------------------------------|------|------|------|------|
| $C_{ies}$ | Input capacitance            | $V_{CE} = 25\text{ V}$ , $f = 1\text{ MHz}$ , $V_{GE} = 0\text{ V}$ | -    | 430  | -    | pF   |
| $C_{oes}$ | Output capacitance           |                                                                     | -    | 40   | -    |      |
| $C_{res}$ | Reverse transfer capacitance |                                                                     | -    | 7    | -    |      |

**Table 5. Switching characteristics (inductive load)**

| Symbol         | Parameter             | Test conditions                                                                                                                                                                | Min. | Typ. | Max. | Unit          |
|----------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| $t_{d(on)}$    | Turn-on delay time    | $V_{CC} = 960\text{ V}$ , $I_C = 5\text{ A}$ , $R_G = 1\text{ k}\Omega$ ,<br>$V_{GE} = 15\text{ V}$ (see Figure 16. Switching waveform)                                        | -    | 690  | -    | ns            |
| $t_r$          | Current rise time     |                                                                                                                                                                                | -    | 170  | -    |               |
| $(di/dt)_{on}$ | Turn-on current slope |                                                                                                                                                                                | -    | 39.6 | -    |               |
| $t_{d(on)}$    | Turn-on delay time    | $V_{CC} = 960\text{ V}$ , $I_C = 5\text{ A}$ , $R_G = 1\text{ k}\Omega$ ,<br>$V_{GE} = 15\text{ V}$ , $T_J = 125\text{ }^\circ\text{C}$<br>(see Figure 16. Switching waveform) | -    | 600  | -    | ns            |
| $t_r$          | Current rise time     |                                                                                                                                                                                | -    | 185  | -    |               |
| $(di/dt)_{on}$ | Turn-on current slope |                                                                                                                                                                                | -    | 39   | -    |               |
| $t_c$          | Cross-over time       | $V_{CC} = 960\text{ V}$ , $I_C = 5\text{ A}$ , $R_G = 1\text{ k}\Omega$ ,<br>$V_{GE} = 15\text{ V}$ (see Figure 16. Switching waveform)                                        | -    | 4    | -    | $\mu\text{s}$ |
| $t_r(V_{off})$ | Off voltage rise time |                                                                                                                                                                                | -    | 2.2  | -    |               |
| $t_d(off)$     | Turn-off delay time   |                                                                                                                                                                                | -    | 12.1 | -    |               |
| $t_f$          | Current fall time     |                                                                                                                                                                                | -    | 1.13 | -    |               |
| $t_c$          | Cross-over time       | $V_{CC} = 960\text{ V}$ , $I_C = 5\text{ A}$ , $R_G = 1\text{ k}\Omega$ ,<br>$V_{GE} = 15\text{ V}$ , $T_J = 125\text{ }^\circ\text{C}$<br>(see Figure 16. Switching waveform) | -    | 5    | -    |               |
| $t_r(V_{off})$ | Off voltage rise time |                                                                                                                                                                                | -    | 2.2  | -    |               |
| $t_d(off)$     | Turn-off delay time   |                                                                                                                                                                                | -    | 12.1 | -    |               |
| $t_f$          | Current fall time     |                                                                                                                                                                                | -    | 2    | -    |               |

**Table 6. Switching energy (inductive load)**

| Symbol          | Parameter                 | Test conditions                                                                                                                                                                | Min. | Typ.  | Max. | Unit |
|-----------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------|------|
| $E_{on}^{(1)}$  | Turn-on switching energy  | $V_{CC} = 960\text{ V}$ , $I_C = 5\text{ A}$ , $R_G = 1\text{ k}\Omega$ ,<br>$V_{GE} = 15\text{ V}$ (see Figure 16. Switching waveform)                                        | -    | 2.59  | -    | mJ   |
| $E_{off}^{(2)}$ | Turn-off switching energy |                                                                                                                                                                                | -    | 9     | -    |      |
| $E_{ts}$        | Total switching energy    |                                                                                                                                                                                | -    | 11.59 | -    |      |
| $E_{on}^{(1)}$  | Turn-on switching energy  | $V_{CC} = 960\text{ V}$ , $I_C = 5\text{ A}$ , $R_G = 1\text{ k}\Omega$ ,<br>$V_{GE} = 15\text{ V}$ , $T_J = 125\text{ }^\circ\text{C}$<br>(see Figure 16. Switching waveform) | -    | 2.64  | -    | mJ   |
| $E_{off}^{(2)}$ | Turn-off switching energy |                                                                                                                                                                                | -    | 10.2  | -    |      |
| $E_{ts}$        | Total switching energy    |                                                                                                                                                                                | -    | 12.68 | -    |      |

1. Including the reverse recovery of the diode.


2. Including the tail of the collector current.

**Table 7. Functional test**


| Symbol   | Parameter                             | Test conditions                                                                                                   | Min. | Typ. | Max. | Unit |
|----------|---------------------------------------|-------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| $I_{AS}$ | Unclamped inductive switching current | $V_{CC} = 50\text{ V}$ , $L = 1.8\text{ mH}$<br>$T_{start} = 25\text{ }^\circ\text{C}$ , $R_g = 1\text{ k}\Omega$ | 3.3  |      |      | A    |

## 2.1 Electrical characteristics curves


**Figure 1. Output characteristics**

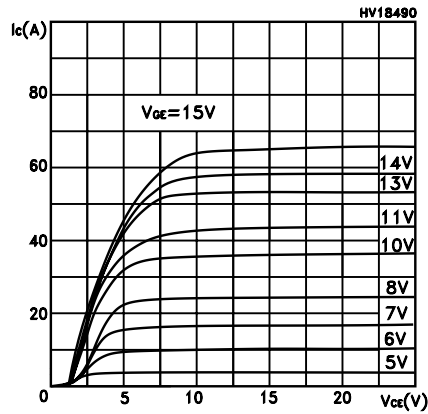


**Figure 2. Transfer characteristics**

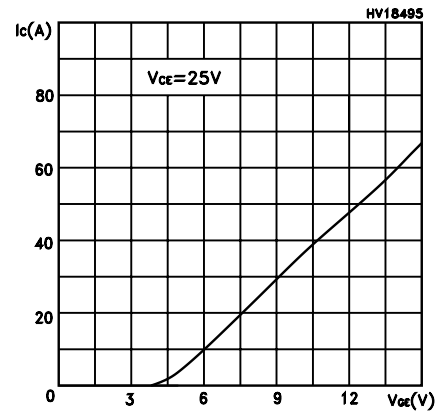


**Figure 3. Collector-emitter on voltage vs temperature**

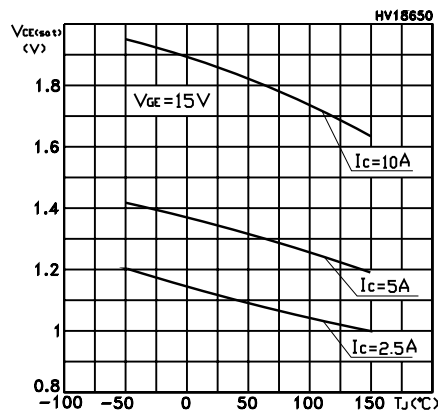


**Figure 4. Gate charge vs gate-source voltage**

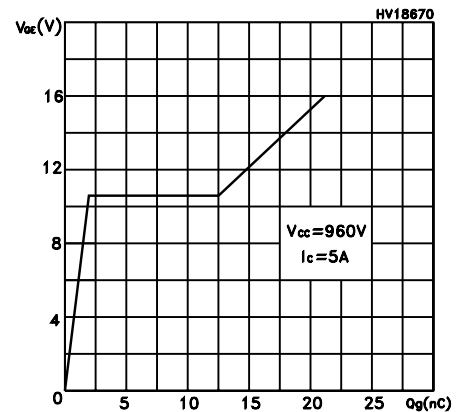


**Figure 5. Capacitance variations**

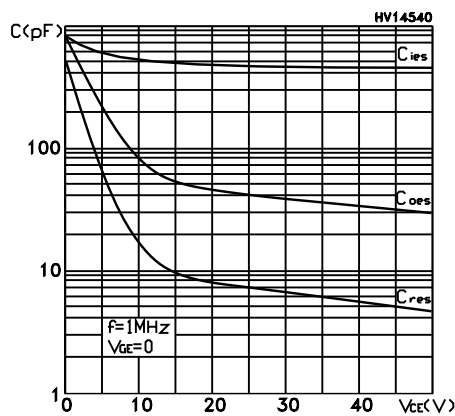


**Figure 6. Normalized gate threshold voltage vs temperature**

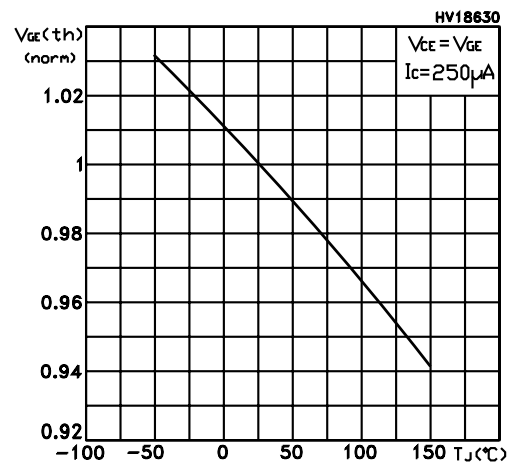


**Figure 7. Collector-emitter on voltage vs collector current**

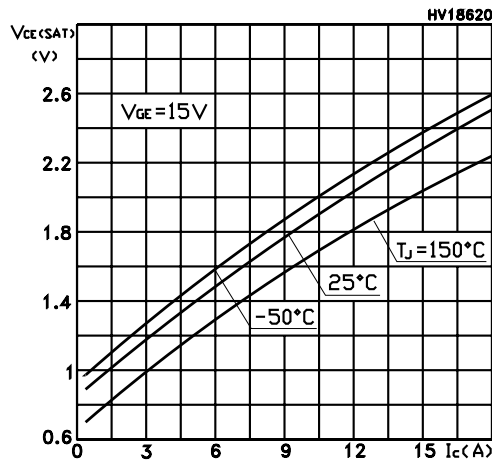


**Figure 8. Breakdown voltage vs temperature**

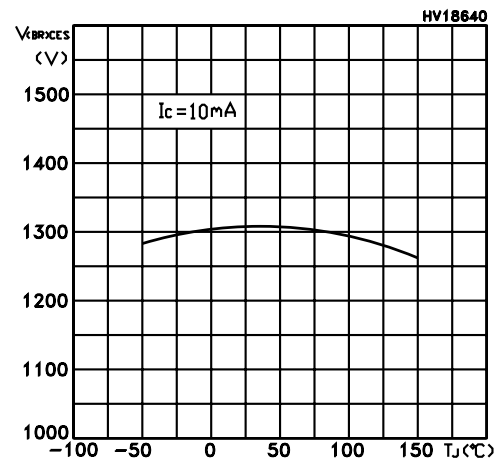


**Figure 9. Normalized collector-emitter on voltage vs temperature**

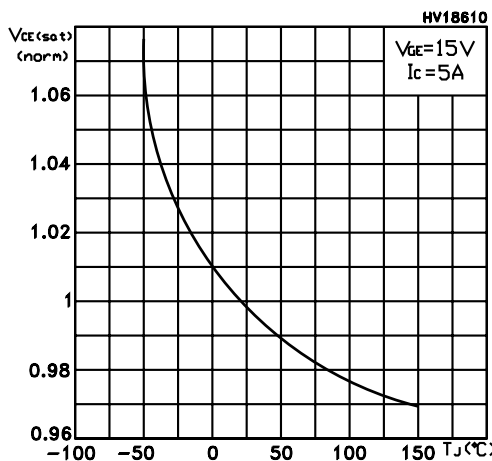


**Figure 10. Switching energy vs gate resistance**

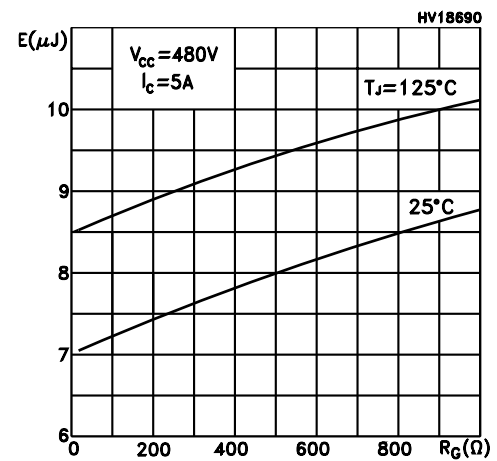


**Figure 11. Switching energy vs collector current**

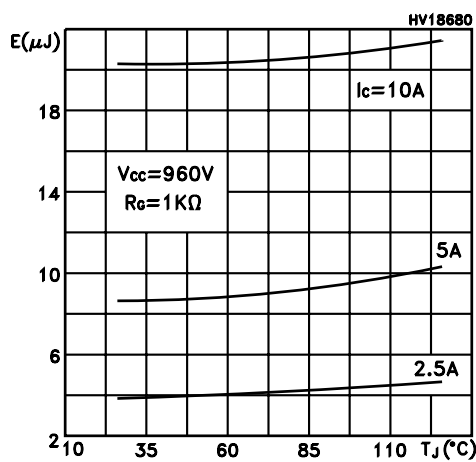




**Figure 12. Turn-off SOA**

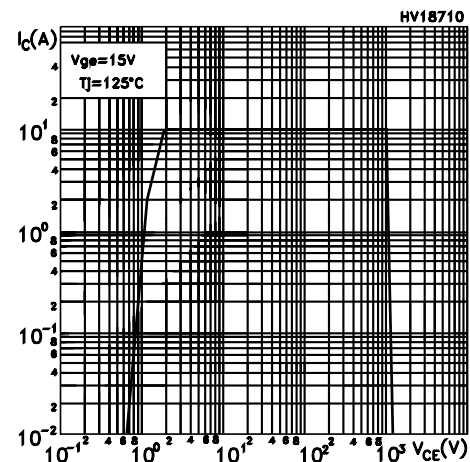

**Figure 13. Thermal impedance**

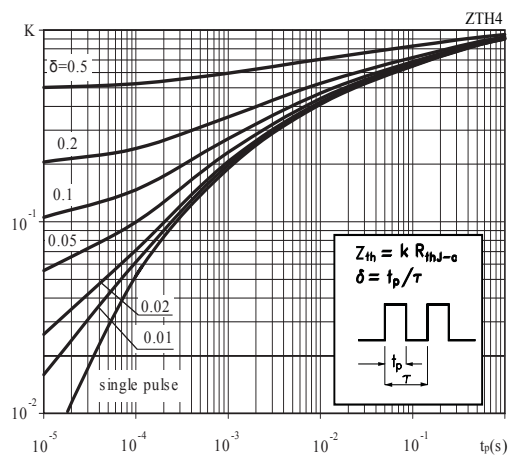

### 3 Test circuits

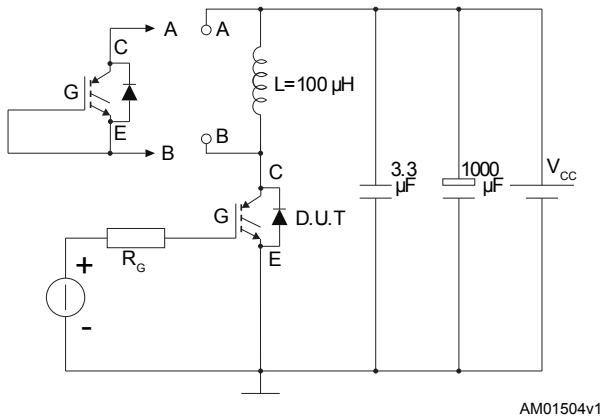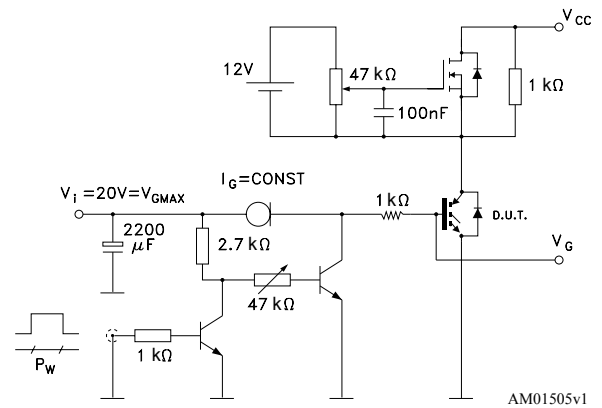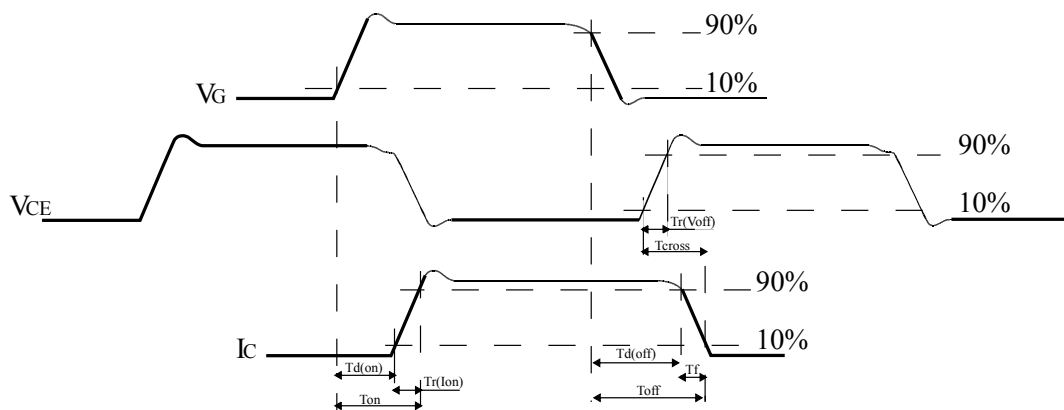**Figure 14. Test circuit for inductive load switching**

**Figure 15. Gate charge test circuit**

**Figure 16. Switching waveform**


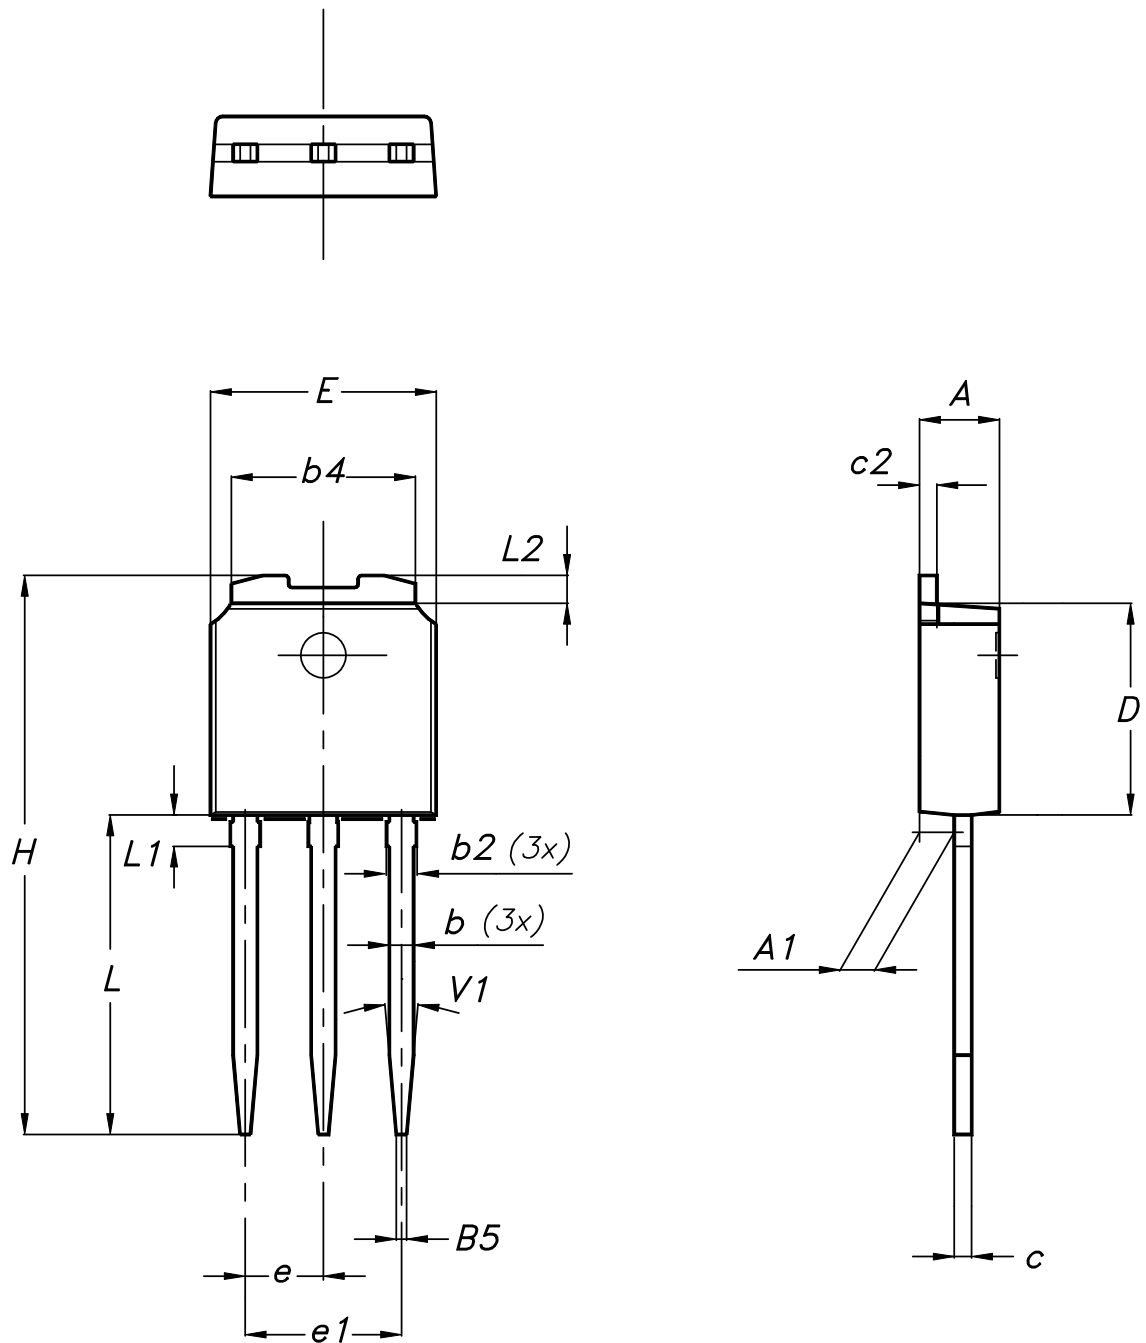
## **4 Package information**

---

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK®** packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

## 4.1 IPAK (TO-251) type A package information

Figure 17. IPAK (TO-251) type A package outline




0068771\_IK\_typeA\_rev14

**Table 8. IPAK (TO-251) type A package mechanical data**

| Dim. | mm   |       |      |
|------|------|-------|------|
|      | Min. | Typ.  | Max. |
| A    | 2.20 |       | 2.40 |
| A1   | 0.90 |       | 1.10 |
| b    | 0.64 |       | 0.90 |
| b2   |      |       | 0.95 |
| b4   | 5.20 |       | 5.40 |
| B5   |      | 0.30  |      |
| c    | 0.45 |       | 0.60 |
| c2   | 0.48 |       | 0.60 |
| D    | 6.00 |       | 6.20 |
| E    | 6.40 |       | 6.60 |
| e    |      | 2.28  |      |
| e1   | 4.40 |       | 4.60 |
| H    |      | 16.10 |      |
| L    | 9.00 |       | 9.40 |
| L1   | 0.80 |       | 1.20 |
| L2   |      | 0.80  | 1.00 |
| V1   |      | 10°   |      |

## 4.2 DPAK (TO-252) type A2 package information

Figure 18. DPAK (TO-252) type A2 package outline

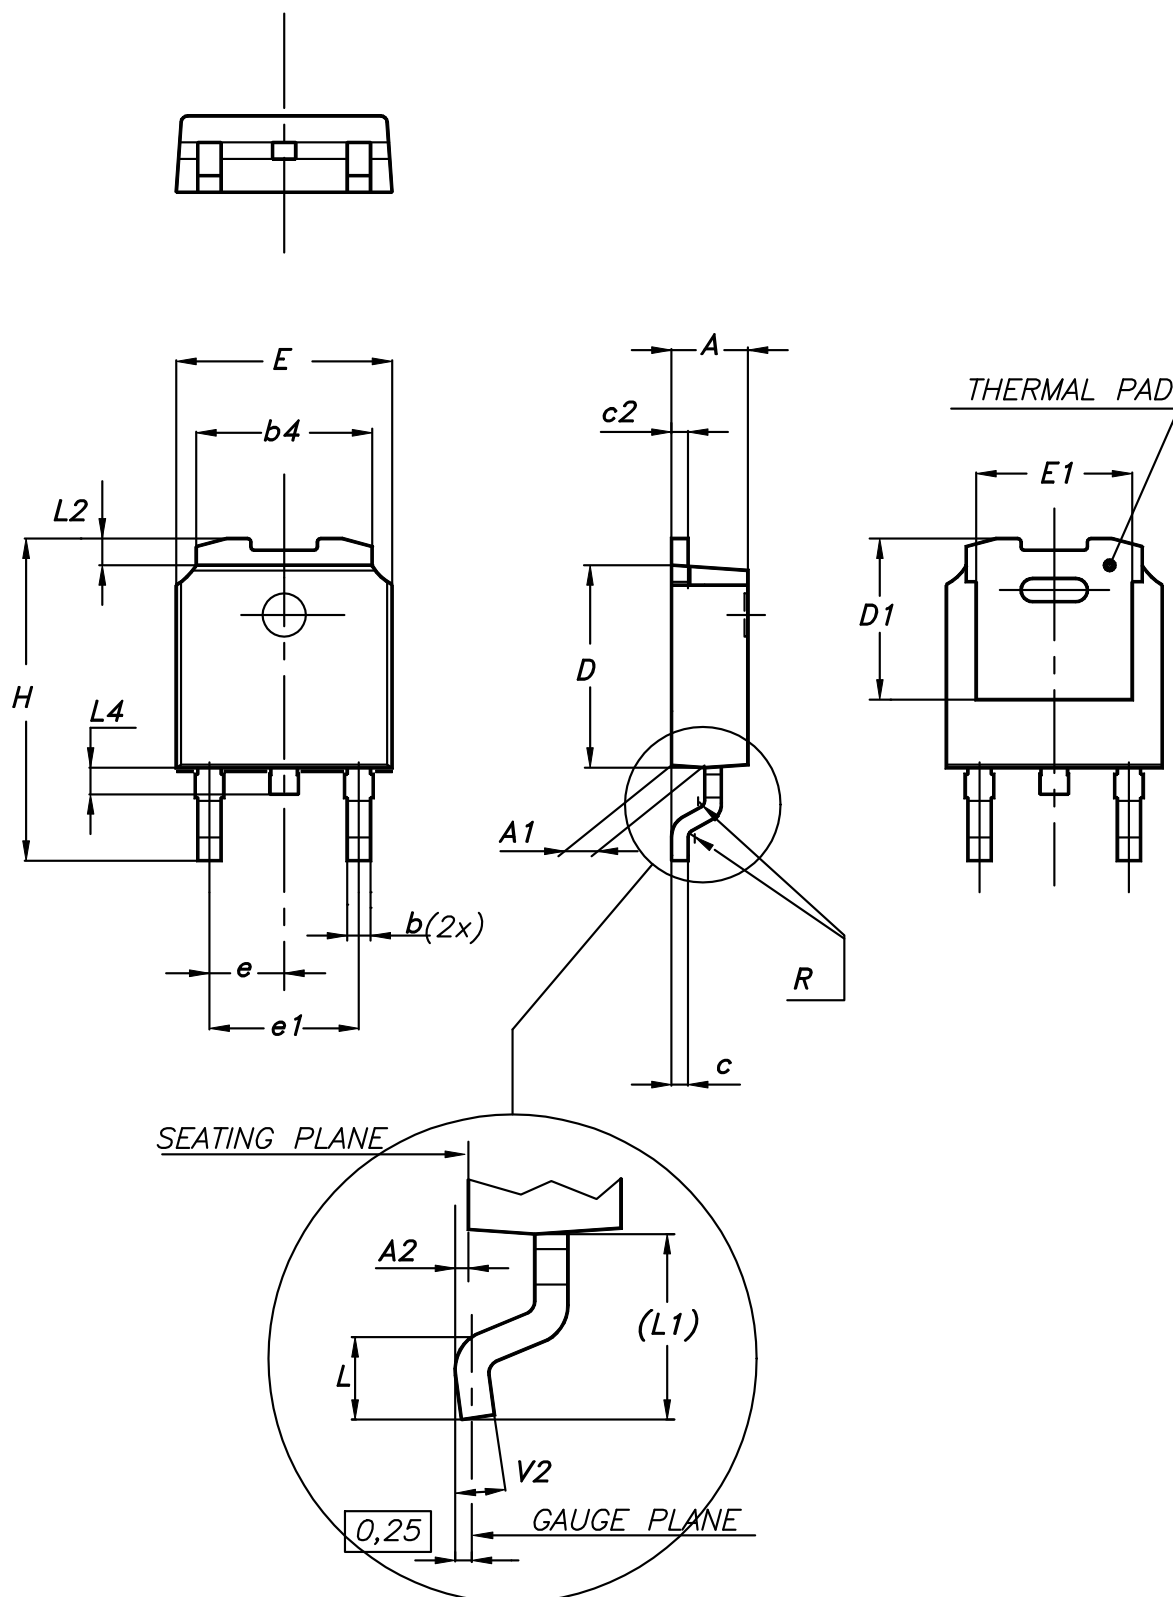


0068772\_type-A2\_rev26

**Table 9. DPAK (TO-252) type A2 mechanical data**

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 2.20  |       | 2.40  |
| A1   | 0.90  |       | 1.10  |
| A2   | 0.03  |       | 0.23  |
| b    | 0.64  |       | 0.90  |
| b4   | 5.20  |       | 5.40  |
| c    | 0.45  |       | 0.60  |
| c2   | 0.48  |       | 0.60  |
| D    | 6.00  |       | 6.20  |
| D1   | 4.95  | 5.10  | 5.25  |
| E    | 6.40  |       | 6.60  |
| E1   | 5.10  | 5.20  | 5.30  |
| e    | 2.159 | 2.286 | 2.413 |
| e1   | 4.445 | 4.572 | 4.699 |
| H    | 9.35  |       | 10.10 |
| L    | 1.00  |       | 1.50  |
| L1   | 2.60  | 2.80  | 3.00  |
| L2   | 0.65  | 0.80  | 0.95  |
| L4   | 0.60  |       | 1.00  |
| R    |       | 0.20  |       |
| V2   | 0°    |       | 8°    |

### 4.3 DPAK (TO-252) type C2 package information

Figure 19. DPAK (TO-252) type C2 package outline

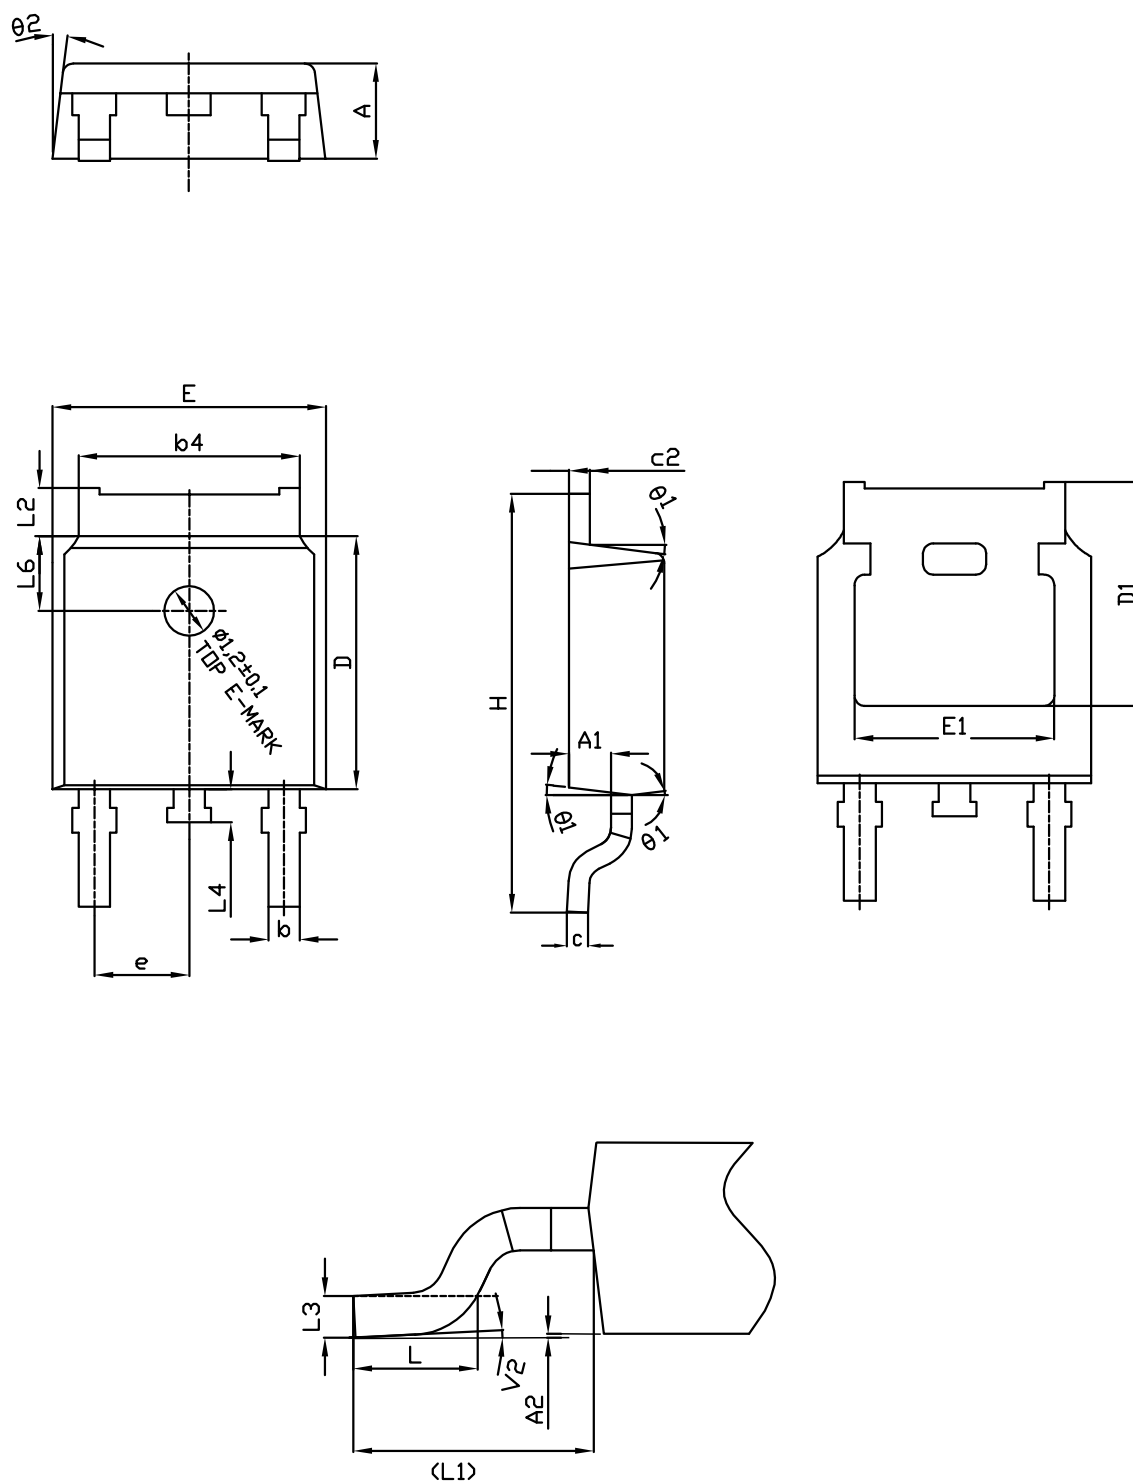


0068772\_type-C2\_rev26

**Table 10. DPAK (TO-252) type C2 mechanical data**

| Dim. | mm       |       |       |
|------|----------|-------|-------|
|      | Min.     | Typ.  | Max.  |
| A    | 2.20     | 2.30  | 2.38  |
| A1   | 0.90     | 1.01  | 1.10  |
| A2   | 0.00     |       | 0.10  |
| b    | 0.72     |       | 0.85  |
| b4   | 5.13     | 5.33  | 5.46  |
| c    | 0.47     |       | 0.60  |
| c2   | 0.47     |       | 0.60  |
| D    | 6.00     | 6.10  | 6.20  |
| D1   | 5.10     |       | 5.60  |
| E    | 6.50     | 6.60  | 6.70  |
| E1   | 5.20     |       | 5.50  |
| e    | 2.186    | 2.286 | 2.386 |
| H    | 9.80     | 10.10 | 10.40 |
| L    | 1.40     | 1.50  | 1.70  |
| L1   | 2.90 REF |       |       |
| L2   | 0.90     |       | 1.25  |
| L3   | 0.51 BSC |       |       |
| L4   | 0.60     | 0.80  | 1.00  |
| L6   | 1.80 BSC |       |       |
| θ1   | 5°       | 7°    | 9°    |
| θ2   | 5°       | 7°    | 9°    |
| V2   | 0°       |       | 8°    |


**Figure 20. DPAK (TO-252) recommended footprint (dimensions are in mm)**

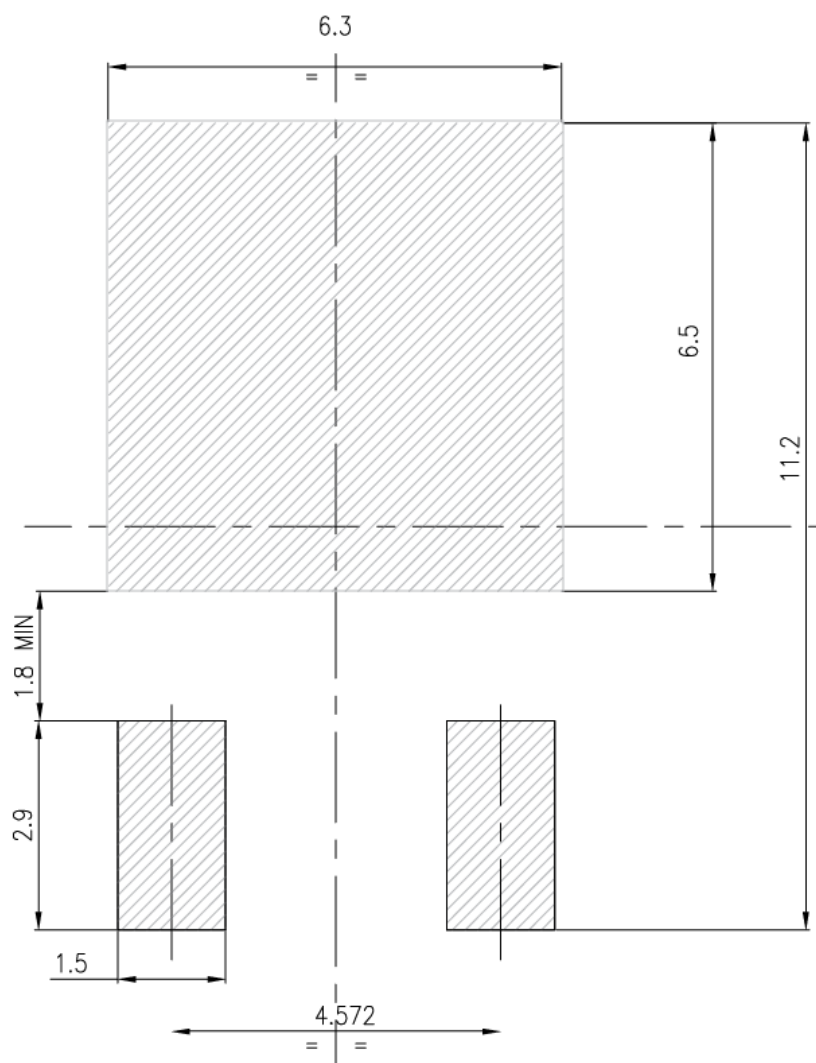


FP\_0068772\_rev26

## 4.4 DPAK (TO-252) packing information

**Figure 21. DPAK (TO-252) tape outline**

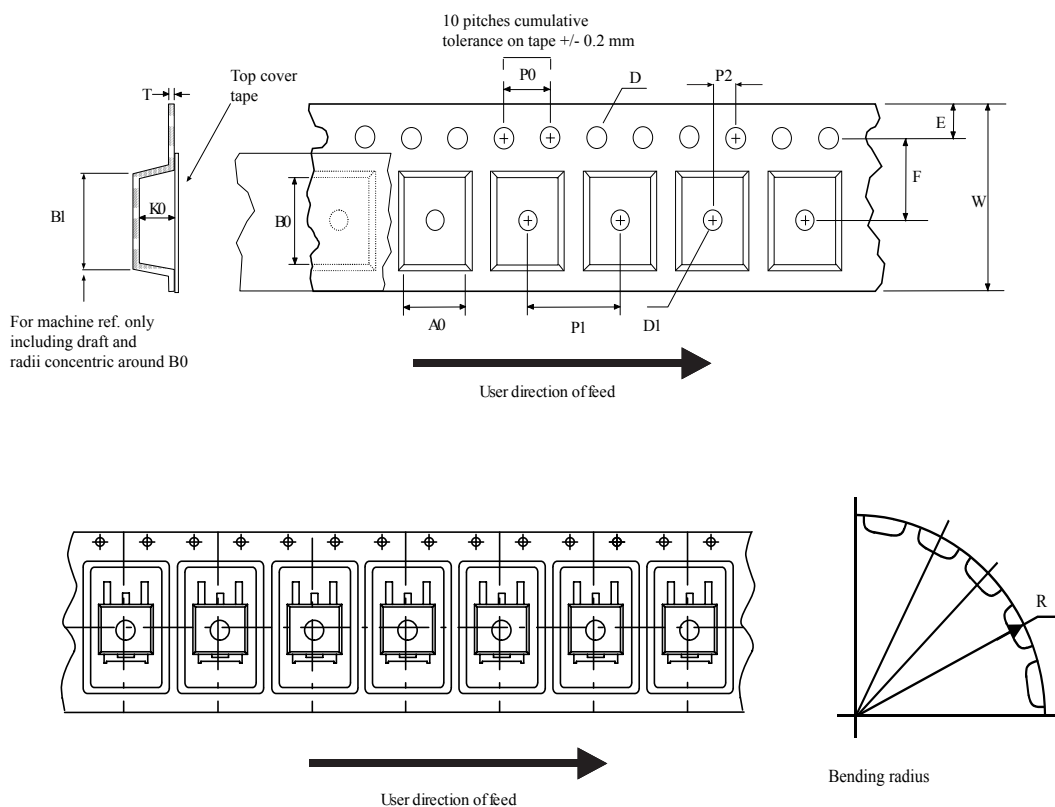

AM08852v1

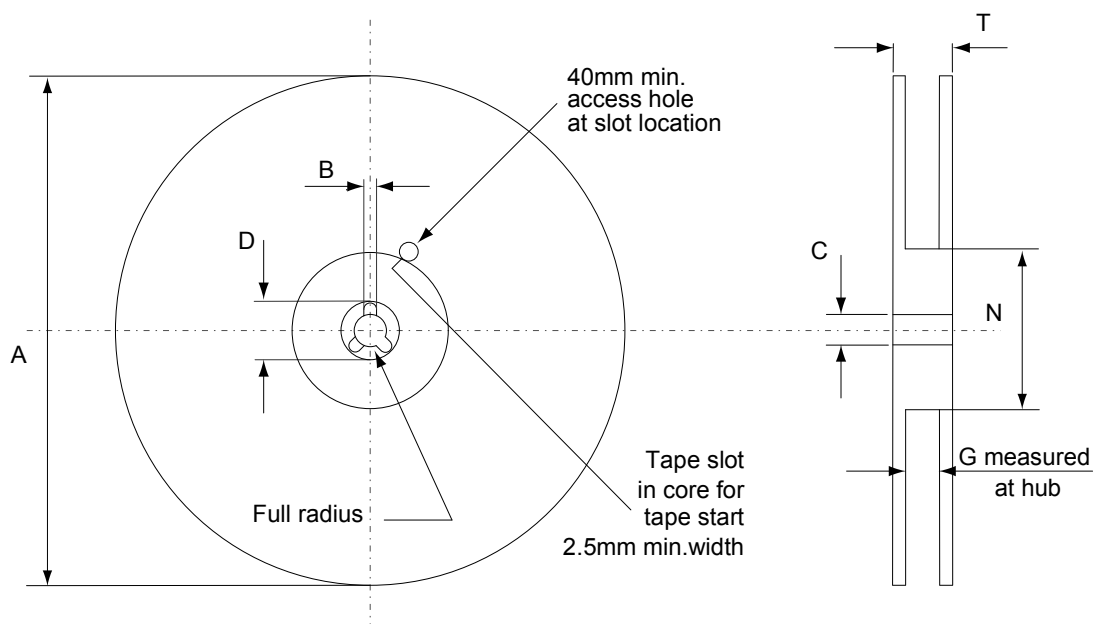**Figure 22. DPAK (TO-252) reel outline**


AM06038v1

**Table 11. DPAK (TO-252) tape and reel mechanical data**

| Tape |      |      | Reel      |      |      |
|------|------|------|-----------|------|------|
| Dim. | mm   |      | Dim.      | mm   |      |
|      | Min. | Max. |           | Min. | Max. |
| A0   | 6.8  | 7    | A         |      | 330  |
| B0   | 10.4 | 10.6 | B         | 1.5  |      |
| B1   |      | 12.1 | C         | 12.8 | 13.2 |
| D    | 1.5  | 1.6  | D         | 20.2 |      |
| D1   | 1.5  |      | G         | 16.4 | 18.4 |
| E    | 1.65 | 1.85 | N         | 50   |      |
| F    | 7.4  | 7.6  | T         |      | 22.4 |
| K0   | 2.55 | 2.75 |           |      |      |
| P0   | 3.9  | 4.1  | Base qty. |      | 2500 |
| P1   | 7.9  | 8.1  | Bulk qty. |      | 2500 |
| P2   | 1.9  | 2.1  |           |      |      |
| R    | 40   |      |           |      |      |
| T    | 0.25 | 0.35 |           |      |      |
| W    | 15.7 | 16.3 |           |      |      |

## 5 Ordering information

**Table 12. Order codes**

| Order code     | Marking    | Package | Packing     |
|----------------|------------|---------|-------------|
| STGD5NB120SZ-1 | GD5NB120SZ | IPAK    | Tube        |
| STGD5NB120SZT4 | GD5NB120SZ | DPAK    | Tape e reel |

## Revision history

**Table 13. Document revision history**

| Date        | Version | Changes                                                                                                                   |
|-------------|---------|---------------------------------------------------------------------------------------------------------------------------|
| 06-Oct-2003 | 5       | No history because migration                                                                                              |
| 18-Jan-2005 | 6       | Final datasheet                                                                                                           |
| 13-Nov-2008 | 7       | Insert new value in <i>Table 2: Absolute maximum ratings</i>                                                              |
| 08-Jan-2019 | 8       | The document status is production data.<br>Updated <a href="#">Section 4 Package information</a> .<br>Minor text changes. |

## Contents

|            |                                                 |           |
|------------|-------------------------------------------------|-----------|
| <b>1</b>   | <b>Electrical ratings .....</b>                 | <b>2</b>  |
| <b>2</b>   | <b>Electrical characteristics.....</b>          | <b>3</b>  |
| <b>2.1</b> | Electrical characteristics curves .....         | 4         |
| <b>3</b>   | <b>Test circuits .....</b>                      | <b>8</b>  |
| <b>4</b>   | <b>Package information.....</b>                 | <b>9</b>  |
| <b>4.1</b> | IPAK (TO-251) type A package information .....  | 9         |
| <b>4.2</b> | DPAK (TO-252) type A2 package information ..... | 11        |
| <b>4.3</b> | DPAK (TO-252) type C2 package information ..... | 13        |
| <b>4.4</b> | DPAK (TO-252) packing information.....          | 16        |
| <b>5</b>   | <b>Ordering information .....</b>               | <b>19</b> |
|            | <b>Revision history .....</b>                   | <b>20</b> |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А