




## High Performance Schottky Rectifier, 2 x 7.5 A

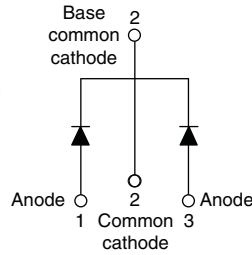

### FEATURES

- 150 °C T<sub>J</sub> operation
- Low forward voltage drop
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Designed and qualified according to JEDEC®-JESD 47
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



RoHS COMPLIANT HALOGEN FREE

| PRIMARY CHARACTERISTICS          |                 |
|----------------------------------|-----------------|
| I <sub>F(AV)</sub>               | 2 x 7.5 A       |
| V <sub>R</sub>                   | 35 V, 45 V      |
| V <sub>F</sub> at I <sub>F</sub> | 0.57 V          |
| I <sub>RM</sub> max.             | 15 mA at 125 °C |
| T <sub>J</sub> max.              | 150 °C          |
| E <sub>AS</sub>                  | 7 mJ            |
| Package                          | 3L TO-220AB     |
| Circuit configuration            | Common cathode  |

### DESCRIPTION

The VS-MBR15...CT... center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

| MAJOR RATINGS AND CHARACTERISTICS |   |             |       |
|-----------------------------------|---|-------------|-------|
| SYMBOL                            | CHARACTERISTICS                               | VALUES      | UNITS |
| I <sub>F(AV)</sub>                | Rectangular waveform                          | 15          | A     |
| V <sub>RRM</sub>                  |   | 35/45       | V     |
| I <sub>FSM</sub>                  | t <sub>p</sub> = 5 μs sine                    | 690         | A     |
| V <sub>F</sub>                    | 7.5 A <sub>pk</sub> , T <sub>J</sub> = 125 °C | 0.57        | V     |
| T <sub>J</sub>                    | Range   | -65 to +150 | °C    |

| VOLTAGE RATINGS                      |                  |                 |                 |       |
|--------------------------------------|------------------|-----------------|-----------------|-------|
| PARAMETER                            | SYMBOL           | VS-MBR1535CT-M3 | VS-MBR1545CT-M3 | UNITS |
| Maximum DC reverse voltage           | V <sub>R</sub>   | 35              | 45              | V     |
| Maximum working peak reverse voltage | V <sub>RWM</sub> |                 |                 |       |

| ABSOLUTE MAXIMUM RATINGS                                 |                    |  |  |        |       |
|--|--------------------|--|--|--------|-------|
| PARAMETER  | SYMBOL             | TEST CONDITIONS  |  | VALUES | UNITS |
| Maximum average forward current<br>per leg<br>per device | I <sub>F(AV)</sub> | T <sub>C</sub> = 131 °C, rated V <sub>R</sub>  |  | 7.5    | A     |
|  |                    |  |  | 15     |       |
| Maximum peak one cycle non-repetitive surge              | I <sub>FSM</sub>   | 5 μs sine or 3 μs rect. pulse  | Following any rated load condition and with rated V <sub>RRM</sub> applied | 690    | A     |
|  |                    | Surge applied at rated load condition half wave single phase 60 Hz   |  | 150    |       |
| Non-repetitive avalanche energy per leg                  | E <sub>AS</sub>    | T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 2 A, L = 3.5 mH  |  | 7      | mJ    |
| Repetitive avalanche current per leg                     | I <sub>AR</sub>    | Current decaying linearly to zero in 1 μs<br>Frequency limited by T <sub>J</sub> maximum V <sub>A</sub> = 1.5 x V <sub>R</sub> typical |  | 2      | A     |



| ELECTRICAL SPECIFICATIONS             |                |   |                                   |        |                  |
|---------------------------------------|----------------|---|-----------------------------------|--------|------------------|
| PARAMETER                             | SYMBOL         | TEST CONDITIONS   |                                   | VALUES | UNITS            |
| Maximum forward voltage drop          | $V_{FM}^{(1)}$ | 15 A  | $T_J = 25\text{ }^\circ\text{C}$  | 0.84   | V                |
|                                       |                | 7.5 A   | $T_J = 125\text{ }^\circ\text{C}$ | 0.57   |                  |
|                                       |                | 15 A  |                                   | 0.72   |                  |
| Maximum instantaneous reverse current | $I_{RM}^{(1)}$ | $T_J = 25\text{ }^\circ\text{C}$  | Rated DC voltage                  | 0.1    | mA               |
|                                       |                | $T_J = 125\text{ }^\circ\text{C}$   |                                   | 15     |                  |
| Maximum junction capacitance          | $C_T$          | $V_R = 5\text{ V}_{DC}$ (test signal range 100 kHz to 1 MHz) $25\text{ }^\circ\text{C}$ |                                   | 400    | pF               |
| Typical series inductance             | $L_S$          | Measured from top of terminal to mounting plane   |                                   | 8.0    | nH               |
| Maximum voltage rate of change        | dV/dt          | Rated $V_R$   |                                   | 10 000 | V/ $\mu\text{s}$ |

**Note**(1) Pulse width < 300  $\mu\text{s}$ , duty cycle < 2 %

| THERMAL - MECHANICAL SPECIFICATIONS                  |            |                                      |  |             |                        |
|--|------------|--------------------------------------|--|-------------|------------------------|
| PARAMETER  | SYMBOL     | TEST CONDITIONS                      |  | VALUES      | UNITS                  |
| Maximum junction temperature range                   | $T_J$      |                                      |  | - 65 to 150 | $^\circ\text{C}$       |
| Maximum storage temperature range                    | $T_{Stg}$  |                                      |  | - 65 to 175 |                        |
| Maximum thermal resistance, junction to case per leg | $R_{thJC}$ | DC operation                         |  | 3.0         | $^\circ\text{C/W}$     |
| Typical thermal resistance, case to heatsink         | $R_{thCS}$ | Mounting surface, smooth and greased |  | 0.50        |                        |
| Maximum thermal resistance, junction to ambient      | $R_{thJA}$ | DC operation                         |  | 60          |                        |
| Approximate weight                                   |            |                                      |  | 2           | g                      |
|  |            |                                      |  | 0.07        | oz.                    |
| Mounting torque                                      | minimum    |                                      |  | 6 (5)       | kgf · cm<br>(lbf · in) |
|  | maximum    |                                      |  | 12 (10)     |                        |
| Marking device                                       |            | Case style 3L TO-220AB               |  | MBR1535CT   |                        |
|  |            |                                      |  | MBR1545CT   |                        |

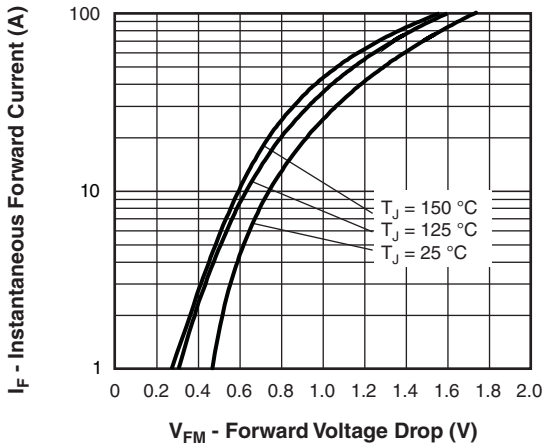


Fig. 1 - Maximum Forward Voltage Drop Characteristics (Per Leg)

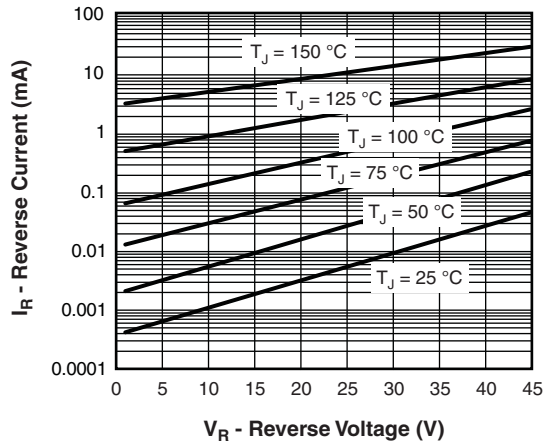


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage (Per Leg)

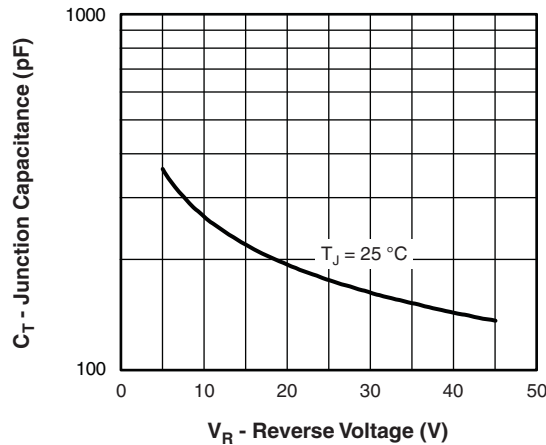


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage (Per Leg)

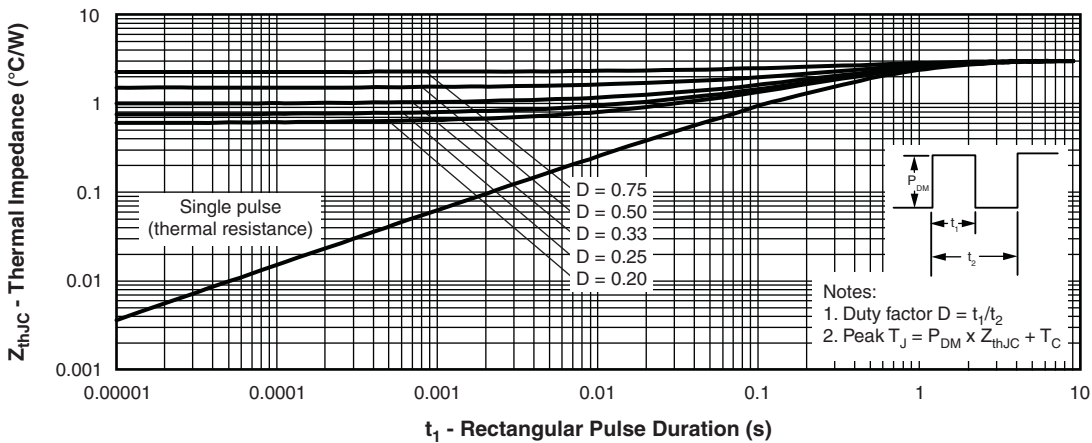


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

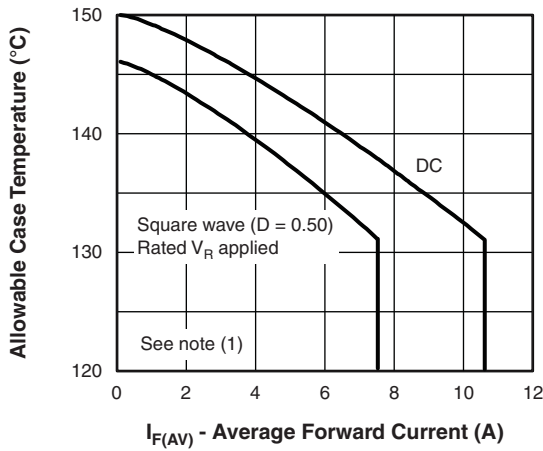


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

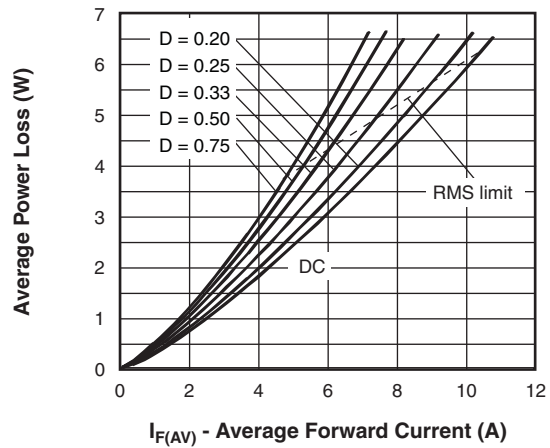


Fig. 6 - Forward Power Loss Characteristics

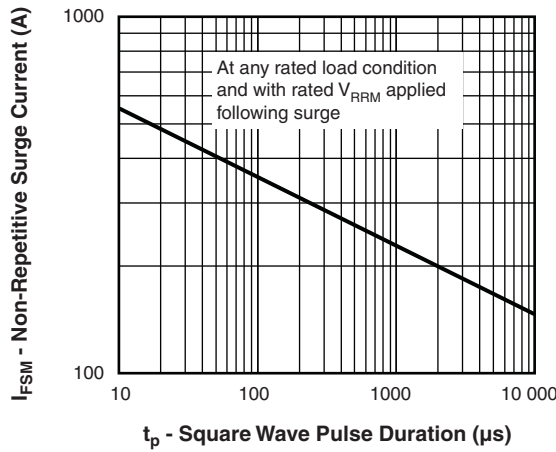



Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

**Note**

- (1) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;
- $P_d$  = forward power loss =  $I_{F(AV)} \times V_{FM}$  at  $(I_{F(AV)}/D)$  (see fig. 6);
- $P_{d_{REV}}$  = inverse power loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R$  at  $V_{R1}$  = rated  $V_R$



## ORDERING INFORMATION TABLE

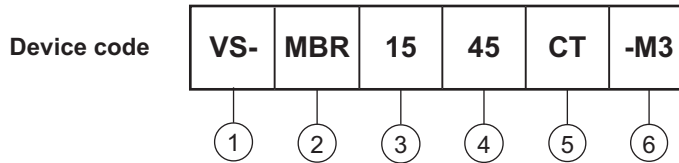

- 1** - Vishay Semiconductors product
  - 2** - Schottky MBR series
  - 3** - Current rating (15 = 15 A)
  - 4** - Voltage ratings 35 = 35 V  
45 = 45 V
  - 5** - CT = essential part number
  - 6** - Environmental digit
- M3 = halogen-free, RoHS-compliant, and termination lead (Pb)-free

| ORDERING INFORMATION (Example) |                  |                        |                         |
|--------------------------------|------------------|------------------------|-------------------------|
| PREFERRED P/N                  | QUANTITY PER T/R | MINIMUM ORDER QUANTITY | PACKAGING DESCRIPTION   |
| VS-MBR1535CT-M3                | 50               | 1000                   | Antistatic plastic tube |
| VS-MBR1545CT-M3                | 50               | 1000                   | Antistatic plastic tube |

| LINKS TO RELATED DOCUMENTS |  |
|----------------------------|--|
| Dimensions                 | <a href="http://www.vishay.com/doc?96154">www.vishay.com/doc?96154</a> |
| Part marking information   | <a href="http://www.vishay.com/doc?95028">www.vishay.com/doc?95028</a> |
| SPICE model                | <a href="http://www.vishay.com/doc?95294">www.vishay.com/doc?95294</a> |



# 3L TO-220AB

**DIMENSIONS** in millimeters and inches



Conforms to JEDEC® outline TO-220AB

| SYMBOL | MILLIMETERS |       | INCHES |       | NOTES | SYMBOL   | MILLIMETERS |       | INCHES |       | NOTES |
|--------|-------------|-------|--------|-------|-------|----------|-------------|-------|--------|-------|-------|
|        | MIN.        | MAX.  | MIN.   | MAX.  |       |          | MIN.        | MAX.  | MIN.   | MAX.  |       |
| A      | 4.25        | 4.65  | 0.167  | 0.183 |       | D2       | 11.68       | 12.88 | 0.460  | 0.507 | 6     |
| A1     | 1.14        | 1.40  | 0.045  | 0.055 |       | E        | 10.11       | 10.51 | 0.398  | 0.414 | 3, 6  |
| A2     | 2.50        | 2.92  | 0.098  | 0.115 |       | E1       | 6.86        | 8.89  | 0.270  | 0.350 | 6     |
| b      | 0.69        | 1.01  | 0.027  | 0.040 |       | e        | 2.41        | 2.67  | 0.095  | 0.105 |       |
| b1     | 0.38        | 0.97  | 0.015  | 0.038 | 4     | e1       | 4.88        | 5.28  | 0.192  | 0.208 |       |
| b2     | 1.20        | 1.73  | 0.047  | 0.068 |       | H1       | 6.09        | 6.48  | 0.240  | 0.255 | 6, 7  |
| b3     | 1.14        | 1.73  | 0.045  | 0.068 | 4     | L        | 13.52       | 14.02 | 0.532  | 0.552 |       |
| c      | 0.36        | 0.61  | 0.014  | 0.024 |       | L1       | 3.32        | 3.82  | 0.131  | 0.150 | 2     |
| c1     | 0.36        | 0.56  | 0.014  | 0.022 | 4     | $\phi P$ | 3.54        | 3.91  | 0.139  | 0.154 |       |
| D      | 14.85       | 15.35 | 0.585  | 0.604 | 3     | Q        | 2.60        | 3.00  | 0.102  | 0.118 |       |
| D1     | 8.38        | 9.02  | 0.330  | 0.355 |       |          |             |       |        |       |       |

**Notes**

- (1) Dimensioning and tolerancing as per ASME Y14.5M-1994
- (2) Lead dimension and finish uncontrolled in L1
- (3) Dimension D, D1, and E do not include mold flash. Mold flash shall not exceed 0.127 mm (0.005") per side. These dimensions are measured at the outermost extremes of the plastic body
- (4) Dimension b1, b3, and c1 apply to base metal only
- (5) Controlling dimensions: inches
- (6) Thermal pad contour optional within dimensions E, H1, D2, and E1
- (7) Outline conforms to JEDEC® TO-220, except D2 (minimum)



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А