


The Altera® DDR, DDR2, and DDR3 SDRAM Controllers with ALTMEMPHY IP provide simplified interfaces to industry-standard DDR, DDR2, and DDR3 SDRAM. The ALTMEMPHY megafunction is an interface between a memory controller and the memory devices, and performs read and write operations to the memory. The DDR, DDR2, and DDR3 SDRAM Controllers with ALTMEMPHY IP work in conjunction with the Altera ALTMEMPHY megafunction.

The DDR and DDR2 SDRAM Controllers with ALTMEMPHY IP and ALTMEMPHY megafunction offer full-rate or half-rate DDR and DDR2 SDRAM interfaces. The DDR3 SDRAM Controller with ALTMEMPHY IP and ALTMEMPHY megafunction support DDR3 SDRAM interfaces in half-rate mode. The DDR, DDR2, and DDR3 SDRAM Controllers with ALTMEMPHY IP offer the high-performance controller II (HPC II), which provides high efficiency and advanced features.

Figure 15–1 shows a system-level diagram including the example top-level file that the DDR, DDR2, or DDR3 SDRAM Controller with ALTMEMPHY IP creates for you.

Figure 15–1. System-Level Diagram

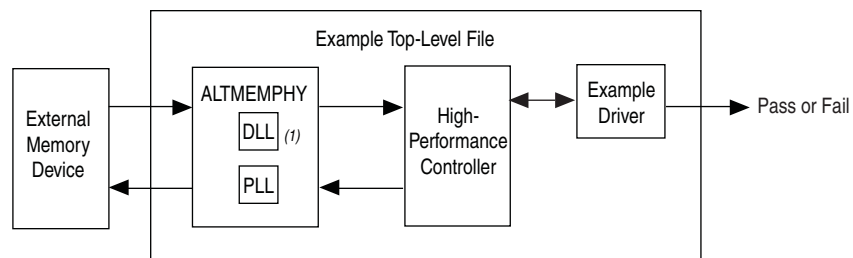

Note to Figure 15–1:

- (1) When you choose **Instantiate DLL Externally**, delay-locked loop (DLL) is instantiated outside the ALTMEMPHY megafunction.

The MegaWizard™ Plug-In Manager generates an example top-level file, consisting of an example driver, and your DDR, DDR2, or DDR3 SDRAM high-performance controller custom variation. The controller instantiates an instance of the ALTMEMPHY megafunction which in turn instantiates a phase-locked loop (PLL) and DLL. You can also instantiate the DLL outside the ALTMEMPHY megafunction to share the DLL between multiple instances of the ALTMEMPHY megafunction. You cannot share a PLL between multiple instances of the ALTMEMPHY megafunction, but you may share some of the PLL clock outputs between these multiple instances.

© 2012 Altera Corporation. All rights reserved. ALTERA, ARRIA, CYCLONE, HARDCOPY, MAX, MEGACORE, NIOS, QUARTUS and STRATIX words and logos are trademarks of Altera Corporation and registered in the U.S. Patent and Trademark Office and in other countries. All other words and logos identified as trademarks or service marks are the property of their respective holders as described at www.altera.com/common/legal.html. Altera warrants performance of its semiconductor products to current specifications in accordance with Altera's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Altera assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Altera. Altera customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.



The example top-level file is a fully-functional design that you can simulate, synthesize, and use in hardware. The example driver is a self-test module that issues read and write commands to the controller and checks the read data to produce the pass or fail, and test complete signals.

The ALTMEMPHY megafunction creates the datapath between the memory device and the memory controller. The megafunction is available as a stand-alone product or can be used in conjunction with the Altera high-performance memory controller. When using the ALTMEMPHY megafunction as a stand-alone product, use with either custom or third-party controllers.



For new designs, Altera recommends using a UniPHY-based external memory interface, such as the DDR2 and DDR3 SDRAM controllers with UniPHY, QDR II and QDR II+ SRAM controllers with UniPHY, or RLDRAM II controller with UniPHY.

Release Information

Table 15-1 provides information about this release of the DDR3 SDRAM Controller with ALTMEMPHY IP.

Table 15-1. Release Information

Item	Description
Version	11.1
Release Date	November 2011
Ordering Codes	IP-SDRAM/HPDDR (DDR SDRAM HPC) IP-SDRAM/HPDDR2 (DDR2 SDRAM HPC) IP-HPMCII (HPC II)
Product IDs	00BE (DDR SDRAM) 00BF (DDR2 SDRAM) 00C2 (DDR3 SDRAM) 00CO (ALTMEMPHY Megafunction)
Vendor ID	6AF7

Altera verifies that the current version of the Quartus[®] II software compiles the previous version of each MegaCore function. The *MegaCore IP Library Release Notes and Errata* report any exceptions to this verification. Altera does not verify compilation with MegaCore function versions older than one release. For information about issues on the DDR, DDR2, or DDR3 SDRAM high-performance controller and the ALTMEMPHY megafunction in a particular Quartus II version, refer to the *Quartus II Software Release Notes*.

Device Family Support

Table 15-2 defines the device support levels for Altera IP cores.

Table 15-2. Altera IP Core Device Support Levels

FPGA Device Families	HardCopy Device Families
Preliminary support —The IP core is verified with preliminary timing models for this device family. The IP core meets all functional requirements, but might still be undergoing timing analysis for the device family. It can be used in production designs with caution.	HardCopy Companion —The IP core is verified with preliminary timing models for the HardCopy companion device. The IP core meets all functional requirements, but might still be undergoing timing analysis for the HardCopy device family. It can be used in production designs with caution.
Final support —The IP core is verified with final timing models for this device family. The IP core meets all functional and timing requirements for the device family and can be used in production designs.	HardCopy Compilation —The IP core is verified with final timing models for the HardCopy device family. The IP core meets all functional and timing requirements for the device family and can be used in production designs.

Table 15-3 shows the level of support offered by the DDR, DDR2, and DDR3 SDRAM Controllers with ALTMEMPHY IP for Altera device families.

Table 15-3. Device Family Support

Device Family	Protocol	
	DDR and DDR2	DDR3
Arria® GX	Final	No support
Arria II GX	Final	Final
Cyclone® III	Final	No support
Cyclone III LS	Final	No support
Cyclone IV E	Final	No support
Cyclone IV GX	Final	No support
HardCopy II	Refer to the What's New in Altera IP page of the Altera website.	No support
Stratix® II	Final	No support
Stratix II GX	Final	No support
Other device families	No support	No support

Features

ALTMEMPHY Megafunction

Table 15-4 summarizes key feature support for the ALTMEMPHY megafunction.

Table 15-4. ALTMEMPHY Megafunction Feature Support

Feature	DDR and DDR2	DDR3
Support for the Altera PHY Interface (AFI) on all supported devices.	✓	✓
Automated initial calibration eliminating complicated read data timing calculations.	✓	✓
Voltage and temperature (VT) tracking that guarantees maximum stable performance for DDR, DDR2, and DDR3 SDRAM interfaces.	✓	✓
Self-contained datapath that makes connection to an Altera controller or a third-party controller independent of the critical timing paths.	✓	✓
Full-rate interface	✓	—
Half-rate interface	✓	✓
Easy-to-use parameter editor	✓	✓

In addition, the ALTMEMPHY megafunction supports DDR3 SDRAM components without leveling:

- The ALTMEMPHY megafunction supports DDR3 SDRAM components without leveling for Arria II GX devices using T-topology for clock, address, and command bus:
 - Supports multiple chip selects.
- The DDR3 SDRAM PHY without leveling f_{MAX} is 400 MHz for single chip selects.
- No support for data-mask (DM) pins for ×4 DDR3 SDRAM DIMMs or components, so select **No** for **Drive DM pins from FPGA** when using ×4 devices.
- The ALTMEMPHY megafunction supports half-rate DDR3 SDRAM interfaces only.

High-Performance Controller II

Table 15-5 summarizes key feature support for the DDR, DDR2, and DDR3 SDRAM HPC II.

Table 15-5. Feature Support (Part 1 of 2)

Feature	DDR and DDR2	DDR3
Half-rate controller	✓	✓
Support for AFI ALTMEMPHY	✓	✓
Support for Avalon [®] Memory Mapped (Avalon-MM) local interface	✓	✓

Table 15–5. Feature Support (Part 2 of 2)

Feature	DDR and DDR2	DDR3
Configurable command look-ahead bank management with in-order reads and writes	✓	✓
Additive latency	✓	✓
Support for arbitrary Avalon burst length	✓	✓
Built-in flexible memory burst adapter	✓	✓
Configurable Local-to-Memory address mappings	✓	✓
Optional run-time configuration of size and mode register settings, and memory timing	✓	✓
Partial array self-refresh (PASR)	✓	✓
Support for industry-standard DDR3 SDRAM devices		
Optional support for self-refresh command	✓	✓
Optional support for user-controlled power-down command	✓	✓
Optional support for automatic power-down command with programmable time-out	✓	✓
Optional support for auto-precharge read and auto-precharge write commands	✓	✓
Optional support for user-controller refresh	✓	✓
Optional multiple controller clock sharing in SOPC Builder Flow		
Integrated error correction coding (ECC) function 72-bit	✓	✓
Integrated ECC function, 16, 24, and 40-bit	✓	✓
Support for partial-word write with optional automatic error correction	✓	✓
SOPC Builder ready		
Support for OpenCore Plus evaluation	✓	✓
IP functional simulation models for use in Altera-supported VHDL and Verilog HDL simulator	✓	✓

Notes to Table 15–5:

- (1) HPC II supports additive latency values greater or equal to $t_{\text{RCD}}-1$, in clock cycle unit (t_{CK}).
- (2) This feature is not supported with DDR3 SDRAM with leveling.

Unsupported Features

Table 15-6 summarizes unsupported features for Altera's ALTMEMPHY-based external memory interfaces.

Table 15-6. Unsupported Features

Memory Protocol	Unsupported Feature
DDR and DDR2 SDRAM	Timing simulation
	Burst length of 2
	Partial burst and unaligned burst in ECC and non-ECC mode when DM pins are disabled
DDR3 SDRAM	Timing simulation
	Partial burst and unaligned burst in ECC and non-ECC mode when DM pins are disabled
	Stratix III and Stratix IV
	DIMM support
	Full-rate interfaces

MegaCore Verification

Altera performs extensive random, directed tests with functional test coverage using industry-standard Denali models to ensure the functionality of the DDR, DDR2, and DDR3 SDRAM Controllers with ALTMEMPHY IP.

Resource Utilization

This section provides typical resource utilization information for the external memory controllers with ALTMEMPHY for supported device families. This information is provided as a guideline only; for precise resource utilization data, you should generate your IP core and refer to the reports generated by the Quartus II software.

Table 15-7 shows resource utilization data for the ALTMEMPHY megafunction, and the DDR3 high-performance controller II for Arria II GX devices.

Table 15-7. Resource Utilization in Arria II GX Devices (Part 1 of 2)

Protocol	Memory Width (Bits)	Combinational ALUTS	Logic Registers	Mem ALUTs	M9K Blocks	M144K Blocks	Memory (Bits)
Controller							
DDR3 (Half rate)	8	1,883	1,505	10	2	0	4,352
	16	1,893	1,505	10	4	0	8,704
	64	1,946	1,521	18	15	0	34,560
	72	1,950	1,505	10	17	0	39,168

Table 15-7. Resource Utilization in Arria II GX Devices (Part 2 of 2)

Protocol	Memory Width (Bits)	Combinational ALUTs	Logic Registers	Mem ALUTs	M9K Blocks	M144K Blocks	Memory (Bits)
Controller+PHY							
DDR3 (Half rate)	8	3,389	2,760	12	4	0	4,672
	16	3,457	2,856	12	7	0	9,280
	64	3,793	3,696	20	24	0	36,672
	72	3,878	3,818	12	26	0	41,536

Table 15-8 shows resource utilization data for the DDR2 high-performance controller and controller plus PHY, for half-rate and full-rate configurations for Arria II GX devices.

Table 15-8. DDR2 Resource Utilization in Arria II GX Devices

Protocol	Memory Width (Bits)	Combinational ALUTs	Logic Registers	Mem ALUTs	M9K Blocks	M144K Blocks	Memory (Bits)
Controller							
DDR2 (Half rate)	8	1,971	1,547	10	2	0	4,352
	16	1,973	1,547	10	4	0	8,704
	64	2,028	1,563	18	15	0	34,560
	72	2,044	1,547	10	17	0	39,168
DDR2 (Full rate)	8	2,007	1,565	10	2	0	2,176
	16	2,013	1,565	10	2	0	4,352
	64	2,022	1,565	10	8	0	17,408
	72	2,025	1,565	10	9	0	19,584
Controller+PHY							
DDR2 (Half rate)	8	3,481	2,722	12	4	0	4,672
	16	3,545	2,862	12	7	0	9,280
	64	3,891	3,704	20	24	0	36,672
	72	3,984	3,827	12	26	0	41,536
DDR2 (Full rate)	8	3,337	2,568	29	2	0	2,176
	16	3,356	2,558	11	4	0	4,928
	64	3,423	2,836	31	12	0	19,200
	72	3,445	2,827	11	14	0	21,952

Table 15-9 shows resource utilization data for the DDR2 high-performance controller and controller plus PHY, for half-rate and full-rate configurations for Cyclone III devices.

Table 15-9. DDR2 Resource Utilization in Cyclone III Devices

Protocol	Memory Width (Bits)	Logic Registers	Logic Cells	M9K Blocks	Memory (Bits)
Controller					
DDR2 (Half rate)	8	1,513	3,015	4	4,464
	16	1,513	3,034	6	8,816
	64	1,513	3,082	18	34,928
	72	1,513	3,076	19	39,280
DDR2 (Full rate)	8	1,531	3,059	4	2,288
	16	1,531	3,108	4	4,464
	64	1,531	3,134	10	17,520
	72	1,531	3,119	11	19,696
Controller+PHY					
DDR2 (Half rate)	8	2,737	5,131	6	4,784
	16	2,915	5,351	9	9,392
	64	3,969	6,564	27	37,040
	72	4,143	6,786	28	41,648
DDR2 (Full rate)	8	2,418	4,763	6	2,576
	16	2,499	4,919	6	5,008
	64	2,957	5,505	15	19,600
	72	3,034	5,608	16	22,032

System Requirements

The DDR3 SDRAM Controller with ALTMEMPHY IP is a part of the MegaCore IP Library, which is distributed with the Quartus II software and downloadable from the Altera website, www.altera.com.




For system requirements and installation instructions, refer to *Altera Software Installation & Licensing*.

Installation and Licensing

Figure 15-2 shows the directory structure after you install the DDR3 SDRAM Controller with ALTMEMPHY IP, where *<path>* is the installation directory. The default installation directory on Windows is `c:\altera\<version>`; on Linux it is `/opt/altera<version>`.

Figure 15-2. Directory Structure

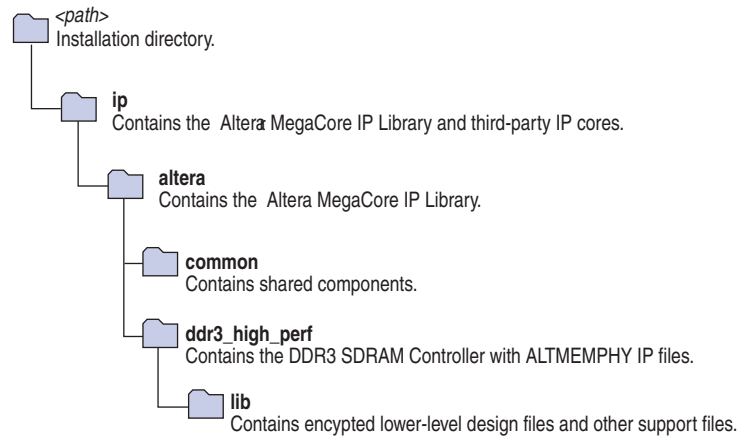

You need a license for the MegaCore function only when you are completely satisfied with its functionality and performance, and want to take your design to production.

To use the DDR3 SDRAM HPC, you can request a license file from the Altera web site at www.altera.com/licensing and install it on your computer. When you request a license file, Altera emails you a **license.dat** file. If you do not have Internet access, contact your local representative.

To use the DDR3 SDRAM HPC II, contact your local sales representative to order a license.

Free Evaluation

Altera's OpenCore Plus evaluation feature is only applicable to the DDR3 SDRAM HPC. With the OpenCore Plus evaluation feature, you can perform the following actions:

- Simulate the behavior of a megafunction (Altera MegaCore function or AMPPSM megafunction) within your system.
- Verify the functionality of your design, as well as evaluate its size and speed quickly and easily.
- Generate time-limited device programming files for designs that include MegaCore functions.
- Program a device and verify your design in hardware.

You need to purchase a license for the megafunction only when you are completely satisfied with its functionality and performance, and want to take your design to production.

OpenCore Plus Time-Out Behavior

OpenCore Plus hardware evaluation can support the following two modes of operation:

- Untethered—the design runs for a limited time
- Tethered—requires a connection between your board and the host computer. If tethered mode is supported by all megafunctions in a design, the device can operate for a longer time or indefinitely

All megafunctions in a device time-out simultaneously when the most restrictive evaluation time is reached. If there is more than one megafunction in a design, a specific megafunction's time-out behavior may be masked by the time-out behavior of the other megafunctions.



For MegaCore functions, the untethered time-out is 1 hour; the tethered time-out value is indefinite.

Your design stops working after the hardware evaluation time expires and the `local_ready` output goes low.

Document Revision History

Table 15-10 lists the revision history for this document.

Table 15-10. Document Revision History

Date	Version	Changes
November 2012	1.2	Changed chapter number from 13 to 15.
June 2012	1.1	Added Feedback icon.
November 2011	1.0	Combined Release Information , Device Family Support , Features list, and Unsupported Features list for DDR, DDR2, and DDR3.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А