


# Silicon PIN Photodiode with Daylight Blocking Filter

## Version 1.4

---

### BP 104 FS



#### Features:

- Especially suitable for applications of 950 nm
- Short switching time (typ. 20 ns)
- DIL plastic package with high packing density
- The product qualification test plan is based on the guidelines of AEC-Q101-REV-C, Stress Test Qualification for Automotive Grade Discrete Semiconductors.

#### Applications

- Photointerrupters
- Remote control

#### Ordering Information

| Type:     | Photocurrent<br>$I_P$ [ $\mu A$ ]<br>$\lambda = 950 \text{ nm}$ , $E_e = 1 \text{ mW/cm}^2$ , $V_R = 5 \text{ V}$ | Ordering Code |
|-----------|-------------------------------------------------------------------------------------------------------------------|---------------|
| BP 104 FS | 34 ( $\geq 25$ )                                                                                                  | Q65110A2627   |

**Maximum Ratings** ( $T_A = 25\text{ °C}$ )

| Parameter                                                         | Symbol            | Values      | Unit |
|-------------------------------------------------------------------|-------------------|-------------|------|
| Operating and storage temperature range                           | $T_{op}; T_{stg}$ | -40 ... 100 | °C   |
| Reverse voltage                                                   | $V_R$             | 20          | V    |
| Total Power dissipation                                           | $P_{tot}$         | 150         | mW   |
| ESD withstand voltage<br>(acc. to ANSI/ ESDA/ JEDEC JS-001 - HBM) | $V_{ESD}$         | 2000        | V    |


**Characteristics** ( $T_A = 25\text{ °C}$ )

| Parameter                                                                                           |             | Symbol                   | Values                | Unit               |
|-----------------------------------------------------------------------------------------------------|-------------|--------------------------|-----------------------|--------------------|
| Photocurrent<br>( $V_R = 5\text{ V}$ , $E_e = 1\text{ mW/cm}^2$ , $\lambda = 950\text{ nm}$ )       | (typ (min)) | $I_P$                    | 34 ( $\geq 25$ )      | $\mu\text{A}$      |
| Wavelength of max. sensitivity                                                                      | (typ)       | $\lambda_{S\max}$        | 950                   | nm                 |
| Spectral range of sensitivity                                                                       | (typ)       | $\lambda_{10\%}$         | (typ) 800<br>... 1100 | nm                 |
| Radiant sensitive area                                                                              | (typ)       | A                        | 4.84                  | $\text{mm}^2$      |
| Dimensions of radiant sensitive area                                                                | (typ)       | L x W                    | 2.2 x 2.2             | mm x mm            |
| Half angle                                                                                          | (typ)       | $\phi$                   | $\pm 60$              | °                  |
| Dark current<br>( $V_R = 10\text{ V}$ )                                                             | (typ (max)) | $I_R$                    | 2 ( $\leq 30$ )       | nA                 |
| Spectral sensitivity of the chip<br>( $\lambda = 950\text{ nm}$ )                                   | (typ)       | $S_{\lambda\text{ typ}}$ | 0.7                   | A / W              |
| Quantum yield of the chip<br>( $\lambda = 950\text{ nm}$ )                                          | (typ)       | $\eta$                   | 0.91                  | Electrons / Photon |
| Open-circuit voltage<br>( $E_e = 0.5\text{ mW/cm}^2$ , $\lambda = 950\text{ nm}$ )                  | (typ (min)) | $V_O$                    | 330 ( $\geq 250$ )    | mV                 |
| Short-circuit current<br>( $E_e = 0.5\text{ mW/cm}^2$ , $\lambda = 950\text{ nm}$ )                 | (typ)       | $I_{SC}$                 | 17                    | $\mu\text{A}$      |
| Rise and fall time<br>( $V_R = 5\text{ V}$ , $R_L = 50\text{ }\Omega$ , $\lambda = 850\text{ nm}$ ) | (typ)       | $t_r, t_f$               | 0.02                  | $\mu\text{s}$      |
| Forward voltage<br>( $I_F = 100\text{ mA}$ , $E_e = 0$ )                                            | (typ)       | $V_F$                    | 1.3                   | V                  |
| Capacitance<br>( $V_R = 0\text{ V}$ , $f = 1\text{ MHz}$ , $E = 0$ )                                | (typ)       | $C_0$                    | 48                    | pF                 |
| Temperature coefficient of $V_O$                                                                    | (typ)       | $TC_V$                   | -2.6                  | mV / K             |

| Parameter                                                                       |       | Symbol | Values               | Unit                                          |
|---------------------------------------------------------------------------------|-------|--------|----------------------|-----------------------------------------------|
| Temperature coefficient of $I_{SC}$<br>( $\lambda = 950 \text{ nm}$ )           | (typ) | $TC_I$ | 0.18                 | % / K                                         |
| Noise equivalent power<br>( $V_R = 10 \text{ V}$ , $\lambda = 950 \text{ nm}$ ) | (typ) | NEP    | 0.036                | $\text{pW} / \text{Hz}^{1/2}$                 |
| Detection limit                                                                 | (typ) | $D^*$  | $6.1 \times 10^{12}$ | $\text{cm} \times \text{Hz}^{1/2} / \text{W}$ |


### Relative Spectral Sensitivity <sup>1) page 12</sup>

$$S_{rel} = f(\lambda)$$

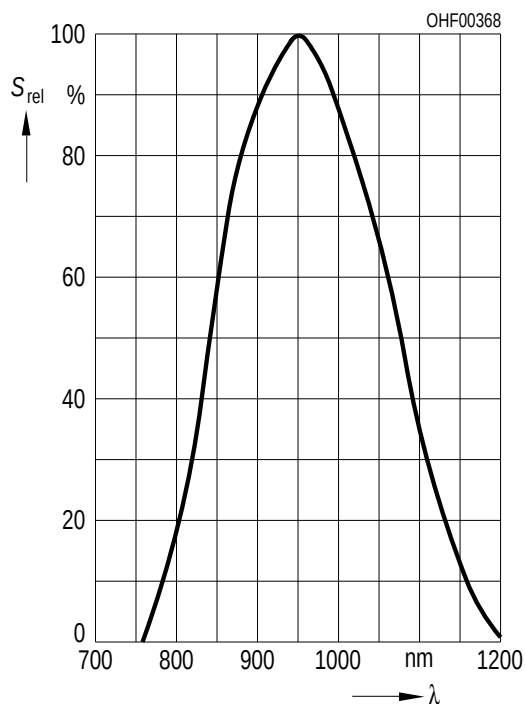


### Photocurrent / Open-Circuit Voltage <sup>1) page 12</sup>

$$I_P (V_R = 5 \text{ V}) / V_O = f(E_e)$$

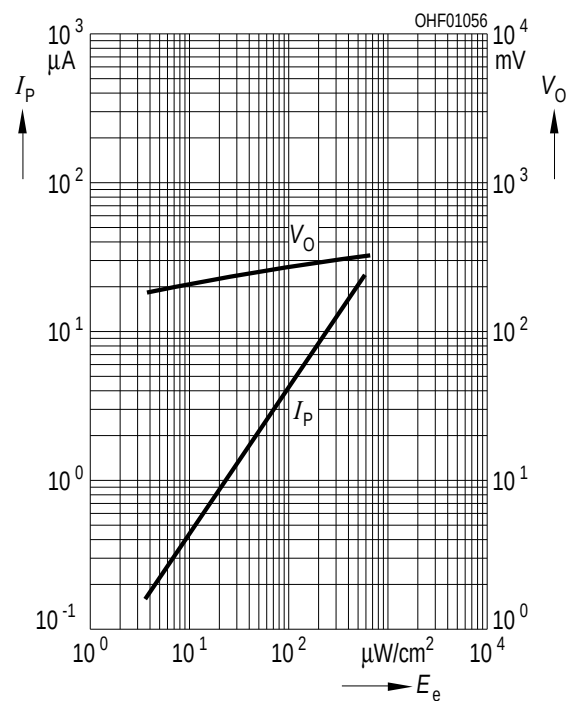


**Power Consumption**


$$P_{\text{tot}} = f(T_A)$$

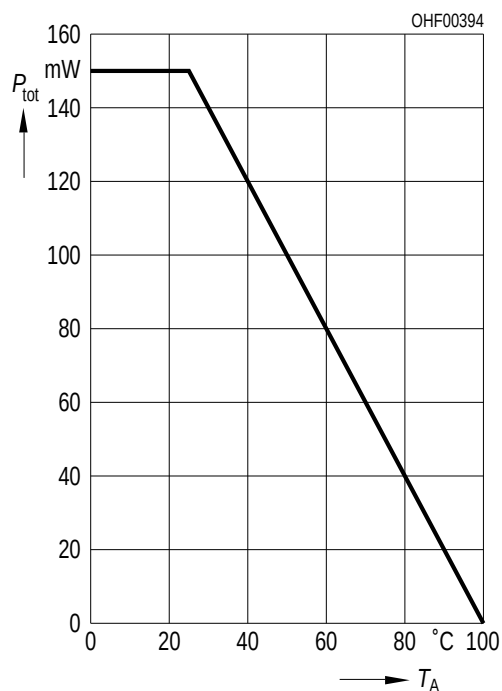**Dark Current** <sup>1) page 12</sup>


$$I_R = f(V_R), E = 0$$

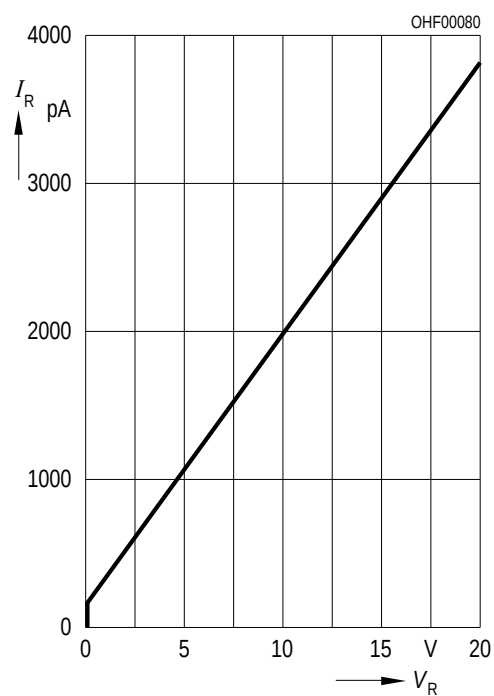**Dark Current** <sup>1) page 12</sup>

$$I_R = f(V_R), E = 0$$

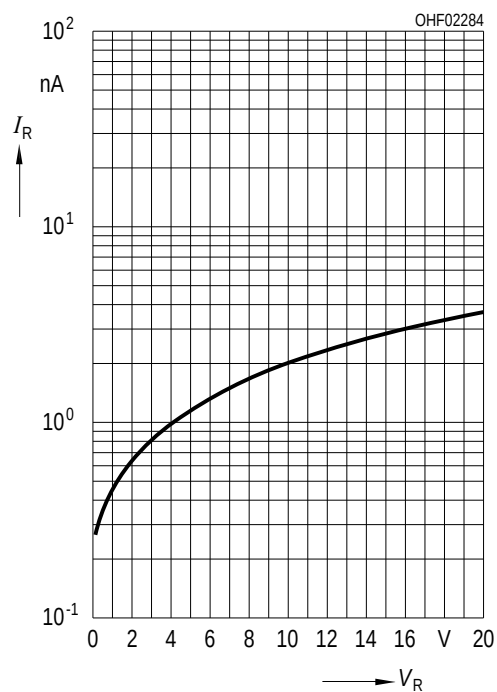
**Capacitance** <sup>1) page 12</sup>

$$C = f(V_R), f = 1 \text{ MHz}, E = 0$$

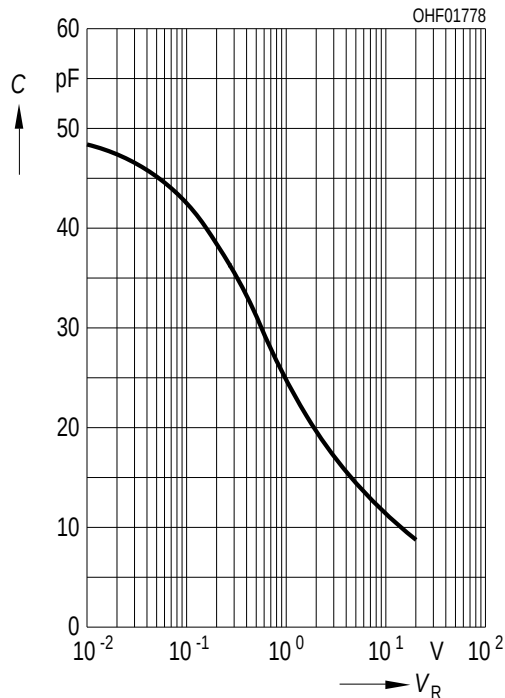


**Dark Current** <sup>1) page 12</sup>


$$I_R = f(T_A), V_R = 10 \text{ V}, E = 0$$

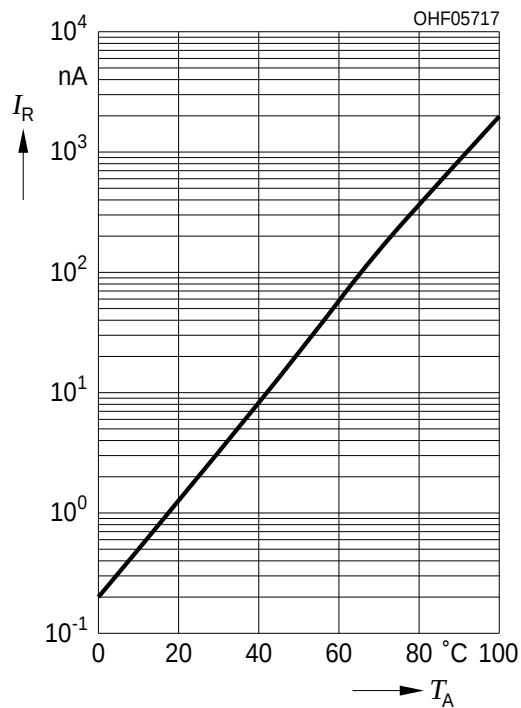**Directional Characteristics** <sup>1) page 12</sup>

$$S_{\text{rel}} = f(\phi)$$

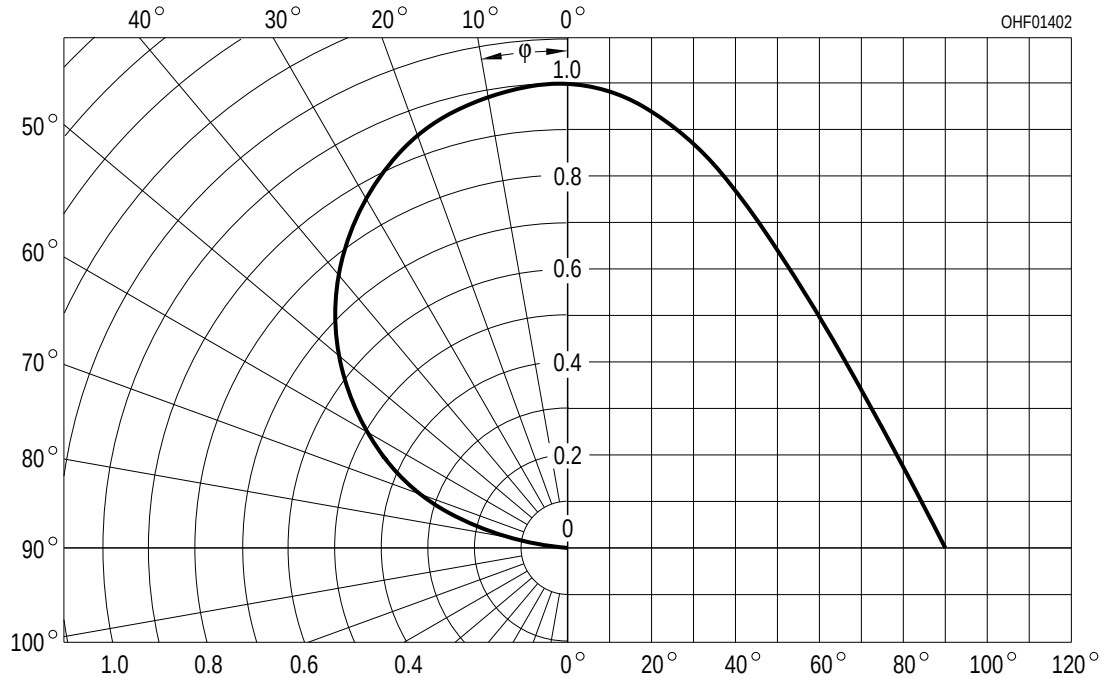

## Package Outline

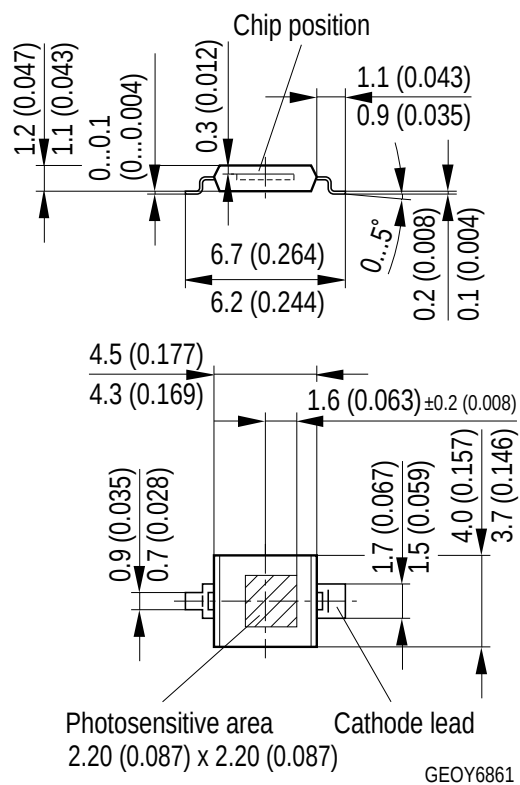

*Dimensions in mm (inch).*

**Package**


SMT DIL, Epoxy

**Approximate Weight:**

44 mg

**Reflow Soldering Profile**

Product complies to MSL Level 4 acc. to JEDEC J-STD-020D.01

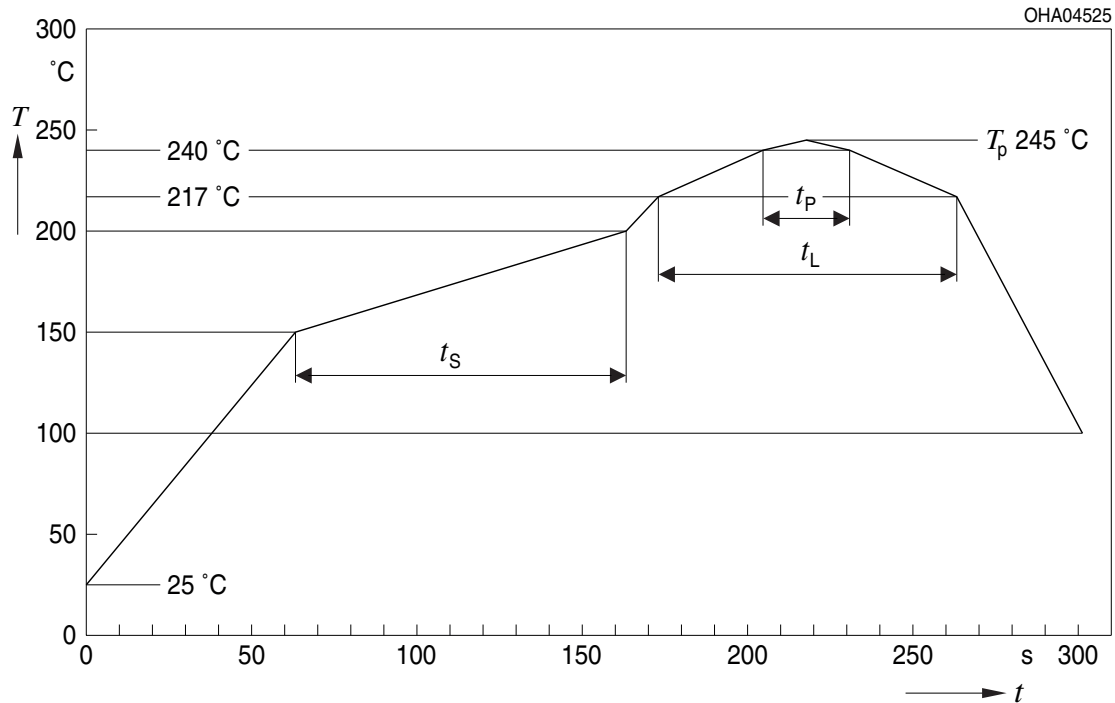


OHA04612

| Profile Feature<br>Profil-Charakteristik                                             | Symbol<br>Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit<br>Einheit    |
|--------------------------------------------------------------------------------------|------------------|---------------------------|----------------|---------|--------------------|
|                                                                                      |                  | Minimum                   | Recommendation | Maximum |                    |
| Ramp-up rate to preheat*)<br>$25^{\circ}\text{C}$ to $150^{\circ}\text{C}$           |                  |                           | 2              | 3       | K/s                |
| Time $t_S$<br>$T_{Smin}$ to $T_{Smax}$                                               | $t_S$            | 60                        | 100            | 120     | s                  |
| Ramp-up rate to peak*)<br>$T_{Smax}$ to $T_P$                                        |                  |                           | 2              | 3       | K/s                |
| Liquidus temperature                                                                 | $T_L$            | 217                       |                |         | $^{\circ}\text{C}$ |
| Time above liquidus temperature                                                      | $t_L$            |                           | 80             | 100     | s                  |
| Peak temperature                                                                     | $T_P$            |                           | 245            | 260     | $^{\circ}\text{C}$ |
| Time within $5^{\circ}\text{C}$ of the specified peak temperature $T_P - 5\text{ K}$ | $t_P$            | 10                        | 20             | 30      | s                  |
| Ramp-down rate*<br>$T_P$ to $100^{\circ}\text{C}$                                    |                  |                           | 3              | 6       | K/s                |
| Time<br>$25^{\circ}\text{C}$ to $T_P$                                                |                  |                           |                | 480     | s                  |

All temperatures refer to the center of the package, measured on the top of the component

\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

## Taping

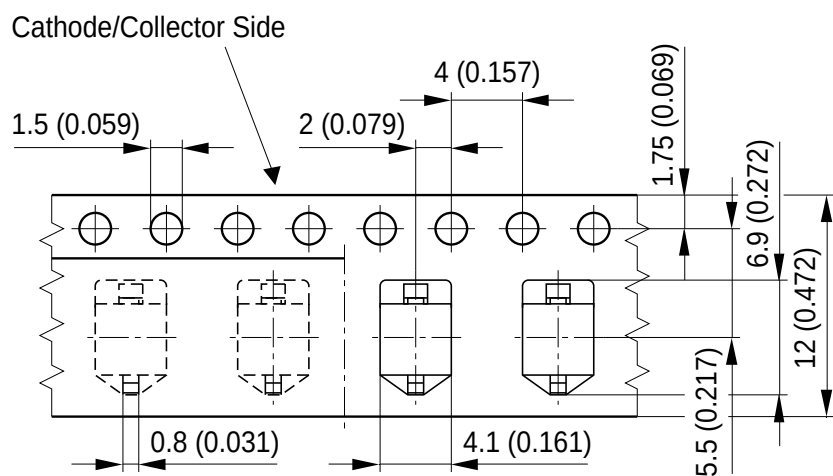


OHAY2287

*Dimensions in mm (inch).*

## Tape and Reel

12 mm tape with 1500 pcs. on  $\varnothing$  180 mm reel

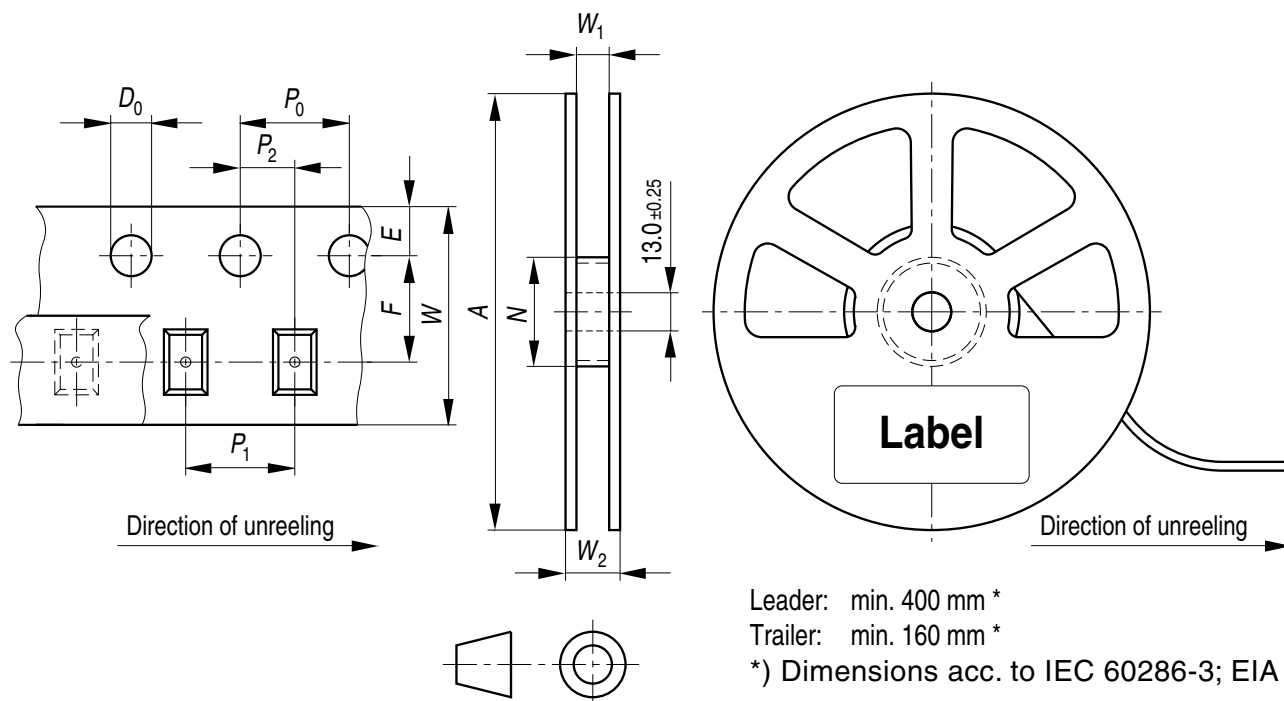

OHAY0324




## Tape dimensions [mm]

| W                | P <sub>0</sub> | P <sub>1</sub>           | P <sub>2</sub> | D <sub>0</sub> | E          | F          |
|------------------|----------------|--------------------------|----------------|----------------|------------|------------|
| 12 ± 0.3 / - 0.1 | 4 ± 0.1        | 4 ± 0.1<br>or<br>8 ± 0.1 | 2 ± 0.05       | 1.5 ± 0.1      | 1.75 ± 0.1 | 5.5 ± 0.05 |


## Reel dimensions [mm]

| A   | W  | N <sub>min</sub> | W <sub>1</sub> | W <sub>2max</sub> |
|-----|----|------------------|----------------|-------------------|
| 180 | 12 | 60               | 12.4 ± 2       | 18.4              |

## Barcode-Product-Label (BPL)

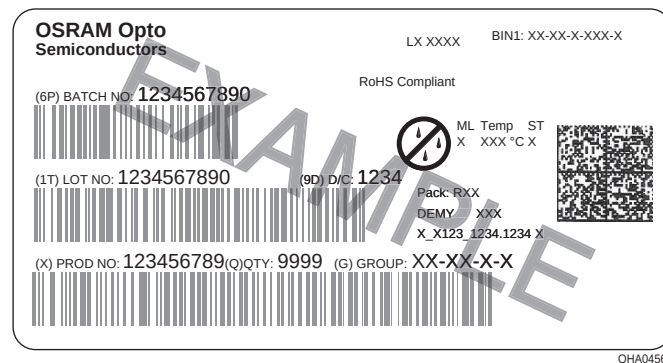

## Dry Packing Process and Materials

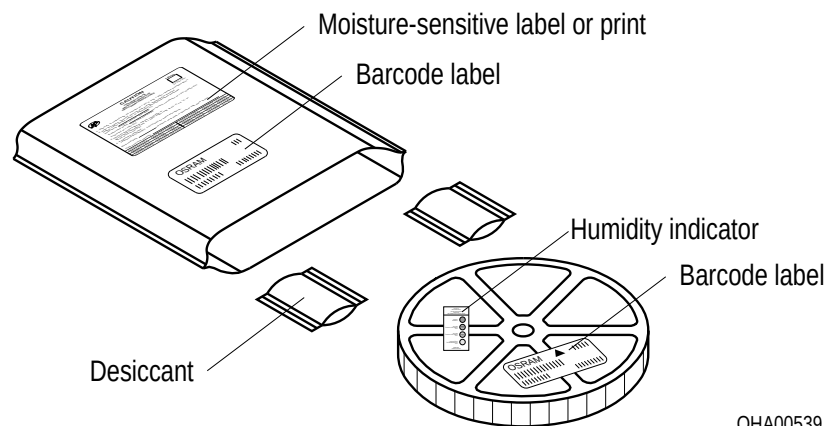


## Note:

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card.

Regarding dry pack you will find further information in the internet. Here you will also find the normative references like JEDEC.

Transportation Packing and Materials

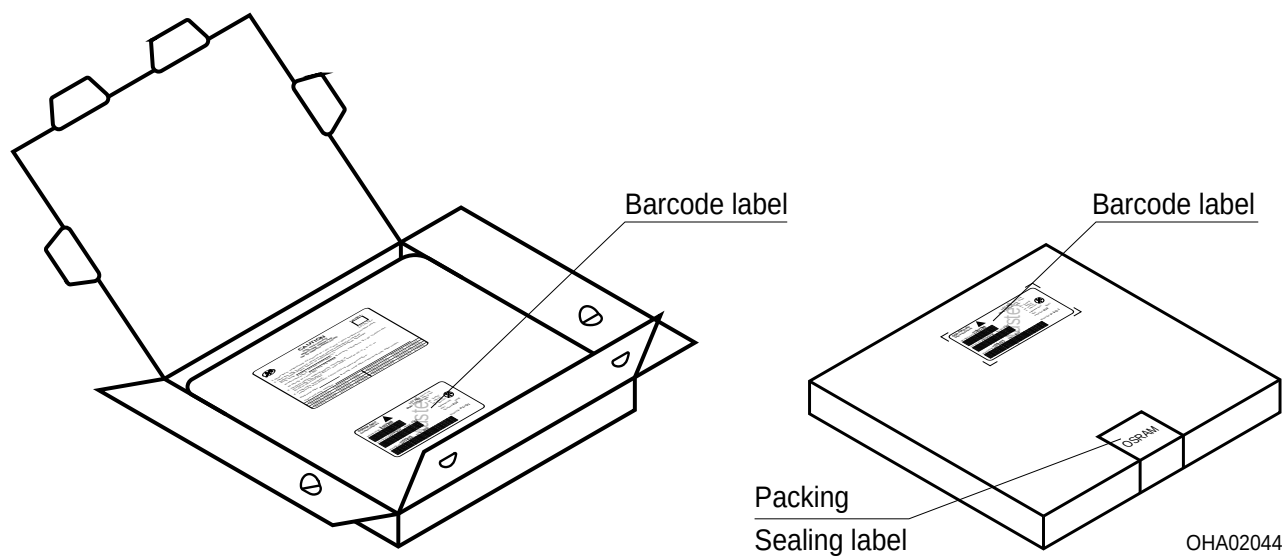

Dimensions of transportation box in mm

| Width   | Length  | Height |
|---------|---------|--------|
| 195 ± 5 | 195 ± 5 | 30 ± 5 |

**Disclaimer**

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

**Attention please!**

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version in the Internet.

**Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office.

By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

**Components used in life-support devices or systems must be expressly authorized for such purpose!**

Critical components\* may only be used in life-support devices\*\* or systems with the express written approval of OSRAM OS.

\*) A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.

\*\*) Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.

**Glossary**

- <sup>1)</sup> **Typical Values:** Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.

**Published by OSRAM Opto Semiconductors GmbH**  
**Leibnizstraße 4, D-93055 Regensburg**  
**[www.osram-os.com](http://www.osram-os.com) © All Rights Reserved.**

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А