



## Pin Description and Characteristic Tables

**Table 1. Pin Descriptions**

| Number | Name            | Type   |          | Description                                                                  |
|--------|-----------------|--------|----------|------------------------------------------------------------------------------|
| 1      | DNU             |        |          | Do not use (factory use only).                                               |
| 2      | nOE             | Input  | Pulldown | Output enable pin. See Table 3A for function. LVCMOS/LVTTL interface levels. |
| 3      | V <sub>EE</sub> | Power  |          | Negative power supply.                                                       |
| 4, 5   | Q, nQ           | Output |          | Differential clock output. LVPECL interface levels.                          |
| 6      | V <sub>CC</sub> | Power  |          | Positive power supply.                                                       |

NOTE: *Pulldown* refers to internal input resistor. See Table 2, *Pin Characteristics*, for typical values.

**Table 2. Pin Characteristics**

| Symbol                | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------------|-------------------------|-----------------|---------|---------|---------|-------|
| C <sub>IN</sub>       | Input Capacitance       |                 |         | 5.5     |         | pF    |
| R <sub>PULLDOWN</sub> | Input Pulldown Resistor |                 |         | 50      |         | kΩ    |

## Function Tables

**Table 3A. nOE Configuration**

| Input       | Output Enable                              |
|-------------|--------------------------------------------|
| nOE         |                                            |
| 0 (default) | Outputs are enabled.                       |
| 1           | Outputs Q, nQ are in high-impedance state. |

NOTE: nOE is an asynchronous control.

**Table 3B. Output Frequency Range**

|                        |
|------------------------|
| 15.476MHz to 866.67MHz |
| 975MHz to 1,300MHz     |

NOTE: Supported output frequency range. The output frequency can be programmed to any frequency in this range and to a precision of 218Hz or better.

## Principles of Operation

The block diagram consists of the internal 3rd overtone crystal and oscillator which provide the reference clock  $f_{XTAL}$  of either 114.285MHz or 100MHz. The PLL includes the FemtoClock NG VCO along with the Pre-divider ( $P$ ), the feedback divider ( $M$ ) and the post divider ( $N$ ). The  $P$ ,  $M$ , and  $N$  dividers determine the output frequency based on the  $f_{XTAL}$  reference. The feedback divider is fractional supporting a huge number of output frequencies. The configuration of the feedback divider to integer-only values results in an improved output phase noise characteristics at the expense of the range of output frequencies. Internal registers are used to hold one factory pre-set  $P$ ,  $M$ , and  $N$  configuration setting. The  $P$ ,  $M$ , and  $N$  frequency configuration supports an output frequency range from 15.476MHz to 866.67MHz and from 975MHz to 1,300MHz.

The devices use the fractional feedback divider with a delta-sigma modulator for noise shaping and robust frequency synthesis capability. The relatively high reference frequency minimizes phase noise generated by frequency multiplication and allows more efficient shaping of noise by the delta-sigma modulator.

The output frequency is determined by the 2-bit pre-divider ( $P$ ), the feedback divider ( $M$ ) and the 7-bit post divider ( $N$ ). The feedback divider ( $M$ ) consists of both a 7-bit integer portion ( $MINT$ ) and an

18-bit fractional portion ( $MFRAC$ ) and provides the means for high-resolution frequency generation. The output frequency  $f_{OUT}$  is calculated by:

$$f_{OUT} = f_{XTAL} \cdot \frac{1}{P \cdot N} \cdot \left[ MINT + \frac{MFRAC + 0.5}{2^{18}} \right]$$

## Frequency Configuration

An order code is assigned to each frequency configuration programmed by the factory (default frequencies). For more information on the available default frequencies and order codes, please see the Ordering Information section in this document. For available order codes, see the *FemtoClock NG Ceramic-Package XO and VCXO Ordering Product Information* document.

For more information on programming capabilities of the device for custom frequency and pull-range configurations, see the *FemtoClock NG Ceramic 5x7 Module Programming Guide*.

## Absolute Maximum Ratings

NOTE: Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC*

*Characteristics or AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

| Item                                                  | Rating                   |
|-------------------------------------------------------|--------------------------|
| Supply Voltage, $V_{CC}$                              | 3.63                     |
| Inputs, $V_I$                                         | -0.5V to $V_{CC} + 0.5V$ |
| Outputs, $I_O$<br>Continuous Current<br>Surge Current | 50mA<br>100mA            |
| Package Thermal Impedance, $\theta_{JA}$              | 49.4°C/W (0 mps)         |
| Storage Temperature, $T_{STG}$                        | -65°C to 150°C           |

## DC Electrical Characteristics

**Table 4A. Power Supply DC Characteristics,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol   | Parameter            | Test Conditions | Minimum | Typical | Maximum | Units |
|----------|----------------------|-----------------|---------|---------|---------|-------|
| $V_{CC}$ | Power Supply Voltage |                 | 3.135   | 3.3     | 3.465   | V     |
| $I_{EE}$ | Power Supply Current |                 |         | 123     | 148     | mA    |

**Table 4B. Power Supply DC Characteristics,  $V_{CC} = 2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol   | Parameter            | Test Conditions | Minimum | Typical | Maximum | Units |
|----------|----------------------|-----------------|---------|---------|---------|-------|
| $V_{CC}$ | Power Supply Voltage |                 | 2.375   | 2.5     | 2.625   | V     |
| $I_{EE}$ | Power Supply Current |                 |         | 119     | 143     | mA    |

**Table 4C. LVPECL DC Characteristics,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol      | Parameter                         | Test Conditions | Minimum        | Typical | Maximum        | Units |
|-------------|-----------------------------------|-----------------|----------------|---------|----------------|-------|
| $V_{OH}$    | Output High Voltage; NOTE 1       |                 | $V_{CC} - 1.4$ |         | $V_{CC} - 0.8$ | V     |
| $V_{OL}$    | Output Low Voltage; NOTE 1        |                 | $V_{CC} - 2.0$ |         | $V_{CC} - 1.6$ | V     |
| $V_{SWING}$ | Peak-to-Peak Output Voltage Swing |                 | 0.6            |         | 1.0            | V     |

NOTE 1: Outputs terminated with 50Ω to  $V_{CC} - 2V$ .

**Table 4D. LVPECL DC Characteristics,  $V_{CC} = 2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol      | Parameter                         | Test Conditions | Minimum        | Typical | Maximum        | Units |
|-------------|-----------------------------------|-----------------|----------------|---------|----------------|-------|
| $V_{OH}$    | Output High Voltage; NOTE 1       |                 | $V_{CC} - 1.4$ |         | $V_{CC} - 0.8$ | V     |
| $V_{OL}$    | Output Low Voltage; NOTE 1        |                 | $V_{CC} - 2.0$ |         | $V_{CC} - 1.5$ | V     |
| $V_{SWING}$ | Peak-to-Peak Output Voltage Swing |                 | 0.4            |         | 1.0            | V     |

NOTE 1: Outputs terminated with 50Ω to  $V_{CC} - 2V$ .

**Table 4E. LVCMOS/LVTTL DC Characteristic,  $V_{CC} = 3.3V \pm 5\%$  or  $2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$** 

| Symbol   | Parameter          |     | Test Conditions                               | Minimum | Typical | Maximum        | Units   |
|----------|--------------------|-----|-----------------------------------------------|---------|---------|----------------|---------|
| $V_{IH}$ | Input High Voltage |     | $V_{CC} = 3.3V$                               | 2       |         | $V_{CC} + 0.3$ | V       |
|          |                    |     | $V_{CC} = 2.5V$                               | 1.7     |         | $V_{CC} + 0.3$ | V       |
| $V_{IL}$ | Input Low Voltage  |     | $V_{CC} = V_{IN} = 3.465V$                    | -0.3    |         | 0.8            | V       |
|          |                    |     | $V_{CC} = V_{IN} = 2.5V$                      | -0.3    |         | 0.7            | V       |
| $I_{IH}$ | Input High Current | nOE | $V_{CC} = V_{IN} = 3.465V$ or $2.625V$        |         |         | 150            | $\mu A$ |
| $I_{IL}$ | Input Low Current  | nOE | $V_{CC} = 3.465V$ or $2.625V$ , $V_{IN} = 0V$ | -10     |         |                | $\mu A$ |

## AC Electrical Characteristics

**Table 5. AC Characteristics,  $V_{CC} = 3.3V \pm 5\%$  or  $2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$**

| Symbol                    | Parameter                                                                                              | Test Conditions                                      | Minimum | Typical | Maximum   | Units  |
|---------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------|---------|---------|-----------|--------|
| $f_{OUT}$                 | Output Frequency Q, nQ                                                                                 |                                                      | 15.476  |         | 866.67    | MHz    |
|                           |                                                                                                        |                                                      | 975     |         | 1,300     | MHz    |
| $f_I$                     | Initial Accuracy                                                                                       | Measured @ $25^{\circ}C$                             |         |         | $\pm 10$  | ppm    |
| $f_S$                     | Temperature Stability                                                                                  | Option code = A or B                                 |         |         | $\pm 100$ | ppm    |
|                           |                                                                                                        | Option code = E or F                                 |         |         | $\pm 50$  | ppm    |
|                           |                                                                                                        | Option code = K or L                                 |         |         | $\pm 20$  | ppm    |
| $f_A$                     | Aging                                                                                                  | Frequency drift over 10 year life                    |         |         | $\pm 3$   | ppm    |
|                           |                                                                                                        | Frequency drift over 15 year life                    |         |         | $\pm 5$   | ppm    |
| $f_T$                     | Total Stability                                                                                        | Option code A, B (10 year life)                      |         |         | $\pm 113$ | ppm    |
|                           |                                                                                                        | Option code E, F (10 year life)                      |         |         | $\pm 63$  | ppm    |
|                           |                                                                                                        | Option code K, L (10 year life)                      |         |         | $\pm 33$  | ppm    |
| $\dot{f}_{it}(cc)$        | Cycle-to-Cycle Jitter; NOTE 1                                                                          |                                                      |         |         | 30        | ps     |
| $\dot{f}_{it}(per)$       | RMS Period Jitter; NOTE 1                                                                              |                                                      |         | 1.9     | 2.8       | ps     |
| $\dot{f}_{it}(\emptyset)$ | RMS Phase Jitter (Random);<br>Fractional PLL feedback and<br>$f_{XTAL} = 100MHz$ (2xxx order codes)    | $17MHz \leq f_{OUT} \leq 1300MHz$ ,<br>NOTE 2, 3, 4  |         | 0.497   | 0.882     | ps     |
|                           | RMS Phase Jitter (Random);<br>Integer PLL feedback and<br>$f_{XTAL} = 100MHz$ (1xxx order codes)       | $500MHz \leq f_{OUT} \leq 1300MHz$ ,<br>NOTE 2, 3, 4 |         | 0.232   | 0.322     | ps     |
|                           |                                                                                                        | $125MHz \leq f_{OUT} < 500MHz$ ,<br>NOTE 2, 3, 4     |         | 0.250   | 0.384     | ps     |
|                           |                                                                                                        | $17MHz \leq f_{OUT} < 125MHz$ ,<br>NOTE 2, 3, 4      |         | 0.275   | 0.405     | ps     |
|                           |                                                                                                        | $f_{OUT} = 156.25MHz$ , NOTE 2, 3, 4                 |         | 0.242   | 0.311     | ps     |
|                           |                                                                                                        | $f_{OUT} = 156.25MHz$ , NOTE 2, 3, 5                 |         | 0.275   | 0.359     | ps     |
|                           | RMS Phase Jitter (Random)<br>Fractional PLL feedback and<br>$f_{XTAL} = 114.285MHz$ (0xxx order codes) | $17MHz \leq f_{OUT} \leq 1300MHz$ ,<br>NOTE 2, 3, 4  |         | 0.474   | 0.986     | ps     |
| $\Phi_N(100)$             | Single-side band phase noise,<br>100Hz from Carrier                                                    | 156.25MHz                                            |         | -92     |           | dBc/Hz |
| $\Phi_N(1k)$              | Single-side band phase noise,<br>1kHz from Carrier                                                     | 156.25MHz                                            |         | -120    |           | dBc/Hz |
| $\Phi_N(10k)$             | Single-side band phase noise,<br>10kHz from Carrier                                                    | 156.25MHz                                            |         | -131    |           | dBc/Hz |
| $\Phi_N(100k)$            | Single-side band phase noise,<br>100kHz from Carrier                                                   | 156.25MHz                                            |         | -138    |           | dBc/Hz |
| $\Phi_N(1M)$              | Single-side band phase noise,<br>1MHz from Carrier                                                     | 156.25MHz                                            |         | -139    |           | dBc/Hz |
| $\Phi_N(10M)$             | Single-side band phase noise,<br>10MHz from Carrier                                                    | 156.25MHz                                            |         | -154    |           | dBc/Hz |
| $t_R / t_F$               | Output Rise/Fall Time                                                                                  | 20% to 80%                                           | 50      |         | 450       | ps     |
| odc                       | Output Duty Cycle                                                                                      |                                                      | 47      |         | 53        | %      |
| $t_{STARTUP}$             | Device startup time after power up                                                                     |                                                      |         |         | 20        | ms     |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfm. The device will meet specifications after thermal equilibrium

has been reached under these conditions.

NOTE: XTAL parameters (initial accuracy, temperature stability, aging and total stability) are guaranteed by manufacturing.

NOTE 1: This parameter is defined in accordance with JEDEC standard 65.


NOTE 2: Refer to the phase noise plot.

NOTE 3: Please see the FemtoClockNG Ceramic 5x7 Modules Programming guide for more information on PLL feedback modes and the optimum configuration for phase noise. Integer PLL feedback is the default operation for the dddd = 1xxx order codes.

NOTE 4: Integration range: 12kHz - 20MHz.


NOTE 5: Integration range: 1kHz - 40MHz.

Typical Phase Noise at 156.25MHz (12kHz - 20MHz)

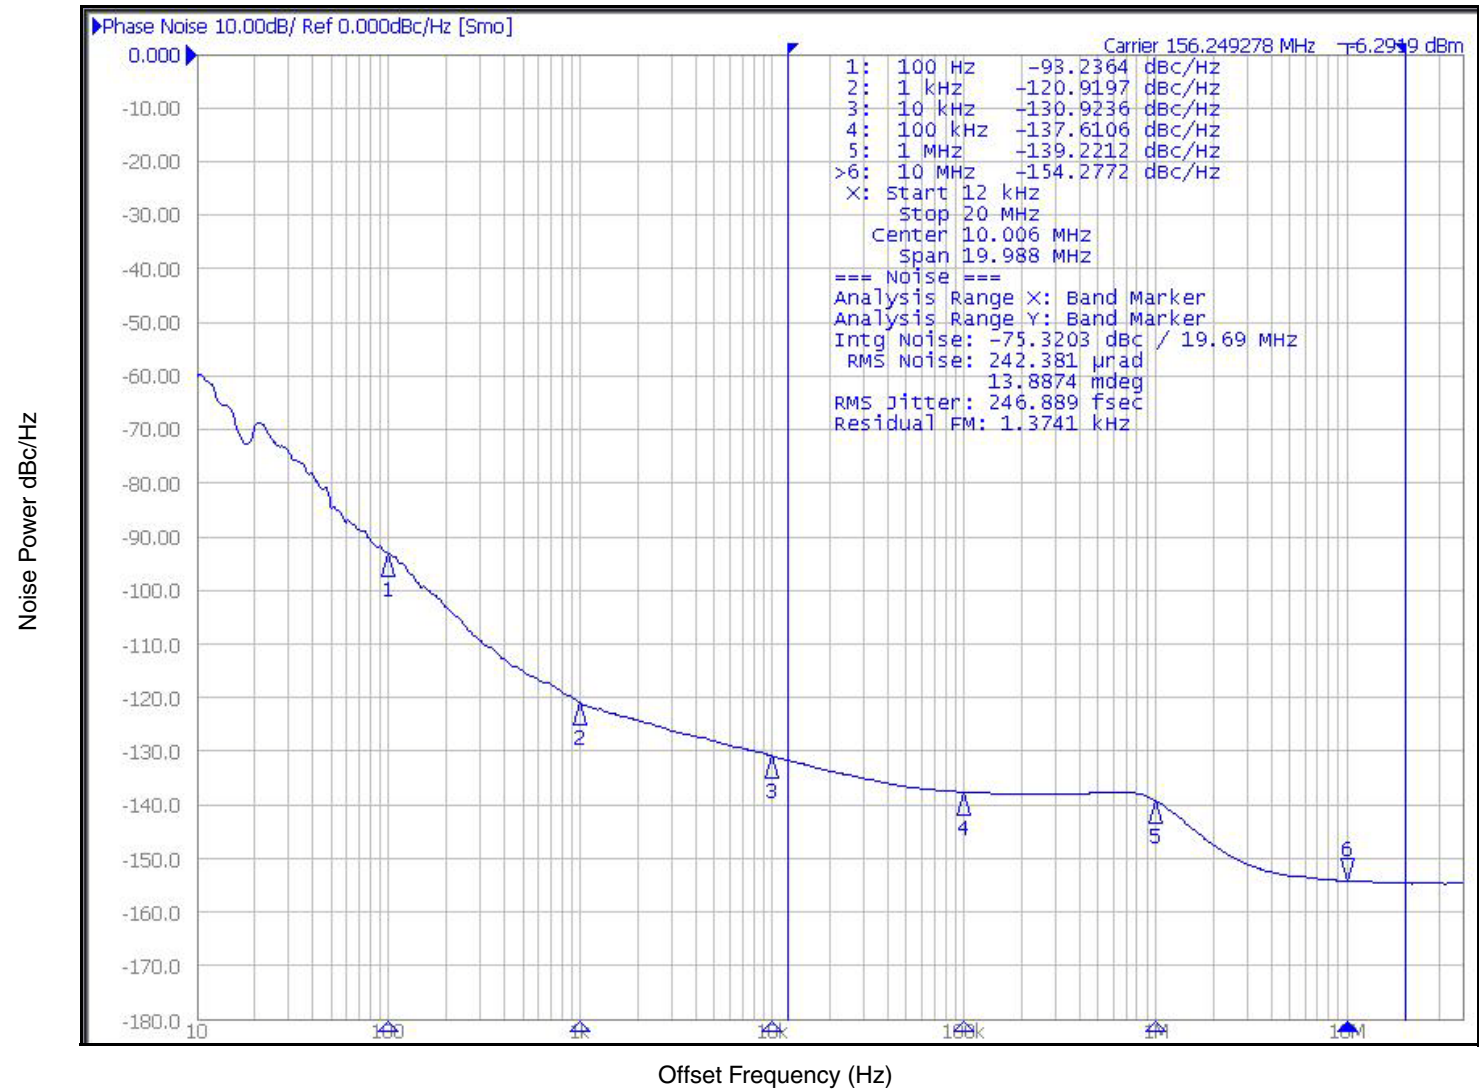





## Parameter Measurement Information

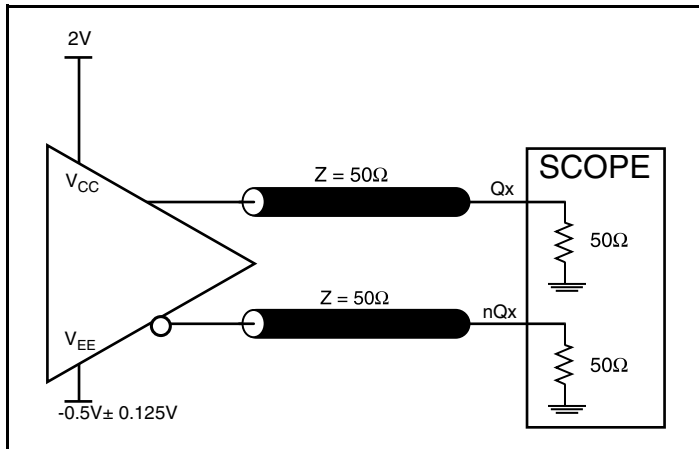


2.5V LVPECL Output Load Test Circuit

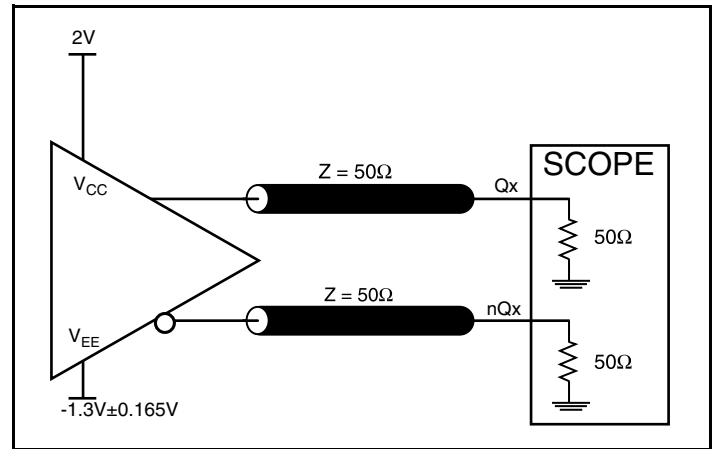


3.3V LVPECL Output Load Test Circuit

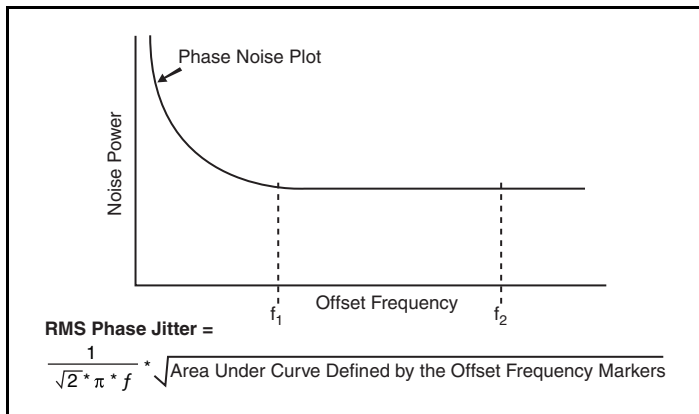


RMS Phase Jitter

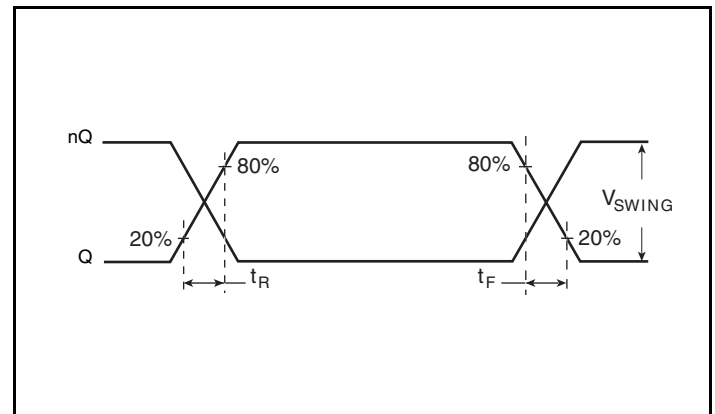

Output Rise/Fall Time

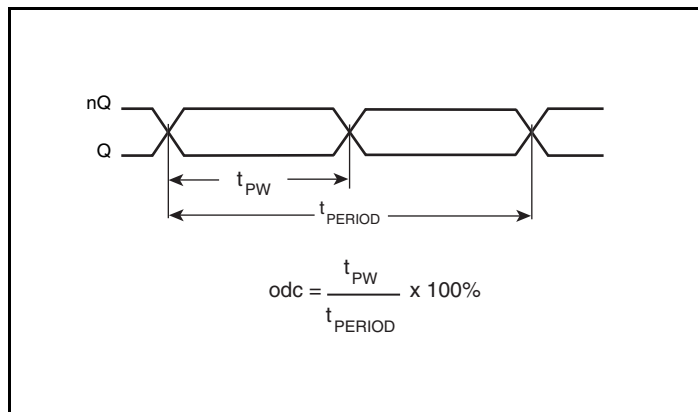


Output Duty Cycle/Pulse Width/Period

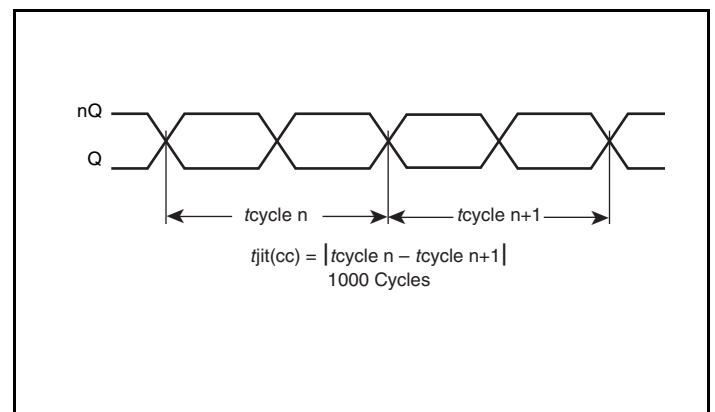

Cycle-to-Cycle Jitter

## Parameter Measurement Information, continued

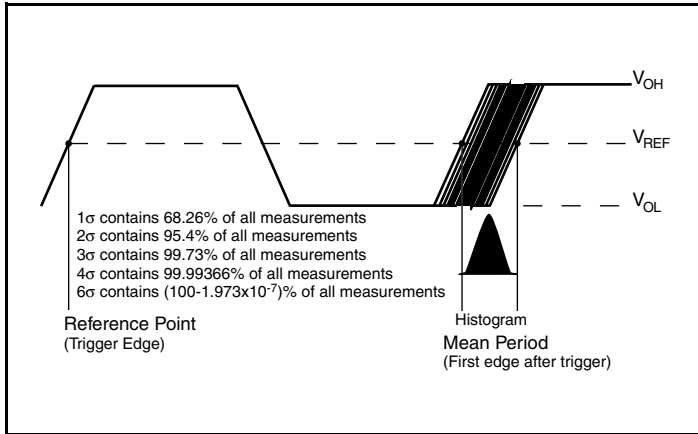

**RMS Period Jitter**

## Applications Information


### Termination for 3.3V LVPECL Outputs

The clock layout topology shown below is a typical termination for LVPECL outputs. The two different layouts mentioned are recommended only as guidelines.


The differential outputs are low impedance follower outputs that generate ECL/LVPECL compatible outputs. Therefore, terminating resistors (DC current path to ground) or current sources must be used for functionality. These outputs are designed to drive 50Ω

transmission lines. Matched impedance techniques should be used to maximize operating frequency and minimize signal distortion.

*Figures 1A and 1B* show two different layouts which are recommended only as guidelines. Other suitable clock layouts may exist and it would be recommended that the board designers simulate to guarantee compatibility across all printed circuit and clock component process variations.

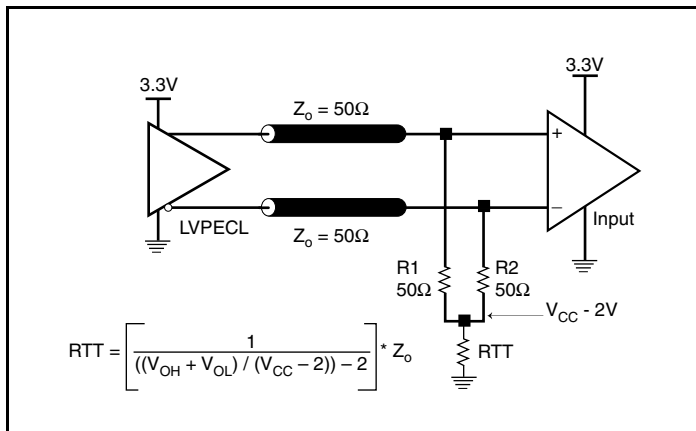

**Figure 1A. 3.3V LVPECL Output Termination**

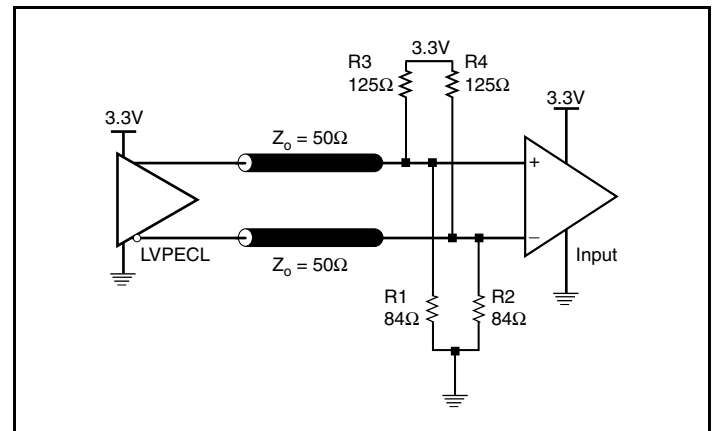

**Figure 1B. 3.3V LVPECL Output Termination**

## Termination for 2.5V LVPECL Outputs

Figure 2A and Figure 2B show examples of termination for 2.5V LVPECL driver. These terminations are equivalent to terminating  $50\Omega$  to  $V_{CC} - 2V$ . For  $V_{CC} = 2.5V$ , the  $V_{CC} - 2V$  is very close to ground

level. The  $R3$  in Figure 2B can be eliminated and the termination is shown in Figure 2C.

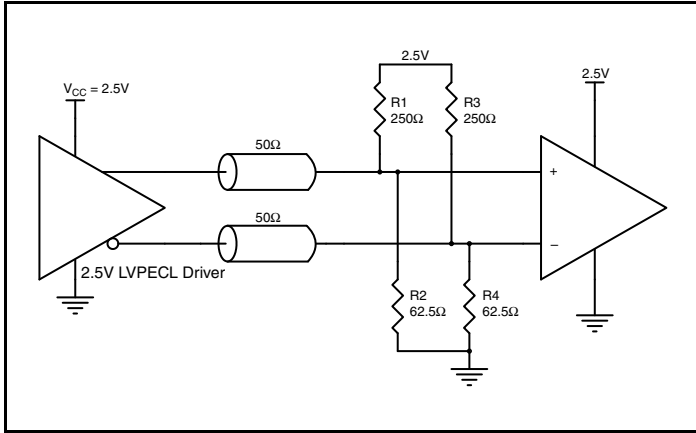


Figure 2A. 2.5V LVPECL Driver Termination Example

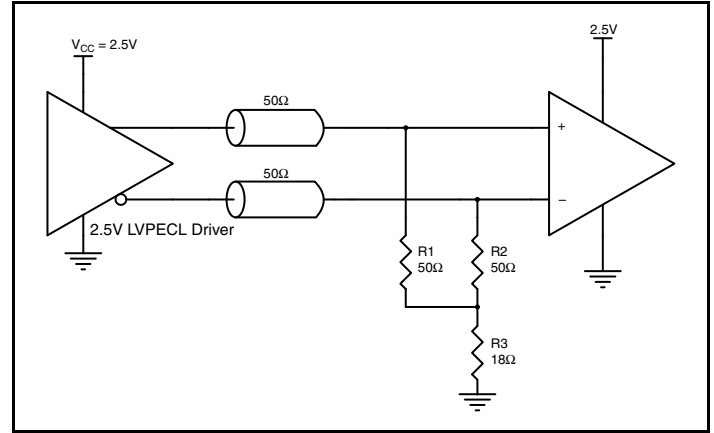


Figure 2B. 2.5V LVPECL Driver Termination Example

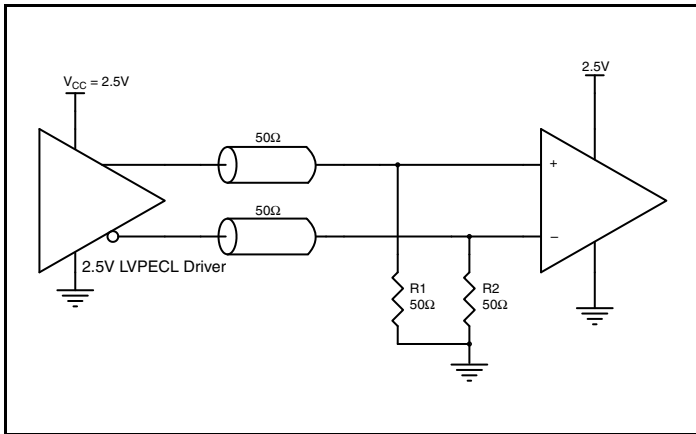


Figure 2C. 2.5V LVPECL Driver Termination Example


## Schematic Layout

Figure 3 shows an example IDT8N3S272 application schematic. The schematic example focuses on functional connections and is intended as an example only and may not represent the exact user configuration. Refer to the pin description and functional tables in the datasheet to ensure the logic control inputs are properly set. For example nOE can be configured from an FPGA instead of set with pullup and pulldown resistors as shown.

As with any high speed analog circuitry, the power supply pins are vulnerable to random noise, so to achieve optimum jitter performance isolation of the  $V_{CC}$  pin from power supply is required. In order to achieve the best possible filtering, it is recommended that the placement of the filter components be on the device side of the PCB as close to the power pins as possible. If space is limited, the  $0.1\mu F$

capacitor on the V<sub>CC</sub> pin must be placed on the device side with direct return to the ground plane through vias. The remaining filter components can be on the opposite side of the PCB.

Power supply filter component recommendations are a general guideline to be used for reducing external noise from coupling into the devices. The filter performance is designed for a wide range of noise frequencies. This low-pass filter starts to attenuate noise at approximately 10kHz. If a specific frequency noise component is known, such as switching power supplies frequencies, it is recommended that component values be adjusted and if required, additional filtering be added. Additionally, good general design practices for power plane voltage stability suggests adding bulk capacitance in the local area of all devices.

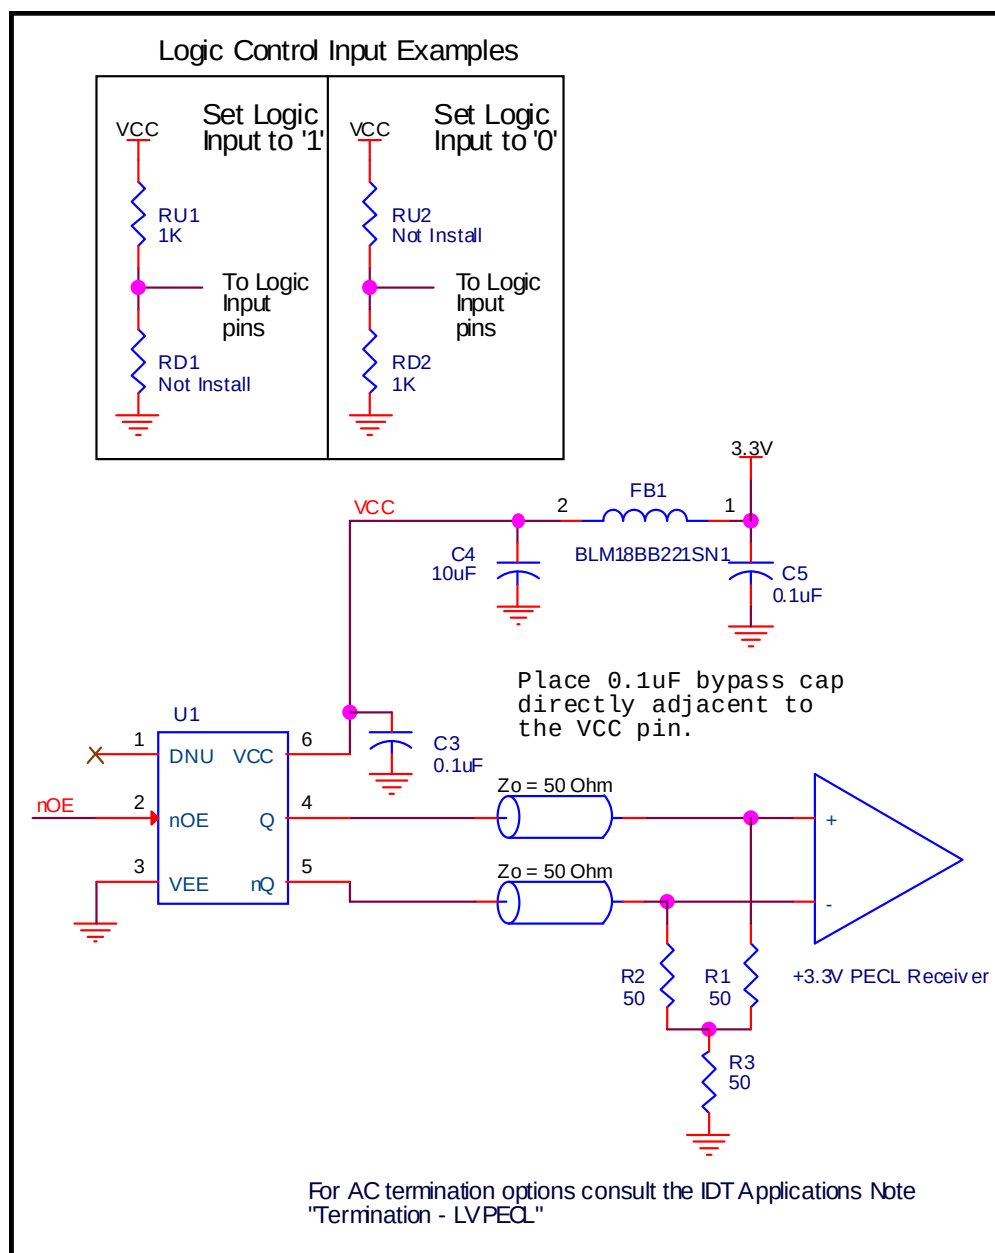

### Figure 3. IDT8N3S272 Schematic Example

## Power Considerations

This section provides information on power dissipation and junction temperature for the IDT8N3S272. Equations and example calculations are also provided.

### 1. Power Dissipation.

The total power dissipation for the IDT8N3S272 is the sum of the core power plus the power dissipated in the load(s). The following is the power dissipation for  $V_{CC} = 3.465V$ , which gives worst case results.

NOTE: Please refer to Section 3 for details on calculating power dissipated in the load.

- Power (core)<sub>MAX</sub> =  $V_{CC\_MAX} * I_{EE\_MAX} = 3.465V * 148mA = 512.82mW$
- Power (outputs)<sub>MAX</sub> = **34.2mW/Loaded Output pair**

**Total Power**<sub>MAX</sub> (3.465V, with all outputs switching) =  $512.82mW + 32mW = 544.82mW$

### 2. Junction Temperature.

Junction temperature,  $T_j$ , is the temperature at the junction of the bond wire and bond pad directly affects the reliability of the device. The maximum recommended junction temperature is 125°C. Limiting the internal transistor junction temperature,  $T_j$ , to 125°C ensures that the bond wire and bond pad temperature remains below 125°C.

The equation for  $T_j$  is as follows:  $T_j = \theta_{JA} * Pd_{total} + T_A$

$T_j$  = Junction Temperature

$\theta_{JA}$  = Junction-to-Ambient Thermal Resistance

$Pd_{total}$  = Total Device Power Dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming no air flow and a multi-layer board, the appropriate value is 49.4°C/W per Table 6 below.

Therefore,  $T_j$  for an ambient temperature of 85°C with all outputs switching is:

$$85^{\circ}C + 0.545W * 49.4^{\circ}C/W = 111.9^{\circ}C. \text{ This is below the limit of } 125^{\circ}C.$$

This calculation is only an example.  $T_j$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).


**Table 6. Thermal Resistance  $\theta_{JA}$  for 6 Lead Ceramic VFQFN, Forced Convection**

| $\theta_{JA}$ by Velocity                   |          |          |          |
|---------------------------------------------|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2        |
| Multi-Layer PCB, JEDEC Standard Test Boards | 49.4°C/W | 44.2°C/W | 42.1°C/W |

### 3. Calculations and Equations.

The purpose of this section is to calculate the power dissipation for the LVPECL output pair.

LVPECL output driver circuit and termination are shown in *Figure 4*.

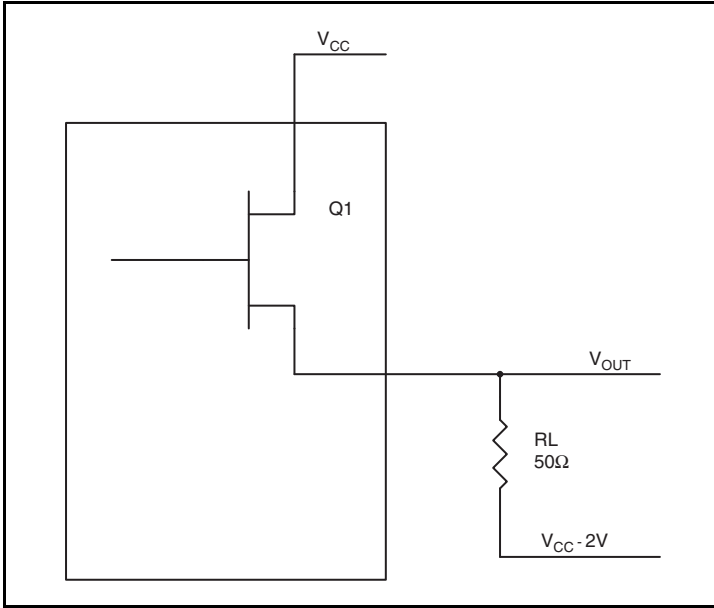

**Figure 4. LVPECL Driver Circuit and Termination**

To calculate power dissipation per output pair due to loading, use the following equations which assume a  $50\Omega$  load, and a termination voltage of  $V_{CC} - 2V$ .

- For logic high,  $V_{OUT} = V_{OH\_MAX} = V_{CC\_MAX} - 0.8V$   
( $V_{CC\_MAX} - V_{OH\_MAX}$ ) = **0.8V**
- For logic low,  $V_{OUT} = V_{OL\_MAX} = V_{CC\_MAX} - 1.6V$   
( $V_{CC\_MAX} - V_{OL\_MAX}$ ) = **1.6V**

$Pd\_H$  is power dissipation when the output drives high.

$Pd\_L$  is the power dissipation when the output drives low.

$$Pd\_H = [(V_{OH\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX}) = [(2V - (V_{CC\_MAX} - V_{OH\_MAX}))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX}) = [(2V - 0.8V)/50\Omega] * 0.8V = \mathbf{19.2mW}$$

$$Pd\_L = [(V_{OL\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX}) = [(2V - (V_{CC\_MAX} - V_{OL\_MAX}))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX}) = [(2V - 1.6V)/50\Omega] * 1.6V = \mathbf{12.8mW}$$

$$\text{Total Power Dissipation per output pair} = Pd\_H + Pd\_L = \mathbf{32mW}$$

## Reliability Information


**Table 7.  $\theta_{JA}$  vs. Air Flow Table for a 6-lead Ceramic 5mm x 7mm Package**

| $\theta_{JA}$ vs. Air Flow                  |          |          |          |
|---------------------------------------------|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2        |
| Multi-Layer PCB, JEDEC Standard Test Boards | 49.4°C/W | 44.2°C/W | 42.1°C/W |

## Transistor Count

The transistor count for IDT8N3S272 is: 47,511

Package Outline and Package Dimensions

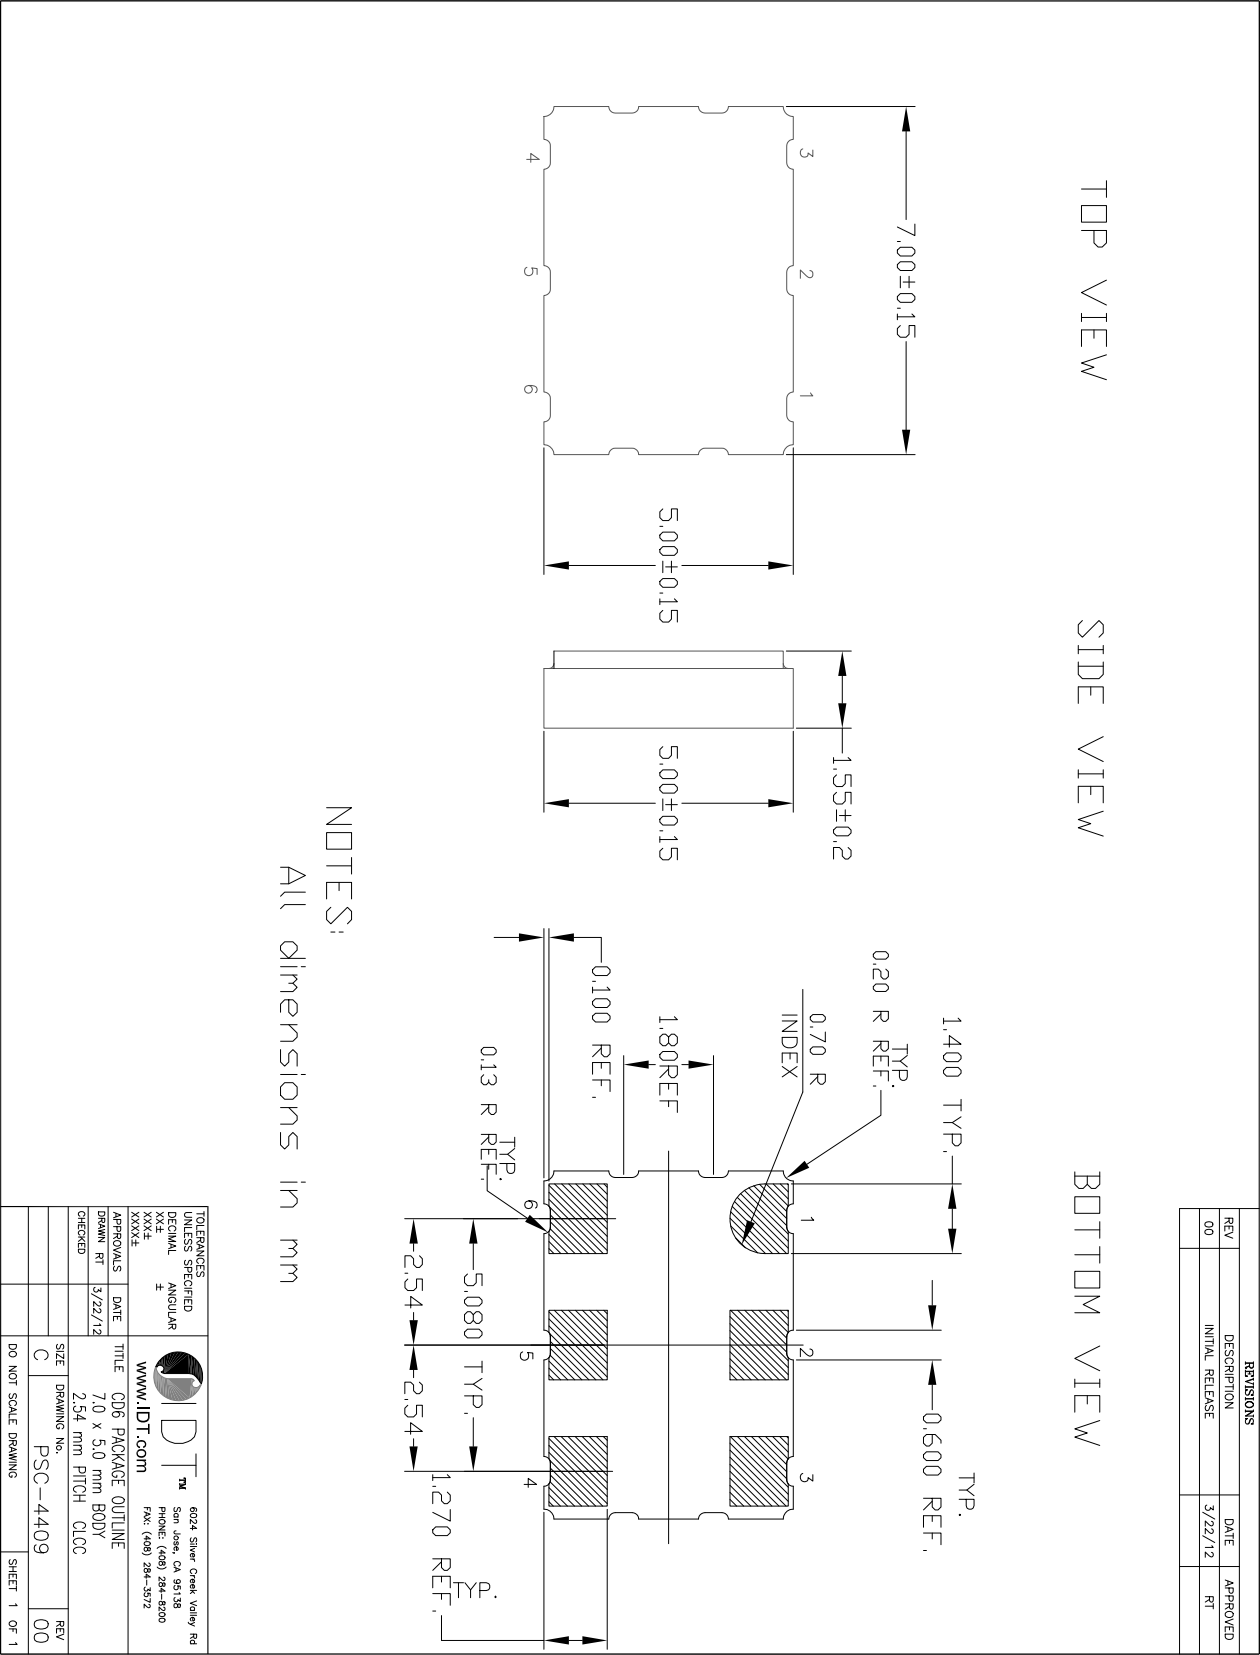

IDT8N3S272CCD

REVISION A

NOVEMBER 28, 2012

16

©2012 Integrated Device Technology, Inc.



## Ordering Information for FemtoClock NG Ceramic-Package XO and VCXO Products

The programmable VCXO and XO devices support a variety of device options such as the output type, number of default frequencies, power supply voltage, ambient temperature range and the frequency accuracy. The device options, default frequencies and default VCXO pull range must be specified at the time of order and are programmed by IDT before the shipment. Table 7 specifies the available order codes, including the device options. Example part number: the order code 8N3S270FD-0001CDI specifies a

programmable XO with a voltage supply of 2.5V, a  $\pm 50$  ppm crystal frequency accuracy, industrial temperature range, a lead-free (6/6 RoHS) 6-lead ceramic 5mm x 7mm x 1.55mm package and is factory-programmed to the default frequencies of 100MHz.

Other default frequencies and order codes are available from IDT on request.

**Table 8. Order Codes**

| Part/Order Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                      |                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p><b>8N X X XXX X X - dddd XX X X</b></p> <p>↓</p> <p><b>FemtoClock NG</b></p> <p>↓</p> <p><b>I/O Identifier</b><br/>0 = LVCMOS<br/>3 = LVPECL<br/>4 = LVDS</p> <p>↓</p> <p><b>Number of Default Frequencies</b><br/>S = 1: Single<br/>D = 2: Dual<br/>Q = 4: Quad</p> <p>↓</p> <p><b>Part Number</b><br/>270 = XO, pin 1 = OE<br/>271 = XO, pin 2 = OE<br/>272 = XO, pin 2 = nOE</p> </div> <div style="text-align: center;"> <p>↓</p> <p><b>Shipping Package</b><br/>8 = Tape &amp; Reel<br/>(no letter) = Tray</p> <p>↓</p> <p><b>Ambient Temperature Range</b><br/>"I" Industrial = (<math>T_A = -40^{\circ}\text{C}</math> to <math>85^{\circ}\text{C}</math>)<br/>(no letter) = (<math>T_A = 0^{\circ}\text{C}</math> to <math>70^{\circ}\text{C}</math>)</p> <p>↓</p> <p><b>Package Code</b><br/>CD = Lead-Free, 6-lead ceramic 5mm x 7mm x 1.55mm</p> <p>↓</p> <p><b>Default-Frequency and VCXO Pull Range</b><br/><i>See Default Frequency &amp; VCXO Pull-Range Ordering Information Table</i><br/>0000...0999: <math>f_{XTAL} = 114.285\text{MHz}</math><br/>1000...1999: <math>f_{XTAL} = 100.000\text{MHz}</math></p> <p>↓</p> <p><b>Die Revision</b><br/>C</p> <p>↓</p> <p><b>Option Code (Supply Voltage and Frequency-Stability)</b><br/>A = <math>V_{CC} = 3.3\text{V} \pm 5\%, \pm 100\text{ppm}</math><br/>B = <math>V_{CC} = 2.5\text{V} \pm 5\%, \pm 100\text{ppm}</math><br/>E = <math>V_{CC} = 3.3\text{V} \pm 5\%, \pm 50\text{ppm}</math><br/>F = <math>V_{CC} = 2.5\text{V} \pm 5\%, \pm 50\text{ppm}</math><br/>K = <math>V_{CC} = 3.3\text{V} \pm 5\%, \pm 20\text{ppm}</math><br/>L = <math>V_{CC} = 2.5\text{V} \pm 5\%, \pm 20\text{ppm}</math></p> </div> </div> |                                                                                      |                                                                                    |
| Marking                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Industrial Temperature Range ( $T_A = -40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ ) | Commercial Temperature Range ( $T_A = 0^{\circ}\text{C}$ to $70^{\circ}\text{C}$ ) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | IDT8N3S272yC-<br>ddddCDI                                                             | IDT8N3S272yC-<br>ddddCD                                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | y = Option Code, dddd = Default-Frequency and VCXO Pull Range.                       |                                                                                    |

NOTE: For order information, see the *FemtoClock NG Ceramic-Package XO and VCXO Ordering Product Information* document.

## We've Got Your Timing Solution



6024 Silver Creek Valley Road  
San Jose, California 95138

### Sales

800-345-7015 (inside USA)  
+408-284-8200 (outside USA)  
Fax: 408-284-2775  
[www.IDT.com/go/contactIDT](http://www.IDT.com/go/contactIDT)

### Technical Support

[netcom@idt.com](mailto:netcom@idt.com)  
+480-763-2056

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners.

Copyright 2012. All rights reserved.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А