

100352

Low Power 8-Bit Buffer with Cut-Off Drivers

General Description


The 100352 contains an 8-bit buffer, individual inputs (D_n), outputs (Q_n), and a data output enable pin ($\overline{OEN}$). A Q output follows its D input when the $\overline{OEN}$ pin is LOW. A HIGH on $\overline{OEN}$ holds the outputs in a cut-off state. The cut-off state is designed to be more negative than a normal ECL LOW level. This allows the output emitter-followers to turn off when the termination supply is $-2.0V$, presenting a high impedance to the data bus. This high impedance reduces termination power and prevents loss of low state noise margin when several loads share the bus.

The 100352 outputs are designed to drive a doubly terminated 50Ω transmission line (25Ω load impedance). All inputs have $50\text{ k}\Omega$ pull-down resistors.

Features

- Cut-off drivers
- Drives 25Ω load
- Low power operation
- 2000V ESD protection
- Voltage compensated operating range = $-4.2V$ to $-5.7V$
- Available to industrial grade temperature range
- Available to MIL-STD-883


Logic Symbol



Pin Names	Description
D_0 – D_7	Data Inputs
$\overline{OEN}$	Output Enable Input
Q_0 – Q_7	Data Outputs
NC	No Connect


Connection Diagrams

24-Pin DIP

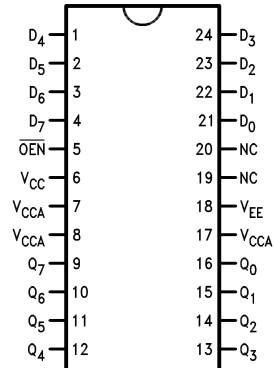


DS100296-2

24-Pin Quad Cerpak



DS100296-3

Logic Diagram

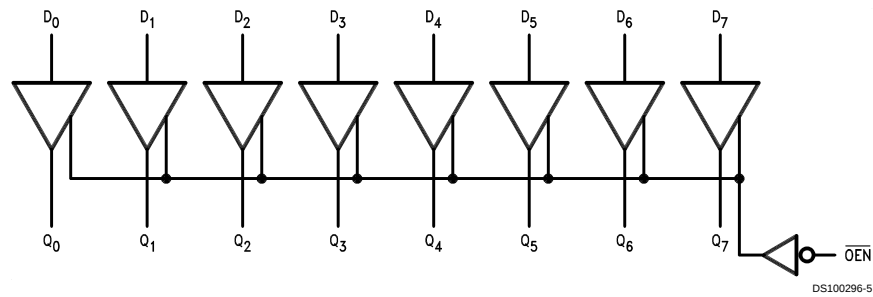

Truth Table

Inputs		Outputs
Dn	$\overline{QEN}$	Qn
L	L	L
H	L	H
X	H	Cutoff

H = HIGH Voltage Level
 L = LOW Voltage Level
 Cutoff = Lower-than-LOW State
 X = Don't Care

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Above which the useful life may be impaired

Storage Temperature (T_{STG}) -65°C to $+150^{\circ}\text{C}$

Maximum Junction Temperature (T_J)
Ceramic $+175^{\circ}\text{C}$

V_{EE} Pin Potential to

Ground Pin -7.0V to $+0.5\text{V}$

Input Voltage (DC) V_{EE} to $+0.5\text{V}$

Output Current (DC Output HIGH) -100 mA

ESD (Note 2)

$\geq 2000\text{V}$

Recommended Operating Conditions

Case Temperature (T_C)

Military -55°C to $+125^{\circ}\text{C}$

Supply Voltage (V_{EE}) -5.7V to -4.2V

Note 1: Absolute maximum ratings are those values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: ESD testing conforms to MIL-STD-883, Method 3015.

Military Version DC Electrical Characteristics

$V_{EE} = -4.2\text{V}$ to -5.7V , $V_{CC} = V_{CCA} = \text{GND}$, $T_C = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$

Symbol	Parameter	Min	Max	Units	T_C	Conditions	Notes
V_{OH}	Output HIGH Voltage	-1025	-870	mV	0°C to $+125^{\circ}\text{C}$	$V_{IN} = V_{IH(\text{Max})}$ or $V_{IL(\text{Min})}$	Loading with 25Ω to -2.0V
		-1085	-870	mV	-55°C		
V_{OL}	Output LOW Voltage	-1830	-1620	mV	0°C to $+125^{\circ}\text{C}$	$V_{IN} = V_{IH(\text{Min})}$ or $V_{IL(\text{Max})}$	Loading with 25Ω to -2.0V
		-1830	-1555	mV	-55°C		
V_{OHC}	Output HIGH Voltage	-1035		mV	0°C to $+125^{\circ}\text{C}$	$V_{IN} = V_{IH(\text{Min})}$ or $V_{IL(\text{Max})}$	Loading with 25Ω to -2.0V
		-1085		mV	-55°C		
V_{OLC}	Output LOW Voltage		-1610	mV	0°C to $+125^{\circ}\text{C}$	$V_{IN} = V_{IH(\text{Min})}$ or $V_{IL(\text{Max})}$	Loading with 25Ω to -2.0V
			-1555	mV	-55°C		
V_{OLZ}	Cut-Off LOW Voltage		-1950	mV	0°C to $+125^{\circ}\text{C}$	$V_{IN} = V_{IH(\text{Min})}$, or $V_{IL(\text{Max})}$	$\overline{\text{OEN}} = \text{HIGH}$
			-1850	mV	-55°C		
V_{IH}	Input HIGH Voltage	-1165	-870	mV	-55°C to $+125^{\circ}\text{C}$	Guaranteed HIGH signal for All inputs	(Notes 3, 4, 5)
V_{IL}	Input LOW Voltage	-1830	-1475	mV	-55°C to $+125^{\circ}\text{C}$	Guaranteed LOW signal for All inputs	(Notes 3, 4, 5, 6)
I_{IL}	Input LOW Current	0.50		μA	-55°C to $+125^{\circ}\text{C}$	$V_{EE} = 4.2\text{V}$ $V_{IN} = V_{IL(\text{Min})}$	(Notes 3, 4, 5)
I_{IH}	Input HIGH Current		240	μA	0°C to $+125^{\circ}\text{C}$	$V_{EE} = -5.7\text{V}$	(Notes 3, 4, 5)
			340	μA	-55°C	$V_{IN} = V_{IH(\text{Max})}$	
I_{EE}	Power Supply Current				-55°C to $+125^{\circ}\text{C}$	Inputs Open	(Notes 3, 4, 5)
		-145	-55	mA		$V_{EE} = -4.2\text{V}$ to -4.8V $V_{EE} = -4.2\text{V}$ to -5.7V	

Note 3: F100K 300 Series cold temperature testing is performed by temperature soaking (to guarantee junction temperature equals -55°C), then testing immediately without allowing for the junction temperature to stabilize due to heat dissipation after power-up. This provides "cold start" specs which can be considered a worst case condition at cold temperatures.

Note 4: Screen tested 100% on each device at -55°C , $+25^{\circ}\text{C}$, and $+125^{\circ}\text{C}$, Subgroups 1, 2, 3, 7, and 8.

Note 5: Sample tested (Method 5005, Table I) on each manufactured lot at -55°C , $+25^{\circ}\text{C}$, and $+125^{\circ}\text{C}$, Subgroups A1, 2, 3, 7, and 8.

Note 6: Guaranteed by applying specified input condition and testing V_{OH}/V_{OL} .

AC Electrical Characteristics

$V_{EE} = -4.2\text{V}$ to -5.7V , $V_{CC} = V_{CCA} = \text{GND}$

Symbol	Parameter	$T_C = -55^{\circ}\text{C}$		$T_C = +25^{\circ}\text{C}$		$T_C = +125^{\circ}\text{C}$		Units	Conditions	Notes
		Min	Max	Min	Max	Min	Max			
t_{PLH}	Propagation Delay	0.30	2.60	0.50	2.40	0.50	2.70	ns	Figures 1, 2	(Notes 7, 8, 10, 11)
t_{PHL}	Dn to Output									
t_{PZH}	Propagation Delay	1.20	4.40	1.40	4.20	1.20	4.40	ns	Figures 1, 2	(Notes 7, 8, 9, 11)
t_{PHZ}	$\overline{\text{OEN}}$ to Output	0.70	3.00	0.70	2.80	0.70	3.20			

AC Electrical Characteristics (Continued)

$V_{EE} = -4.2V$ to $-5.7V$, $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_C = -55^\circ C$		$T_C = +25^\circ C$		$T_C +125^\circ C$		Units	Conditions	Notes
		Min	Max	Min	Max	Min	Max			
t_{TLH}	Transition Time	0.40	2.50	0.40	2.40	0.40	2.70	ns	Figures 1, 2	(Note 10)
t_{THL}	20% to 80%, 80% to 20%									

Note 7: F100K 300 Series cold temperature testing is performed by temperature soaking (to guarantee junction temperature equals $-55^\circ C$), then testing immediately after power-up. This provides "cold start" specs which can be considered a worst case condition at cold temperatures.


Note 8: Screen tested 100% on each device at $+25^\circ C$ temperature only, Subgroup A9.

Note 9: Sample tested (Method 5005, Table I) on each manufactured lot at $+25^\circ C$, Subgroup A9, and at $+125^\circ C$ and $-55^\circ C$ temperatures, Subgroups A10 and A11.

Note 10: Not tested at $+25^\circ C$, $+125^\circ C$, and $-55^\circ C$ temperature (design characterization data).

Note 11: The propagation delay specified is for single output switching. Delays may vary up to 300 ps with multiple outputs switching.

Test Circuitry

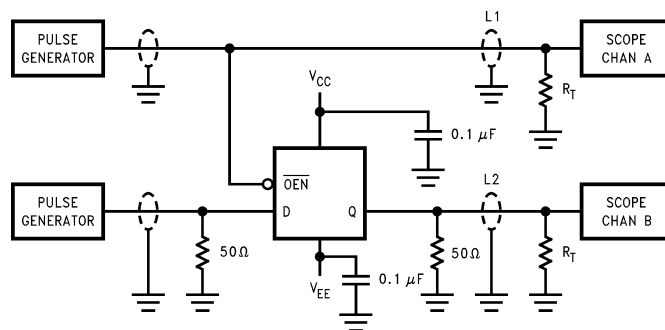

DS100296-6

Notes:

$V_{CC}, V_{CCA} = +2V$, $V_{EE} = -2.5V$

$L1$ and $L2$ = equal length 50Ω impedance lines

$R_T = 50\Omega$ terminator internal to scope


Decoupling 0.1 μF from GND to V_{CC} and V_{EE}

All unused outputs are loaded with 25Ω to GND

C_L = Fixture and stray capacitance ≤ 3 pF

FIGURE 1. AC Test Circuit

Switching Waveforms

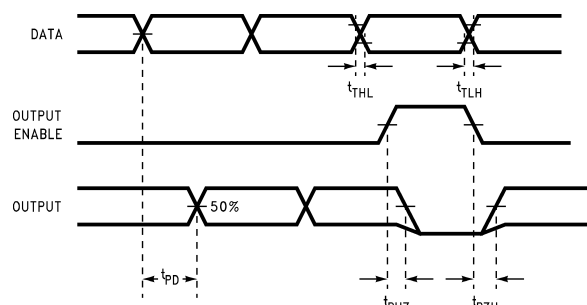


DS100296-7


Note:

The output AC measurement point for cut-off propagation delay testing = the 50% voltage point between active V_{OL} and V_{OH} .


FIGURE 2. Propagation Delay, Cut-Off and Transition Times



Physical Dimensions inches (millimeters) unless otherwise noted

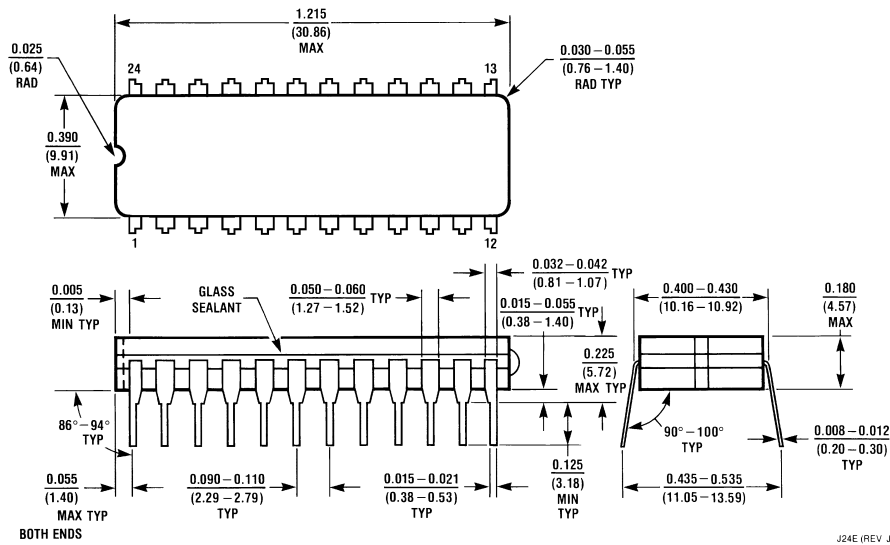

24-Lead Ceramic Dual-In-Line Package (0.400" Wide) (D)
NS Package Number J24E

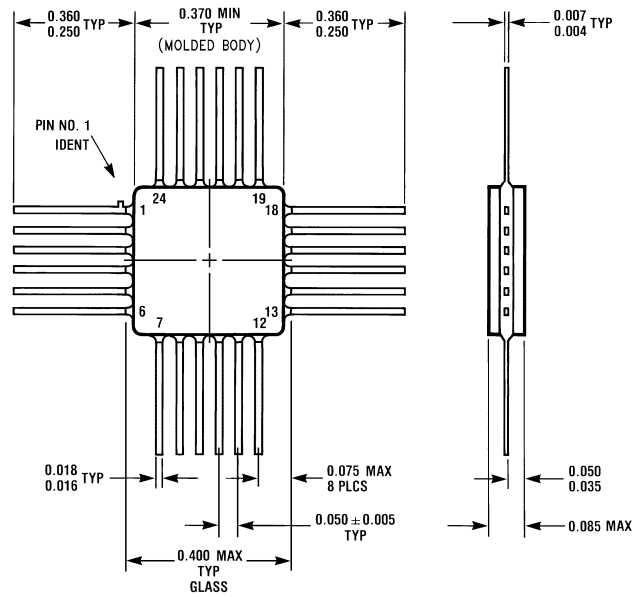

24-Lead Quad Cerpak (F)
NS Package Number W24B

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor
Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor
Asia Pacific Customer
Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

**National Semiconductor
Japan Ltd.**
Tel: 81-3-5620-6175
Fax: 81-3-5620-6179

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А