



Discoidal MLC Feed-Through Capacitors and Filters

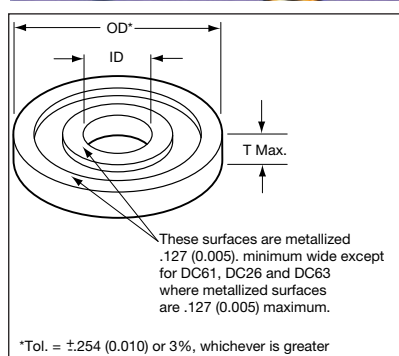

DC Style (US Preferred Sizes)

APPLICATION INFORMATION ON DISCOIDAL

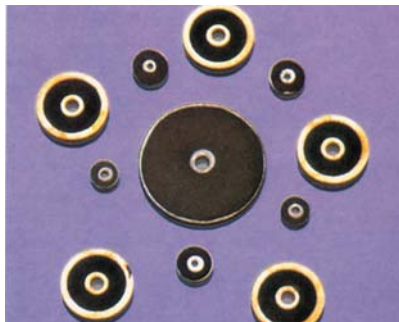

LOWEST CAPACITANCE IMPEDANCES TO GROUND

A discoidal MLC capacitor has very low impedance associated with its ground path since the signal is presented with a multi-directional path. These electrode paths, which can be as many as 100, allow for low ESR and ESL which are the major elements in impedance at high frequencies.


The assembled discoidal element or feed-thru allows signal to be fed in through a chassis or bulkhead, conditioned as it passes through the discoidal, and isolated by the chassis and discoidal from the original signal. An example of this application would be in an AFT circuit where the AC noise signal would be required to be stripped from the DC control signal. Other applications include single line EMI/RFI suppression, L-C filter construction, and coaxial shield bypass filtering.

The shape of the discoidal lends itself to filter construction. The short length allows compact construction where L-C construction is desired. The size freedom associated with this element allows almost any inside/outside diameter combination. By allowing the inside diameter to equal the center insulator diameter of a coaxial signal line and special termination techniques, this device will allow bypass filtering of a floating shield to ground.

* Discoidal capacitors are available in two (2) temperature coefficients (C0G, X7R) and a variety of shapes and sizes, the most standard of which appear on pages 102 and 13.

* Custom designed capacitor arrays are available in an unlimited number of configuration with a wide range of rating voltages (50-2000) and temperature coefficients (NPO, BX, BR, X7R) please see page 121. For additional information please contact AVX.

AVX's DC Series 50V, 100V, 200V, C0G and X7R parts are capable of meeting the requirements of MIL-PRF-31033.



ELECTRICAL SPECIFICATIONS

Temperature Coefficient

C0G: A Temperature Coefficient - 0 ± 30 ppm/°C, -55° +125°C
X7R: C Temperature Coefficient - $\pm 15\%$, -55° to +125°C

Capacitance Test (MIL-STD-202 Method 305)

C0G: 25°C, 1.0 ± 0.2 Vrms at 1KHz, for ≤ 100 pF use 1 MHz
X7R: 25°C, 1.0 ± 0.2 Vrms at 1KHz

Dissipation Factor 25°C

C0G: 0.15% Max @ 25°C, 1.0 ± 0.2 Vrms at 1KHz, for ≤ 100 pF use 1 MHz
X7R: 2.5% Max @ 25°C, 1.0 ± 0.2 Vrms at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

C0G and X7R: 100K M Ω or 1000 M Ω - μ F, whichever is less.

Insulation Resistance 125°C (MIL-STD-202 Method 302)

C0G and X7R: 10K M Ω or 100 M Ω - μ F, whichever is less.

Dielectric Withstanding Voltage 25°C (Flash Test)*

C0G and X7R: 250% rated voltage for 5 seconds with 50 mA max charging current. 500V rated units will be tested at 750 VDC

Life Test (1000 hrs)

C0G and X7R: 200% rated voltage at +125°C
(500 Volt units @ 600 VDC)

Moisture Resistance (MIL-STD-202 Method 106)

C0G, X7R: Ten cycles with no voltage applied.

Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)

HOW TO ORDER

Not RoHS Compliant

DC61	5	A	561	K	A	5	1	06
AVX Style See Pages 119-120	Voltage 50V = 5 100V = 1 200V = 2 500V = 7	Temperature Coefficient C0G = A X7R = C	Capacitance Code (2 significant digits + no. of zeros) Examples: 10 pF = 100 100 pF = 101 1,000 pF = 102 22,000 pF = 223 220,000 pF = 224	Capacitance Tolerance C0G: J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ X7R: K = $\pm 10\%$ M = $\pm 20\%$	Test Level A = Standard	Termination 5 = Silver (AVX Standard) A = Untermated 7 = SnNi w/Au Sputter (100 μ inches)	Inside Diameter See Pages 117-119	Maximum Thickness 04 = 1.02 (0.040) 06 = 1.52 (0.060) 10 = 2.54 (0.100)

For dimensions, voltages or values not specified, please consult factory.

Discoidal MLC Feed-Through Capacitors and Filters



DC Style

SIZE AND CAPACITANCE SPECIFICATIONS

Dimensions: millimeters (inches)

EIA Characteristic		C0G																
AVX Style		DC50	DC80	DC61	DC26	DC63	DC04	DC65	DC66	DC67	DC69	DC32	DC70	DC02	DC71	DC05	DC73	DC72
Outside Diameter (OD)*		0.05 (0.002)	0.80 (0.003)	2.54 (0.100)	3.43 (0.135)	3.81 (0.150)	4.83 (0.190)	5.33 (0.210)	5.97 (0.235)	6.73 (0.265)	8.13 (0.320)	8.51 (0.335)	8.89 (0.350)	9.40 (0.370)	9.78 (0.385)	12.70 (0.500)	15.24 (0.600)	16.26 (0.640)
Thickness Maximum (T)		0.04 (0.002)	0.04 (0.002)	1.52 (0.060)	1.52 (0.060)	1.52 (0.060)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)
Inside Diameter No. (ID)		1	1,2	1,2	1,2,3	1,2,3,4	1,2,3	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4
Termination		Sputter	All															
Voltage		50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50
cap. in pF	10 12 15																	
	18 22 27																	
	33 39 47																	
	56 68 82																	
	100 120 150																	
	180 220 270																	
	330 390 470																	
	560 680 820																	
	1000 1200 1500																	
	1800 2200 2700																	
	3300 3900 4700																	
	5600 6800 8200																	
	10,000 12,000 15,000																	
	18,000 22,000 27,000																	
	33,000 39,000 47,000																	
	56,000 68,000 82,000																	
	100,000 120,000 150,000																	
	180,000 220,000 270,000																	
	330,000 390,000 470,000																	
	560,000 680,000																	

DC50 termination can only be sputter Au

*Outside Diameter:

Tolerance is ± 0.254 (0.010) or 3% whichever is greater

Inside Diameter:

$$1 = .635^{+.127}_{-.051} (.025^{+.005}_{-.002})$$

$$2 = .762^{+.127}_{-.051} (.030^{+.005}_{-.002})$$

$$3 = .914^{+.127}_{-.051} (.036^{+.005}_{-.002})$$

$$4 = 1.07^{+.127}_{-.051} (.042^{+.005}_{-.002})$$

$$5 = 1.27 \pm .127 (0.050 \pm .005)$$

$$6 = 1.52 \pm .127 (0.060 \pm .005)$$

$$7 = 1.73 \pm .127 (0.068 \pm .005)$$



Discoidal MLC Feed-Through Capacitors and Filters



DC Style

SIZE AND CAPACITANCE SPECIFICATIONS

Dimensions: millimeters (inches)


EIA Characteristic	X7R																
AVX Style	DC50	DC80	DC61	DC26	DC63	DC04	DC65	DC66	DC67	DC69	DC32	DC70	DC02	DC71	DC05	DC73	DC72
Outside Diameter (OD)*	0.05 (0.002)	0.08 (0.003)	2.54 (0.100)	3.43 (0.135)	3.81 (0.150)	4.83 (0.190)	5.33 (0.210)	5.97 (0.235)	6.73 (0.265)	8.13 (0.320)	8.51 (0.335)	8.89 (0.350)	9.40 (0.370)	9.78 (0.385)	12.70 (0.500)	15.24 (0.600)	16.26 (0.640)
Thickness Maximum (T)	0.04 (0.002)	0.04 (0.002)	1.52 (0.060)	1.52 (0.060)	1.52 (0.060)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)	2.54 (0.100)
Inside Diameter No. (ID)	1	1,2	1,2	1,2,3	1,2,3,4	1,2,3	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4	5,6,7 1,2,3,4
Termination	Sputter	All															
Voltage	50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50	500 200 100 50
cap. in pF	56 68 82																
	100 120 150																
	180 220 270																
	330 390 470																
	560 680 820																
	1000 1200 1500																
	1800 2200 2700																
	3300 3900 4700																
	5600 6800 8200																
	10,000 12,000 15,000																
	18,000 22,000 27,000																
	33,000 39,000 47,000																
	56,000 68,000 82,000																
	100,000 120,000 150,000																
	180,000 220,000 270,000																
	330,000 390,000 470,000																
	560,000 680,000 820,000																
	1.0 μ F 1.2 μ F 1.5 μ F																
	1.8 μ F 2.2 μ F 2.7 μ F																
	3.3 μ F 3.9 μ F 6.8 μ F																

DC50 termination can only be sputter Au

***Outside Diameter:**
Tolerance is ± 0.254 (0.010) or 3%
whichever is greater

Inside Diameter:		
1 = $.635^{+.127}_{-.051}$ ($.025^{+.005}_{-.002}$)	3 = $.914^{+.127}_{-.051}$ ($.036^{+.005}_{-.002}$)	5 = $1.27 \pm .127$ ($0.050 \pm .005$)
2 = $.762^{+.127}_{-.051}$ ($.030^{+.005}_{-.002}$)	4 = $1.07^{+.127}_{-.051}$ ($.042^{+.005}_{-.002}$)	6 = $1.52 \pm .127$ ($0.060 \pm .005$)
		7 = $1.73 \pm .127$ ($0.068 \pm .005$)



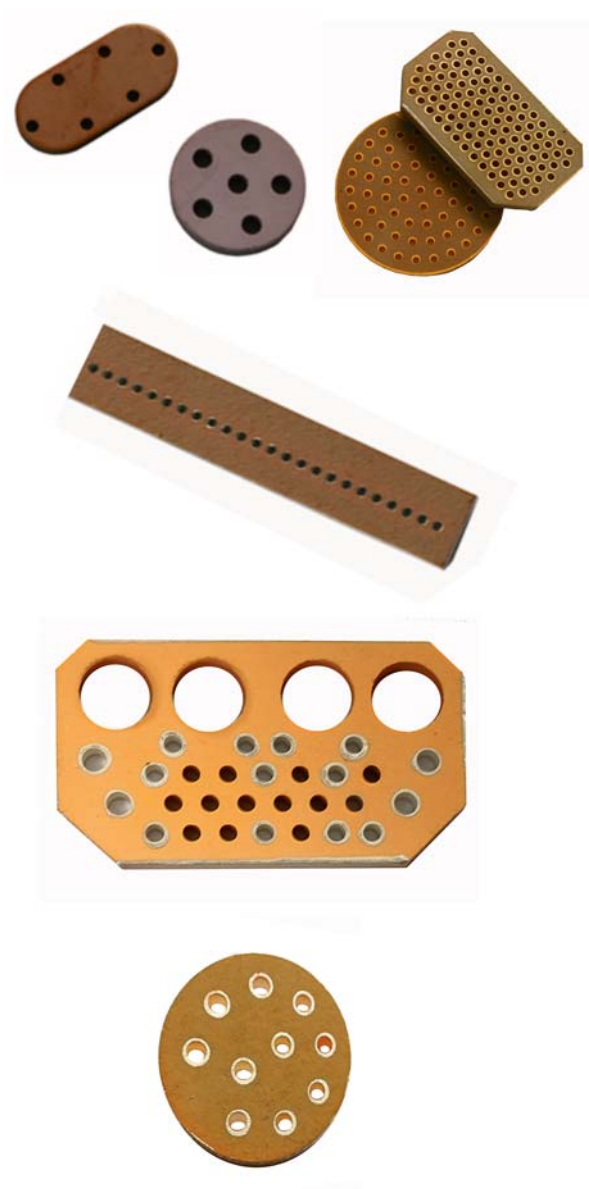

Custom Applications requiring planar capacitor arrays designed to customer specific schematic including unique shapes, sizes, hole / pin configurations, multiple capacitor values, internal &/or external grounds, and more.

APPLICATIONS

- Implantable Medical
- Military
- Aerospace
- EMI Filters Assembly
- EMI Filter Arrays

PRODUCTS

These capacitor arrays form the basis for many custom filter assemblies. For full detail of these options, please follow the link below to our EMI filter master catalog.

<http://www.avx.com/docs/masterpubs/emift.pdf>

BENEFITS

- A custom designed filter bracket will help:
- To reduce your yield losses
- To eliminate filter rework in assemblies
- To reduce system assembly costs
- To minimize your inventory

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А