

NHD-7.0-800480EF-ATXL#-T

TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

| | |
|---------|--------------------------------------|
| NHD- | Newhaven Display |
| 7.0- | 7.0" Diagonal |
| 800480- | 800xRGBx480 Pixels |
| EF- | Model |
| A- | Built-in Driver / No Controller |
| T- | White LED Backlight |
| X- | TFT |
| L- | 12:00 Optimal View, Wide Temperature |
| #- | RoHS Compliant |
| T- | Resistive Touch Panel |

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com


Document Revision History

| Revision | Date | Description | Changed by |
|----------|-----------|-------------------------------------|------------|
| 0 | 8/29/2013 | Initial Release | ML |
| 1 | 8/12/2014 | Touch Panel Characteristics updated | ML |
| 2 | 4/1/2015 | Mechanical drawing updated | AK |

Functions and Features

- 800xRGBx480 resolution
- LED backlight
- 24-bit digital RGB interface
- 16.7M colors
- 4-wire resistive Touch Panel

Mechanical Drawing

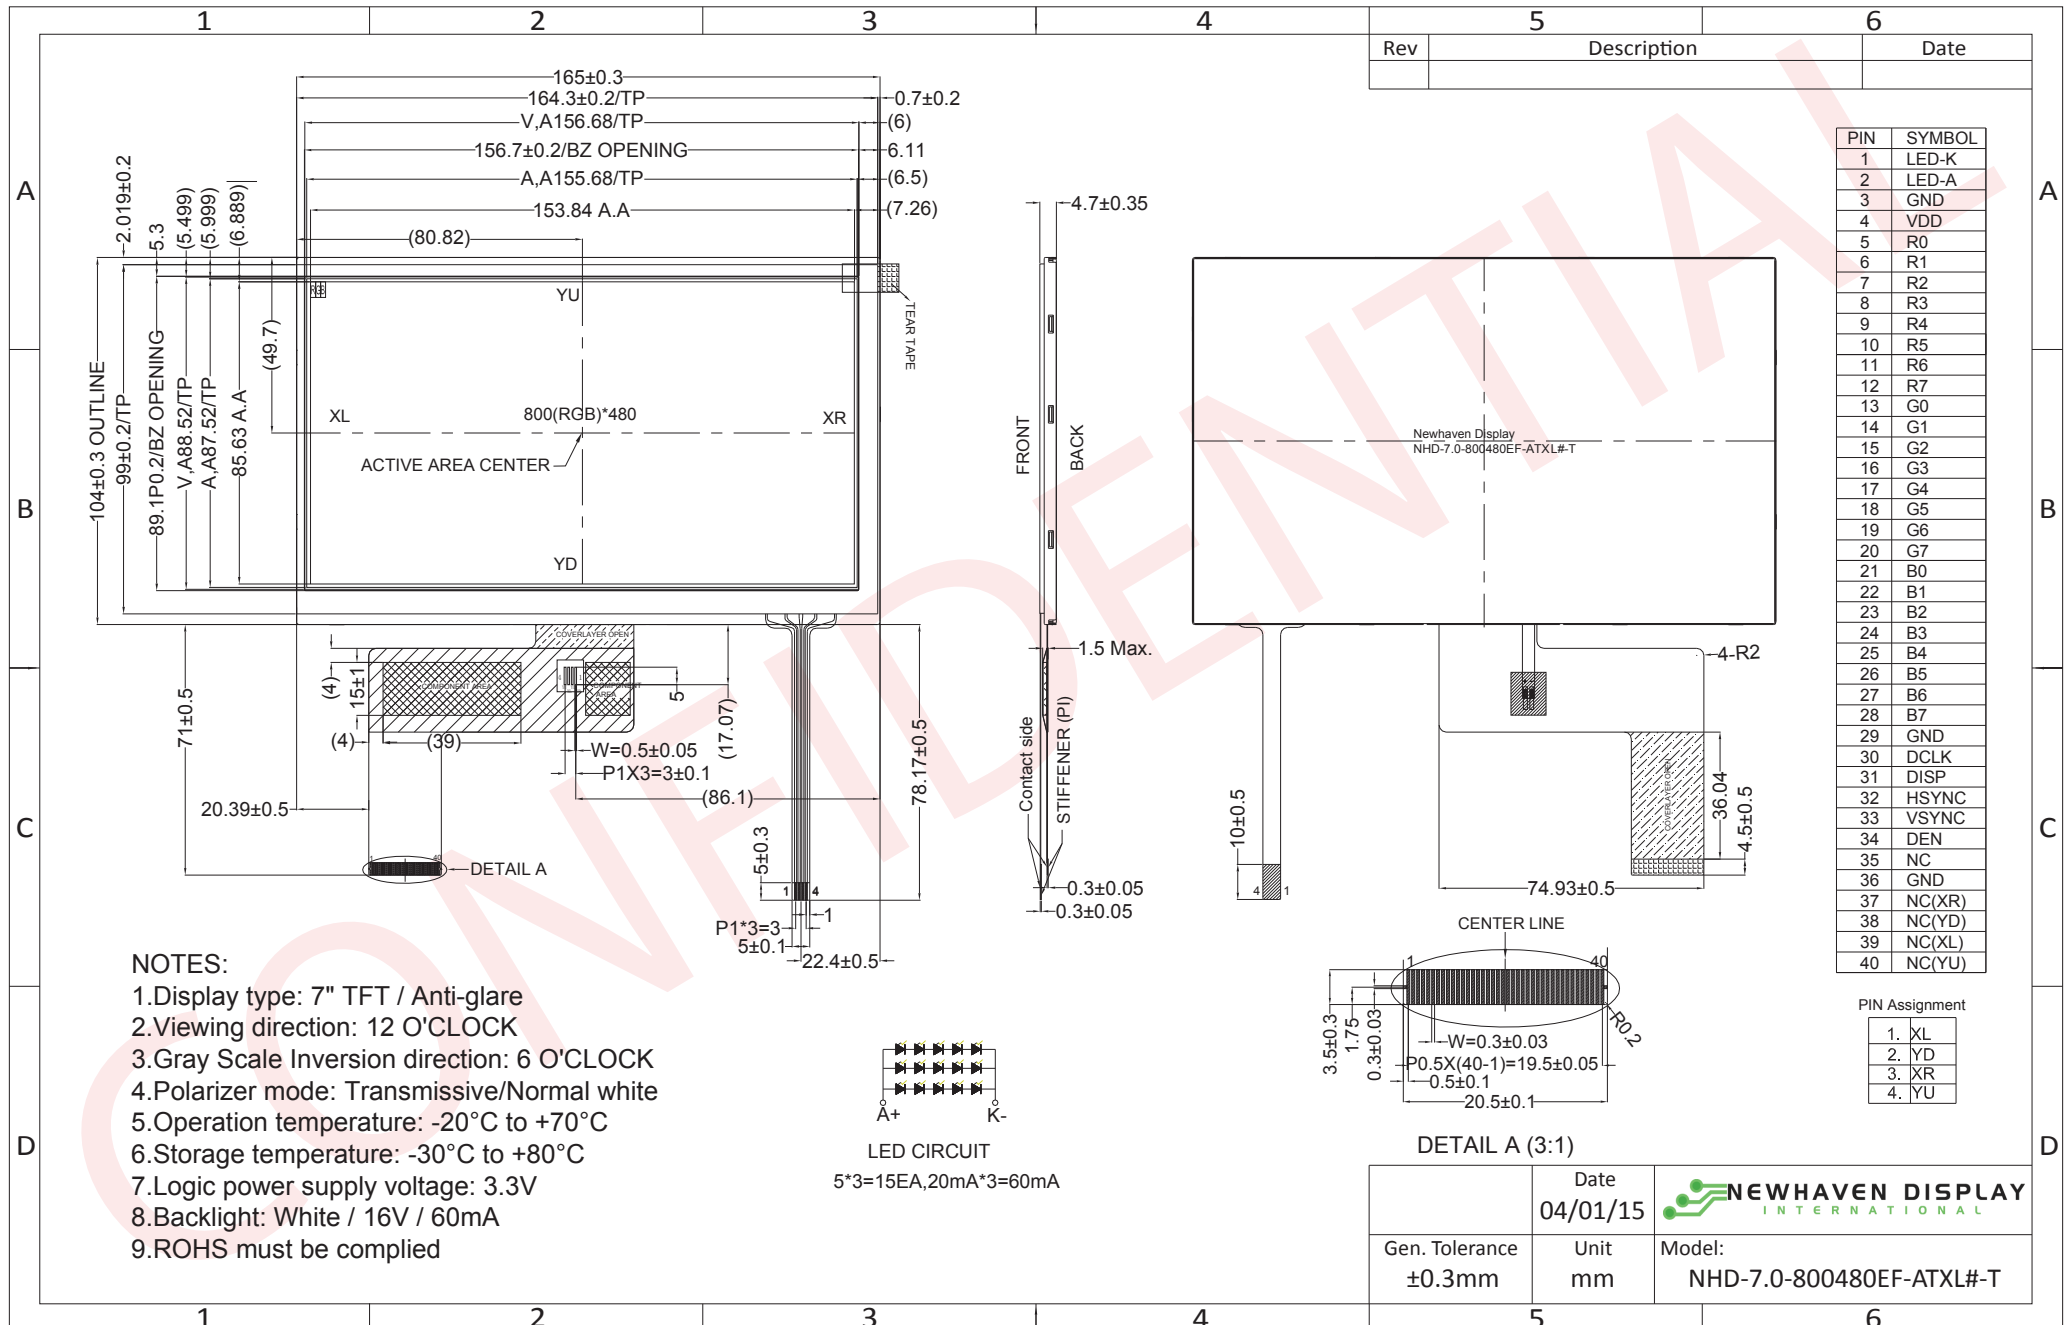

The drawing contained herein is the exclusive property of Newhaven Display International, Inc. and shall not be copied, reproduced, and/or disclosed in any format without permission.

Pin Description

TFT:

| Pin No. | Symbol | Connection | Function Description |
|---------|---------|--------------|----------------------------------|
| 1 | LED-K | Power Supply | Backlight Cathode |
| 2 | LED-A | Power Supply | Backlight Anode (60mA @ 16V) |
| 3 | GND | Power Supply | Ground |
| 4 | VDD | Power Supply | Supply Voltage for LCD (+3.3V) |
| 5-12 | [R0-R7] | MPU | Red Data signals |
| 13-20 | [G0-G7] | MPU | Green Data signals |
| 21-28 | [B0-B7] | MPU | Blue Data signals |
| 29 | GND | Power Supply | Ground |
| 30 | CLKIN | MPU | Clock for Input data |
| 31 | DISP | MPU | Display ON/OFF DISP=1:Display ON |
| 32 | HSD | MPU | Line Synchronization signal |
| 33 | VSD | MPU | Frame Synchronization signal |
| 34 | DEN | MPU | Data Enable signal |
| 35 | NC | - | No Connect |
| 36 | GND | Power Supply | Ground |
| 37 | NC(XR) | - | No Connect |
| 38 | NC(YD) | - | No Connect |
| 39 | NC(XL) | - | No Connect |
| 40 | NC(YU) | - | No Connect |

Recommended connector: 0.5mm pitch 40-Conductor FFC. Molex p/n: 54104-4031 (top contact)

Touch Panel:

| Pin No. | Symbol | Connection | Function Description |
|---------|--------|-------------|----------------------|
| 1 | XL | Touch Panel | Touch Panel – LEFT |
| 2 | YD | Touch Panel | Touch Panel – DOWN |
| 3 | XR | Touch Panel | Touch Panel – RIGHT |
| 4 | YU | Touch Panel | Touch Panel – UP |

Recommended connector: 1.0mm pitch 4-Conductor FFC. Molex p/n: 52207-0485 (top contact)

Driver/Controller Information

Built-in HX8264-D02 Source Driver: http://www.newhavendisplay.com/app_notes/HX8264-D02.pdf

Built-in HX8664-B Gate Driver: http://www.newhavendisplay.com/app_notes/HX8664-B.pdf

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|--------|----------------|---------|------|---------|------|
| Operating Temperature Range | Top | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | Tst | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | VDD | - | 3.0 | 3.3 | 3.6 | V |
| Supply Current | IDD | VDD=3.3V, 25°C | 60 | 85 | 120 | mA |
| "H" Level Input | VIH | - | 0.7*VDD | - | VDD | V |
| "L" Level Input | VIL | - | GND | - | 0.3*VDD | V |
| "H" Level Output | VOH | - | VDD-0.4 | - | - | V |
| "L" Level Output | VOL | - | - | - | GND+0.4 | V |
| Backlight Supply Voltage | VLED | - | 14.5 | 16 | 16.5 | V |
| Backlight Supply Current | ILED | VLED=16V | 45 | 60 | 75 | mA |

Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|-----------|------|------|------|-------------------|
| Viewing Angle – Top | - | Cr ≥ 10 | - | 55 | - | ° |
| Viewing Angle – Bottom | - | | - | 65 | - | ° |
| Viewing Angle – Left | - | | - | 70 | - | ° |
| Viewing Angle – Right | - | | - | 70 | - | ° |
| Contrast Ratio | Cr | - | - | 400 | - | - |
| Luminance | L | - | 170 | 220 | - | cd/m ² |
| Response Time | Tr+Tf | - | - | 25 | 35 | ms |

Viewing angles based on 6:00 gray scale inversion

Touch Panel Characteristics

| Item | Min. | Typ. | Max. | Unit |
|------------------------------|-----------|------|------|------------|
| Linearity | -3 | - | 3 | % |
| Terminal Resistance – X-Axis | 50 | - | 400 | Ω |
| Terminal Resistance – Y-Axis | 350 | - | 1100 | Ω |
| Insulation Resistance | 20 | - | - | MΩ |
| Operating Voltage | - | - | 10 | V |
| Chattering | - | - | 10 | ms |
| Activation Force | 10 | - | 100 | g |
| Pen Writing Durability | 20,000 | - | - | Characters |
| Pitting Durability | 1,000,000 | - | - | Touches |
| Surface Hardness | 3 | - | - | H |

Timing Characteristics

| Parameter | Symbol | Spec. | | | Unit |
|------------------------|-----------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| HS setup time | T_{hst} | 8 | - | - | ns |
| HS hold time | T_{hhd} | 8 | - | - | ns |
| VS setup time | T_{vst} | 8 | - | - | ns |
| VS hold time | T_{vhd} | 8 | - | - | ns |
| Data setup time | T_{dsu} | 8 | - | - | ns |
| Data hold time | T_{dhd} | 8 | - | - | ns |
| DE setup time | T_{esu} | 8 | - | - | ns |
| DE hold time | T_{ehd} | 8 | - | - | ns |
| VDD Power On Slew rate | T_{POR} | - | - | 20 | ms |
| RSTB pulse width | T_{Rst} | 10 | - | - | us |
| CLKIN cycle time | T_{cph} | 20 | - | - | ns |
| CLKIN pulse duty | T_{cwh} | 40 | 50 | 60 | % |
| Output stable time | T_{sst} | - | - | 6 | us |


Horizontal Timing

| Parameter | Symbol | Spec. | | | Unit |
|--------------------------|--------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| Horizontal Display Area | thd | 800 | | | DCLK |
| DCLK frequency | fclk | - | 30 | 50 | MHz |
| One Horizontal Line | th | 889 | 928 | 1143 | DCLK |
| HS pulse width | thpw | 1 | 48 | 255 | DCLK |
| HS Back Porch (Blanking) | thb | 88 | | | DCLK |
| HS Front Porch | thfp | 1 | 40 | 255 | DCLK |
| DE mode Blanking | th-thd | 85 | 128 | 512 | DCLK |


Vertical Timing

| Parameter | Symbol | Spec. | | | Unit |
|--------------------------|--------|-------|------|------|-------|
| | | Min. | Typ. | Max. | |
| Vertical Display Area | tvd | 480 | | | T_H |
| VS period time | tv | 513 | 525 | 767 | T_H |
| VS pulse width | tvpw | 3 | 3 | 255 | T_H |
| VS Back Porch (Blanking) | tvb | 32 | | | T_H |
| VS Front Porch | tvfp | 1 | 13 | 255 | T_H |
| DE mode Blanking | tv-tvd | 4 | 45 | 255 | T_H |

Horizontal Timing

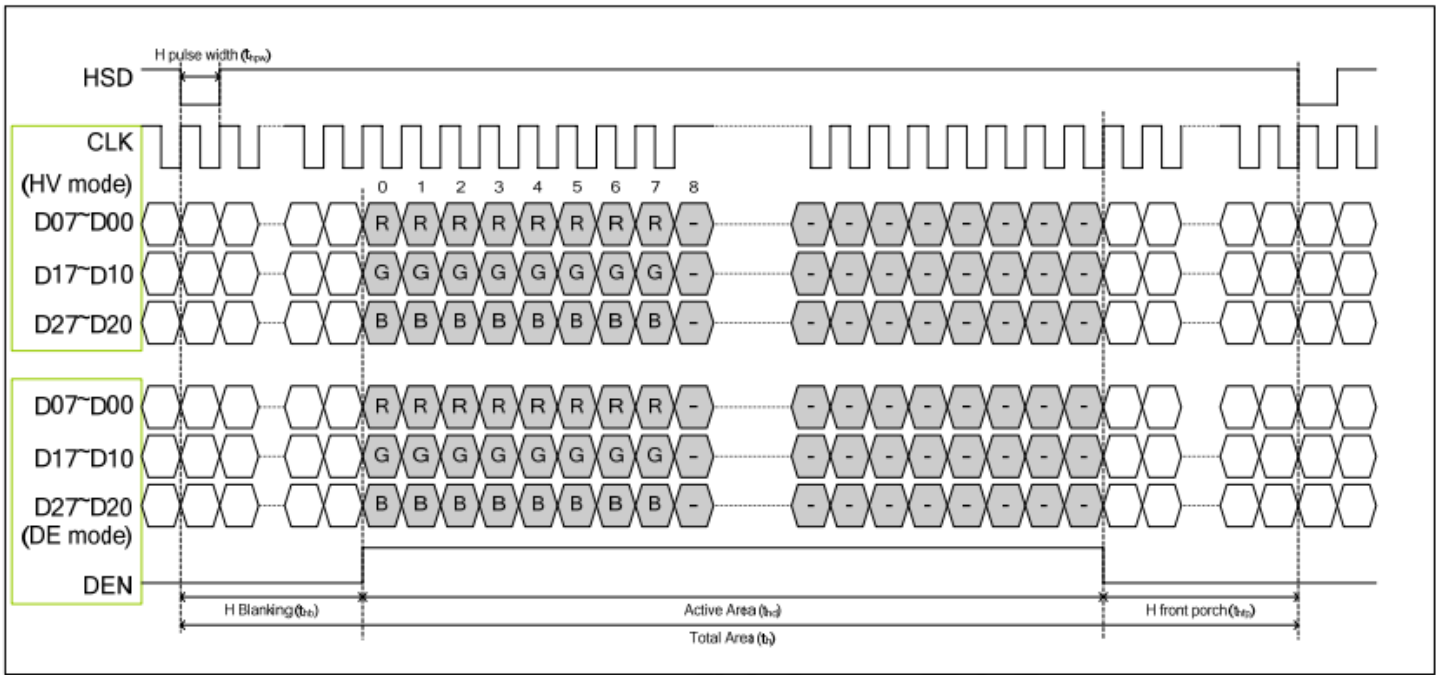


Vertical Timing

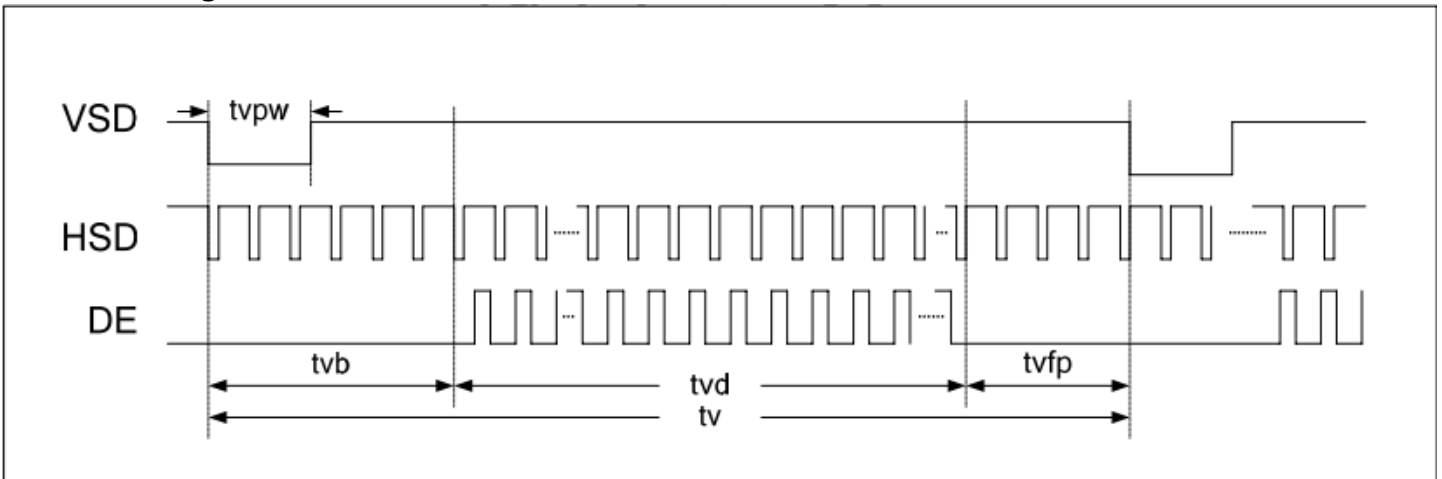


Parallel 24-bit RGB mode

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------|--------|------|------|------|-------|---------------|
| CLKIN Frequency | Fclk | - | 40 | 50 | MHz | VDD=3.0V~3.6V |
| CLKIN Cycle Time | Tclk | 20 | 25 | - | ns | - |
| CLKIN Pulse Duty | Tcwh | 40 | 50 | 60 | % | Tclk |
| Time from HSD to Source Output | Thso | | 64 | | CLKIN | - |
| Time from HSD to LD | Thld | | 64 | | CLKIN | - |
| Time from HSD to STV | Thstv | | 2 | | CLKIN | - |
| Time from HSD to CKV | Thckv | | 20 | | CLKIN | - |
| Time from HSD to OEV | Thoev | | 4 | | CLKIN | - |
| LD Pulse Width | Twld | | 10 | | CLKIN | - |
| CKV Pulse Width | Twckv | | 66 | | CLKIN | - |
| OEV Pulse Width | Twoev | | 74 | | CLKIN | - |


Input Clock and Data Timing

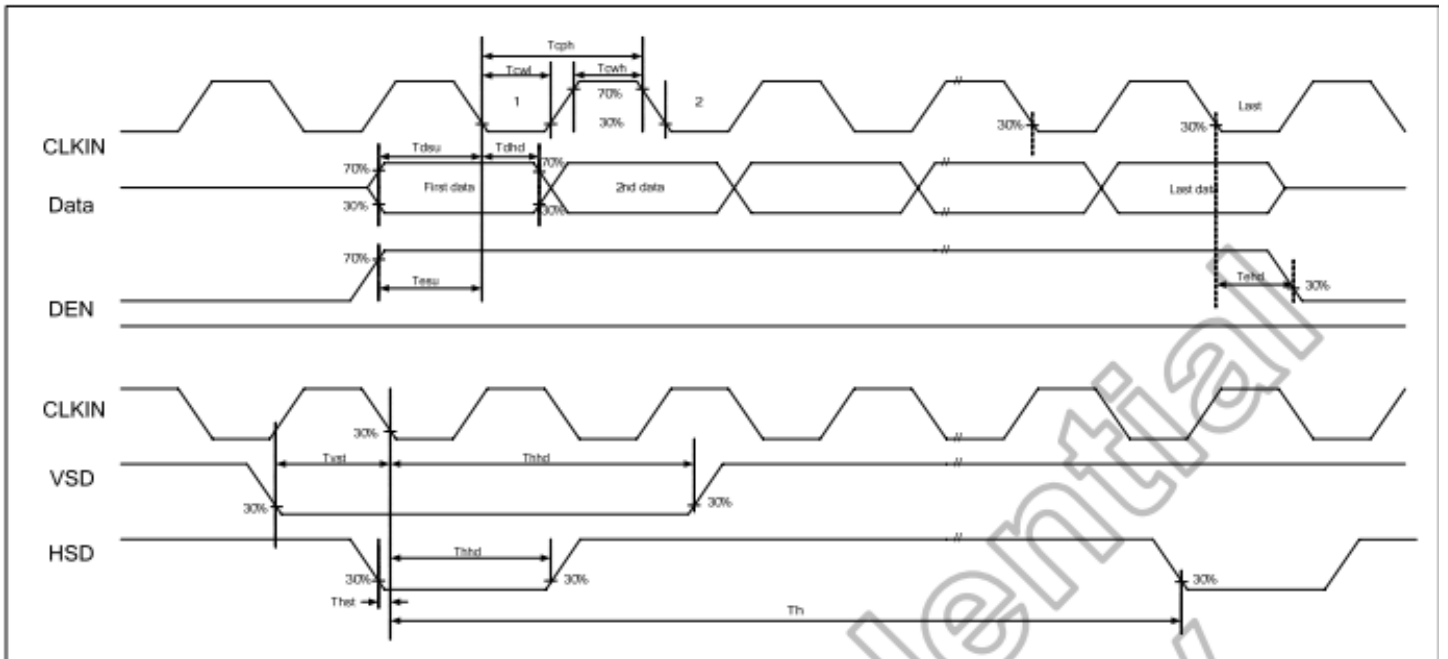


Source Output Timing

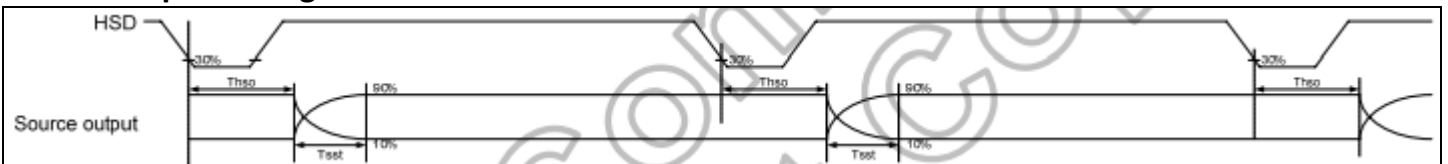


Vertical Timing HV (Cascade)

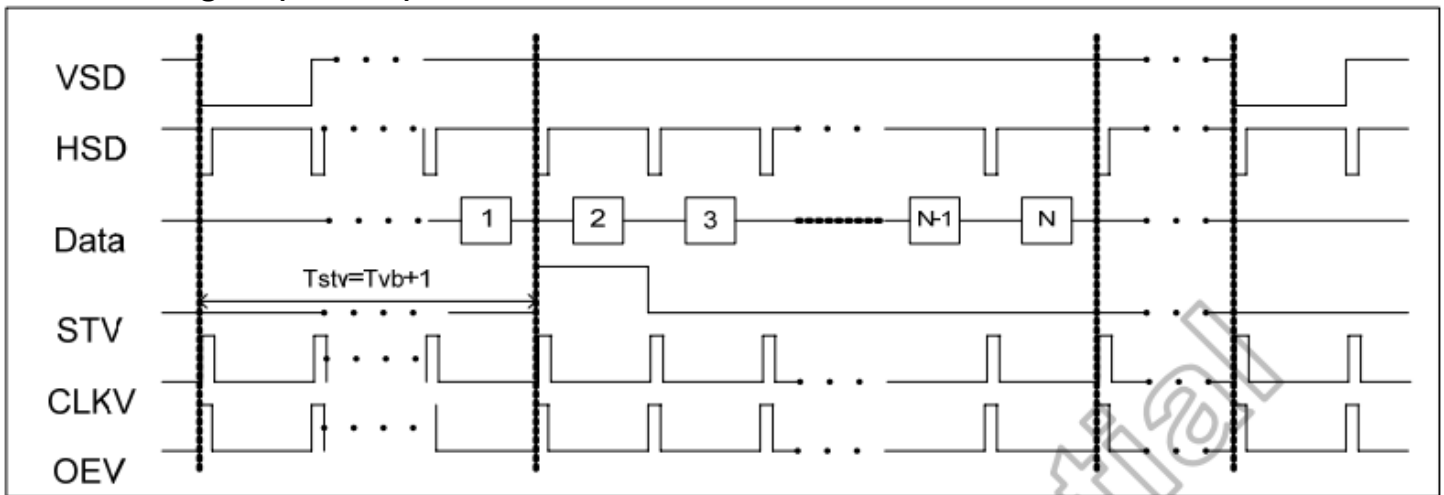


Vertical Timing DE (Cascade)

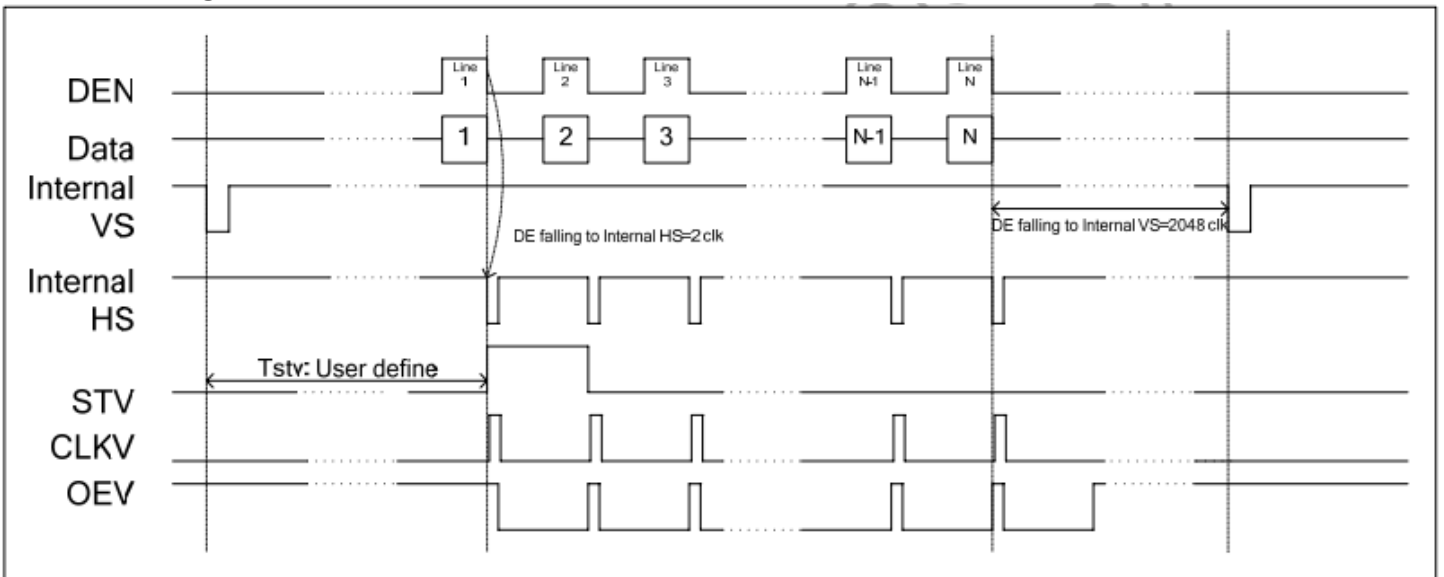


Gate Output Timing (Cascade)

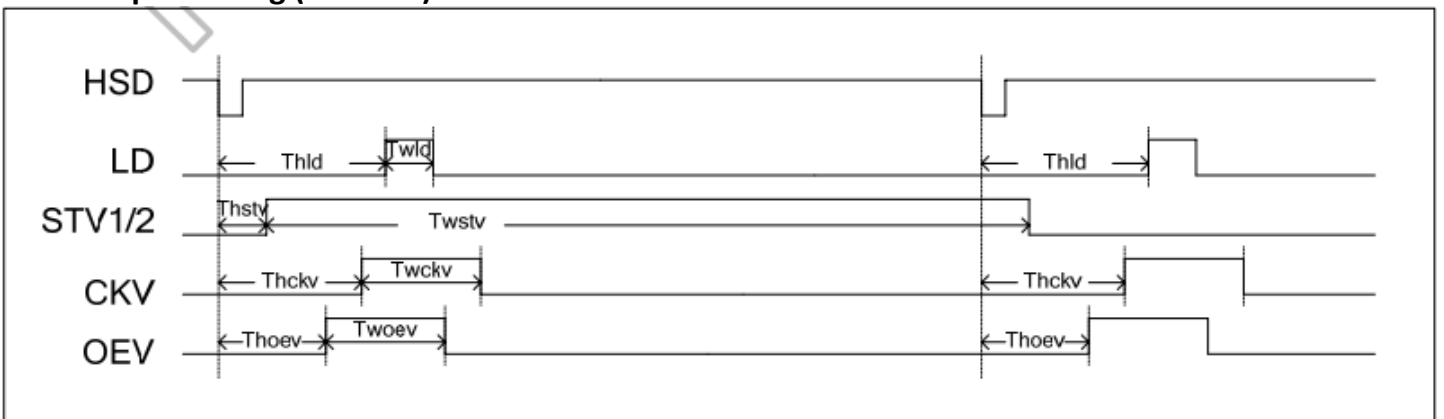


Vertical Timing HV (Dual Gate)

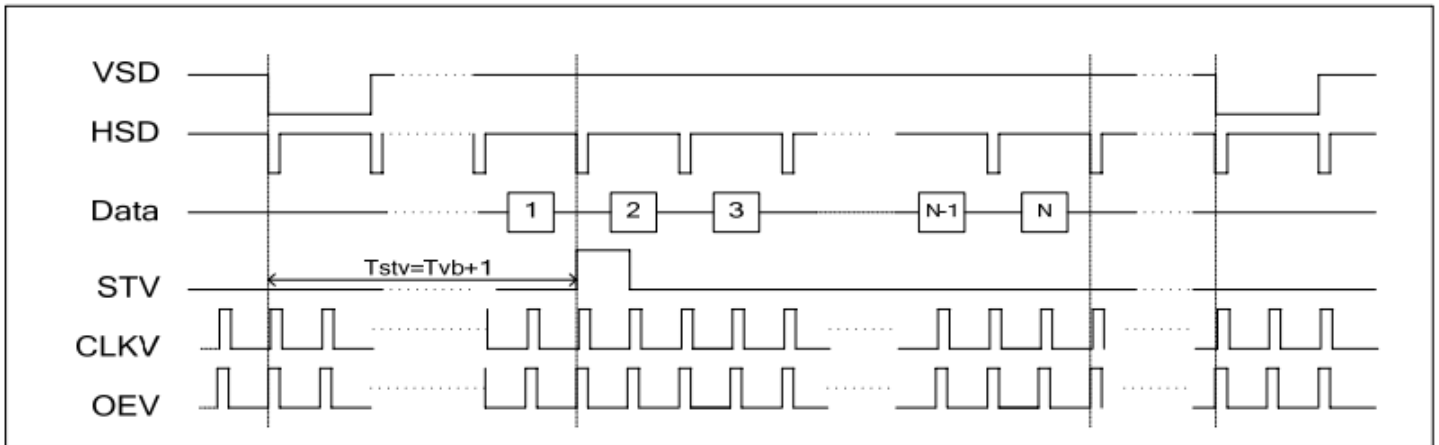


Vertical Timing DE (Dual Gate)

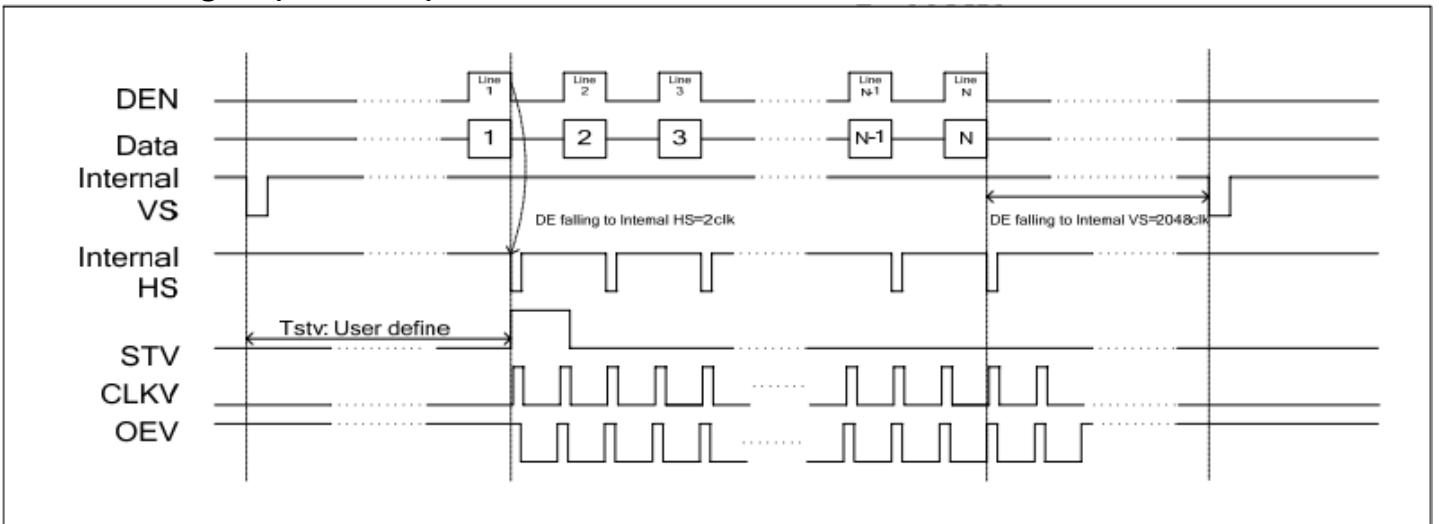


Gate Output Timing (Dual Gate)

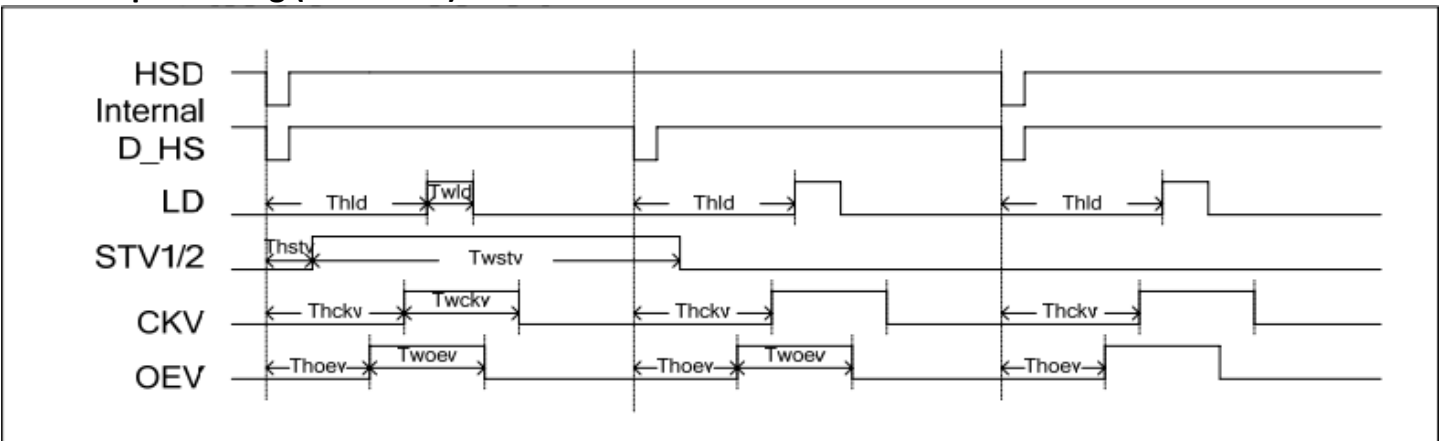

Power ON/OFF Sequence

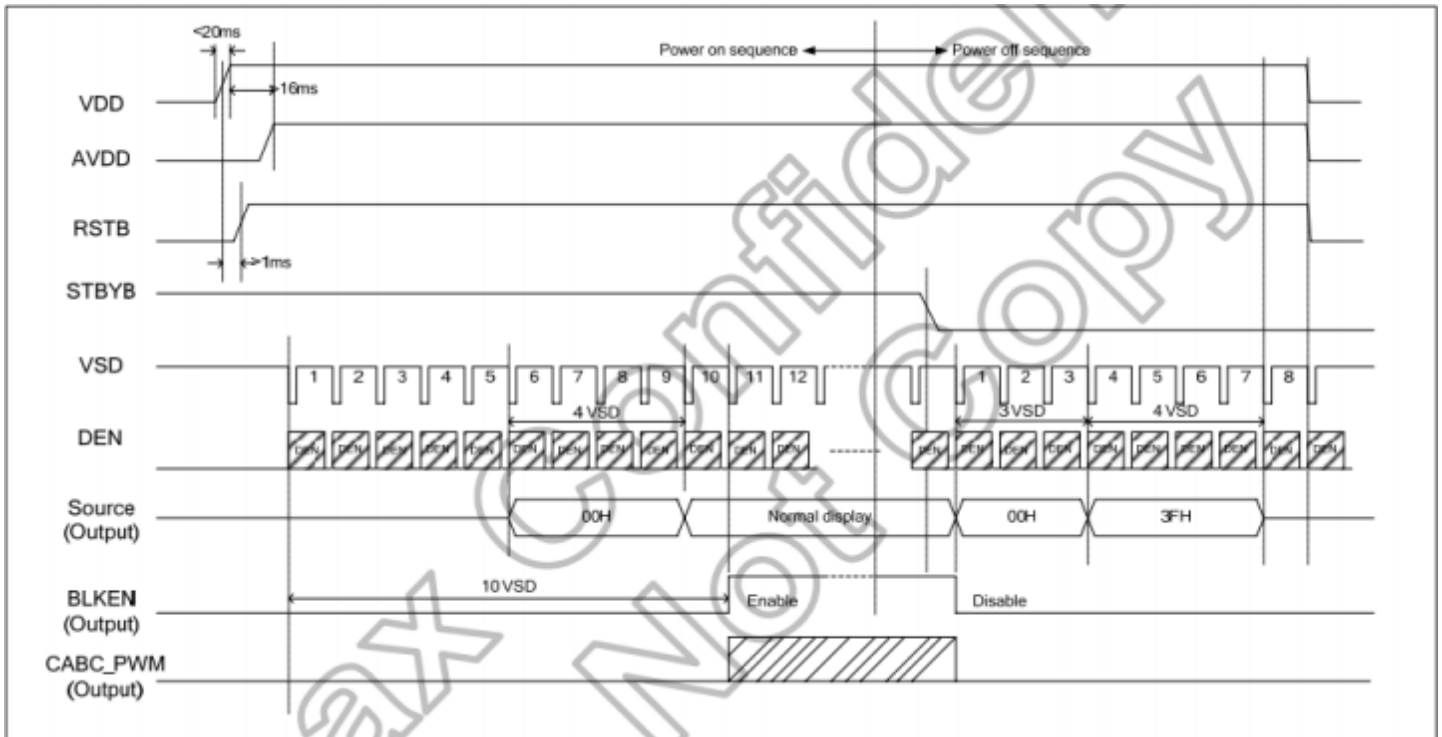

Enter/Exit Standby Mode Sequence

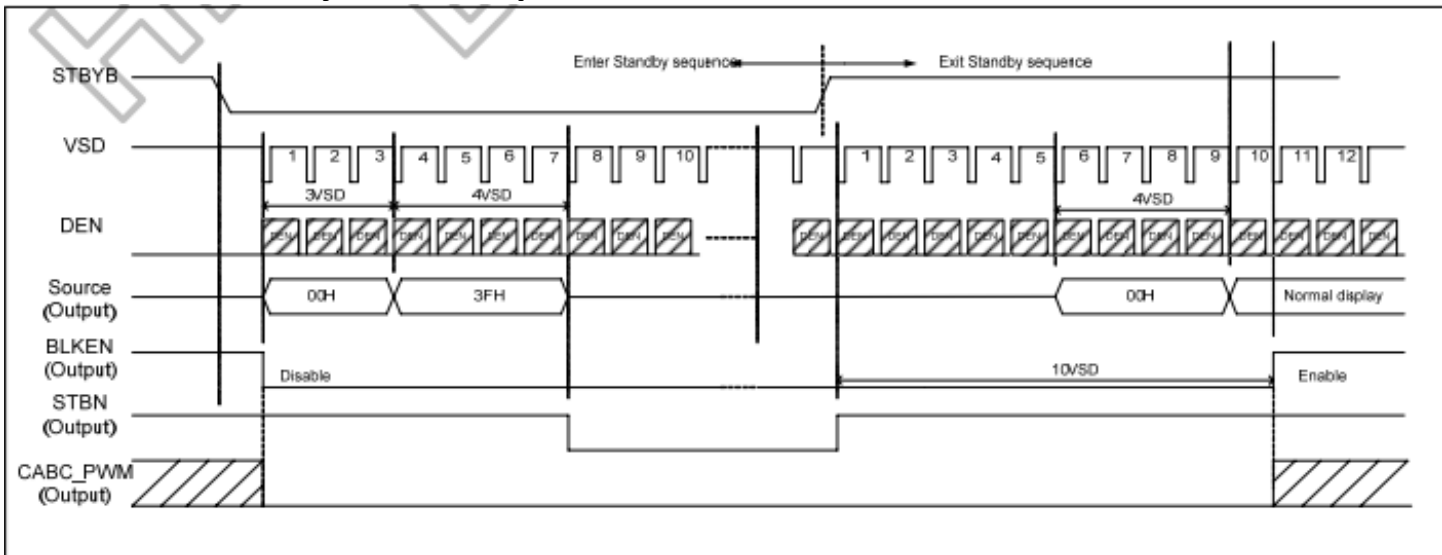

Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|---|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C , 96hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C , 96hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C, 96hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C , 96hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +50°C , 90% RH , 96hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | -30°C, 30min -> 80°C, 30min, Change time: 5min, 10 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz , 1.5mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=800V, RS=1.5kΩ, CS=100pF One time | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А