

**KRPA Series Panel Plug-in Relay**

- 5 to 10A current capability
- Contact arrangements of 1, 2 and 3 form C (CO)
- Octal type termination for quick installation
- Indicator lamp available on certain models



Typical applications  
Baggage handling, lighting, inspection equipment, marine.

**Approvals**

UL E22575; CSA LR15734  
Technical data of approved types on request.

**Contact Data**

Contact arrangement	1 form C (CO), 2 form C (CO), 3 form C (CO)	
Rated voltage	240VAC	
Rated current	10A	
Contact material	Ag	AgCdO
Min. recommended contact load	100mA, 12VDC	300mA, 12VDC
Frequency of operation	360 ops./hour	360 ops./hour

**Contact ratings**

Type	Load	Cycles
<b>UL 508</b>		
KRPA, Ag	5A, 120VAC	100x10 <sup>3</sup>
	3A, 240VAC	100x10 <sup>3</sup>
	1/10HP, 120VAC	1x10 <sup>3</sup>
	1/6HP, 240VAC	1x10 <sup>3</sup>
KRPA, AgCdO	10A, 240VAC	100x10 <sup>3</sup>
	1/3HP, 120VAC	1x10 <sup>3</sup>
	1/2HP, 240VAC	1x10 <sup>3</sup>
KA, Ag	5A, 120VAC	
	3A, 240VAC	
	1/10HP, 120VAC	
	1/6HP, 240VAC	
KA, AgCdO	10A, 120VAC	
	6A, 240VAC	
	1/6HP, 120VAC	
	1/3HP, 240VAC	
Mechanical endurance		10x10 <sup>6</sup> ops.

**Coil Data**

Coil voltage range	6 to 220VDC 6 to 240VAC
Coil insulation system according UL	Class B

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Coil resistance Ω±10%	Rated coil power W
6	6	4.5	32	1.15
12	12	9.0	120	1.2
24	24	18.0	472	1.25
48	48	36.0	1800	1.3
110	110	82.5	10000	1.2
-	220	Use 110V relay with 10KΩ, 5W resistor in series		

All figures are given for coil without preenergization, at ambient temperature +23°C.

**Coil Data (continued)**

**Coil versions, AC coil**

Coil code	Rated voltage VAC	Operate voltage VAC	Coil resistance Ω±15%	Rated coil power VA
6	6	5.1	6	2.01
12	12	10.2	24	2.02
24	24	20.4	85	2.02
120	120	102.0	2250	2.1
240	240	204.0	9110	2.1

All figures are given for coil without preenergization, at ambient temperature +23°C.

**Insulation Data**

Initial dielectric strength		
between open contacts		1000V <sub>rms</sub>
between contact and coil		1000V <sub>rms</sub>
between adjacent contacts		1000V <sub>rms</sub>
Initial insulation resistance		
between insulated elements		KRPA: 1000MΩ KA: 100MΩ

**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customer-support/rohssupportcenter](http://www.te.com/customer-support/rohssupportcenter)

Ambient temperature		
DC coil		KRPA: -45°C to 70°C KA: -45°C to 85°C
AC coil		KRPA: -45°C to 55°C KA: -45°C to 70°C
Category of environmental protection		
IEC 61810		RT1 - dust protected KRPA and RTO - open style KA
Terminal type		KRPA: 8- or 11-pin octal-type plug KA: solder terminals
Weight		85g
Packaging/unit		tray/25 pcs., box/150pcs.

**Accessories**


For details see datasheet      Sockets and Accessories, KRPA Relays

Product Code	Description
27E891	Two pole DIN socket (use 20C318 clip)
27E892	Three pole DIN socket (use 20C318 clip)
27E122	Two pole track mount socket (use 20C318 clip)
27E123	Three pole track mount socket (use 20C318 clip)


**KRPA Series Panel Plug-in Relay** (Continued)

**Dimensions**

KRPA

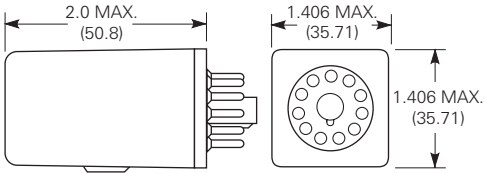


KA

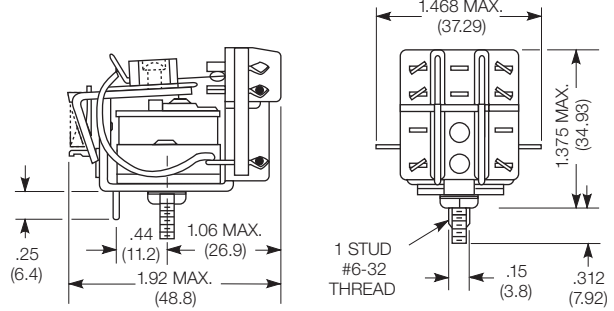

**Terminal assignment**


KRPA

1 form C




KRPA

2 form C




KRPA

3 form C




KA

1 form C




KA

2 form C



KA

3 form C



**Product code structure**

Typical product code **KRPA -5 A Y -120**

<b>Type</b>		<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>KRPA</b> Enclosed relay with octal-style plug <b>KA</b> Open style relay with solder terminals						
<b>Contact arrangement and rating</b>		<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>5</b> 1 form C (CO)	<b>11</b> 2 form C (CO)					
<b>14</b> 3 form C (CO)		<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>Coil Input</b>						
<b>A</b> AC, 50/60Hz	<b>D</b> DC	<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>Contact material and indicator lamp option</b>						
<b>Y</b> Ag, no indicator lamp	<b>G</b> AgCdO, no indicator lamp	<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>N</b> AgCdO, with indicator (Code N only available with relay type KRPA)						
<b>Options</b>		<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>Leave blank</b> no additional options						
<b>F</b> Au flashed contacts (Options F and P only available with relay type KRPA)	<b>P</b> Push to test button	<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>
<b>Coil voltage</b>						
Coil code: please refer to coil versions table		<b>KRPA</b>	<b>-5</b>	<b>A</b>	<b>Y</b>	<b>-120</b>

**KRPA Series Panel Plug-in Relay** (Continued)

Product Code	Arrangement	Contact Material	Coil	Option	Part Number		
KA-5AG-120	1 form C, 1 CO	AgCdO	120VAC	Open style	7-1393099-1		
KA-5AY-120		Ag			7-1393099-3		
KA-5DG-6		AgCdO			6VDC	7-1393099-9	
KA-5DG-12					12VDC	7-1393099-7	
KA-5DG-110			110VDC	7-1393099-6			
KA-11AG-120	2 form C, 2 CO	Ag	120VAC		3-1393099-6		
KA-11AY-6			6VAC	4-1393099-1			
KA-11AY-24			24VAC	4-1393099-0			
KA-11AY-120			120VAC	3-1393099-9			
KA-11DG-12	AgCdO	12VDC		4-1393099-3			
KA-11DG-24		24VDC	4-1393099-5				
KA-11DG-110		110VDC	4-1393099-2				
KA-14AG-120	3 form C, 3 CO	Ag	120VAC		5-1393099-0		
KA-14AY-120					5-1393099-4		
KA-14DG-24			AgCdO	24VDC	5-1393099-7		
KA-14DG-110				110VDC	5-1393099-5		
KRPA-5AG-24	1 form C, 1 CO		24VAC	None	9-1393104-9		
KRPA-5AG-120			120VAC		9-1393104-8		
KRPA-5DG-6			6VDC		1393105-5		
KRPA-5DG-12			12VDC		1393105-3		
KRPA-5DG-24		24VDC	1393105-4				
KRPA-5DY-12	Ag	12VDC		1393105-6			
KRPA-5DY-24		24VDC	1393105-7				
KRPA-11AG-6		AgCdO	6VAC		2-1393104-8		
KRPA-11AG-12	2 form C, 2 CO		12VAC		2-1393104-4		
KRPA-11AG-24			24VAC	1-1393105-2			
KRPA-11AG-120			120VAC	2-1393104-5			
KRPA-11AG-240			240VAC	2-1393104-7			
KRPA-11AN-12				12VAC	Indicator	3-1393104-1	
KRPA-11AN-24				24VAC		3-1393104-3	
KRPA-11AN-120				120VAC		3-1393104-2	
KRPA-11AN-240				240VAC		3-1393104-4	
KRPA-11AY-6			Ag		6VAC	None	3-1393104-9
KRPA-11AY-12					12VAC		3-1393104-5
KRPA-11AY-24					24VAC		3-1393104-7
KRPA-11AY-120					120VAC		3-1393104-6
KRPA-11AY-240		240VAC		3-1393104-8			
KRPA-11DG-6	AgCdO		6VDC		4-1393104-7		
KRPA-11DG-12			12VDC	4-1393104-3			
KRPA-11DG-24			24VDC	4-1393104-5			
KRPA-11DG-48			48VDC	4-1393104-6			
KRPA-11DG-110			110VDC	4-1393104-2			
KRPA-11DG-125			125VDC	4-1393104-4			
KRPA-11DG-24			24VDC	4-1393104-5			
KRPA-11DG-48			48VDC	4-1393104-6			
KRPA-11DN-12				12VDC	Indicator	5-1393104-0	
KRPA-11DN-24				24VDC		5-1393104-1	
KRPA-11DN-110				110VDC		4-1393104-9	
KRPA-11DY-12			Ag		12VDC	None	5-1393104-6
KRPA-11DY-24	24VDC	5-1393104-7					
KRPA-14AG-12	AgCdO	12VAC					6-1393104-4
KRPA-14AG-24	3 form C, 3 CO		24VAC		6-1393104-7		
KRPA-14AG-120			120VAC	6-1393104-5			
KRPA-14AG-240			240VAC	6-1393104-8			
KRPA-14AN-24				24VAC	Indicator	7-1393104-4	
KRPA-14AN-120				120VAC		7-1393104-3	
KRPA-14AN-240				240VAC		7-1393104-5	
KRPA-14AY-24			Ag		24VAC	None	7-1393104-8
KRPA-14AY-120					120VAC		7-1393104-7
KRPA-14AY-240					240VAC		7-1393104-9
KRPA-14DG-12			AgCdO		12VDC		8-1393104-2
KRPA-14DG-24					24VDC	8-1393104-4	
KRPA-14DG-48					48VDC	8-1393104-5	
KRPA-14DG-110	110VDC	8-1393104-1					
KRPA-14DG-125	125VDC	8-1393104-3					
KRPA-14DN-24		24VDC			Indicator	9-1393104-0	
KRPA-14DY-24	Ag					None	9-1393104-3

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А