

# 1:4 LVPECL Fanout Buffer with Selectable Clock Input

## Features


- Select one of two differential (LVPECL, LVDS, HCSL, or CML) input pairs to distribute to four LVPECL output pairs
- Translates any single-ended input signal to 3.3 V LVPECL levels with resistor bias on INx# input
- 30 ps maximum output-to-output skew
- 480 ps maximum propagation delay
- 0.15 ps maximum additive RMS phase jitter at 156.25 MHz (12 kHz to 20 MHz offset)
- Up to 1.5 GHz operation
- Synchronous clock enable function
- 20-pin TSSOP
- 2.5 V or 3.3 V operating voltage <sup>[1]</sup>
- Commercial and industrial operating temperature range

## Functional Description

The CY2DP1504 is an ultra-low noise, low-skew, low-propagation delay, 1:4 LVPECL fanout buffer targeted to meet the requirements of high-speed clock distribution applications. The CY2DP1504 can select between separate differential (LVPECL, LVDS, HCSL, or CML) input clock pairs using the IN\_SEL pin. The synchronous clock enable function ensures glitch-free output transitions during enable and disable periods. The device has a fully differential internal architecture that is optimized to achieve low additive jitter and low skew at operating frequencies of up to 1.5 GHz.

For a complete list of related documentation, [click here](#).

## Logic Block Diagram

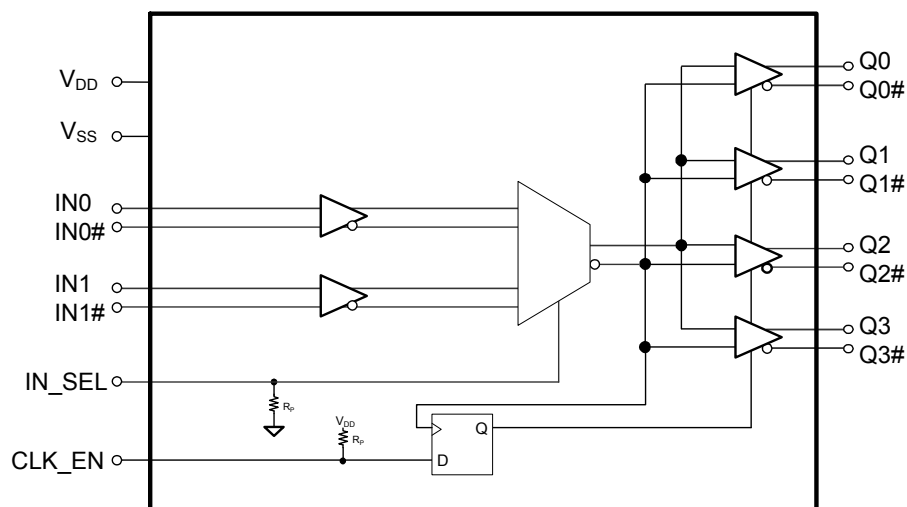

### Note

1. Input AC-coupling capacitors are required for voltage-translation applications.


## Contents

|                                     |           |
|-------------------------------------|-----------|
| <b>Pinouts</b>                      | <b>3</b>  |
| <b>Pin Definitions</b>              | <b>3</b>  |
| <b>Absolute Maximum Ratings</b>     | <b>4</b>  |
| <b>Operating Conditions</b>         | <b>4</b>  |
| <b>DC Electrical Specifications</b> | <b>5</b>  |
| <b>Thermal Resistance</b>           | <b>5</b>  |
| <b>AC Electrical Specifications</b> | <b>6</b>  |
| <b>Switching Waveforms</b>          | <b>8</b>  |
| <b>Application Information</b>      | <b>10</b> |
| <b>Ordering Information</b>         | <b>11</b> |
| Ordering Code Definitions           | 11        |
| <b>Package Diagram</b>              | <b>12</b> |

|                                                |           |
|------------------------------------------------|-----------|
| <b>Acronyms</b>                                | <b>13</b> |
| <b>Document Conventions</b>                    | <b>13</b> |
| Units of Measure                               | 13        |
| <b>Document History Page</b>                   | <b>14</b> |
| <b>Sales, Solutions, and Legal Information</b> | <b>16</b> |
| Worldwide Sales and Design Support             | 16        |
| Products                                       | 16        |
| PSoC@Solutions                                 | 16        |
| Cypress Developer Community                    | 16        |
| Technical Support                              | 16        |

## Pinouts

**Figure 1. 20-pin TSSOP pinout**

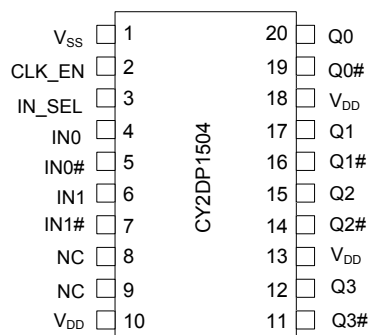

## Pin Definitions

| Pin No.        | Pin Name        | Pin Type | Description                                                                                                                                                                      |
|----------------|-----------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1              | V <sub>SS</sub> | Power    | Ground                                                                                                                                                                           |
| 2              | CLK_EN          | Input    | Synchronous clock enable. LVCMOS/LVTTL.<br>When CLK_EN = Low, Q(0:3) outputs are held Low and Q(0:3)# outputs are held High                                                      |
| 3              | IN_SEL          | Input    | Input clock select pin. LVCMOS/LVTTL;<br>When IN_SEL = Low, the IN0/IN0# differential input pair is active<br>When IN_SEL = High, the IN1/IN1# differential input pair is active |
| 4              | IN0             | Input    | Differential (LVPECL, HCSL, LVDS, or CML) input clock. Active when IN_SEL = Low                                                                                                  |
| 5              | IN0#            | Input    | Differential (LVPECL, HCSL, LVDS, or CML) complementary input clock. Active when IN_SEL = Low                                                                                    |
| 6              | IN1             | Input    | Differential (LVPECL, HCSL, LVDS, or CML) input clock. Active when IN_SEL = High                                                                                                 |
| 7              | IN1#            | Input    | Differential (LVPECL, HCSL, LVDS, or CML) complementary input clock. Active when IN_SEL = High                                                                                   |
| 8, 9           | NC              |          | No connection                                                                                                                                                                    |
| 10, 13, 18     | V <sub>DD</sub> | Power    | Power supply                                                                                                                                                                     |
| 11, 14, 16, 19 | Q(0:3)#         | Output   | LVPECL complementary output clocks                                                                                                                                               |
| 12, 15, 17, 20 | Q(0:3)          | Output   | LVPECL output clocks                                                                                                                                                             |

## Absolute Maximum Ratings

| Parameter       | Description                                                 | Condition           | Min                                                  | Max                             | Unit |
|-----------------|-------------------------------------------------------------|---------------------|------------------------------------------------------|---------------------------------|------|
| $V_{DD}$        | Supply voltage                                              | Non functional      | -0.5                                                 | 4.6                             | V    |
| $V_{IN}^{[2]}$  | Input voltage, relative to $V_{SS}$                         | Non functional      | -0.5                                                 | Lesser of 4.0 or $V_{DD} + 0.4$ | V    |
| $V_{OUT}^{[2]}$ | DC output or I/O voltage, relative to $V_{SS}$              | Non functional      | -0.5                                                 | Lesser of 4.0 or $V_{DD} + 0.4$ | V    |
| $T_S$           | Storage temperature                                         | Non functional      | -55                                                  | 150                             | °C   |
| $ESD_{HBM}$     | Electrostatic discharge (ESD) protection (Human body model) | JEDEC STD 22-A114-B | 2000                                                 | –                               | V    |
| $L_U$           | Latch up                                                    |                     | Meets or exceeds JEDEC Spec JESD78B IC Latch up Test |                                 |      |
| UL-94           | Flammability rating                                         | At 1/8 in           | V-0                                                  |                                 |      |
| MSL             | Moisture sensitivity level                                  |                     | 3                                                    |                                 |      |

## Operating Conditions

| Parameter | Description                   | Condition                                                                                     | Min   | Max   | Unit |
|-----------|-------------------------------|-----------------------------------------------------------------------------------------------|-------|-------|------|
| $V_{DD}$  | Supply voltage                | 2.5-V supply                                                                                  | 2.375 | 2.625 | V    |
|           |                               | 3.3-V supply                                                                                  | 3.135 | 3.465 | V    |
| $T_A$     | Ambient operating temperature | Commercial                                                                                    | 0     | 70    | °C   |
|           |                               | Industrial                                                                                    | -40   | 85    | °C   |
| $t_{PU}$  | Power ramp time               | Power-up time for $V_{DD}$ to reach minimum specified voltage (power ramp must be monotonic). | 0.05  | 500   | ms   |

### Note

2. The voltage on any I/O pin cannot exceed the power pin during power up. Power supply sequencing is not required.

## DC Electrical Specifications

( $V_{DD} = 3.3 \text{ V} \pm 5\%$  or  $2.5 \text{ V} \pm 5\%$ ;  $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$  (Commercial) or  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  (Industrial))

| Parameter              | Description                                                              | Condition                                            | Min             | Max             | Unit             |
|------------------------|--------------------------------------------------------------------------|------------------------------------------------------|-----------------|-----------------|------------------|
| $I_{DD}$               | Operating supply current                                                 | All LVPECL outputs floating (internal $I_{DD}$ )     | –               | 61              | mA               |
| $V_{IH1}$              | Input high voltage, differential input clocks IN0 and IN0#, IN1 and IN1# |                                                      | –               | $V_{DD} + 0.3$  | V                |
| $V_{IL1}$              | Input low voltage, differential input clocks IN0 and IN0#, IN1 and IN1#  |                                                      | –0.3            | –               | V                |
| $V_{IH2}$              | Input high voltage, CLK_EN, IN_SEL                                       | $V_{DD} = 3.3 \text{ V}$                             | 2.0             | $V_{DD} + 0.3$  | V                |
| $V_{IL2}$              | Input low voltage, CLK_EN, IN_SEL                                        | $V_{DD} = 3.3 \text{ V}$                             | –0.3            | 0.8             | V                |
| $V_{IH3}$              | Input high voltage, CLK_EN, IN_SEL                                       | $V_{DD} = 2.5 \text{ V}$                             | 1.7             | $V_{DD} + 0.3$  | V                |
| $V_{IL3}$              | Input low voltage, CLK_EN, IN_SEL                                        | $V_{DD} = 2.5 \text{ V}$                             | –0.3            | 0.7             | V                |
| $V_{ID\_LDVS}^{[3]}$   | LVDS input differential amplitude                                        | See <a href="#">Figure 2 on page 8</a>               | 0.4             | 0.8             | V                |
| $V_{ID\_LVPECL}^{[3]}$ | LVPECL/CML/HSCL input differential amplitude                             | See <a href="#">Figure 2 on page 8</a>               | 0.4             | 1.0             | V                |
| $V_{ICM}$              | Input common mode voltage                                                | See <a href="#">Figure 2 on page 8</a>               | 0.2             | $V_{DD} - 0.2$  | V                |
| $I_{IH}$               | Input high current, all inputs                                           | Input = $V_{DD}^{[4]}$                               | –               | 150             | $\mu\text{A}$    |
| $I_{IL}$               | Input low current, all inputs                                            | Input = $V_{SS}^{[4]}$                               | –150            | –               | $\mu\text{A}$    |
| $V_{OH}$               | LVPECL output high voltage                                               | Terminated with $50 \Omega$ to $V_{DD} - 2.0^{[5]}$  | $V_{DD} - 1.20$ | $V_{DD} - 0.70$ | V                |
| $V_{OL}$               | LVPECL output low voltage                                                | Terminated with $50 \Omega$ to $V_{DD} - 2.0^{[5]}$  | $V_{DD} - 2.0$  | $V_{DD} - 1.63$ | V                |
| $R_P$                  | Internal pull-up/pull-down resistance, LVCMOS logic inputs               | CLK_EN has pull-up only<br>IN_SEL has pull-down only | 60              | 165             | $\text{k}\Omega$ |
| $C_{IN}$               | Input capacitance                                                        | Measured at 10 MHz; per pin                          | –               | 3               | pF               |

## Thermal Resistance

| Parameter <sup>[6]</sup> | Description                              | Test Conditions                                                                                                             | 20-pin TSSOP | Unit                      |
|--------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------|---------------------------|
| $\theta_{JA}$            | Thermal resistance (junction to ambient) | Test conditions follow standard test methods and procedures for measuring thermal impedance, in accordance with EIA/JESD51. | 80           | $^\circ\text{C}/\text{W}$ |
| $\theta_{JC}$            | Thermal resistance (junction to case)    |                                                                                                                             | 16           | $^\circ\text{C}/\text{W}$ |

### Notes

- $V_{ID}$  minimum of 400 mV is required to meet all output AC Electrical Specifications. The device is functional with  $V_{ID}$  minimum of greater than 200 mV.
- Positive current flows into the input pin, negative current flows out of the input pin.
- Refer to [Figure 3 on page 8](#).
- These parameters are guaranteed by design and are not tested.

## AC Electrical Specifications

( $V_{DD} = 3.3 \text{ V} \pm 5\%$  or  $2.5 \text{ V} \pm 5\%$ ;  $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$  (Commercial) or  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  (Industrial))

| Parameter                  | Description                                                                                                                                                           | Condition                                                                                                             | Min | Typ | Max  | Unit   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----|-----|------|--------|
| $F_{IN}$                   | Input frequency                                                                                                                                                       | Differential Input                                                                                                    | DC  | —   | 1.5  | GHz    |
|                            |                                                                                                                                                                       | Single-ended CMOS Input <sup>[7]</sup>                                                                                | DC  | —   | 250  | MHz    |
| $F_{OUT}$                  | Output frequency                                                                                                                                                      | $F_{OUT} = F_{IN}$ , Differential Input                                                                               | DC  | —   | 1.5  | GHz    |
|                            |                                                                                                                                                                       | $F_{OUT} = F_{IN}$ , Single-ended CMOS Input <sup>[7]</sup>                                                           | DC  | —   | 250  | MHz    |
| $V_{PP}$                   | LVPECL differential output voltage peak to peak, single-ended. Terminated with $50 \Omega$ to $V_{DD} - 2.0$ <sup>[8]</sup>                                           | $F_{OUT} = \text{DC to } 150 \text{ MHz}$                                                                             | 600 | —   | —    | mV     |
|                            |                                                                                                                                                                       | $F_{OUT} = >150 \text{ MHz to } 1.5 \text{ GHz}$                                                                      | 400 | —   | —    | mV     |
| $t_{PD}$ <sup>[9]</sup>    | Propagation delay differential input pair to differential output pair                                                                                                 | Input rise/fall time $< 1.5 \text{ ns}$ (20% to 80%)                                                                  | —   | —   | 480  | ps     |
| $t_{ODC}$ <sup>[10]</sup>  | Output duty cycle                                                                                                                                                     | 50% duty cycle at input, Frequency range up to 1 GHz, Differential input                                              | 48  | —   | 52   | %      |
|                            |                                                                                                                                                                       | 50% duty cycle at input, Frequency range up to 250 MHz, Single-ended CMOS input <sup>[7]</sup>                        | 45  | —   | 55   | %      |
| $t_{SK1}$ <sup>[11]</sup>  | Output-to-output skew                                                                                                                                                 | Any output to any output, with same load conditions at DUT                                                            | —   | —   | 30   | ps     |
| $t_{SK1D}$ <sup>[11]</sup> | Device-to-device output skew                                                                                                                                          | Any output to any output between two or more devices. Devices must have the same input and have the same output load. | —   | —   | 150  | ps     |
| $PN_{ADD}$                 | Additive RMS phase noise, 156.25-MHz input, Rise/fall time $< 150 \text{ ps}$ (20% to 80%), $V_{ID} > 400 \text{ mV}$ or Input Swing = $3.0 \text{ V}$ <sup>[7]</sup> | Offset = 1 kHz                                                                                                        | —   | —   | −120 | dBc/Hz |
|                            |                                                                                                                                                                       | Offset = 10 kHz                                                                                                       | —   | —   | −130 | dBc/Hz |
|                            |                                                                                                                                                                       | Offset = 100 kHz                                                                                                      | —   | —   | −135 | dBc/Hz |
|                            |                                                                                                                                                                       | Offset = 1 MHz                                                                                                        | —   | —   | −145 | dBc/Hz |
|                            |                                                                                                                                                                       | Offset = 10 MHz                                                                                                       | —   | —   | −153 | dBc/Hz |
|                            |                                                                                                                                                                       | Offset = 20 MHz                                                                                                       | —   | —   | −155 | dBc/Hz |

### Notes

7. Refer to [Application Information](#) on page 10.
8. Refer to [Figure 3](#) on page 8.
9. Refer to [Figure 4](#) on page 8.
10. Refer to [Figure 5](#) on page 8.
11. Refer to [Figure 6](#) on page 9.

## AC Electrical Specifications (continued)

( $V_{DD} = 3.3 \text{ V} \pm 5\%$  or  $2.5 \text{ V} \pm 5\%$ ;  $T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$  (Commercial) or  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  (Industrial))

| Parameter         | Description                              | Condition                                                                                                                                 | Min | Typ | Max  | Unit |
|-------------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|------|------|
| $t_{JIT}^{[12]}$  | Additive RMS phase jitter (random)       | 156.25 MHz,<br>12 kHz to 20 MHz offset;<br>input rise/fall time < 150 ps<br>(20% to 80%),<br>$V_{ID} > 400 \text{ mV}$                    | —   | —   | 0.15 | ps   |
|                   |                                          | 156.25 MHz Sinewave,<br>12 kHz to 20 MHz offset,<br>input rise/fall time < 150 ps<br>(20% to 80%),<br>Input Swing = 3.0 V <sup>[13]</sup> | —   | —   | 0.15 | ps   |
| $t_R, t_F^{[14]}$ | Output rise/fall time                    | 50% duty cycle at input,<br>20% to 80% of full swing<br>( $V_{OL}$ to $V_{OH}$ )<br>Input rise/fall time < 1.5 ns<br>(20% to 80%)         | —   | —   | 300  | ps   |
| $t_{SOD}$         | Time from clock edge to outputs disabled | Synchronous clock enable<br>(CLK_EN) switched Low                                                                                         | —   | —   | 700  | ps   |
| $t_{SOE}$         | Time from clock edge to outputs enabled  | Synchronous clock enable<br>(CLK_EN) switched High                                                                                        | —   | —   | 700  | ps   |

### Notes


12. Refer to [Figure 7](#) on page 9.

13. Refer to [Application Information](#) on page 10.


14. Refer to [Figure 8](#) on page 9.

## Switching Waveforms


**Figure 2. Input Differential and Common Mode Voltages**

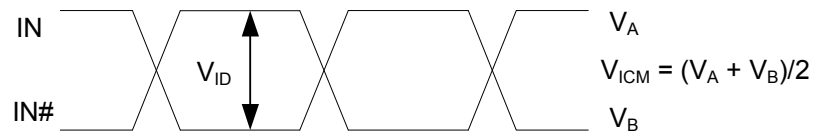


**Figure 3. Output Differential Voltage**

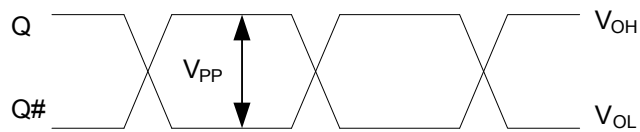

**Figure 4. Input to Any Output Pair Propagation Delay**

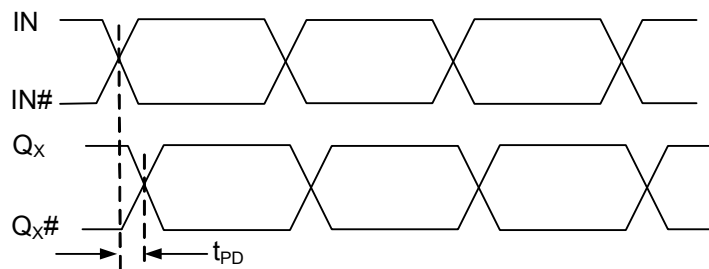


**Figure 5. Output Duty Cycle**

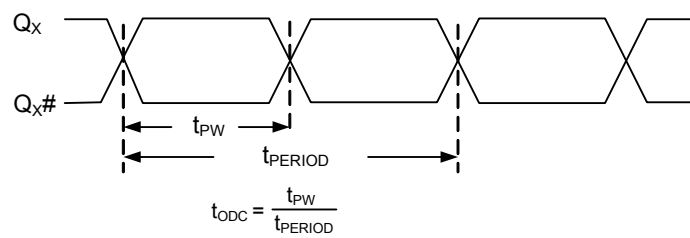


## Switching Waveforms (continued)


**Figure 6. Output-to-Output and Device-to-Device Skew**

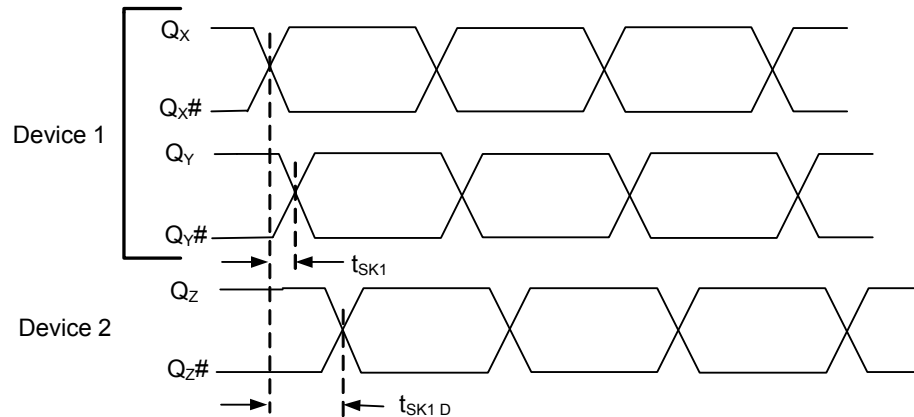


**Figure 7. RMS Phase Jitter**

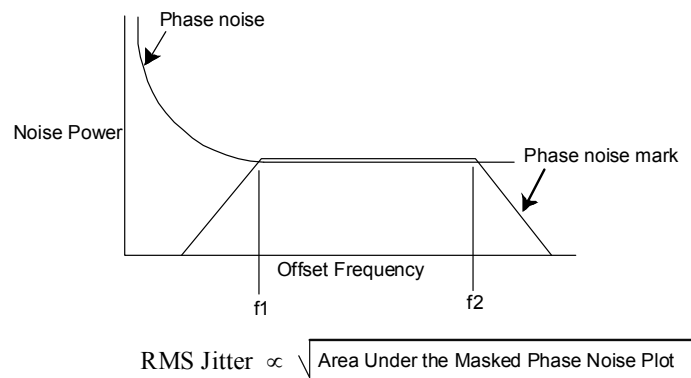

**Figure 8. Output Rise/Fall Time**

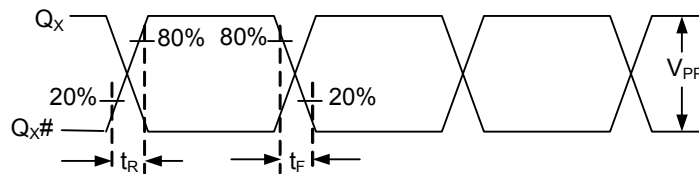

**Figure 9. Synchronous Clock Enable Timing**

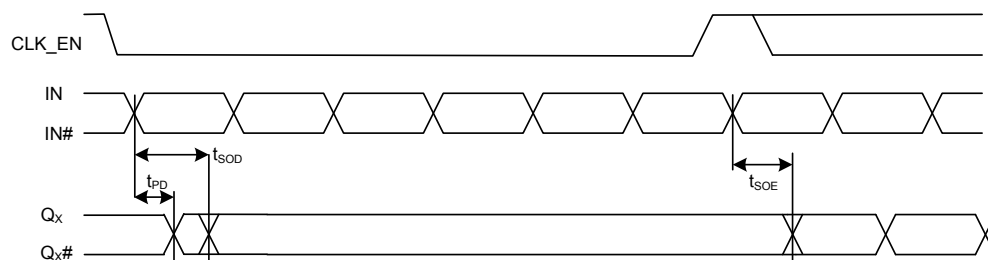


## Application Information

CY2DP1504 can be used with a single-ended CMOS input by biasing the Complementary Input Clock (INx#). “True” input pins (INx) of differential input pair can be fed with a single-ended CMOS input signal. The “complementary” input pin (INx#) of the same differential input pair can be biased with Vref.

Figure 10 shows the schematic which can be used to give single-ended CMOS input to the CY2DP1504.

The reference voltage  $V_{ref} = VDD/2$  is generated by the bias resistors R1, R2 and capacitor C0. This bias circuit should be located as close as possible to the input pin. The ratio of R1 and R2 might need to be adjusted to position the Vref in the center of the input voltage swing. For example, if the input clock swing is 2.5 V and  $VDD = 3.3$  V, Vref should be 1.25 V and  $R2/R1 = 0.609$ .


**Figure 10. Application Example**

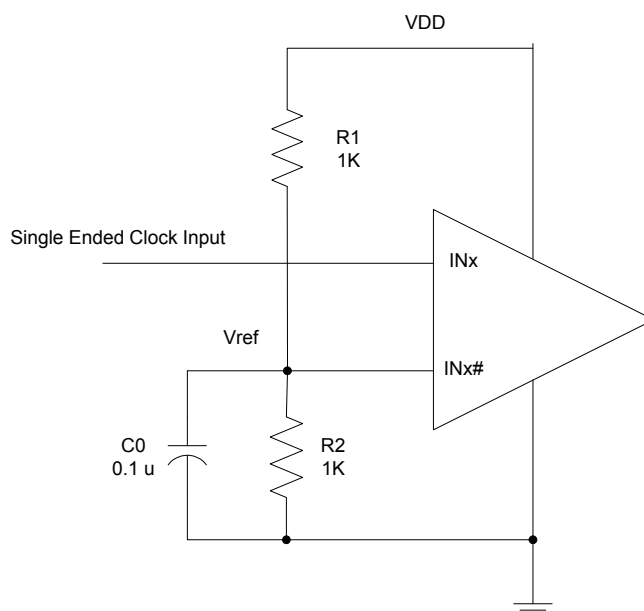

## Ordering Information


| Part Number    | Type                         | Production Flow             |
|----------------|------------------------------|-----------------------------|
| <b>Pb-free</b> |                              |                             |
| CY2DP1504ZXC   | 20-pin TSSOP                 | Commercial, 0 °C to 70 °C   |
| CY2DP1504ZXCT  | 20-pin TSSOP – Tape and Reel | Commercial, 0 °C to 70 °C   |
| CY2DP1504ZXI   | 20-pin TSSOP                 | Industrial, –40 °C to 85 °C |
| CY2DP1504ZXIT  | 20-pin TSSOP – Tape and Reel | Industrial, –40 °C to 85 °C |

## Ordering Code Definitions

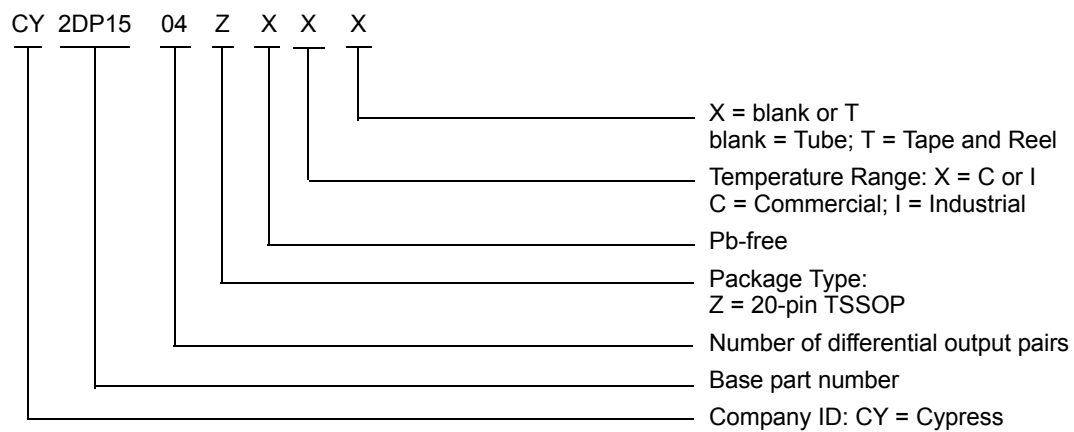

## Package Diagram

**Figure 11. 20-pin TSSOP 4.40 mm Body Z20.173/ZZ20.173 Package Outline, 51-85118**  
 20 Lead TSSOP 4.40 MM BODY

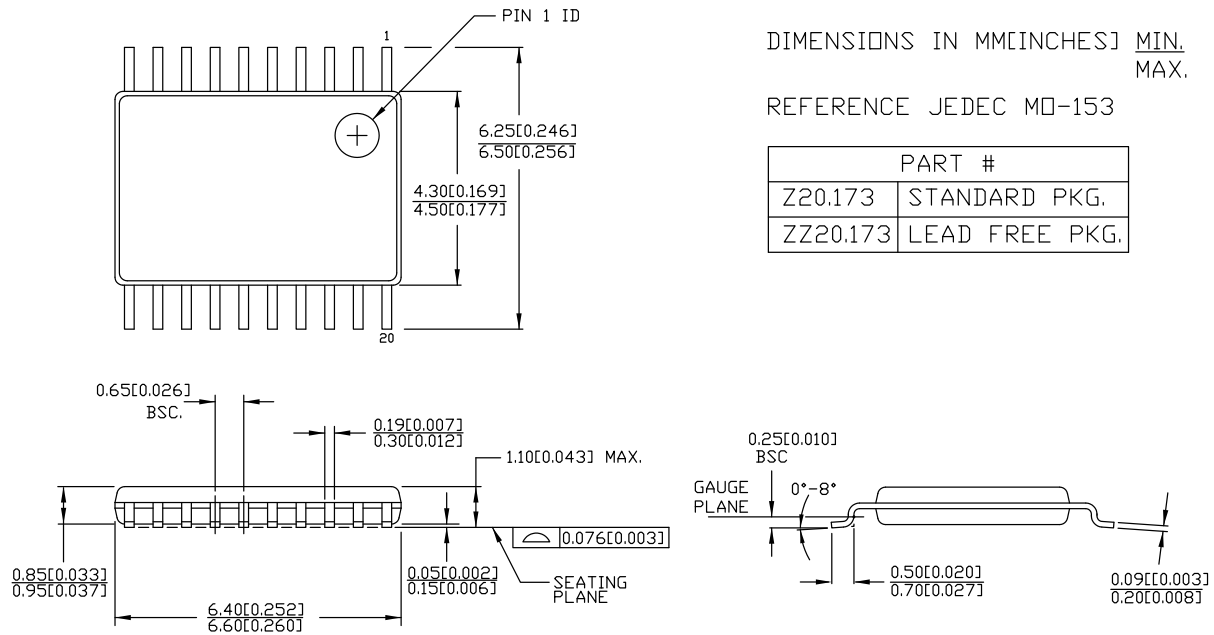

51-85118 \*E

## Acronyms

| Acronym | Description                                         |
|---------|-----------------------------------------------------|
| ESD     | electrostatic discharge                             |
| HBM     | human body model                                    |
| HCSL    | high-speed current steering logic                   |
| JEDEC   | joint electron devices engineering council          |
| LVC MOS | low-voltage complementary metal oxide semiconductor |
| LVPECL  | low-voltage positive emitter-coupled logic          |
| LVTTTL  | low-voltage transistor-transistor logic             |
| RMS     | root mean square                                    |
| TSSOP   | thin shrunk small outline package                   |

## Document Conventions

### Units of Measure

| Symbol | Unit of Measure                  |
|--------|----------------------------------|
| °C     | degree Celsius                   |
| dBc    | decibels relative to the carrier |
| GHz    | gigahertz                        |
| Hz     | hertz                            |
| kΩ     | kilohm                           |
| μA     | microampere                      |
| μF     | microfarad                       |
| μs     | microsecond                      |
| mA     | milliampere                      |
| ms     | millisecond                      |
| mV     | millivolt                        |
| MHz    | megahertz                        |
| ns     | nanosecond                       |
| Ω      | ohm                              |
| pF     | picofarad                        |
| ps     | picosecond                       |
| V      | volt                             |
| W      | watt                             |

## Document History Page

| Document Title: CY2DP1504, 1:4 LVPECL Fanout Buffer with Selectable Clock Input<br>Document Number: 001-56215 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Revision                                                                                                      | ECN     | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| **                                                                                                            | 2782891 | CXQ             | 10/09/09        | New data sheet.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| *A                                                                                                            | 2838916 | CXQ             | 01/05/2010      | <p>Changed status from "ADVANCE" to "PRELIMINARY".</p> <p>Changed from 0.34 ps to 0.25 ps maximum additive jitter in "Features" on page 1 and in <math>t_{JIT}</math> in the AC Electrical Specs table on page 5.</p> <p>Added <math>t_{PU}</math> spec to the Operating Conditions table on page 3.</p> <p>Changed max <math>I_{DD}</math> spec in the DC Electrical Specs table on page 4 from 60 mA to 61 mA.</p> <p>Change <math>V_{OH}</math> in the DC Electrical Specs table on page 4: minimum from <math>V_{DD} - 1.15V</math> to <math>V_{DD} - 1.20V</math>; maximum from <math>V_{DD} - 0.75V</math> to <math>V_{DD} - 0.70V</math>.</p> <p>Removed <math>V_{OD}</math> spec from the DC Electrical Specs table on page 4.</p> <p>Added <math>R_P</math> spec in the DC Electrical Specs table on page 4. Min = 60 k<math>\Omega</math>, Max = 140 k<math>\Omega</math>.</p> <p>Added a measurement definition for <math>C_{IN}</math> in the DC Electrical Specs table on page 4.</p> <p>Added <math>V_{PP}</math> spec to the AC Electrical Specs table on page 5. <math>V_{PP}</math> min = 600 mV for DC - 150 MHz and min = 400 mV for 150 MHz to 1.5 GHz.</p> <p>Changed letter case and some names of all the timing parameters in the AC Electrical Specs table on page 5 to be consistent with EROS.</p> <p>Lowered all additive phase noise mask specs by 3 dB in the AC Electrical Specs table on page 5.</p> <p>Added condition to <math>t_R</math> and <math>t_F</math> specs in the AC Electrical specs table on page 5 that input rise/fall time must be less than 1.5 ns (20% to 80%).</p> <p>Changed letter case and some names of all the timing parameters in Figures 3, 4, 5, 6 and 8, to be consistent with EROS.</p> |
| *B                                                                                                            | 3011766 | CXQ             | 08/20/2010      | <p>Changed maximum additive jitter from 0.25 ps to 0.11 ps in "Features" on page 1 and in <math>t_{JIT}</math> in the AC Electrical Specs table.</p> <p>Added note 3 to describe <math>I_{IH}</math> and <math>I_{IL}</math> specs.</p> <p>Removed reference to data distribution from "Functional Description".</p> <p>Changed <math>R_P</math> for differential inputs from 100 k<math>\Omega</math> to 150 k<math>\Omega</math> in the Logic Block Diagram and from 60 k<math>\Omega</math> min / 140 k<math>\Omega</math> max to 90 k<math>\Omega</math> min / 210 k<math>\Omega</math> max in the DC Electrical Specs table.</p> <p>Added max <math>V_{ID}</math> of 1.0V in DC Electrical Specs table.</p> <p>Updated phase noise specs for 1 k/10 k/100 k/1 M/10 M/20 MHz offset to -120/-130/-135/-150/-150/-150dBc/Hz, respectively, in the AC Electrical Specs table.</p> <p>Added "Frequency range up to 1 GHz" condition to <math>t_{ODC}</math> spec.</p> <p>Added Ordering Code Definition.</p> <p>Updated package diagram.</p> <p>Added Acronyms.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| *C                                                                                                            | 3017258 | CXQ             | 08/27/2010      | Corrected Output Rise/Fall time diagram.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| *D                                                                                                            | 3100234 | CXQ             | 11/18/2010      | <p>Updated Phase jitter to 0.15ps max from 0.11ps max.</p> <p>Changed <math>V_{IN}</math> and <math>V_{OUT}</math> specs from 4.0V to "lesser of 4.0 or <math>V_{DD} + 0.4</math>"</p> <p>Removed 200mA min LU spec, replaced with "Meets or exceeds JEDEC Spec JESD78B IC Latchup Test"</p> <p>Removed <math>R_P</math> spec for differential input clock pins <math>IN_X</math> and <math>IN_X\#</math>.</p> <p>Changed <math>C_{IN}</math> condition to "Measured at 10 MHz".</p> <p>Changed <math>PN_{ADD}</math> specs for 1MHz, 10MHz, and 20MHz offsets.</p> <p>Removed <math>t_S</math> and <math>t_H</math> specs from AC specs table.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| *E                                                                                                            | 3135201 | CXQ             | 01/12/2011      | <p>Removed "Preliminary" status heading.</p> <p>Removed resistors from <math>IN_X/IN_X\#</math> in <a href="#">Logic Block Diagram</a>.</p> <p>Added <a href="#">Figure 9</a> to describe <math>T_{SOE}</math> and <math>T_{SOD}</math>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| *F                                                                                                            | 3090938 | CXQ             | 02/25/2011      | Post to external web.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Document History Page** (continued)

| Document Title: CY2DP1504, 1:4 LVPECL Fanout Buffer with Selectable Clock Input<br>Document Number: 001-56215 |         |                 |                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Revision                                                                                                      | ECN     | Orig. of Change | Submission Date | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| *G                                                                                                            | 3208968 | CXQ             | 03/29/2011      | Changed $R_p$ max from 140 k $\Omega$ to 165 k $\Omega$ and updated $R_p$ in <a href="#">Logic Block Diagram</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| *H                                                                                                            | 3308039 | CXQ             | 07/11/2011      | Updated supported differential input clock types to include LVPECL/LVDS/CML in Features, Functional Description, Pin Definitions, and DC specs table sections.<br>Broke out $V_{ID}$ spec into $V_{ID\_LVDS}$ and $V_{ID\_LVPECL}$ specs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| *I                                                                                                            | 3395868 | PURU            | 10/05/11        | Updated supported differential input clock types to include HCSL in <a href="#">Features</a> , <a href="#">Pinouts</a> , and <a href="#">DC Electrical Specifications</a> table.<br>Changed Min value of $V_{ICM}$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| *J                                                                                                            | 3740406 | CINM            | 09/11/2012      | Minor text edits.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| *K                                                                                                            | 3799048 | PURU            | 12/05/2012      | Updated <a href="#">Features</a> :<br>Added "Translates any single-ended input signal to 3.3 V LVPECL levels with resistor bias on INx# input".<br>Updated <a href="#">AC Electrical Specifications</a> :<br>Added Note 7 and Note 13.<br>Added $F_{IN}$ parameter values for "Single Ended CMOS Input" condition (Minimum value = DC, Maximum value = 250 MHz).<br>Added $F_{OUT}$ parameter values for "Single Ended CMOS Input" condition (Minimum value = DC, Maximum value = 250 MHz).<br>Updated $t_{PD}$ parameter (Changed description from "Propagation delay input pair to output pair" to "Propagation delay differential input pair to differential output pair").<br>Added $t_{ODC}$ parameter values for "Single Ended CMOS Input" condition (Minimum value = 45%, Maximum value = 55%).<br>Updated description of $PN_{ADD}$ parameter (Replaced "Additive RMS phase noise, 156.25-MHz input, Rise/fall time < 150 ps (20% to 80%), $V_{ID} > 400$ mV" with "Additive RMS phase noise, 156.25-MHz input, Rise/fall time < 150 ps (20% to 80%), $V_{ID} > 400$ mV or Input Swing = 3.0 V <sup>[7]</sup> ").<br>Added $t_{JIT}$ parameter values for the Condition "156.25 MHz Sinewave, 12 kHz to 20 MHz offset, input rise/fall time < 150 ps (20% to 80%), Input Swing = 3.0 V <sup>[13]</sup> " (Maximum value = 0.15 ps).<br>Added <a href="#">Application Information</a> .<br>Updated to new template. |
| *L                                                                                                            | 4586288 | PURU            | 12/04/2014      | Updated <a href="#">Functional Description</a> :<br>Added "For a complete list of related documentation, <a href="#">click here</a> ." at the end.<br>Updated <a href="#">Package Diagram</a> :<br>spec 51-85118 – Changed revision from *D to *E.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| *M                                                                                                            | 4959240 | TAVA            | 10/12/2015      | Updated to new template.<br>Completing Sunset Review.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| *N                                                                                                            | 5267558 | PSR             | 05/13/2016      | Added <a href="#">Thermal Resistance</a> .<br>Updated to new template.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| *O                                                                                                            | 5973884 | AESATMP8        | 11/22/2017      | Updated logo and Copyright.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

|                               |                                                                    |
|-------------------------------|--------------------------------------------------------------------|
| ARM® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Internet of Things            | <a href="http://cypress.com/iot">cypress.com/iot</a>               |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| Microcontrollers              | <a href="http://cypress.com/mcu">cypress.com/mcu</a>               |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Power Management ICs          | <a href="http://cypress.com/pmic">cypress.com/pmic</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless Connectivity         | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6](#)

### Cypress Developer Community

[Forums](#) | [WICED IOT Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)

© Cypress Semiconductor Corporation, 2009-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А