

## STRADA-2X2-T3

IESNA Type III (medium) beam for roads that are equal to or wider than mounting height

### TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	7.1 mm
Fastening	glue, pin, screw
ROHS compliant	yes ⓘ


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADA-2X2-T3	Multi-lens	PMMA	clear	


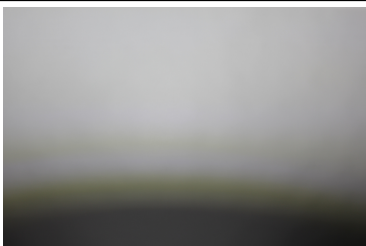
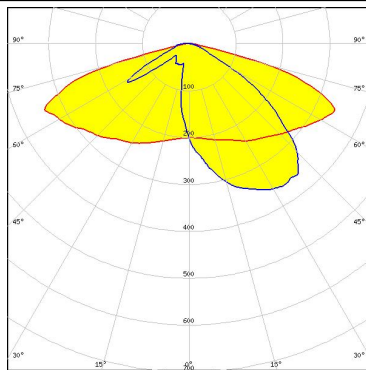

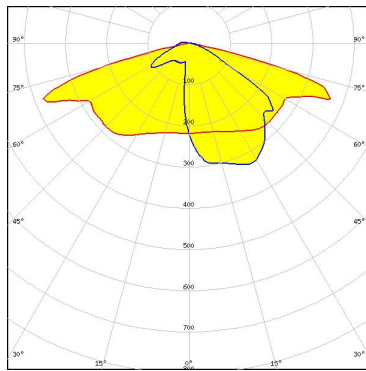

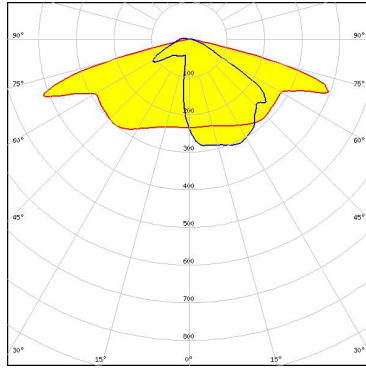

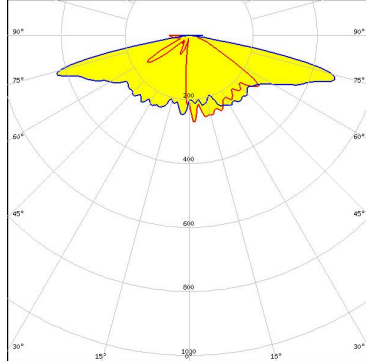


### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C13301_STRADA-2X2-T3 » Box size: 480 x 280 x 300 mm	800	160	160	7.6

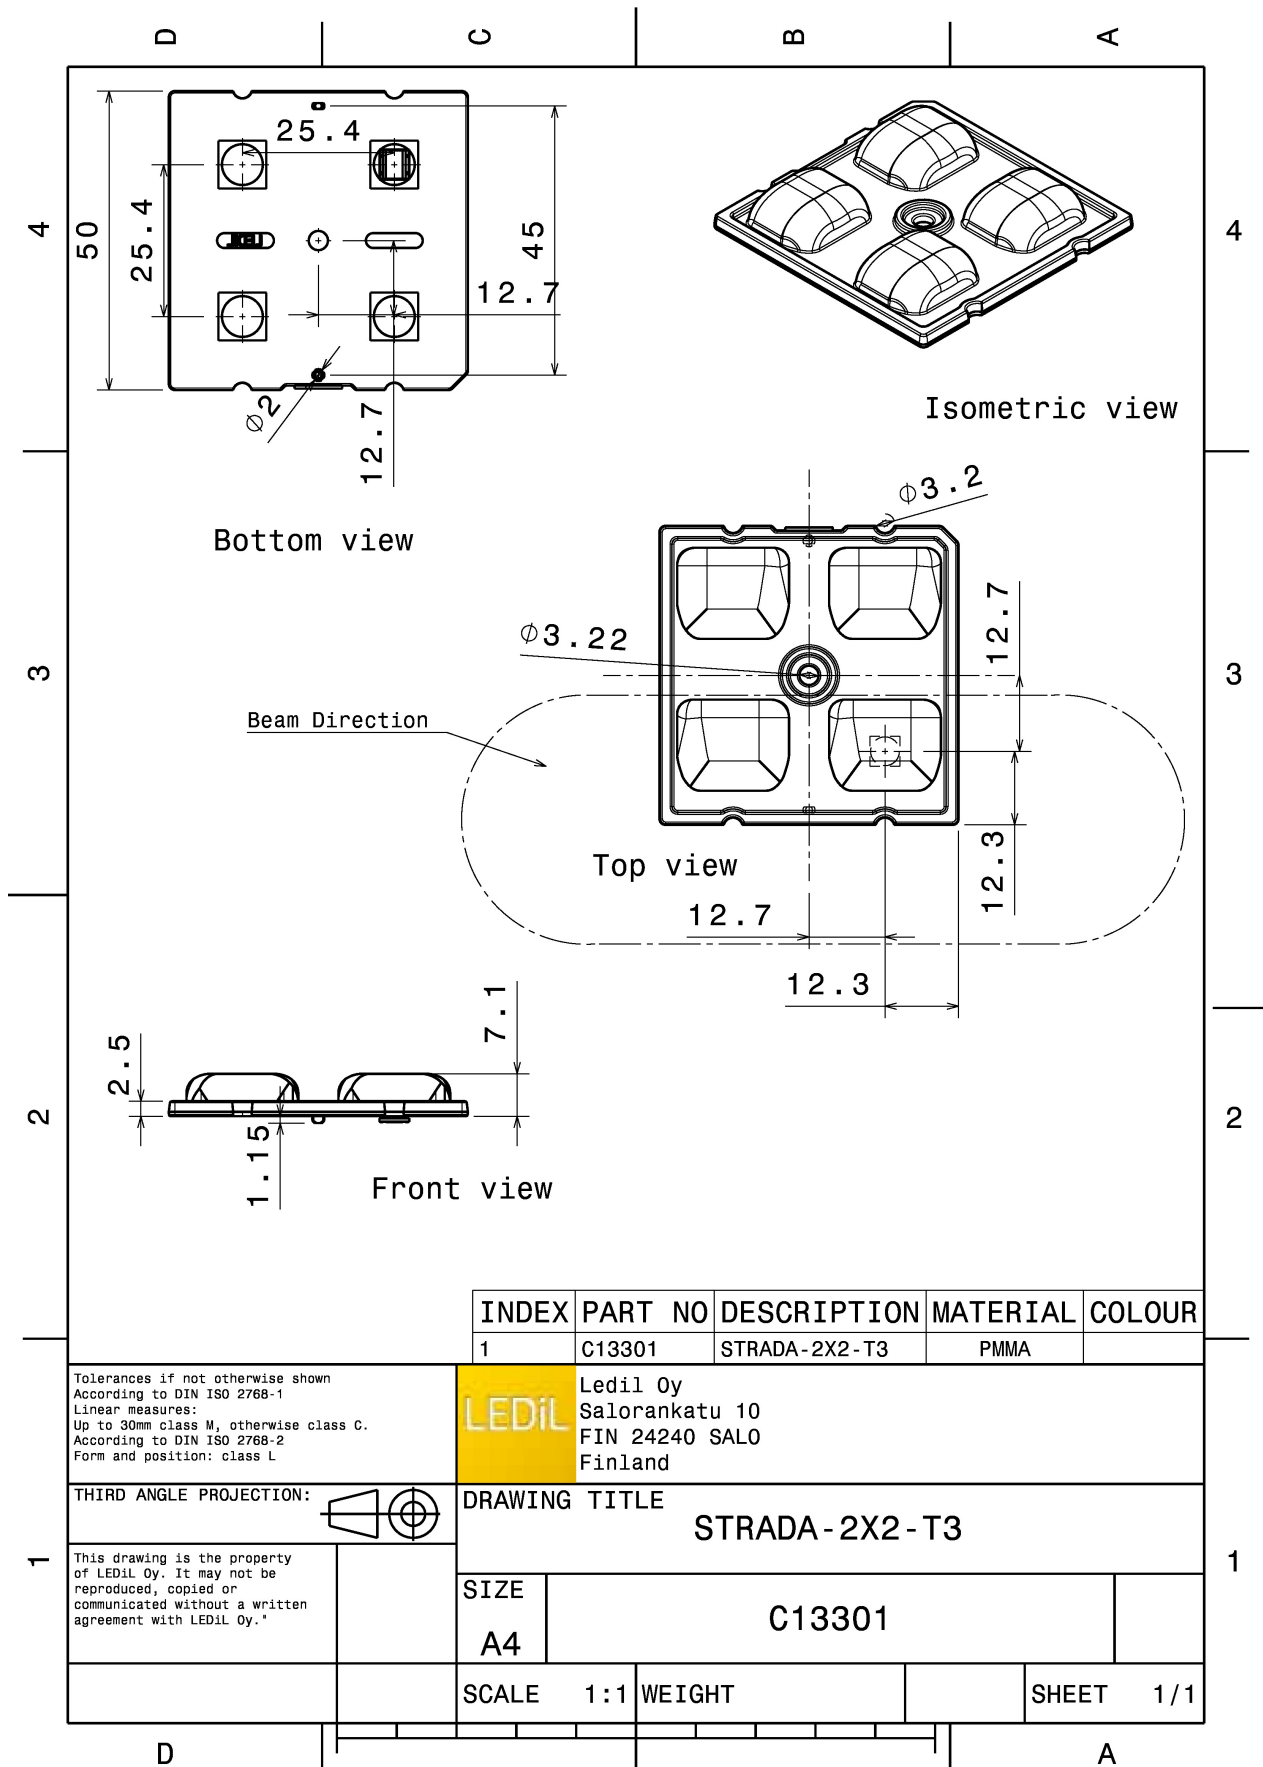


#### PHOTOMETRIC DATA (MEASURED):

<p> <b>bridgelux</b></p> <p>LED                    Bridgelux SMD 5050            FWHM                Asymmetric            Efficiency            94 %            Peak intensity      0.5 cd/lm            LEDs/each optic    1            Light colour        White            Required components:</p>		
<p> <b>COMET ELECTRONICS</b></p> <p>LED                    QUICK FLUX XTP 2x4 xxx LS G5            FWHM                Asymmetric            Efficiency            94 %            Peak intensity      0.6 cd/lm            LEDs/each optic    1            Light colour        White            Required components:</p>		
<p> <b>COMET ELECTRONICS</b></p> <p>LED                    QUICK FLUX XTP 2x6 xxx LS G5            FWHM                Asymmetric            Efficiency            94 %            Peak intensity      0.6 cd/lm            LEDs/each optic    1            Light colour        White            Required components:</p>		
<p> <b>CREE</b></p> <p>LED                    XB-D            FWHM                Asymmetric            Efficiency            %            LEDs/each optic    1            Light colour        White            Required components:</p>		

#### PHOTOMETRIC DATA (MEASURED):


#### CREE

LED XD16  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

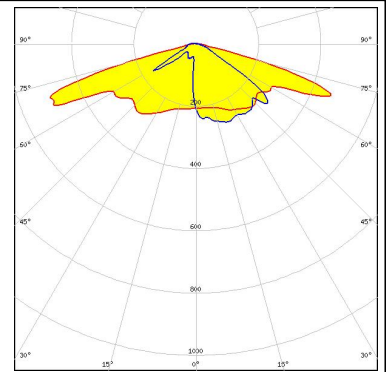


#### CREE

LED XD16  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 4  
 Light colour White  
 Required components:

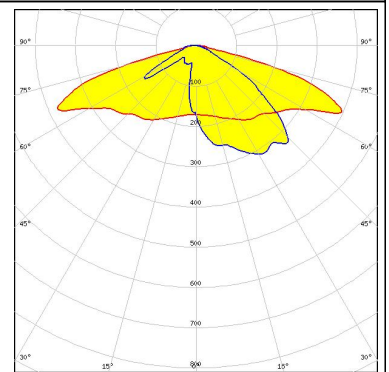


#### CREE

LED XM-L  
 FWHM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

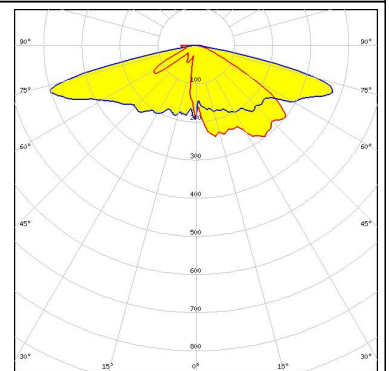

#### CREE


LED XM-L2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

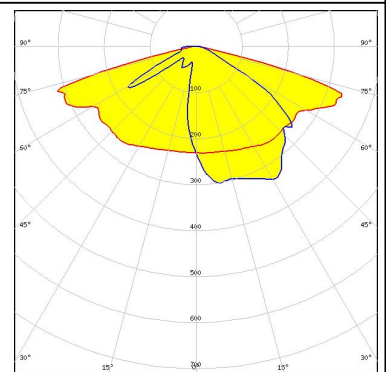

#### PHOTOMETRIC DATA (MEASURED):


#### CREE

LED XP-E2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

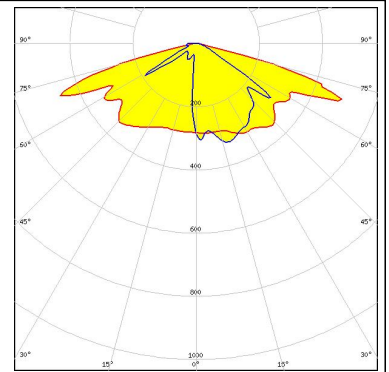


#### CREE

LED XP-G  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

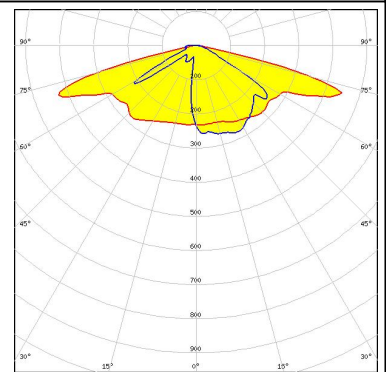


#### CREE

LED XP-G2  
 FWHM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

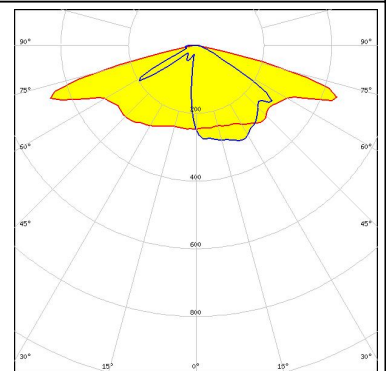

#### CREE


LED XP-G3  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

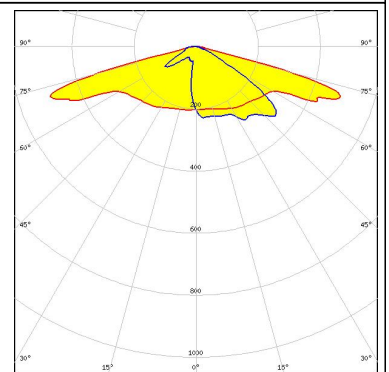

#### PHOTOMETRIC DATA (MEASURED):


#### CREE

LED XP-L HD  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

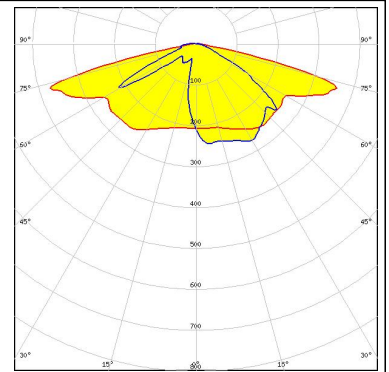


#### CREE

LED XP-L HI  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

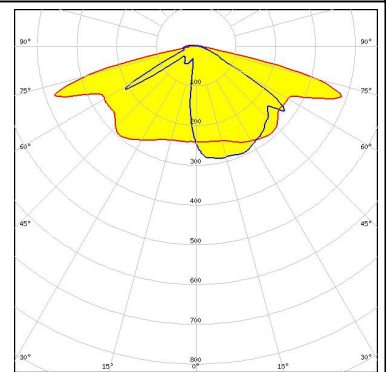


#### CREE

LED XP-L2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

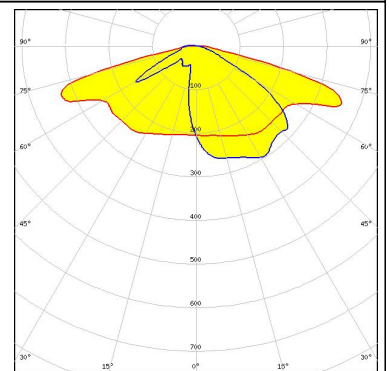

#### CREE

LED XQ-E HD  
 FWHM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

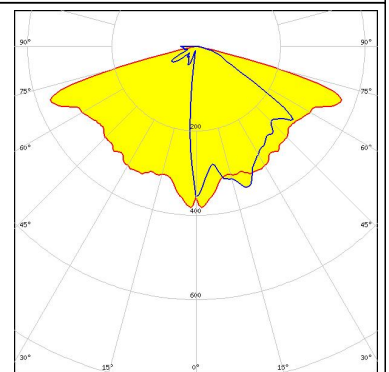





#### PHOTOMETRIC DATA (MEASURED):




LED XT-E  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

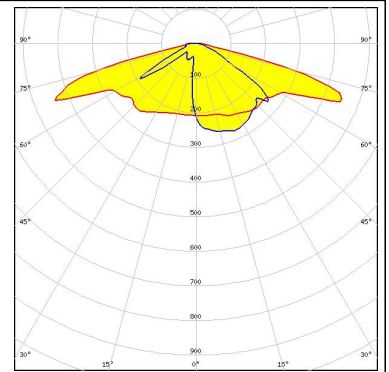


LED H35C0 (LEMWA33)  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

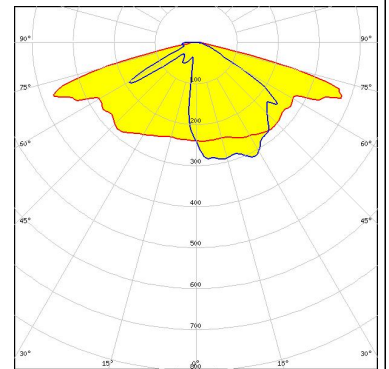

LED H35C1 (LEMWA33)  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

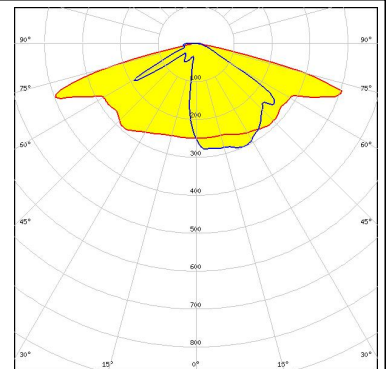


LED LUXEON 5050 Round LES  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

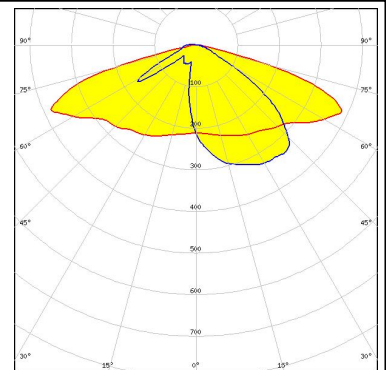

#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON MZ  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

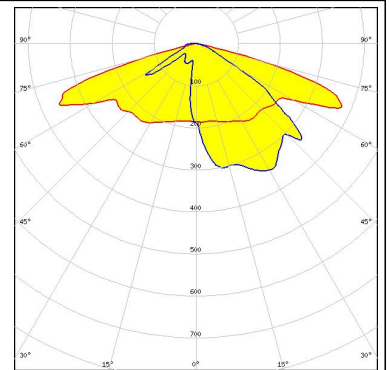


##### LUMILEDS

LED LUXEON Q  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

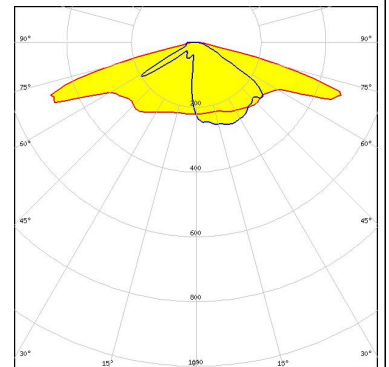


##### LUMILEDS

LED LUXEON R  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

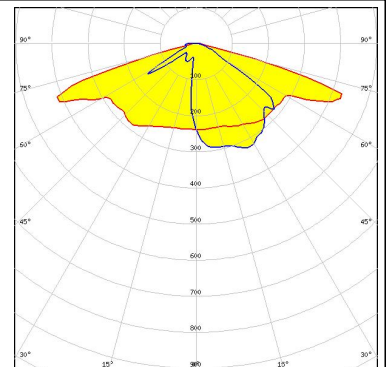

##### LUMILEDS

LED LUXEON Rebel ES  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

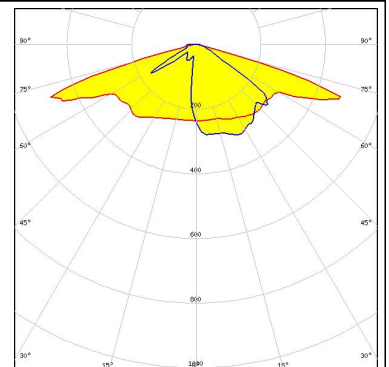




#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON T  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

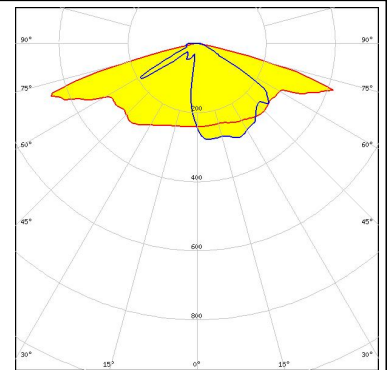


##### LUMILEDS

LED LUXEON TX  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

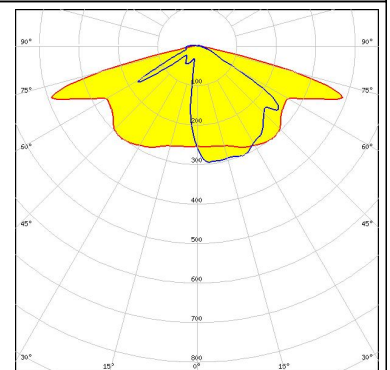


##### LUMILEDS

LED LUXEON V  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

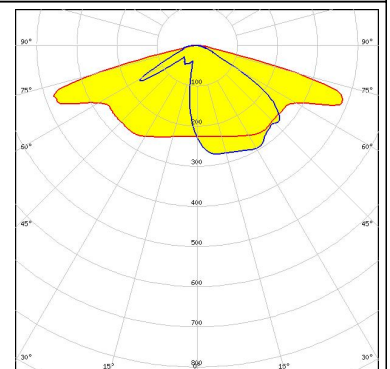

##### LUMILEDS


LED LUXEON V2  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

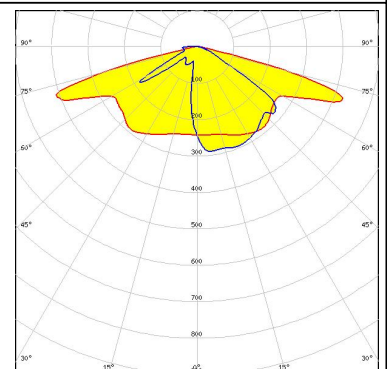


#### PHOTOMETRIC DATA (MEASURED):




LED LUXEON Z ES  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

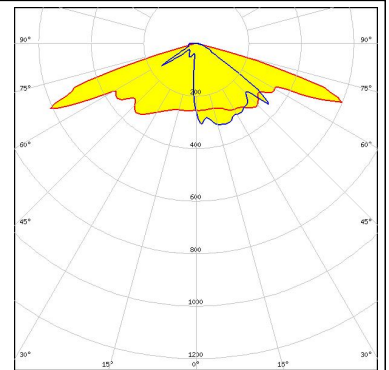


LED RecLED 224x50mm 2x8 Opt G1  
 FWHM Asymmetric  
 Efficiency 98 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

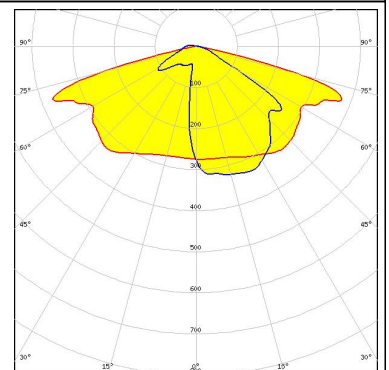

LED NCSxx19A  
 FWHM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

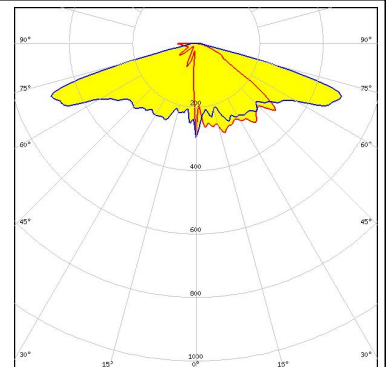


LED NCSxx19B  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

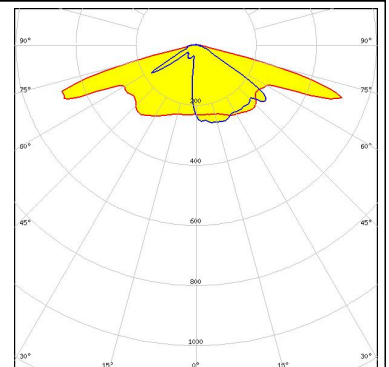


#### PHOTOMETRIC DATA (MEASURED):




LED NS9x383  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

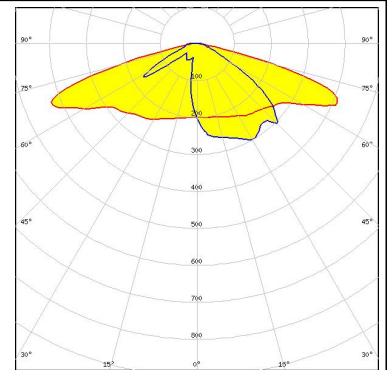


LED NVSW219D  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

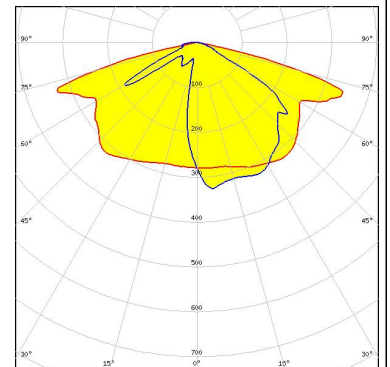

LED NVSW219F  
FWHM Asymmetric  
Efficiency 97 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

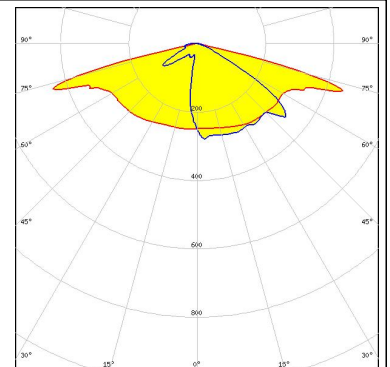


LED NVSW319B  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

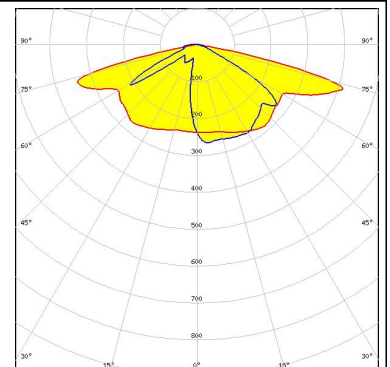


#### PHOTOMETRIC DATA (MEASURED):




LED NVSW3x9A  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

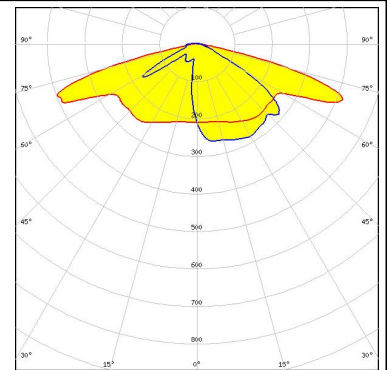


LED NVSxE21A  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

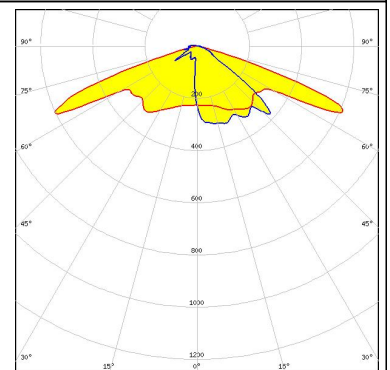

LED NVSxx19A  
FWHM Asymmetric  
Efficiency %  
LEDs/each optic 1  
Light colour White  
Required components:

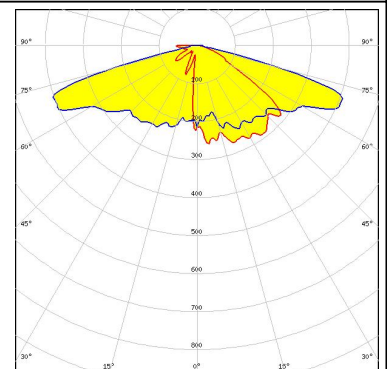


LED NVSxx19B/NVSxx19C  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

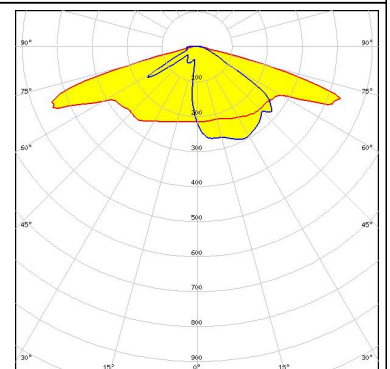


#### PHOTOMETRIC DATA (MEASURED):



LED NVSxx19B/NVSxx19C  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

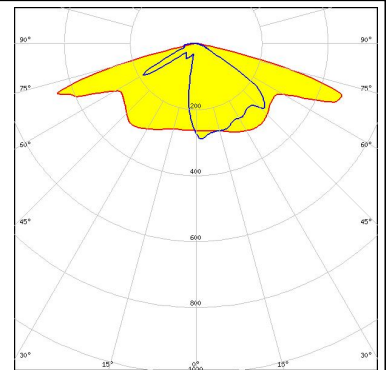


LED NWSx229A  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

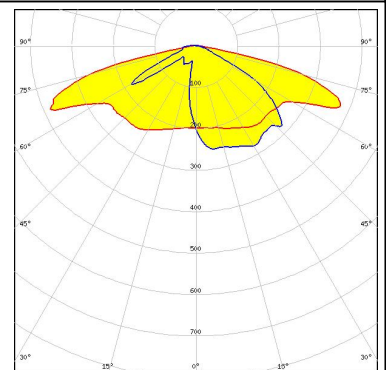


### OSRAM

LED PrevalLED Brick HP 2x8  
FWHM Asymmetric  
Efficiency 97 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

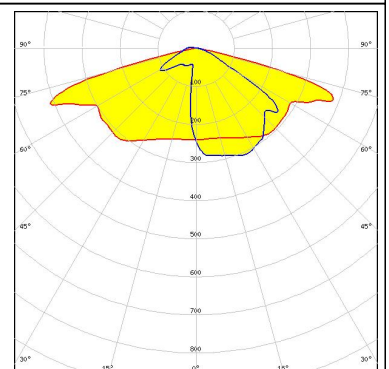

### OSRAM

Opto Semiconductors  
LED Duris S8  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

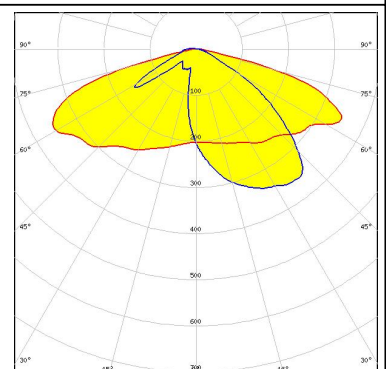


#### PHOTOMETRIC DATA (MEASURED):

#### OSRAM

Opto Semiconductors


LED OSLON Square PC  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

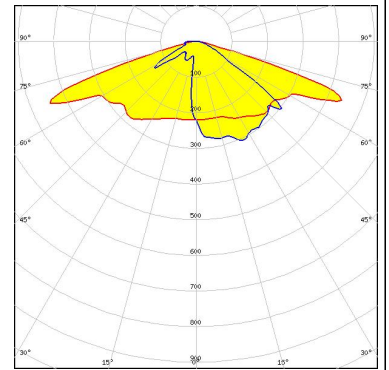

#### OSRAM


Opto Semiconductors

LED OSLON SSL 80  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

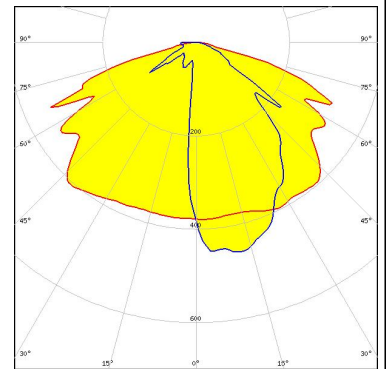


#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

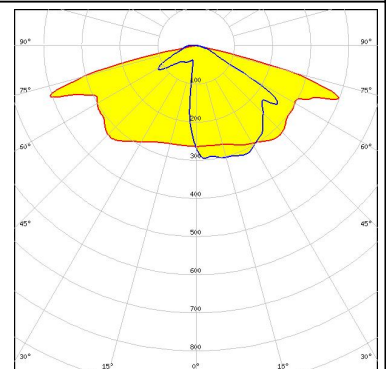

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

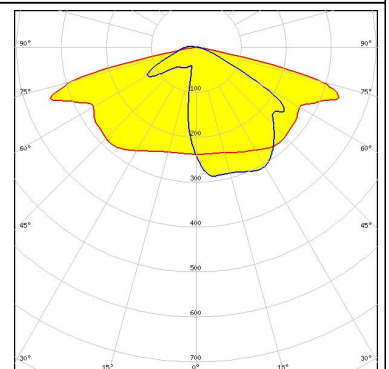




#### PHOTOMETRIC DATA (MEASURED):


### SAMSUNG

LED HiLOM RH16 (LH351C)  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

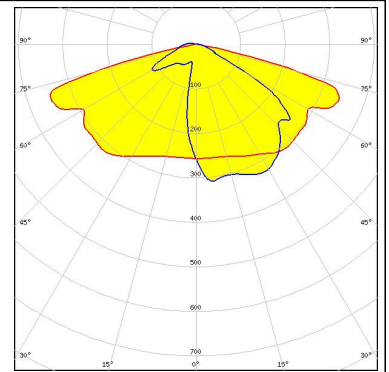


### SAMSUNG

LED LH351A  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

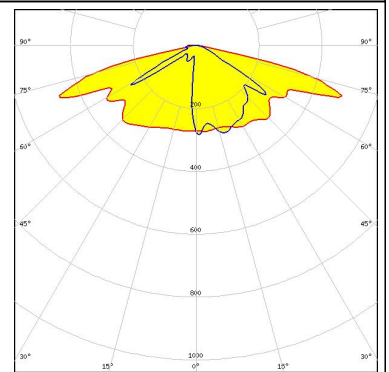


### SAMSUNG

LED LH351B  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

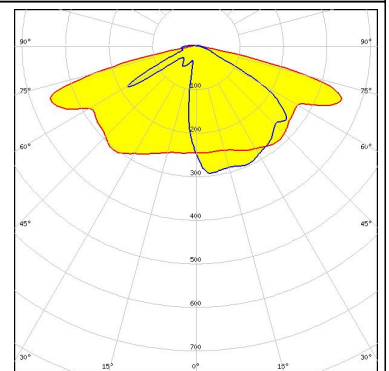

### SAMSUNG


LED LH351C  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

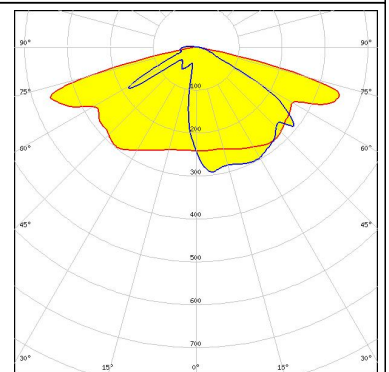

#### PHOTOMETRIC DATA (MEASURED):


### SAMSUNG

LED LH351D  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

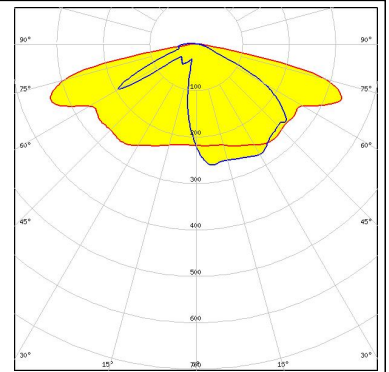


### SAMSUNG

LED LH351Z  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

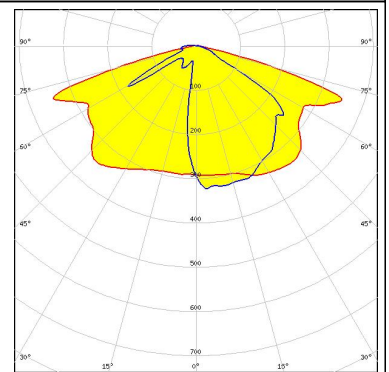


### SAMSUNG

LED LH508A  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

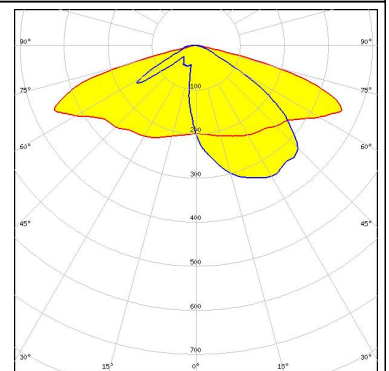
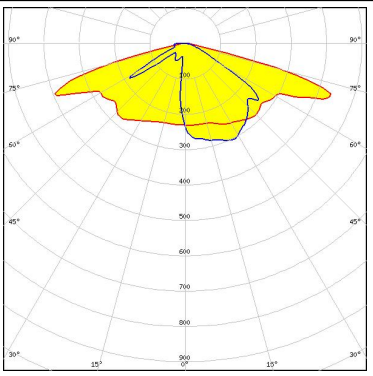

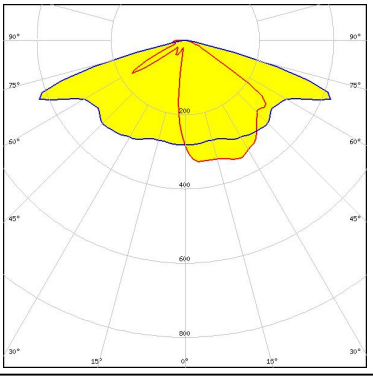

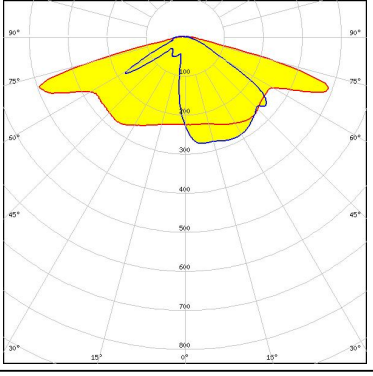

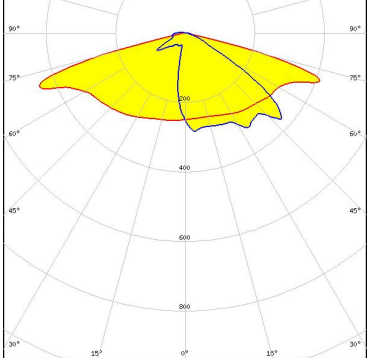


SEOUL SEMICONDUCTOR






LED Acrich MJT 4040  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

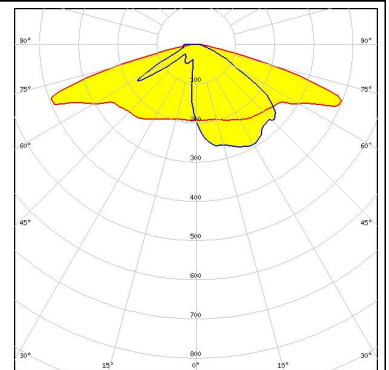

#### PHOTOMETRIC DATA (MEASURED):

<p> SEUL SEMICONDUCTOR</p> <p>LED Z5M            FWHM Asymmetric            Efficiency 94 %            Peak intensity 0.7 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p> SEUL SEMICONDUCTOR</p> <p>LED Z5M1/Z5M2            FWHM Asymmetric            Efficiency 94 %            Peak intensity 0.7 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p> SEUL SEMICONDUCTOR</p> <p>LED Z5M3            FWHM Asymmetric            Efficiency 94 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p> SEUL SEMICONDUCTOR</p> <p>LED Z5M4            FWHM Asymmetric            Efficiency 97 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	

#### PHOTOMETRIC DATA (MEASURED):

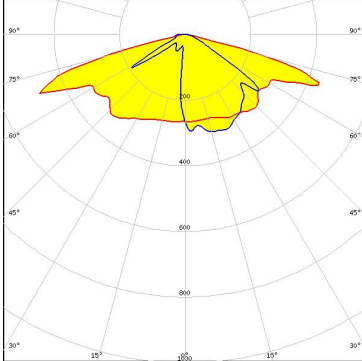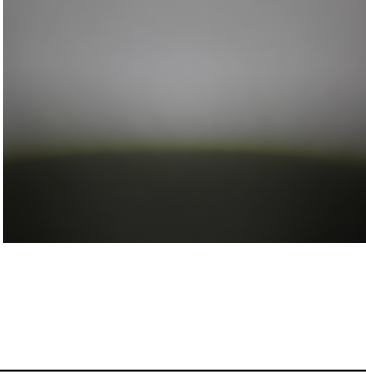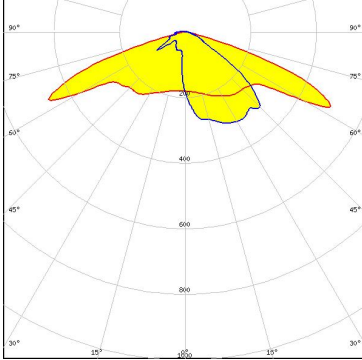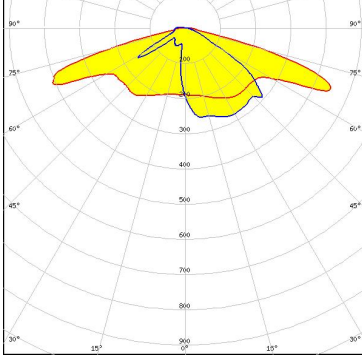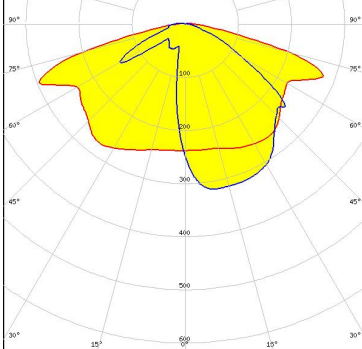
<p><b>SEOL</b> SEOUL SEMICONDUCTOR</p> <p>LED            Z5P FWHM        Asymmetric Efficiency    94 % Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour    White Required components:</p>		
<p><b>SEOL</b> SEOUL SEMICONDUCTOR</p> <p>LED            Z8Y22 FWHM        Asymmetric Efficiency    94 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour    White Required components:</p>		
<p><b>SEOL</b> SEOUL SEMICONDUCTOR</p> <p>LED            Z8Y22P FWHM        Asymmetric Efficiency    94 % Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour    White Required components:</p>		
<p><b>TOSHIBA</b> Leading Innovation &gt;&gt;&gt;</p> <p>LED            TL1L3 FWHM        Asymmetric Efficiency    94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour    White Required components:</p>		

#### PHOTOMETRIC DATA (MEASURED):

#### TOSHIBA

Leading Innovation >>>

LED TL1L4  
FWHM Asymmetric  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

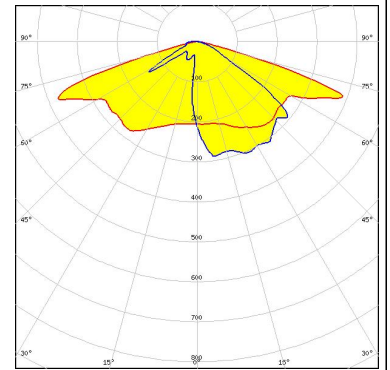


#### TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


#### TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

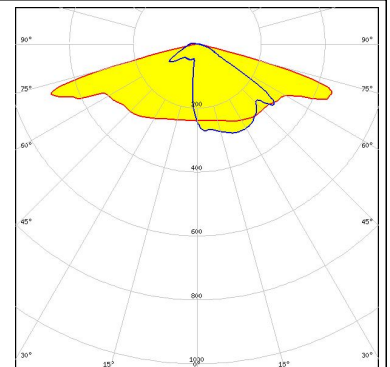

#### TRIDONIC


LED RLE G1 49x121mm 2000lm xxx EXC OTD  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

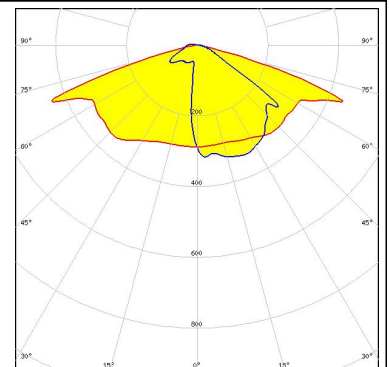

#### PHOTOMETRIC DATA (MEASURED):


#### TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

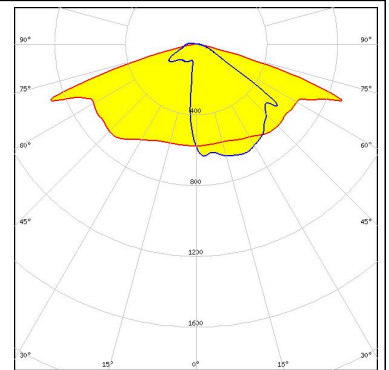


#### TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

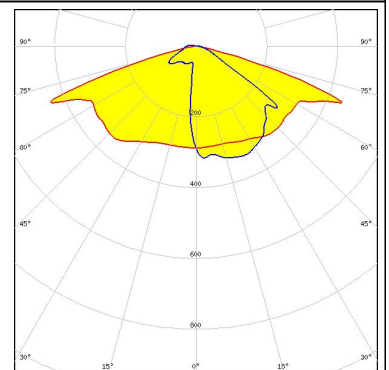

#### TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

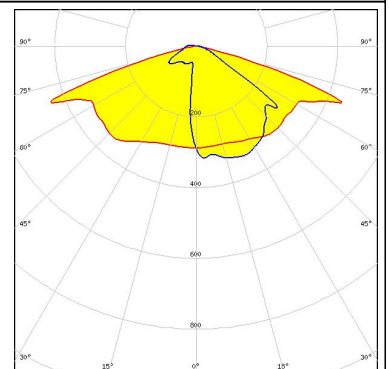





#### PHOTOMETRIC DATA (SIMULATED):



LED J Series 5050  
FWHM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

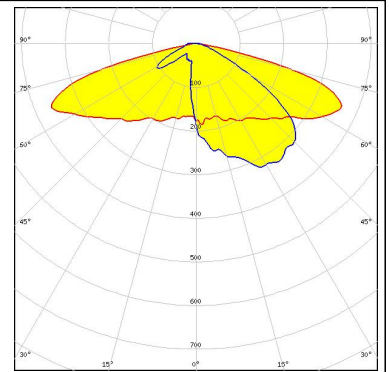

LED XB-H  
FWHM Asymmetric  
Efficiency 91 %  
LEDs/each optic 1  
Light colour White  
Required components:

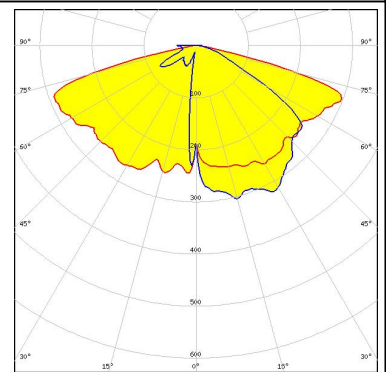

LED XHP35 HD  
FWHM Asymmetric  
Efficiency 90 %  
LEDs/each optic 1  
Light colour White  
Required components:




LED XHP35 HI  
FWHM Asymmetric  
Efficiency 92 %  
LEDs/each optic 1  
Light colour White  
Required components:


#### PHOTOMETRIC DATA (SIMULATED):



LED XP-G2 HE  
 FWHM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

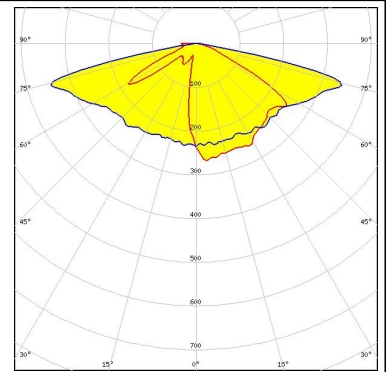


LED XP-G3  
 FWHM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

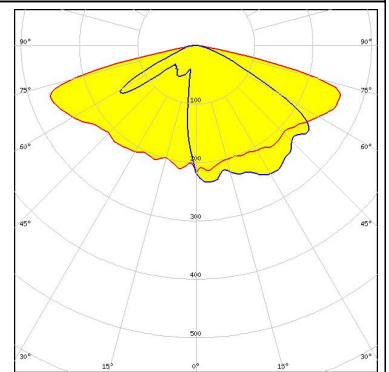

Transparent protective cover




LED LUXEON 5050 Round LES  
 FWHM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

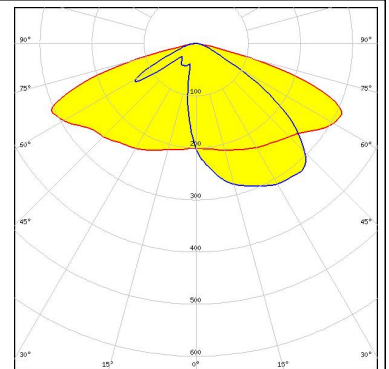

Transparent protective cover



LED LUXEON 5050 Square LES  
 FWHM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

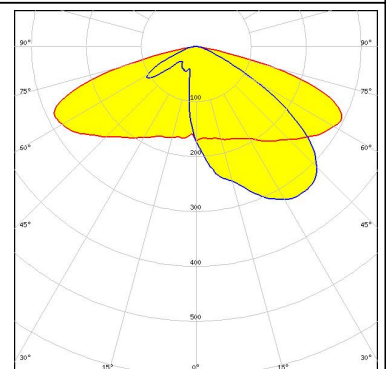


Transparent protective cover

#### PHOTOMETRIC DATA (SIMULATED):


##### LUMILEDS

LED LUXEON 5050 Square LES  
 FWHM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

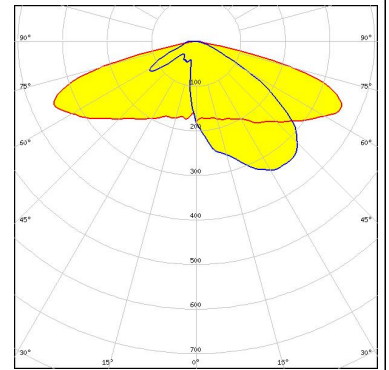


##### LUMILEDS

LED LUXEON H50-2  
 FWHM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

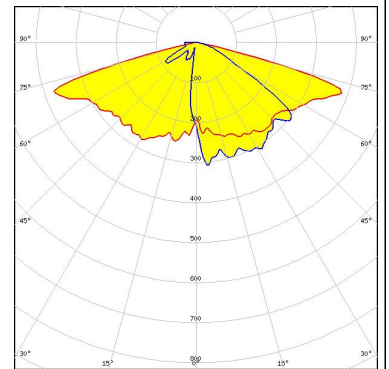


##### LUMILEDS

LED LUXEON V2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

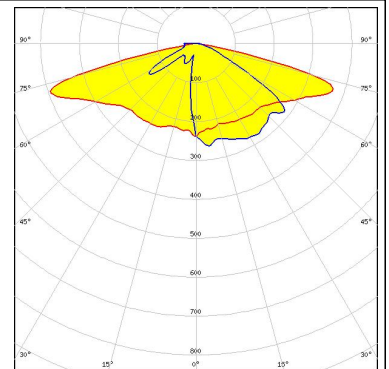

##### NICHIA

LED NV4WB35AM  
 FWHM Asymmetric  
 Efficiency 95 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

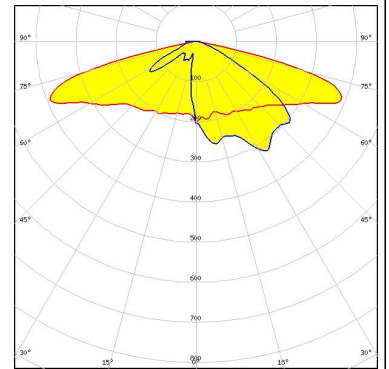


#### PHOTOMETRIC DATA (SIMULATED):




LED NVSxE21A  
FWHM Asymmetric  
Efficiency 80 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Transparent protective cover

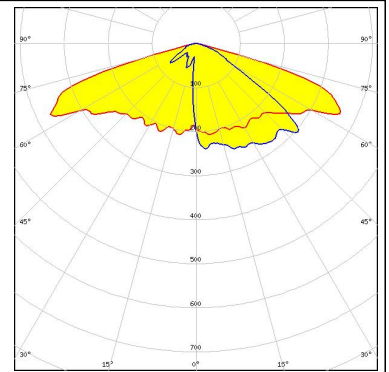


LED NVSxx19B/NVSxx19C  
FWHM Asymmetric  
Efficiency 82 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Transparent protective cover

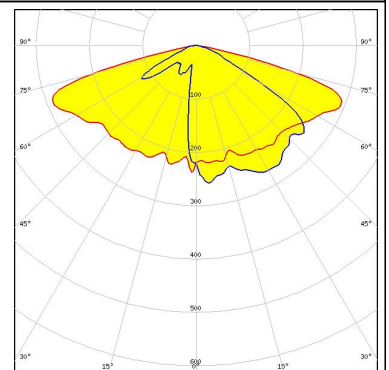


LED PrevaLED Brick HP 2x8  
FWHM Asymmetric  
Efficiency 91 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

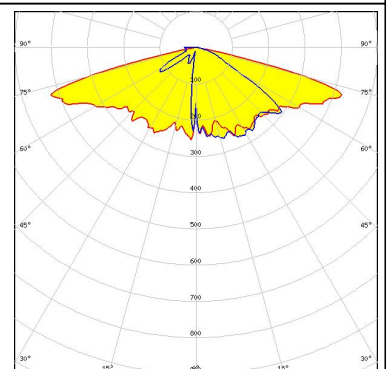

LED Duris S8  
FWHM Asymmetric  
Efficiency 82 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Transparent protective cover

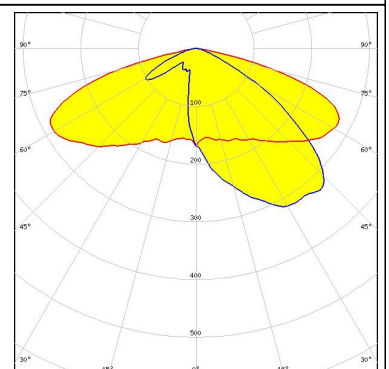

#### PHOTOMETRIC DATA (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (2W version)  
 FWHM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

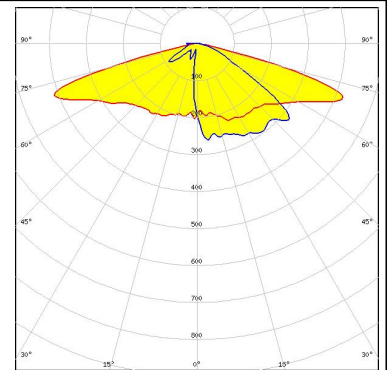


**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

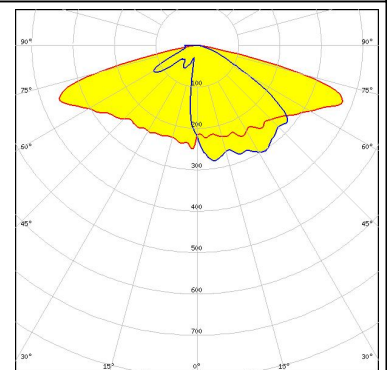


**OSRAM**  
Opto Semiconductors

LED OSLOM Square CSSRM2/CSSRM3  
 FWHM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

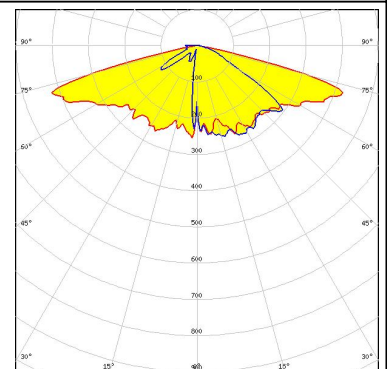

**OSRAM**  
Opto Semiconductors

LED OSLOM Square CSSRM2/CSSRM3  
 FWHM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

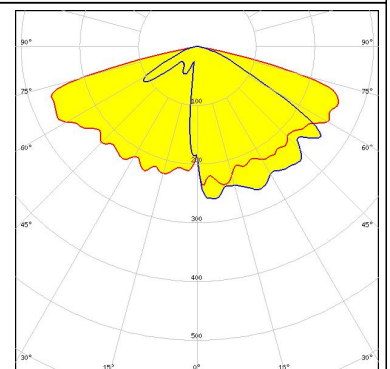

Transparent protective cover


#### PHOTOMETRIC DATA (SIMULATED):

#### OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Transparent protective cover

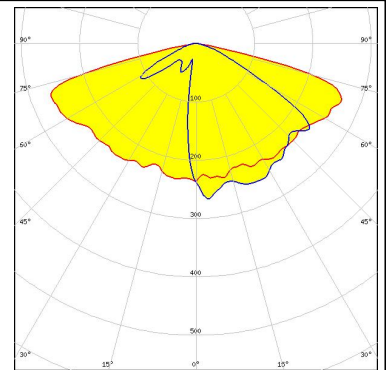


#### PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4  
 FWHM Asymmetric  
 Efficiency 93 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

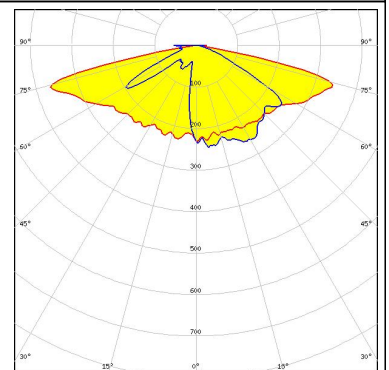


SEOUL SEMICONDUCTOR

LED SEOUL DC 5050 6V  
 FWHM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

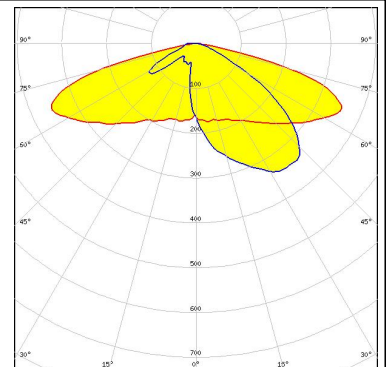


SEOUL SEMICONDUCTOR

LED Z8Y19  
 FWHM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 4  
 Light colour White  
 Required components:

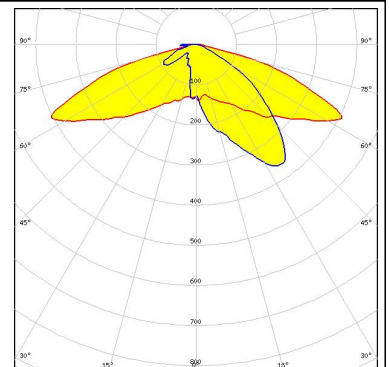



#### PHOTOMETRIC DATA (SIMULATED):

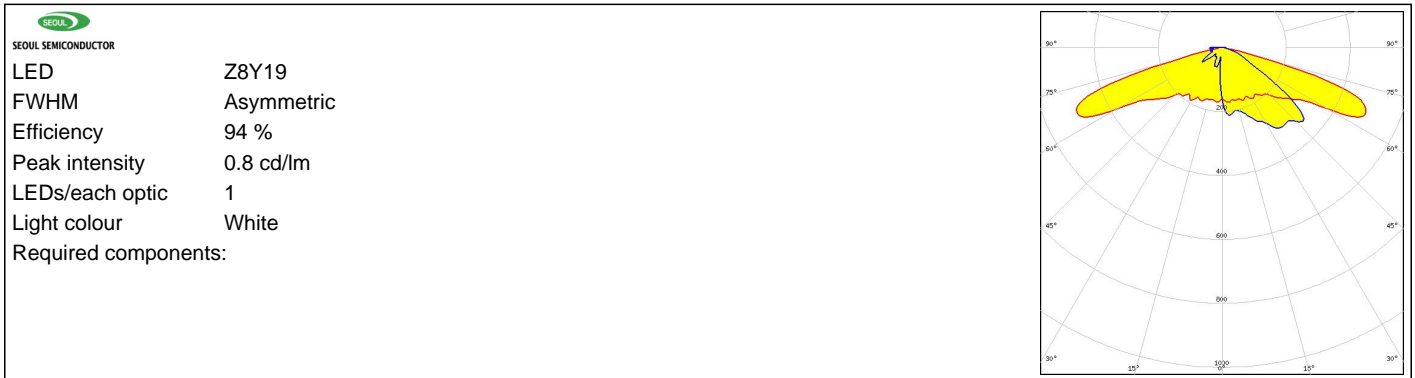

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А