

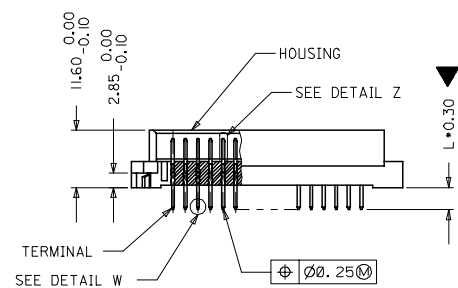
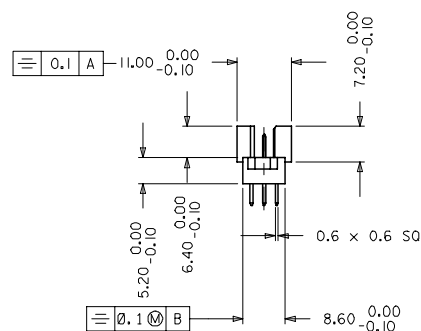
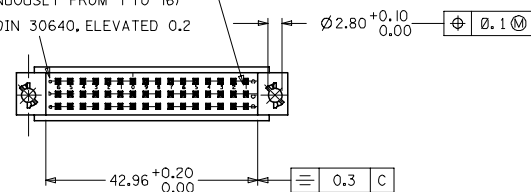



1. MATERIAL NUMBER, BATCH CODE, UL CSA MARKING TO BE PRINTED ON THE CONNECTOR AS PER E-36502-005
2. PRODUCT SPECIFICATION PS:85013-001
3. PACKING SPECIFICATION PK: 36512-001
4. CUT FACES OF TIP WITHOUT PLATING IS PERMITTED
5. REFERENCE AREA OF PLATING
6. GAUGE DRAWING REFER E-36500-100

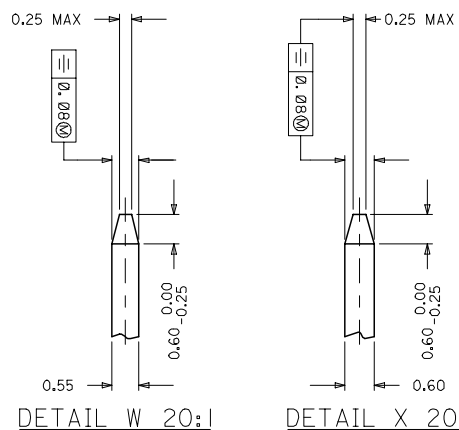

SCRIPT E1.5-6 DIN 30640, ELEVATED 0.2



EC NO: 2005-0092		2004/11/23		2004/11/23		2004/11/23		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION																
DRINKING WATER		CHICKENPOX		CHICKENPOX		APPROPRIATE		$\nabla=1$ $\nabla=0$		<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± 0.005</td><td>± 0.0002</td></tr><tr><td>3 PLACES</td><td>± 0.005</td><td>± 0.0002</td></tr><tr><td>2 PLACES</td><td>± 0.005</td><td>± 0.0002</td></tr><tr><td>1 PLACE</td><td>± 0.1</td><td>± 0.004</td></tr></table>			mm	INCH	4 PLACES	± 0.005	± 0.0002	3 PLACES	± 0.005	± 0.0002	2 PLACES	± 0.005	± 0.0002	1 PLACE	± 0.1	± 0.004	DRAWN BY NS		DATE 2004/03/31		TITLE 48 POS. MALE CONNECTOR ACC. DIN 41612 STYLE R/2 CONTACTS MOLEX MOLEX INCORPORATED			
	mm	INCH																																
4 PLACES	± 0.005	± 0.0002																																
3 PLACES	± 0.005	± 0.0002																																
2 PLACES	± 0.005	± 0.0002																																
1 PLACE	± 0.1	± 0.004																																
										ANGULAR $\pm 2^{\circ}$		MATERIAL NO. SEE CHART		DOCUMENT NO. E-85013-0002		SHEET NO. 1 OF 2																		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A1																																

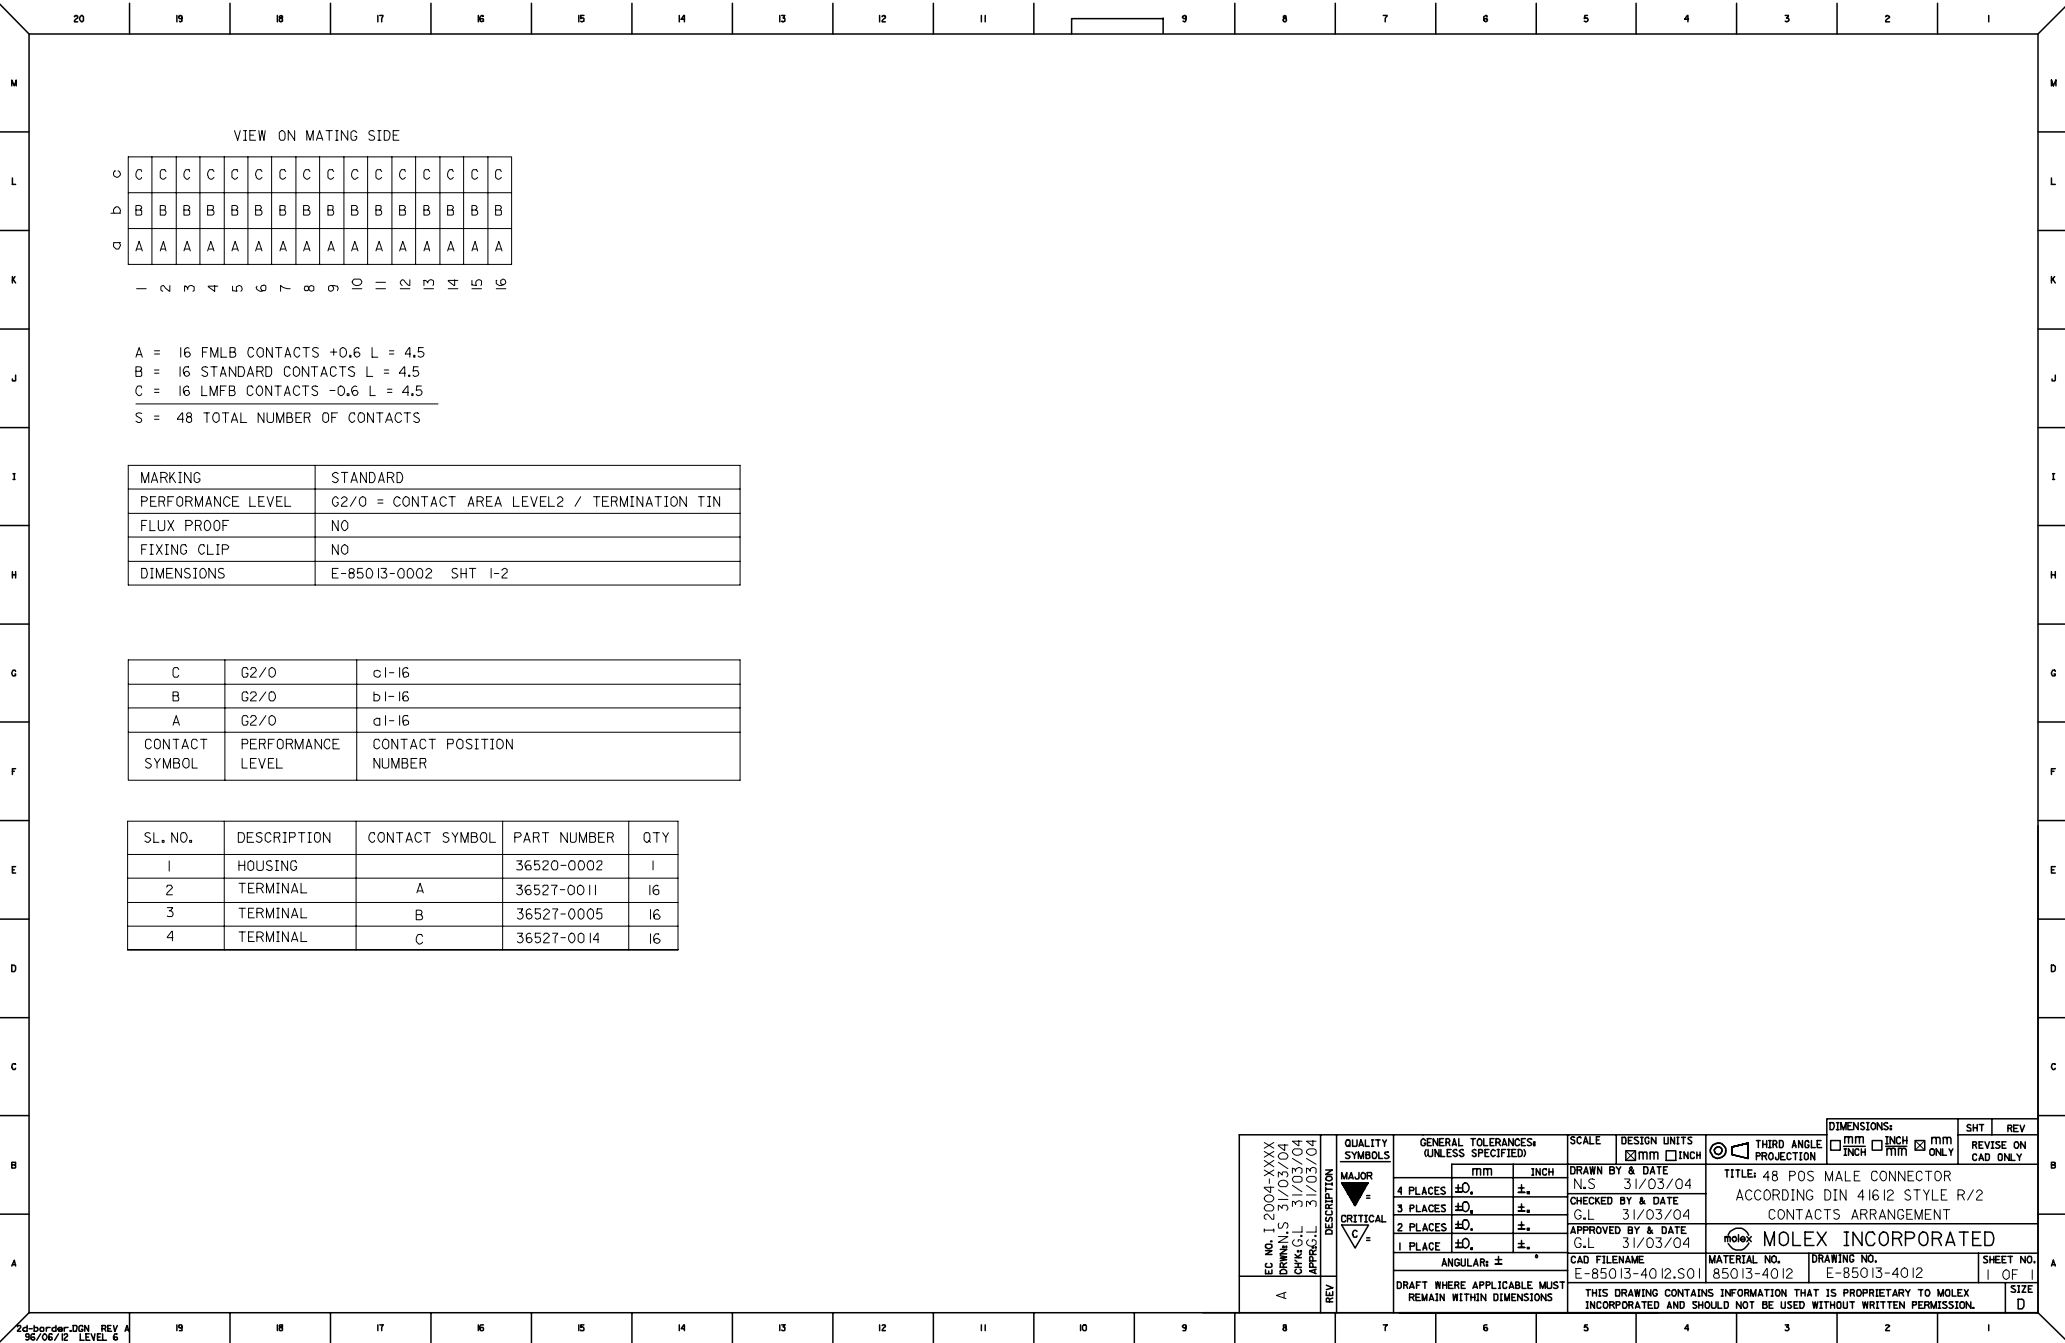

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

A = 16 FMLB CONTACTS +0.6 L = 4.5
B = 16 STANDARD CONTACTS L = 4.5
C = 16 LMFB CONTACTS -0.6 L = 4.5

S = 48 TOTAL NUMBER OF CONTACTS

C	G2/O	c1-16
B	G2/O	b1-16
A	G2/O	a1-16
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>3 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>2 PLACES</td> <td>±0.</td> <td>±.</td> </tr> <tr> <td>1 PLACE</td> <td>±0.</td> <td>±.</td> </tr> </tbody> </table>			mm	INCH	4 PLACES	±0.	±.	3 PLACES	±0.	±.	2 PLACES	±0.	±.	1 PLACE	±0.	±.	SCALE DRAWN BY & DATE S.S 27/03/01 CHECKED BY & DATE G.L 27/03/01 APPROVED BY & DATE G.L 27/03/01	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION TITLE: 48 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE R/2 CONTACTS ARRANGEMENT	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ mm ☐ INCH ☐ mm ONLY	SHT. REV REVISION ON CAD ONLY
	mm	INCH																						
4 PLACES	±0.	±.																						
3 PLACES	±0.	±.																						
2 PLACES	±0.	±.																						
1 PLACE	±0.	±.																						
EC NO. I 2004-XXXX DIN/EN 31/03/04 CH/6 G.L 31/03/04 APPL/6 L 31/03/04		MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th></tr></thead></table>			mm	INCH																	
	mm	INCH																						

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А