

Power-off Isolation, 6 Ω , 1.8 V to 5.5 V, SPDT Analog Switch (2:1 Multiplexer)

DESCRIPTION

The DG4599E is a high performance single-pole, double-throw (SPDT) analog switch designed for 1.8 V to 5.5 V operation with a single power rail.

Fabricated with high density CMOS technology, the device achieves low on resistance of 6 Ω and switch off capacitance of 7 pF at a 5 V power supply and low power consumption, and fast switching speeds.

The DG4599E features break before make switching performance. It can handle both analog and digital signals and permits signals with amplitudes of up to V_{+} to be transmitted in either direction.

A power-off protection circuit is built into the switch to prevent an abnormal current path through the signal pins during the power-off condition. The part can withstand greater than 7 kV ESD (human body model). The DG4599E is available in the compact SC-70-6L package.

FEATURES

- Low switch on-resistance (6 Ω)
- +1.8 V to +5.5 V single supply operation
- Isolation in powered-off mode
- Low voltage logic control
- Control logic inputs can go over V_{+}
- Low parasitic capacitance
- Break before make switching
- Latch-up performance exceeds 200 mA per JESD 78
- High ESD rating
 - 7000 V human body model (JS-001)
 - 1000 V charge device model (JS-002)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS*
Available

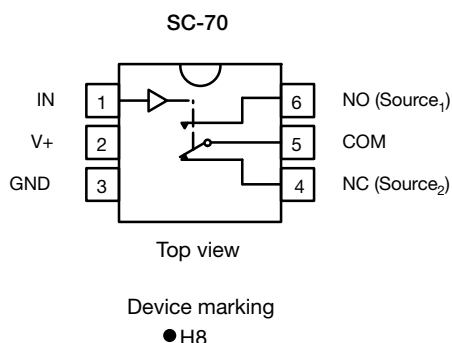
Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

APPLICATIONS

- Battery powered devices
- Consumer and computing
- Instrumentation
- Medical equipment
- Control and automation

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



TRUTH TABLE		
LOGIC	NC	NO
0	On	Off
1	Off	On

Notes

- Logic "0" ≤ 0.8 V
- Logic "1" ≥ 2.4 V

ORDERING INFORMATION		
TEMP. RANGE	PACKAGE	PART NUMBER
-40 $^{\circ}$ C to +85 $^{\circ}$ C	SC-70-6	DG4599EDL-T1-GE3

**ABSOLUTE MAXIMUM RATINGS**

PARAMETER		LIMIT	UNIT
V+, COM, NC, NO, IN reference to GND		-0.3 to 6	V
Continuous current (any terminal)		± 50	mA
Peak current (pulsed at 1 ms, 10 % duty cycle)		± 200	
Storage temperature		-65 to +150	°C
Power dissipation (packages) ^a	6-pin SC-70 ^b	250	mW
ESD / HBM	JS-001	7000	V
ESD / CDM	JS-002	1000	
Latch up	Per JESD78 with 1.5 x voltage clamp	200	mA

Notes

- a. All leads welded or soldered to PC board
b. Derate 3.1 mW/°C above 70 °C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

SPECIFICATIONS (V+ = 5 V)

PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V+ = 5 V, ± 10 % V _{IN} = 0.8 V or 2.4 V ^e	TEMP. ^a	LIMITS -40 °C to +85 °C			UNIT
				MIN. ^b	TYP. ^c	MAX. ^b	
Analog Switch							
Analog signal range ^d	V _{NO} , V _{NC} V _{COM}		Full	0	-	V+	V
Drain-source on-resistance ^d	R _{DS(on)}	V+ = 4.5 V, V _{COM} = 3 V, I _{NO} , I _{NC} = 10 mA	Room	-	6	60	Ω
			Full	-	8	65	
R _{DS(on)} flatness ^d	R _{DS(on)} flatness	V+ = 5 V, V _{COM} = 1.5 V, 3.5 V, I _{NO} , I _{NC} = 10 mA	Room	-	0.4	-	nA
R _{DS(on)} match ^d	ΔR _{DS(on)}	V+ = 4.5 V, V _{COM} = 3 V, I _{NO} , I _{NC} = 10 mA	Room	-	0.04	2	
Switch-off leakage current ^f	I _{NO(off)} , I _{NC(off)}	V+ = 5.5 V, V _{NO} , V _{NC} = 1 V / 4.5 V, V _{COM} = 4.5 V / 1 V	Room	-1.5	-	1.5	
			Full	-4	-	4	
	I _{COM(off)}		Room	-1	-	1	
			Full	-4	-	4	
Channel-on leakage current ^f	I _{COM(on)}	V+ = 5.5 V, V _{NO} , V _{NC} = V _{COM} = 1 V / 4.5 V	Room	-1	-	1	μA
			Full	-4	-	4	
Power-down leakage	I _{PD}	V+ = 0 V, V _{COM} = 5 V, NO/NC open, V _{IN} = GND	Full	-	-	5	μA
		V+ = 0 V, V _{NO} , V _{NC} = 5 V, COM open, V _{IN} = GND	Full	-	-	5	
Digital Control							
Input high voltage	V _{INH}		Full	2.4	-	-	V
Input low voltage	V _{INL}		Full	-	-	0.8	
Input capacitance ^d	C _{IN}		Full	-	6	-	pF
Input current	I _{INL} or I _{INH}	V _{IN} = 0 V or V+	Full	-1	-	1	μA
Dynamic Characteristics							
Turn-on time ^d	t _{ON}	V _{NO} or V _{NC} = 3 V, R _L = 300 Ω, C _L = 35 pF	Room	-	10	30	ns
			Full	-	-	40	
Turn-off time ^d	t _{OFF}		Room	-	8	25	
			Full	-	-	30	
Break-before-make time ^d	t _{BBM}		Room	1	-	-	
Charge injection ^d	Q _{INJ}		C _L = 1 nF, V _{GEN} = 0 V, V _{NO} , V _{NC} = 0 V, R _{GEN} = 0 Ω	Room	-	1	-
Off-isolation ^d	OIRR	R _L = 50 Ω, C _L = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk ^d	X _{TALK}		Room	-	-77	-	
NO, NC off capacitance ^d	C _{NO(off)}	V _{IN} = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	C _{NC(off)}		Room	-	7	-	
Channel-on capacitance ^d	C _{ON}		Room	-	13	-	
Power Supply							
Power supply current ^d	I+	V _{IN} = 0 V or V+	Full	-	0.004	1	μA



SPECIFICATIONS (V+ = 3 V)							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V+ = 3 V, ± 10 % VIN = 0.4 V or 2 V ^e	TEMP. ^a	LIMITS -40 °C to +85 °C			UNIT
				MIN. ^b	TYP. ^c	MAX. ^b	
Analog Switch							
Analog signal range ^d	VNO, VNC VCOM		Full	0	-	V+	V
Drain-source on-resistance ^d	RDS(on)	V+ = 2.7 V, VCOM = 1.5 V, INO, INC = 10 mA	Room	-	13	95	Ω
			Full	-	15	105	
RDS(on) flatness ^d	RDS(on) flatness	V+ = 3 V, VCOM = 0 V to V+, INO, INC = 10 mA	Room	-	1.4	-	
RDS(on) match ^d	ΔRDS(on)	V+ = 2.7 V, VCOM = 1.5 V, INO, INC = 10 mA	Room	-	0.03	2	
Switch-off leakage current ^f	INO(off), INC(off)	V+ = 3.3 V, VNO, VNC = 1 V / 3 V, VCOM = 3 V / 1 V	Room	-400	-	400	pA
			Full	-4	-	4	nA
	ICOM(off)		Room	-800	-	800	pA
			Full	-8	-	8	nA
Channel-on leakage current ^f	ICOM(on)	V+ = 3.3 V, VNO, VNC = VCOM = 1 V / 3 V	Room	-800	-	800	pA
			Full	-8	-	8	nA
Digital Control							
Input high voltage	VINH		Full	2	-	-	V
Input low voltage	VINL		Full	-	-	0.4	
Input capacitance ^d	CIN		Full	-	6	-	pF
Input current	IINL or IINH	VIN = 0 V or V+	Full	-1	-	1	μA
Dynamic Characteristics							
Turn-on time ^d	tON	VNO or VNC = 2 V, RL = 300 Ω, CL = 35 pF	Room	-	13	45	ns
			Full	-	-	55	
Turn-off time ^d	tOFF		Room	-	9	35	
			Full	-	-	40	
Break-before-make time ^d	tBBM		Room	1	-	-	
Charge injection ^d	QINJ	CL = 1 nF, VGEN = 0 V, VNO, VNC = 0 V, RGEN = 0 Ω	Room	-	0.9	-	pC
Off-isolation ^d	OIRR	RL = 50 Ω, CL = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk ^d	XTALK		Room	-	-77	-	
NO, NC off capacitance ^d	CNO(off)	VIN = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	CNC(off)		Room	-	7	-	
Channel-on capacitance ^d	CON		Room	-	14	-	
Power Supply							
Power supply current ^d	I+	VIN = 0 V or V+	Full	-	0.002	1	μA



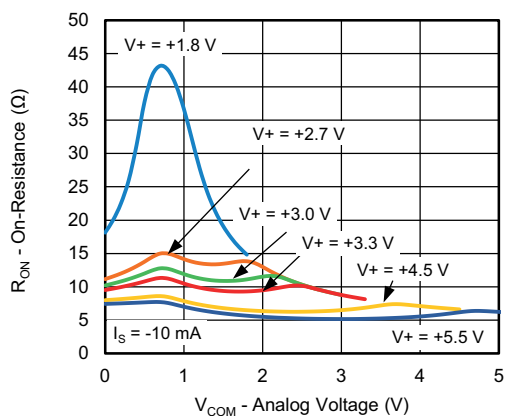
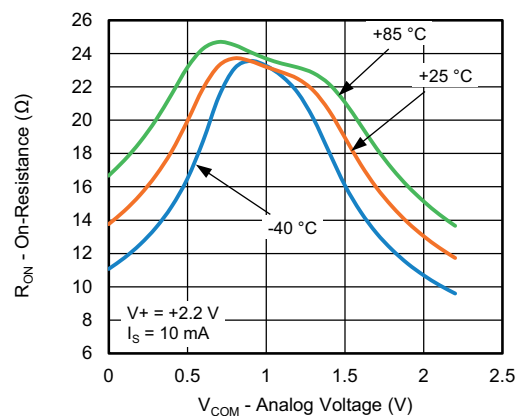
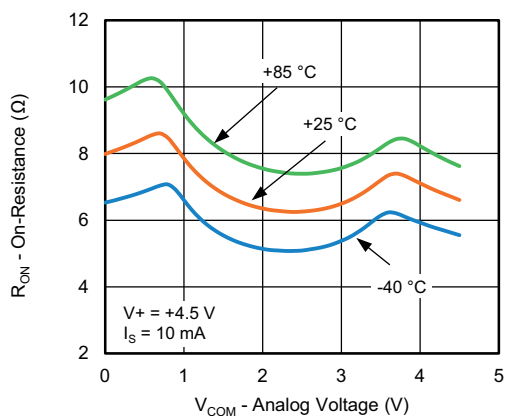
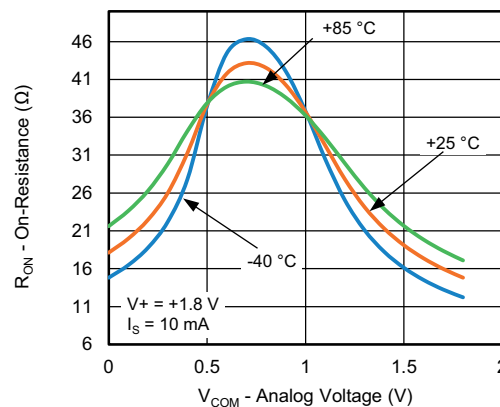
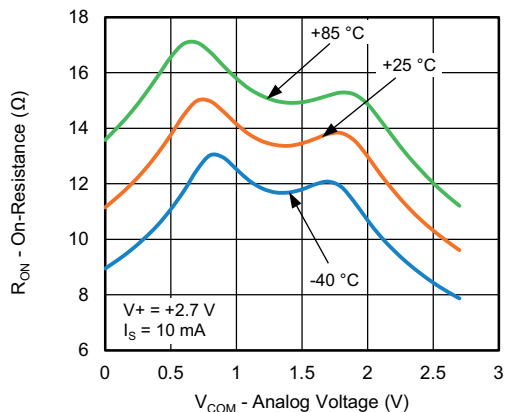
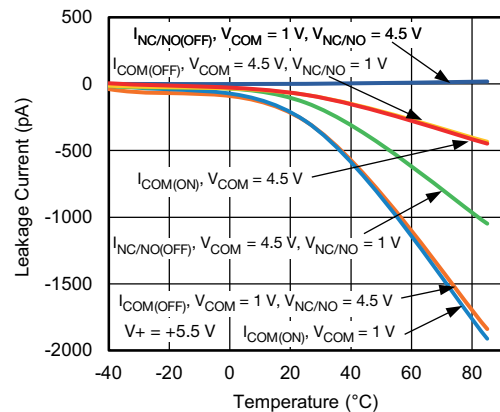
SPECIFICATIONS (V+ = 2.5 V)							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V+ = 2.5 V, ± 10 % VIN = 0.4 V or 2 V ^e	TEMP. ^a	LIMITS -40 °C to +85 °C			UNIT
				MIN. ^b	TYP. ^c	MAX. ^b	
Analog Switch							
Analog signal range ^d	VNO, VNC VCOM		Full	0	-	V+	V
Drain-source on-resistance ^d	RDS(on)	V+ = 2.2 V, VCOM = 1 V, INO, INC = 10 mA	Room	-	23	110	Ω
			Full ^d	-	24	120	
RDS(on) flatness ^d	RDS(on) flatness	V+ = 2.5 V, VCOM = 0 V to V+, INO, INC = 10 mA	Room	-	1.7	-	
RDS(on) match ^d	ΔRDS(on)	V+ = 2.2 V, VCOM = 1.2 V, INO, INC = 10 mA	Room	-	0.1	2	
Switch-off leakage current ^f	INO(off), INC(off)	V+ = 2.7 V, VNO, VNC = 0.5 V / 1.5 V, VCOM = 1.5 V / 0.5 V	Room	-200	-	200	pA
			Full ^d	-3	-	3	nA
	ICOM(off)		Room	-200	-	200	pA
			Full ^d	-3	-	3	nA
Channel-on leakage current ^f	ICOM(on)	V+ = 2.7 V, VNO, VNC = VCOM = 0.5 V / 1.5 V	Room	-200	-	200	pA
			Full ^d	-3	-	3	nA
Digital Control							
Input high voltage	VINH		Full	2	-	-	V
Input low voltage	VINL		Full	-	-	0.4	
Input capacitance ^d	CIN		Full	-	6	-	pF
Input current	IINL or IINH	VIN = 0 V or V+	Full	-1	-	1	μA
Dynamic Characteristics							
Turn-on time ^d	tON	VNO or VNC = 1.5 V, RL = 300 Ω, CL = 35 pF	Room	-	16	50	ns
			Full ^d	-	-	60	
Turn-off time ^d	tOFF		Room	-	10	35	
			Full	-	-	45	
Break-before-make time ^d	tBBM		Room ^d	1	-	-	
Charge injection ^d	QINJ	CL = 1 nF, VGEN = 0 V, VNO, VNC = 0 V, RGEN = 0 Ω	Room	-	0.9	-	pC
Off-isolation ^d	OIRR	RL = 50 Ω, CL = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk ^d	XTALK		Room	-	-77	-	
NO, NC off capacitance ^d	CNO(off)	VIN = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	CNC(off)		Room	-	7	-	
Channel-on capacitance ^d	CON		Room	-	14	-	
Power Supply							
Power supply current ^d	I+	VIN = 0 V or V+	Full	-	-	1	μA

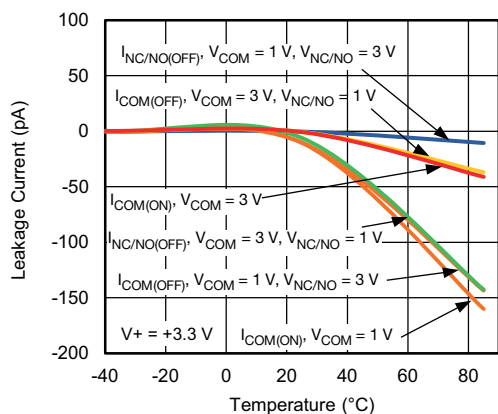
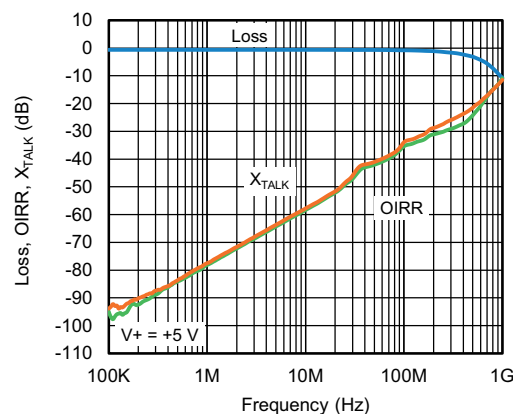
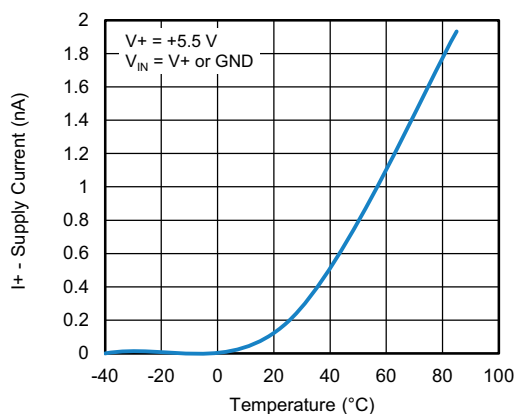
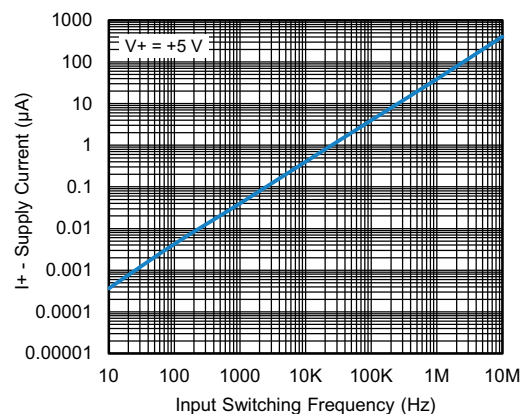
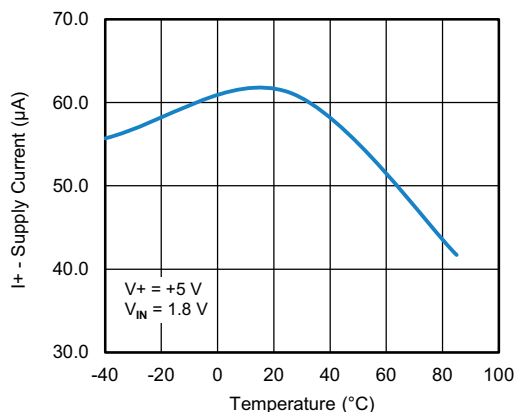
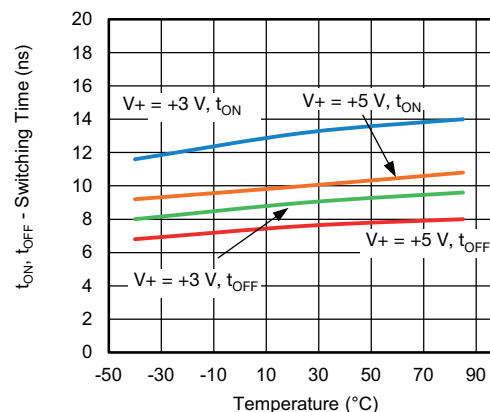


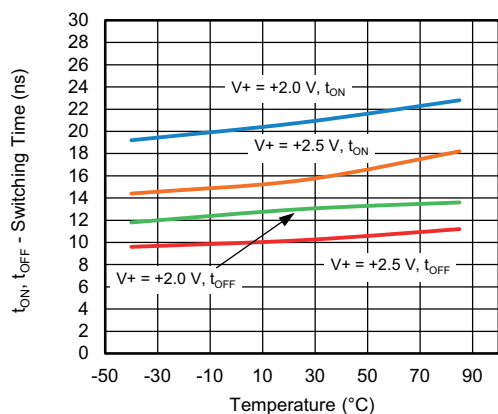
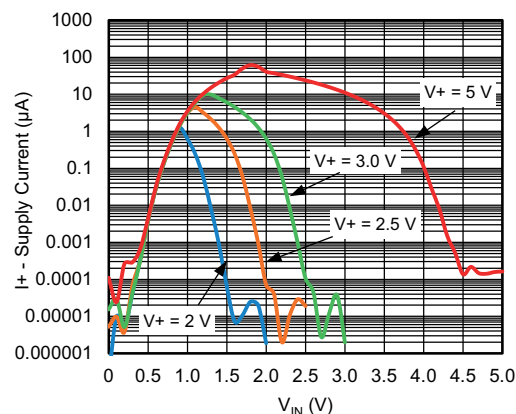
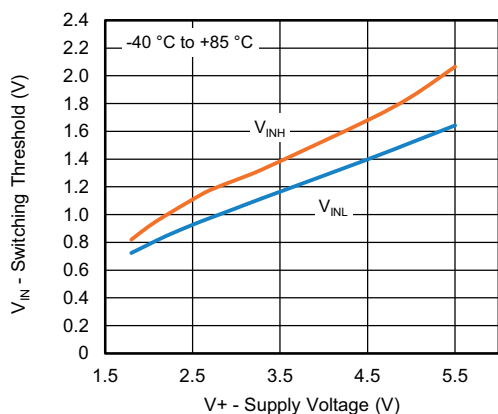
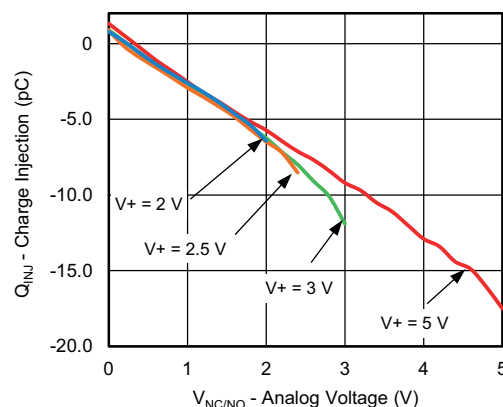
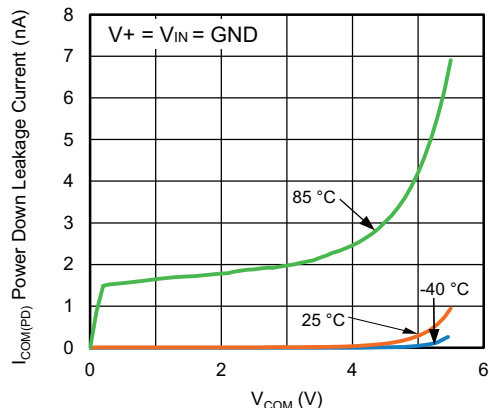
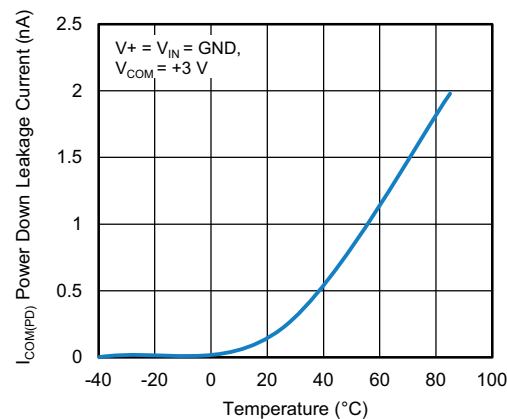
SPECIFICATIONS (V+ = 2 V)							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V+ = 2 V, ± 10 % VIN = 0.4 V or 1.6 V ^e	TEMP. ^a	LIMITS -40 °C to +85 °C			UNIT
				MIN. ^b	TYP. ^c	MAX. ^b	
Analog Switch							
Analog signal range ^d	VNO, VNC VCOM		Full	0	-	V+	V
Drain-source on-resistance ^d	RDS(on)	V+ = 1.8 V, VCOM = 1 V, INO, INC = 10 mA	Room	-	37	110	Ω
			Full ^d	-	36	120	
RDS(on) flatness ^d	RDS(on) flatness	V+ = 2 V, VCOM = 0 V to V+, INO, INC = 10 mA	Room	-	3	-	
RDS(on) match ^d	ΔRDS(on)	V+ = 1.8 V, VCOM = 1 V, INO, INC = 10 mA	Room	-	0.04	2	
Switch-off leakage current ^f	INO(off), INC(off)	V+ = 2.2 V, VNO, VNC = 0.5 V / 1.5 V, VCOM = 1.5 V / 0.5 V	Room	-200	-	200	pA
			Full ^d	-3	-	3	nA
	ICOM(off)		Room	-200	-	200	pA
			Full ^d	-3	-	3	nA
Channel-on leakage current ^f	ICOM(on)	V+ = 2.2 V, VNO, VNC = VCOM = 0.5 V / 1.5 V	Room	-200	-	200	pA
			Full ^d	-3	-	3	nA
Digital Control							
Input high voltage	VINH		Full	1.6	-	-	V
Input low voltage	VINL		Full	-	-	0.4	
Input capacitance ^d	CIN		Full	-	6	-	pF
Input current	IINL or IINH	VIN = 0 V or V+	Full	-1	-	1	μA
Dynamic Characteristics							
Turn-on time ^d	tON	VNO or VNC = 1.5 V, RL = 300 Ω, CL = 35 pF	Room	-	21	50	ns
			Full ^d	-	-	60	
Turn-off time ^d	tOFF		Room	-	13	35	
			Full ^d	-	-	45	
Break-before-make time ^d	tBBM		Room	1	-	-	
Charge injection ^d	QINJ		CL = 1 nF, VGEN = 0 V, VNO, VNC = 0 V, RGEN = 0 Ω	Room	-	0.8	-
Off-isolation ^d	OIRR	RL = 50 Ω, CL = 5 pF, f = 1 MHz	Room	-	-78	-	dB
Crosstalk ^d	XTALK		Room	-	-77	-	
NO, NC off capacitance ^d	CNO(off)	VIN = 0 V or V+, f = 1 MHz	Room	-	7	-	pF
	CNC(off)		Room	-	7	-	
Channel-on capacitance ^d	CON		Room	-	14	-	
Power Supply							
Power supply current ^d	I+	VIN = 0 V or V+	Full	-	-	1	μA

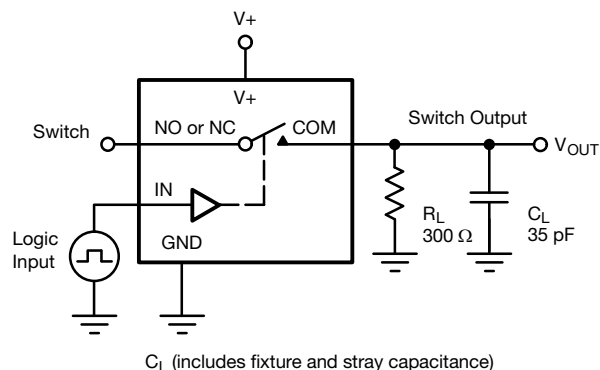
Notes

- a. Room = 25 °C, full = as determined by the operating suffix
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet
c. Typical values are for design aid only, not guaranteed nor subject to production testing
d. Guarantee by design, nor subjected to production test
e. V_{IN} = input voltage to perform proper function
f. Guaranteed by 5 V leakage testing, not production tested

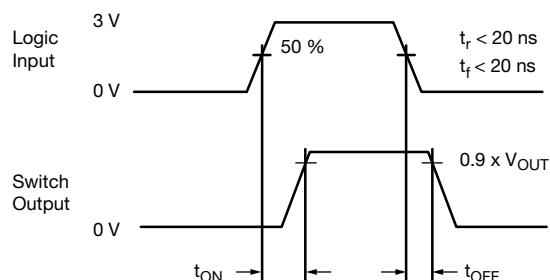
TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

 $R_{DS(on)}$ vs. V_{COM} and Supply Voltage

 $R_{DS(on)}$ vs. Analog Voltage and Temperature

 $R_{DS(on)}$ vs. Analog Voltage and Temperature

 $R_{DS(on)}$ vs. Analog Voltage and Temperature

 $R_{DS(on)}$ vs. Analog Voltage and Temperature

Leakage Current vs. Temperature

TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

Leakage Current vs. Temperature

Insertion Loss, Off-Isolation Crosstalk vs. Frequency

Supply Current vs. Temperature

Supply Current vs. Input Switching Frequency

Supply Current vs. Temperature

Switching Time vs. Temperature

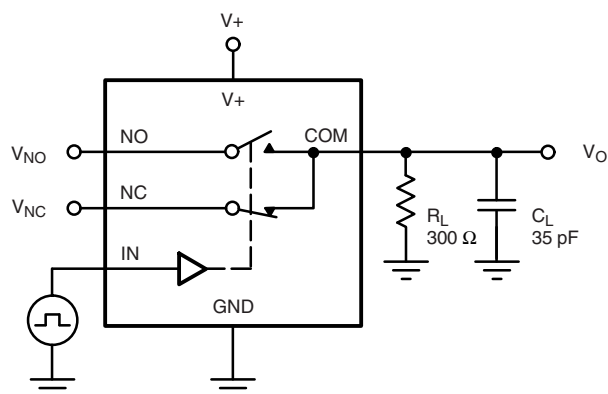
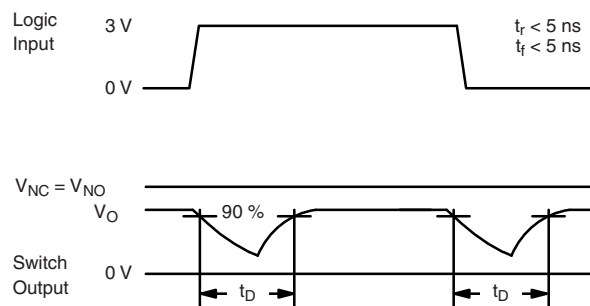
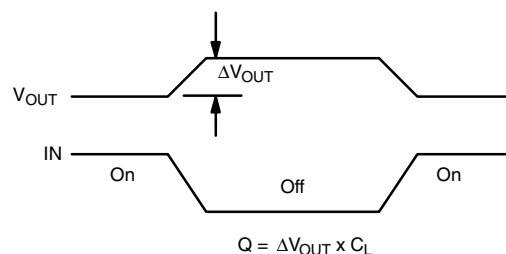
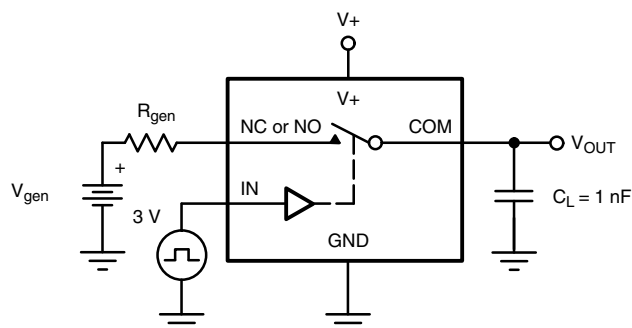
TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

Switching Time vs. Temperature

Supply Current vs. Enable Input Voltage

Switching Threshold vs. Supply Voltage

Charge Injection vs. Analog Voltage

Power Down Leakage Current vs. V_{COM}

Power Down Leakage Current vs. Temperature

TEST CIRCUITS

 C_L (includes fixture and stray capacitance)

$$V_{OUT} = V_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$

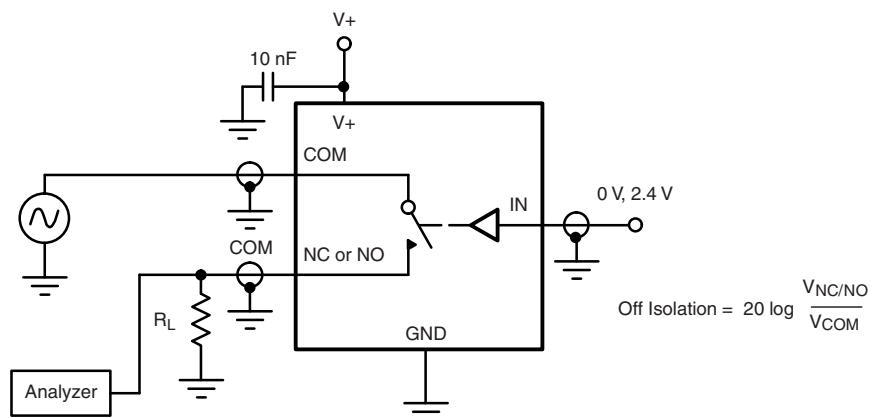
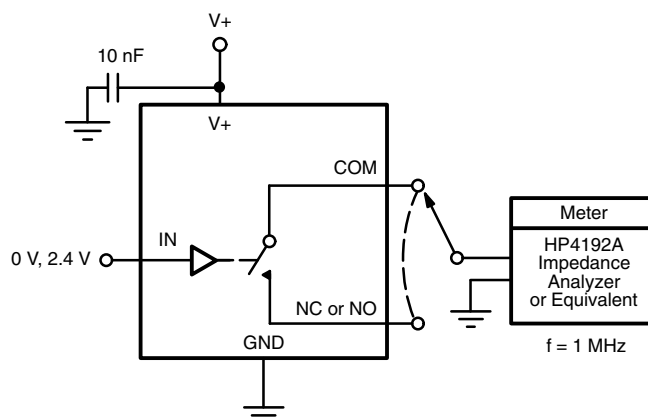


Logic "1" = switch on
Logic input waveforms inverted for switches that have the opposite logic sense.

Fig. 1 - Switching Time

 C_L (includes fixture and stray capacitance)

Fig. 2 - Break-Before-Make Interval


IN depends on switch configuration: input polarity determined by sense of switch.

Fig. 3 - Charge Injection

TEST CIRCUITS

Fig. 4 - Off-Isolation

Fig. 5 - Channel Off / On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?76618.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А