

## DS760SL Series

760 Watts Bulk Front End

### Data Sheet

Total Output Power:  
760 Watts +5.0 Vdc Stand-by

#### SPECIAL FEATURES

- 760 W output power
- 18.1 W/cu-in
- 1U X 54.5 mm form factor (slimline)
- N + 1 redundant
- Hot-swap
- Internal OR'ing
- 5.0 V housekeeping
- High efficiency 91% @ 230 Vac, 50% load
- Variable speed "smart fans"
- EMI Class A
- EN61000 Immunity
- Two year warranty

#### SAFETY

- UL/cUL 60950-1
- CSA 60950-1
- VDE 60950-1
- China CCC
- CB Scheme Report/Cert




#### Electrical Specifications

| Input                    |   |                                     |
|--------------------------|---|-------------------------------------|
| Input range (operating): | 90 - 264 Vac  |                                     |
| Input range (nominal):   | 115 / 230 Vac   | Input through IEC connector         |
| Frequency:               | 47 - 63 Hz  |                                     |
| Input fusing:            | Internal 10 A fuses                                     |                                     |
| Inrush current:          | < = 25 A peak   | Either hot or cold start            |
| Power factor:            | 0.99 typical  | Meets EN61000-3-2                   |
| Harmonics:               | Meets IEC 1000-3-2 requirements                         |                                     |
| Input current:           | 8.8 A RMS max input current                             | At 100 Vac                          |
| Holdup time:             | 12 ms minimum for main O/P<br>20 ms minimum for standby | At full rated load                  |
| Undervoltage lockout:    | 85 ± 2.5 Vac<br>80 ± 2.5 Vac                            | Turn-on voltage<br>Turn-off voltage |
| Overvoltage lockout:     | N/A   |                                     |
| Leakage current:         | < 0.8 mA  | At 264 Vac                          |
| On/Off power switch:     | N/A   |                                     |
| Power line transient:    | MOV directly after the fuse                             |                                     |

#### Environmental Specifications

|                              |  |
|------------------------------|--|
| Operating temperature:       | -10 ° to 50 °C, can operate up to 60°C at derated output power |
| Storage temperature:         | -40 ° to 85 °C   |
| Cooling:                     | Internal fan (fan speed control)                               |
| Operating relative humidity: | 5% to 95% non-condensing                                       |
| Altitude:                    | 10,000 feet  |
| RoHS compliant:              | Yes  |

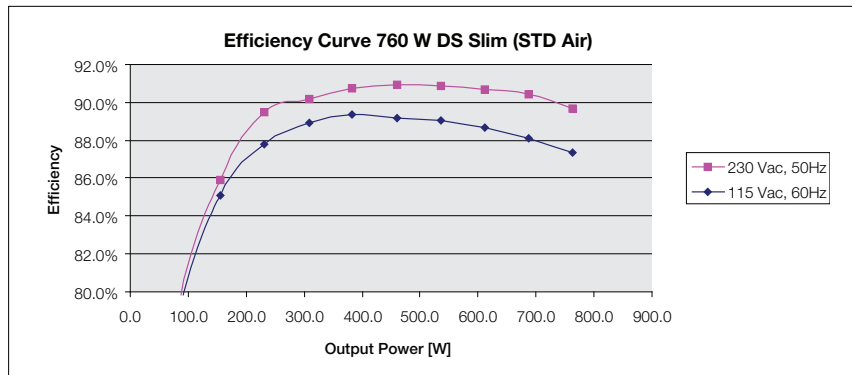


| Output                        |  |   |
|-------------------------------|--|---|
| Output rating:                | 12 V @ 62.3 A; 748 W<br>5.0 Vsb @ 2.4 A; 12 W  | 90 - 264 Vac  |
| Setpoint:                     | 12.0 V   | Programmable $\pm 5\%$ through I <sup>2</sup> C serial bus  |
| Total regulation range:       | 12 V $\pm 1\%$<br>5.0 Vsb $\pm 3\%$            | Line/load/transient when measured at output connector   |
| Rated load:                   | 760 W maximum                                  | No derating over operating temp range for standard air version. Reverse air version is derated  |
| Minimum load:                 | 12 V @ 0.0 A<br>5.0 Vsb @ 0.0 A                | No loss of regulation   |
| Output noise (PARD):          | 100 mV Max P-P<br>100 mV Max P-P               | 12.0 V output<br>5.0 Vsb output<br>Measured with a 0.1 $\mu$ F ceramic and 10 $\mu$ F tantalum capacitor on any output; 20 Mhz                        |
| Output voltage overshoot:     | 300 mV; 12 V main<br>200 mV; 5.0 standby       | 1 A/ $\mu$ Sec slew rate  |
| Transient response:           | < 250 $\mu$ Sec                                | 50% load step @ 1 A/ $\mu$ s<br>Step load valid between 10% to 100% of output rating<br>Recovery time to within 1% of set point at onset of transient |
| Max units in parallel:        | Up to 4  |   |
| Short circuit protection:     | To 120% of rated output                        | Output to return  |
| Remote sense:                 | Compensation up to 100 mV                      |   |
| Output isolation:             | Standard per Safety Requirements               |   |
| Forced load sharing:          | To within 10% of all shared outputs            | Digital sharing control   |
| Overload protection (OCP):    | 120% to 130%<br>120% to 170%                   | 12 V output<br>5.0 Vsb output   |
| Overvoltage protection (OVP): | 110% to 120%<br>110% to 125%                   | 12 V output<br>5.0 Vsb output   |
| Overtemperature protection:   | 10 - 15 $^{\circ}$ C above safe operating area | Both PFC and output converter monitored   |

## Ordering Information

| Model Number  | O/P Voltage Set Point | Set Point Tolerance | Total Regulation | Minimum Current | Maximum Current | Output Ripple P/P | Stand-by Voltage | Air Flow |
|---------------|-----------------------|---------------------|------------------|-----------------|-----------------|-------------------|------------------|----------|
| DS760SL-3     | 12.0 Vdc              | $\pm 0.2\%$         | $\pm 1\%$        | 0 A             | 62.3 A          | 120 mV            | 5.0 V @ 2.4 A    | Standard |
| DS760SL-3-001 | 12.0 Vdc              | $\pm 0.2\%$         | $\pm 1\%$        | 0 A             | 50.0 A          | 120 mV            | 5.0 V @ 2.4 A    | Reverse  |
| DS760SL-3-002 | 12.0 Vdc              | $\pm 0.2\%$         | $\pm 1\%$        | 0 A             | 62.3 A          | 120 mV            | 3.3 V @ 2.4 A    | Standard |
| DS760SL-3-003 | 12.0 Vdc              | $\pm 0.2\%$         | $\pm 1\%$        | 0 A             | 50.0 A          | 120 mV            | 3.3 V @ 2.4 A    | Reverse  |

Outputs - All Models

Timing Diagram

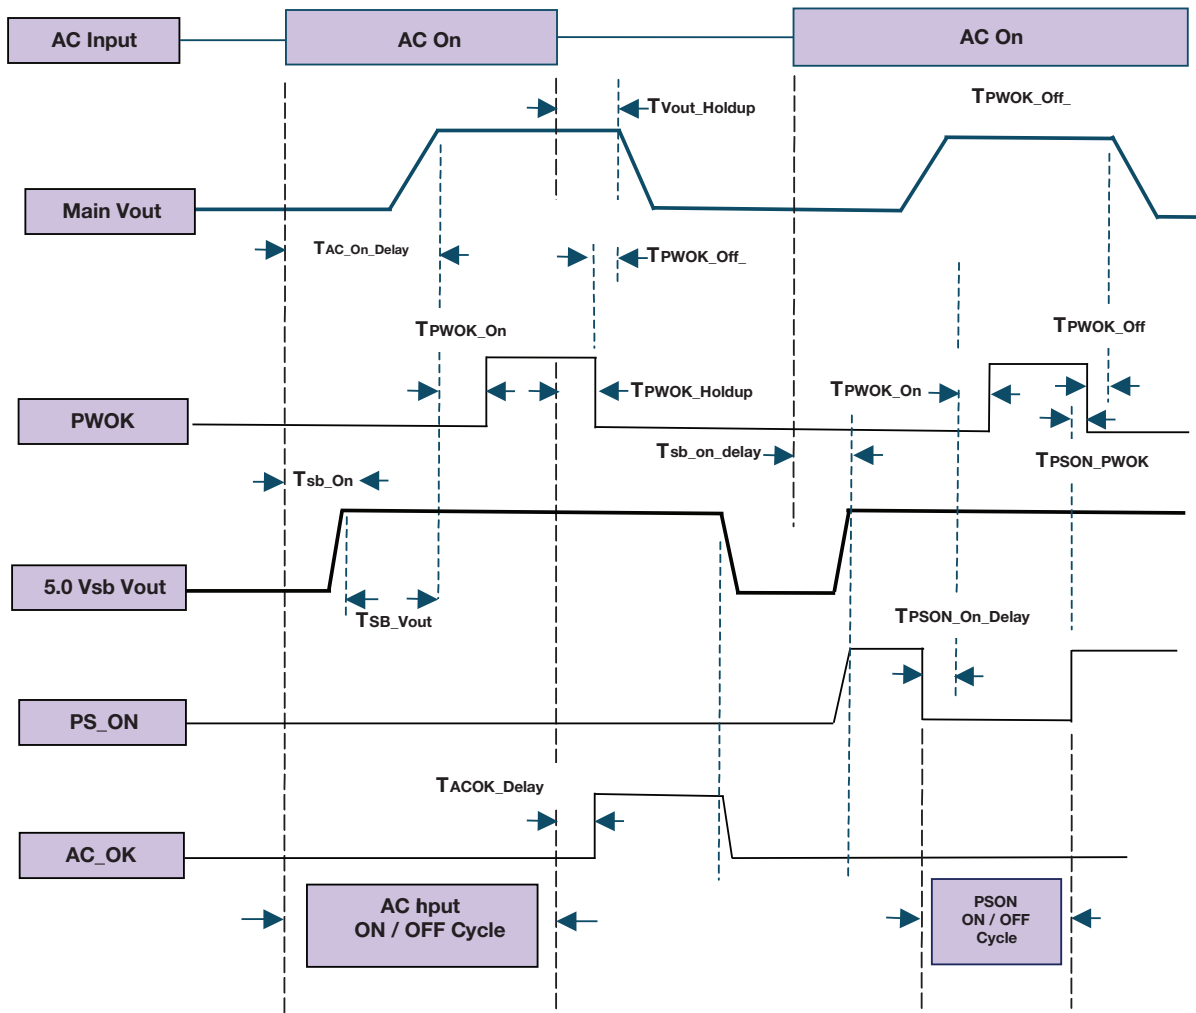

## Outputs - All Models

| Turn On/Off Timing |  |     |      |       |
|--------------------|--|-----|------|-------|
| Item               | Description  | Min | Max  | Units |
| Tvout_rise         | +12 Output rise time   | 10  | 300  | mSec  |
| Tvout_rise         | 5.0 Vsb output rise time   | 1   | 50   | mSec  |
| Tsb_on_delay       | Delay from AC being applied to 5.0 Vsb being within regulation.                                      |     | 1500 | mSec  |
| Tac_on_delay       | Delay from AC being applied to all output voltages being within regulation.                          |     | 3000 | mSec  |
| Tvout_holdup       | Time all output voltages, including 5.0 Vsb, stay within regulation after loss of AC.                | 12  |      | mSec  |
| Tpwok_holdup       | Delay from loss of AC to de-assertion of PWOK  | 5   |      | mSec  |
| Tpson_on_delay     | Delay from PSON# active to output voltages within regulation limits.                                 | 50  | 2500 | mSec  |
| Tpson_pwok         | Delay from PSON# de-active to PWOK being de-asserted.  |     | 100  | mSec  |
| Tacok_delay        | Delay from loss of AC input to de-assertion of ACOK#.  | 10  |      | mSec  |
| Tpwok_on           | Delay from output voltages within regulation limits to PWOK asserted at turn on.                     | 100 | 1000 | mSec  |
| Tpwok_off          | Delay from PWOK de-asserted to 12 Vdc or 5.0 Vsb dropping out of regulation limits.                  | 1   | 1000 | mSec  |
| Tpwok_low          | Duration of PWOK being in the de-asserted state during an off/on cycle using AC or the PSON# signal. | 100 |      | mSec  |
| Tsb_vout           | Delay from 5.0 Vsb being in regulation to 12 Vdc being in regulation at AC turn on.                  | 50  | 1000 | mSec  |

### PSON #

The PSON# signal is required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the +12 Vdc power rail. When this signal is not pulled low by the system, or left open, the +12 Vdc output turns off. The Vsb output remains on. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply. The power supply fan(s) shall operate at the lowest speed.

| PSON Signal Characteristics         |  |           |
|-------------------------------------|--|-----------|
| Signal Type                         | Accepts an open collector/drain input from the system. Pulled-up to the Vsb located in power supply. |           |
| PSON# = Low                         | ON   |           |
| PSON# = Open                        | OFF  |           |
|                                     | MIN  | MAX       |
| Logic level low (power supply ON)   | 0 V  | 0.8 V     |
| Logic level high (power supply OFF) | 2.0 V  | Vsb +0.2V |
| Source current, Vpson = low         |  | 4 mA      |
| Power up delay: Tpson_on_delay      | 5 msec   | 200 msec  |

**PWOK# (POWER GOOD)**

PWOK is a power good signal and will assert HIGH when the outputs are within the regulation limits. PWOK will be pulled LOW by the power supply to indicate when either output falls below regulation limits or when AC power has been removed for a time sufficiently long so that power supply operation is no longer guaranteed. The start of the PWOK# delay time shall be inhibited as long as the +12 Vdc output is in current limit or the 5.0 Vsb output is below the regulation limit.

| PWOK Signal Characteristics                     |   |               |
|---|---|---------------|
| Signal Type                                     | Open collector/drain output from power supply.<br>Pullup to Vsb external to the power supply. |               |
| PWOK = High                                     | Power Good  |               |
| PWOK = Low                                      | Power Not Good  |               |
|   | MIN   | MAX           |
| To tLogic level low voltage, Ising = 4 mA       | 0 V   | 0.8 V         |
| Logic level high voltage, Isource = 200 $\mu$ A | 2.0 V   | Vsb +0.2      |
| Sink current, PWOK = low                        |   | 4 mA          |
| Source current, PWOK = high                     |   | 2 mA          |
| PWOK delay: T <sub>pwok_on</sub>                | 100 ms  | 1000 ms       |
| PWOK rise and fall time                         |   | 100 $\mu$ sec |
| Power down delay: T <sub>pson_off</sub>         | 1 msec  | 1000 msec     |

**PSKILL**

The +12 Vdc output only from the power supply shall be disabled if the PSKILL input is high and V Standby will continue to be provided, outputs may be enabled if this signal is low. The power supply includes a pull up to disable all outputs if this signal is open. PSKILL shall not be connectd during a hot insertion before all of the other pins are connected.

### AC INPUT PRESENT INDICATOR (ACOK<sup>#</sup>)

The ACOK<sup>#</sup> signal is used to indicate presence of AC input to the power supply. This signal shall be connected to Vsb through a resistor on the host system side. A logic “High” level on this signal shall indicate AC input to the power supply is present. A Logic “Low” on this signal shall indicate a loss of AC input to the power supply.

| ACOK <sup>#</sup> Signal Characteristics     |   |              |
|--|---|--------------|
| Signal Type                                  | Pull up to Vsb through a resistor in the host system. |              |
| PWOK = High                                  | Present   |              |
| PWOK = Low                                   | Not Present   |              |
|  | MIN   | MAX          |
| Logic level low voltage, Isink = 4 mA        | 0 V   | 0.8 V        |
| Logic level high voltage, Isink = 50 $\mu$ A | 2.0 V   | Vsb +0.2     |
| Sink current, PRESENT <sup>#</sup> = low     |   | 4 mA         |
| Sink current, PRESENT <sup>#</sup> = high    |   | 50 $\mu$ sec |

### STATUS INDICATIONS

See table below for Summary of Status signals, Ports and Indicators. The condition column assumes 2 or more power supplies present and ON and 5.0 Vsb shared for management interface. On the “Fan Blocked” condition, the assumption is that all outputs are within spec and not over temperature. This would be considered a “warning” condition. On the “Standby” condition, the system differentiates this state by knowing PS\_ONL in negated (requesting Standby).


| Status Indicators                               |                |        |                 |      |                   |         |        |           |      |       |     |      |
|---|----------------|--------|-----------------|------|-------------------|---------|--------|-----------|------|-------|-----|------|
| Condition                                       | Status Signals |        | Status Register |      | Shutdown Register |         |        |           |      | LED's |     |      |
|   | ACOK/H         | PWOK/H | PSON            | PWOK | Fan-Fail          | AC-Loss | 0-Temp | 0-Current | Fail | AC    | DC  | Fail |
| Normal Operation                                | 1              | 1      | 1               | 1    | 0                 | 0       | 0      | 0         | 0    | On    | On  | Off  |
| V1 12 V Overcurrent                             | 1              | 0      | 1               | 0    | 0                 | 0       | 0      | 1         | 1    | On    | Off | On   |
| AC Input Fail                                   | 0              | 0      | 1               | 0    | 0                 | 1       | 0      | 0         | 1    | Off   | Off | Off  |
| Fan Blocked or Running Under Speed.<br>O/P's ok | 1              | 1      | 1               | 1    | 0                 | 0       | 0      | 0         | 0    | On    | On  | Off  |
| UV on V1 12 V and PS Has Latched Off            | 1              | 0      | 1               | 0    | 0                 | 0       | 0      | 0         | 1    | On    | Off | On   |
| UV on Vsb +5.0 and PS Has Turned Off            | 1              | 0      | 1               | 0    | 0                 | 0       | 0      | 0         | 1    | On    | Off | On   |
| OV on V1 12V or Vsb +5.0 & PS Has Latched Off   | 1              | 0      | 1               | 0    | 0                 | 0       | 0      | 0         | 1    | On    | Off | On   |
| Over Temp and PS Has Turned Off                 | 1              | 0      | 1               | 0    | 0                 | 0       | 1      | 0         | 1    | On    | Off | On   |
| Fan Below Shutdown Limit                        | 1              | 0      | 1               | 0    | 1                 | 0       | 0      | 0         | 1    | On    | Off | On   |
| No Problems But PS is in Standby Mode           | 1              | 0      | 0               | 0    | 0                 | 0       | 0      | 0         | 0    | On    | Off | Off  |

Pin Out Table


| Pin   | Signal Name              |
|-------|--------------------------|
| Pin 1 | +12 V                    |
| Pin 2 | +12 V                    |
| Pin 3 | Ground                   |
| Pin 4 | Ground                   |
| S1    | +12 V Sense              |
| S2    | +12 V RTN Sense          |
| S3    | +12 V Current Share      |
| S4    | SMB_ALERT/L              |
| S5    | SDA                      |
| S6    | SCL*                     |
| S7    | PSKILL                   |
| S8    | PSON/L                   |
| S9    | PW_OK                    |
| S10   | PS_A1                    |
| S11   | +5.0 V_STBY              |
| S12   | +5.0 V_STBY              |
| S13   | Reserved                 |
| S14   | PRESENT/L                |
| S15   | PS_A0                    |
| S16   | Reserved                 |
| S17   | Reserved for factory use |
| S18   | EEPROM_WP                |
| S19   | ACOK/H                   |
| S20   | Not used                 |
| S21   | Not used                 |
| S22   | Reserved for factory use |
| S23   | +5.0 V_STBY              |
| S24   | +5.0 V_STBY              |

\* Supports I<sup>2</sup>C standard mode (100 kHz) only


Mechanical Drawing

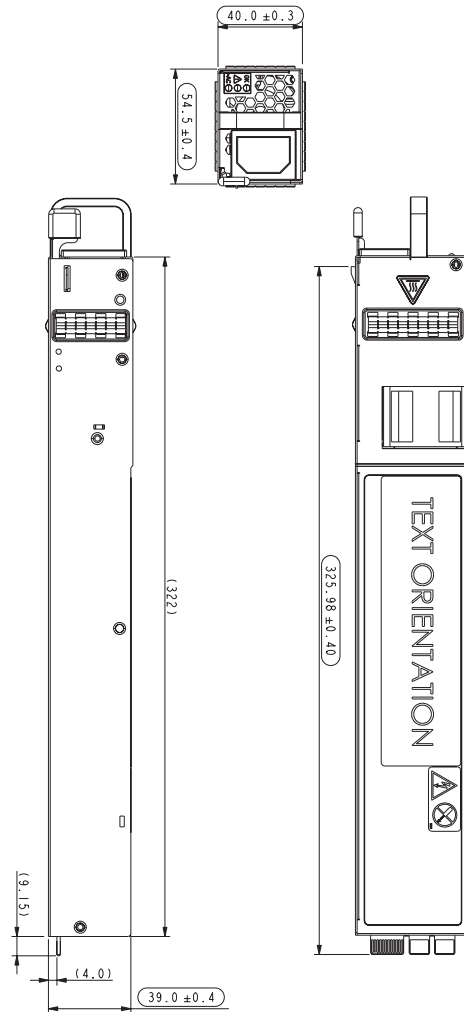

Output Connector

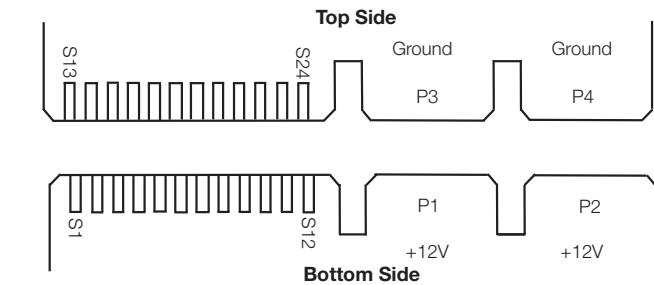

| Reference          | On Power Supply     | Mating Connector or Equivalent |
|--------------------|---------------------|--------------------------------|
| AC Input Connector | IEC60320-C14        | IEC60320-C13                   |
| Output Connector   | MOLEX P/N 4598/4005 | MOLEX P/N 45984-4343           |

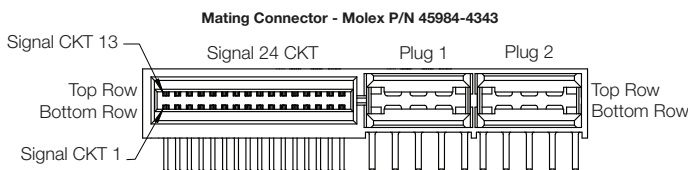

\*Note: The top side of the PSU Output Connector connects with the Bottom Row of the Mating Connector  
ex: PSU-S13 ↔ Mating Signal Ckt1

| Mating Connector Details |                                      |
|--------------------------|--------------------------------------|
| P/N                      | Molex 45984-4343                     |
| Current Rating           | 30                                   |
| Receptacle Header        | Upper & Lower Blades                 |
| No. of Contacts          | 4 Power Contacts, 24 Signal Contacts |

#### BURN-IN

100% Burn-in at 45°C, at 80 - 90% load. Duration of burn-in determined by Quality Assurance Procedures.

#### MTBF

The power supply has a minimum MTBF of 300K hours using the Bell core 332, issue 6 specification @ 25°C and 40°C, ambient, at full load. With the power supply installed in a system in a 25 °C ambient environment and operating at full load, capacitor life shall be 10 years, minimum for ALL electrolytic capacitors contained within this power supply. The power supply shall demonstrate a MTBF level of > 500,000 hours.

#### QUALITY ASSURANCE

Full QAV testing shall be conducted in accordance with Artesyn Embedded Technologies Standards with reports available upon request.

#### WARRANTY

Artesyn Embedded Technologies shall warrant the power supply to be free of defects in materials and workmanship for a minimum period of two years from the date of shipment, when operated within specifications. The warranty shall be fully transferable to the end owner of the equipment powered by the supply.

#### WORLDWIDE OFFICES

##### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

##### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

##### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А