

# NLSV4T244E

## 4-Bit Dual-Supply Non-Inverting Level Translator

The NLSV4T244E is a 4-bit configurable dual-supply voltage level translator. The input  $A_n$  and output  $B_n$  ports are designed to track two different power supply rails,  $V_{CCA}$  and  $V_{CCB}$  respectively. Both supply rails are configurable from 0.9 V to 4.5 V allowing universal low-voltage translation from the input  $A_n$  to the output  $B_n$  port.

### Features

- Wide  $V_{CCA}$  and  $V_{CCB}$  Operating Range: 0.9 V to 4.5 V
- High-Speed w/ Balanced Propagation Delay
- Inputs and Outputs have OVT Protection to 4.5 V
- Non-preferential  $V_{CCA}$  and  $V_{CCB}$  Sequencing
- Outputs at 3-State until Active  $V_{CC}$  is Reached
- Power-Off Protection
- Outputs Switch to 3-State with  $V_{CCB}$  at GND
- Ultra-Small Packaging: 1.7 mm x 2.0 mm UQFN12
- These are Pb-Free Devices

### Typical Applications

- Mobile Phones, PDAs, Other Portable Devices

### Important Information


- ESD Protection for All Pins:
  - HBM (Human Body Model) > 2000 V
  - MM (Machine Model) > 400 V




ON Semiconductor®

<http://onsemi.com>

### MARKING DIAGRAMS




UQFN12  
MU SUFFIX  
CASE 523AE





AF = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package


(Note: Microdot may be in either location)



SOIC-14  
D SUFFIX  
CASE 751A



TSSOP-14  
DT SUFFIX  
CASE 948G



A = Assembly Location  
L, WL = Wafer Lot  
Y, YY = Year  
W, WW = Work Week  
G or ▪ = Pb-Free Package  
(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device          | Package           | Shipping†        |
|-----------------|-------------------|------------------|
| NLSV4T244EMUTAG | UQFN12 (Pb-Free)  | 3000/Tape & Reel |
| NLSV4T244EDR2G  | SO-14 (Pb-Free)   | 2500/Tape & Reel |
| NLSV4T244EDTR2G | TSSOP14 (Pb-Free) | 2500/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

NLSV4T244E

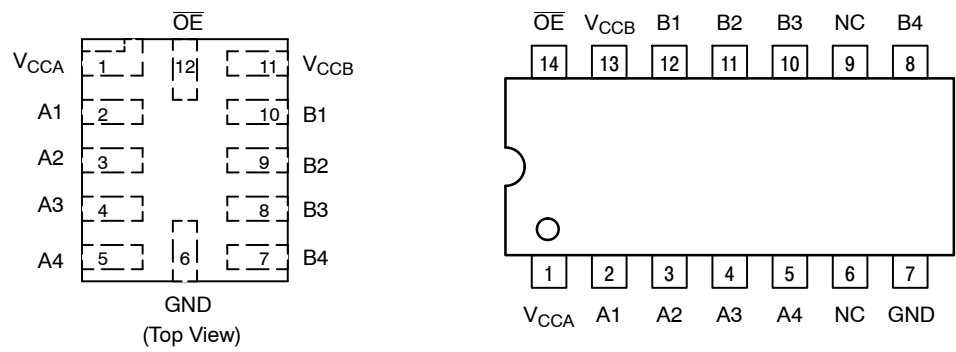


Figure 1. Pin Assignments

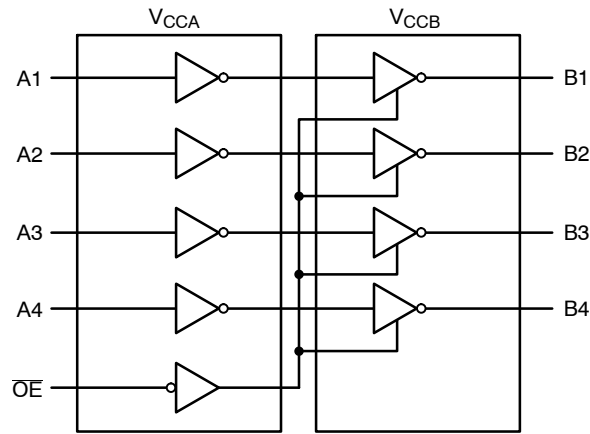


Figure 2. Logic Diagram

PIN ASSIGNMENT

| PIN            | FUNCTION                    |
|----------------|-----------------------------|
| VCCA           | Input Port DC Power Supply  |
| VCCB           | Output Port DC Power Supply |
| GND            | Ground                      |
| A <sub>n</sub> | Input Port                  |
| B <sub>n</sub> | Output Port                 |
| OE             | Output Enable               |

TRUTH TABLE

| Inputs |                | Outputs        |
|--------|----------------|----------------|
| OE     | A <sub>n</sub> | B <sub>n</sub> |
| L      | L              | L              |
| L      | H              | H              |
| H      | X              | 3-State        |

# NLSV4T244E

## MAXIMUM RATINGS

| Symbol             | Rating                               | Value        | Condition               | Unit |
|--------------------|--------------------------------------|--------------|-------------------------|------|
| $V_{CCA}, V_{CCB}$ | DC Supply Voltage                    | -0.5 to +5.5 |                         | V    |
| $V_I$              | DC Input Voltage $A_n$               | -0.5 to +5.5 |                         | V    |
| $V_C$              | Control Input $\overline{OE}$        | -0.5 to +5.5 |                         | V    |
| $V_O$              | DC Output Voltage (Power Down) $B_n$ | -0.5 to +5.5 | $V_{CCA} = V_{CCB} = 0$ | V    |
|                    | (Active Mode) $B_n$                  | -0.5 to +5.5 |                         | V    |
|                    | (Tri-State Mode) $B_n$               | -0.5 to +5.5 |                         | V    |
| $I_{IK}$           | DC Input Diode Current               | -20          | $V_I < GND$             | mA   |
| $I_{OK}$           | DC Output Diode Current              | -50          | $V_O < GND$             | mA   |
| $I_O$              | DC Output Source/Sink Current        | $\pm 50$     |                         | mA   |
| $I_{CCA}, I_{CCB}$ | DC Supply Current Per Supply Pin     | $\pm 100$    |                         | mA   |
| $I_{GND}$          | DC Ground Current per Ground Pin     | $\pm 100$    |                         | mA   |
| $T_{STG}$          | Storage Temperature                  | -65 to +150  |                         | °C   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS

| Symbol                | Parameter                                                                                                         | Min | Max       | Unit |
|-----------------------|-------------------------------------------------------------------------------------------------------------------|-----|-----------|------|
| $V_{CCA}, V_{CCB}$    | Positive DC Supply Voltage                                                                                        | 0.9 | 4.5       | V    |
| $V_I$                 | Bus Input Voltage                                                                                                 | GND | 4.5       | V    |
| $V_C$                 | Control Input $\overline{OE}$                                                                                     | GND | 4.5       | V    |
| $V_{IO}$              | Bus Output Voltage (Power Down Mode) $B_n$                                                                        | GND | 4.5       | V    |
|                       | (Active Mode) $B_n$                                                                                               | GND | $V_{CCB}$ | V    |
|                       | (Tri-State Mode) $B_n$                                                                                            | GND | 4.5       | V    |
| $T_A$                 | Operating Temperature Range                                                                                       | -40 | +85       | °C   |
| $\Delta t / \Delta V$ | Input Transition Rise or Rate<br>$V_I$ , from 30% to 70% of $V_{CC}$ ; $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$ | 0   | 10        | nS   |

# NLSV4T244E

## DC ELECTRICAL CHARACTERISTICS

| Symbol                              | Parameter                                                                                 | Test Conditions                                                                                      | V <sub>CCA</sub> (V) | V <sub>CCB</sub> (V) | -40°C to +85°C          |                         | Unit |
|-------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------|----------------------|-------------------------|-------------------------|------|
|                                     |                                                                                           |                                                                                                      |                      |                      | Min                     | Max                     |      |
| V <sub>IH</sub>                     | Input HIGH Voltage<br>(An, OE)                                                            |                                                                                                      | 3.6 – 4.5            | 0.9 – 4.5            | 2.2                     | –                       | V    |
|                                     |                                                                                           |                                                                                                      | 2.7 – 3.6            |                      | 2.0                     | –                       |      |
|                                     |                                                                                           |                                                                                                      | 2.3 – 2.7            |                      | 1.6                     | –                       |      |
|                                     |                                                                                           |                                                                                                      | 1.4 – 2.3            |                      | 0.65 * V <sub>CCA</sub> | –                       |      |
|                                     |                                                                                           |                                                                                                      | 0.9 – 1.4            |                      | 0.9 * V <sub>CCA</sub>  | –                       |      |
| V <sub>IL</sub>                     | Input LOW Voltage<br>(An, OE)                                                             |                                                                                                      | 3.6 – 4.5            | 0.9 – 4.5            | –                       | 0.8                     | V    |
|                                     |                                                                                           |                                                                                                      | 2.7 – 3.6            |                      | –                       | 0.8                     |      |
|                                     |                                                                                           |                                                                                                      | 2.3 – 2.7            |                      | –                       | 0.7                     |      |
|                                     |                                                                                           |                                                                                                      | 1.4 – 2.3            |                      | –                       | 0.35 * V <sub>CCA</sub> |      |
|                                     |                                                                                           |                                                                                                      | 0.9 – 1.4            |                      | –                       | 0.1 * V <sub>CCA</sub>  |      |
| V <sub>OH</sub>                     | Output HIGH Voltage                                                                       | I <sub>OH</sub> = -100 µA; V <sub>I</sub> = V <sub>IH</sub>                                          | 0.9 – 4.5            | 0.9 – 4.5            | V <sub>CCB</sub> - 0.2  | –                       | V    |
|                                     |                                                                                           | I <sub>OH</sub> = -0.5 mA; V <sub>I</sub> = V <sub>IH</sub>                                          | 0.9                  | 0.9                  | 0.75 * V <sub>CCB</sub> | –                       |      |
|                                     |                                                                                           | I <sub>OH</sub> = -2 mA; V <sub>I</sub> = V <sub>IH</sub>                                            | 1.4                  | 1.4                  | 1.05                    | –                       |      |
|                                     |                                                                                           | I <sub>OH</sub> = -6 mA; V <sub>I</sub> = V <sub>IH</sub>                                            | 1.65                 | 1.65                 | 1.25                    | –                       |      |
|                                     |                                                                                           | I <sub>OH</sub> = -12 mA; V <sub>I</sub> = V <sub>IH</sub>                                           | 2.3                  | 2.3                  | 2.0                     | –                       |      |
|                                     |                                                                                           |                                                                                                      | 2.7                  | 2.7                  | 2.2                     | –                       |      |
|                                     |                                                                                           | I <sub>OH</sub> = -18 mA; V <sub>I</sub> = V <sub>IH</sub>                                           | 2.3                  | 2.3                  | 1.7                     | –                       |      |
|                                     |                                                                                           |                                                                                                      | 3.0                  | 3.0                  | 2.4                     | –                       |      |
|                                     |                                                                                           | I <sub>OH</sub> = -24 mA; V <sub>I</sub> = V <sub>IH</sub>                                           | 3.0                  | 3.0                  | 2.2                     | –                       |      |
| V <sub>OL</sub>                     | Output LOW Voltage                                                                        | I <sub>OL</sub> = 100 µA; V <sub>I</sub> = V <sub>IL</sub>                                           | 0.9 – 4.5            | 0.9 – 4.5            | –                       | 0.2                     | V    |
|                                     |                                                                                           | I <sub>OL</sub> = 0.5 mA; V <sub>I</sub> = V <sub>IH</sub>                                           | 1.1                  | 1.1                  | –                       | 0.3                     |      |
|                                     |                                                                                           | I <sub>OL</sub> = 2 mA; V <sub>I</sub> = V <sub>IH</sub>                                             | 1.4                  | 1.4                  | –                       | 0.35                    |      |
|                                     |                                                                                           | I <sub>OL</sub> = 6 mA; V <sub>I</sub> = V <sub>IL</sub>                                             | 1.65                 | 1.65                 | –                       | 0.3                     |      |
|                                     |                                                                                           | I <sub>OL</sub> = 12 mA; V <sub>I</sub> = V <sub>IL</sub>                                            | 2.3                  | 2.3                  | –                       | 0.4                     |      |
|                                     |                                                                                           |                                                                                                      | 2.7                  | 2.7                  | –                       | 0.4                     |      |
|                                     |                                                                                           | I <sub>OL</sub> = 18 mA; V <sub>I</sub> = V <sub>IL</sub>                                            | 2.3                  | 2.3                  | –                       | 0.6                     |      |
|                                     |                                                                                           |                                                                                                      | 3.0                  | 3.0                  | –                       | 0.45                    |      |
|                                     |                                                                                           | I <sub>OL</sub> = 24 mA; V <sub>I</sub> = V <sub>IL</sub>                                            | 3.0                  | 3.0                  | –                       | 0.6                     |      |
| I <sub>I</sub>                      | Input Leakage Current                                                                     | V <sub>I</sub> = V <sub>CCA</sub> or GND                                                             | 0.9 – 4.5            | 0.9 – 4.5            | -1.0                    | 1.0                     | µA   |
| I <sub>OFF</sub>                    | Power-Off Leakage Current                                                                 | OE = 0 V                                                                                             | 0<br>0.9 – 4.5       | 0.9 – 4.5<br>0       | -1.0<br>-1.0            | 1.0<br>1.0              | µA   |
| I <sub>CCA</sub>                    | Quiescent Supply Current                                                                  | V <sub>I</sub> = V <sub>CCA</sub> or GND;<br>I <sub>O</sub> = 0, V <sub>CCA</sub> = V <sub>CCB</sub> | 0.9 – 4.5            | 0.9 – 4.5            | –                       | 2.0                     | µA   |
| I <sub>CCB</sub>                    | Quiescent Supply Current                                                                  | V <sub>I</sub> = V <sub>CCA</sub> or GND;<br>I <sub>O</sub> = 0, V <sub>CCA</sub> = V <sub>CCB</sub> | 0.9 – 4.5            | 0.9 – 4.5            | –                       | 2.0                     | µA   |
| I <sub>CCA</sub> + I <sub>CCB</sub> | Quiescent Supply Current                                                                  | V <sub>I</sub> = V <sub>CCA</sub> or GND;<br>I <sub>O</sub> = 0, V <sub>CCA</sub> = V <sub>CCB</sub> | 0.9 – 4.5            | 0.9 – 4.5            | –                       | 4.0                     | µA   |
| ΔI <sub>CCA</sub>                   | Increase in I <sub>CC</sub> per Input Voltage,<br>Other Inputs at V <sub>CCA</sub> or GND | V <sub>I</sub> = V <sub>CCA</sub> - 0.6 V;<br>V <sub>I</sub> = V <sub>CCA</sub> or GND               | 4.5<br>3.6           | 4.5<br>3.6           | –                       | 10<br>5.0               | µA   |
| ΔI <sub>CCB</sub>                   | Increase in I <sub>CC</sub> per Input Voltage,<br>Other Inputs at V <sub>CCA</sub> or GND | V <sub>I</sub> = V <sub>CCA</sub> - 0.6 V;<br>V <sub>I</sub> = V <sub>CCA</sub> or GND               | 4.5<br>3.6           | 4.5<br>3.6           | –                       | 10<br>5.0               | µA   |
| I <sub>OZ</sub>                     | I/O Tri-State Output Leakage<br>Current                                                   | T <sub>A</sub> = 25°C, OE = 0V <sub>CCA</sub> ,<br>V <sub>O</sub> = 0 to V <sub>CCB</sub> + 0.5 V    | 0.9 – 4.5            | 0.9 – 4.5            | –                       | 1.0                     | µA   |
|                                     |                                                                                           | T <sub>A</sub> = 25°C, OE = 0V <sub>CCA</sub> ,<br>V <sub>O</sub> = 0 to 4.5 V                       |                      |                      | –                       | 75                      |      |

# NLSV4T244E

## TOTAL STATIC POWER CONSUMPTION ( $I_{CCA} + I_{CCB}$ )

| V <sub>CCA</sub> (V) | -40°C to +85°C       |       |     |       |     |       |     |       |     |       | Unit |
|----------------------|----------------------|-------|-----|-------|-----|-------|-----|-------|-----|-------|------|
|                      | V <sub>CCB</sub> (V) |       |     |       |     |       |     |       |     |       |      |
|                      | 4.5                  |       | 3.3 |       | 2.8 |       | 1.8 |       | 0.9 |       |      |
|                      | Min                  | Max   | Min | Max   | Min | Max   | Min | Max   | Min | Max   |      |
| 4.5                  |                      | 2     |     | 2     |     | 2     |     | 2     |     | < 1.5 | μA   |
| 3.3                  |                      | 2     |     | 2     |     | 2     |     | 2     |     | < 1.5 | μA   |
| 2.8                  |                      | < 2   |     | < 1   |     | < 1   |     | < 0.5 |     | < 0.5 | μA   |
| 1.8                  |                      | < 1   |     | < 1   |     | < 0.5 |     | < 0.5 |     | < 0.5 | μA   |
| 0.9                  |                      | < 0.5 |     | < 0.5 |     | < 0.5 |     | < 0.5 |     | < 0.5 | μA   |

NOTE: Connect ground before applying supply voltage  $V_{CCA}$  or  $V_{CCB}$ . This device is designed with the feature that the power-up sequence of  $V_{CCA}$  and  $V_{CCB}$  will not damage the IC.

## AC ELECTRICAL CHARACTERISTICS

| Symbol                                                       | Parameter                                                 | V <sub>CCA</sub> (V) | −40°C to +85°C       |      |     |      |     |      |     |      |     |      | Unit |
|--------------------------------------------------------------|-----------------------------------------------------------|----------------------|----------------------|------|-----|------|-----|------|-----|------|-----|------|------|
|                                                              |                                                           |                      | V <sub>CCB</sub> (V) |      |     |      |     |      |     |      |     |      |      |
|                                                              |                                                           |                      | 4.5                  |      | 3.3 |      | 2.8 |      | 1.8 |      | 1.5 |      |      |
|                                                              |                                                           |                      | Min                  | Max  | Min | Max  | Min | Max  | Min | Max  | Min | Max  |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub><br>(Note<br>NO TAG)   | Propagation<br>Delay,<br>A <sub>n</sub> to B <sub>n</sub> | 4.5                  |                      | 3.0  |     | 3.2  |     | 3.4  |     | 3.7  |     | 4.0  | nS   |
|                                                              |                                                           | 3.6                  |                      | 3.3  |     | 3.5  |     | 3.7  |     | 4.0  |     | 4.3  |      |
|                                                              |                                                           | 2.8                  |                      | 3.5  |     | 3.7  |     | 3.9  |     | 4.2  |     | 4.5  |      |
|                                                              |                                                           | 1.8                  |                      | 3.8  |     | 4.0  |     | 4.2  |     | 4.5  |     | 4.8  |      |
|                                                              |                                                           | 1.5                  |                      | 4.1  |     | 4.3  |     | 4.5  |     | 4.8  |     | 5.0  |      |
| t <sub>PZH</sub> ,<br>t <sub>PZL</sub><br>(Note<br>NO TAG)   | Output<br>Enable,<br>OE to B <sub>n</sub>                 | 4.5                  |                      | 4.4  |     | 4.8  |     | 5.2  |     | 5.7  |     | 6.2  | nS   |
|                                                              |                                                           | 3.3                  |                      | 4.7  |     | 5.1  |     | 5.5  |     | 6.0  |     | 6.5  |      |
|                                                              |                                                           | 2.8                  |                      | 4.9  |     | 5.3  |     | 5.7  |     | 6.2  |     | 6.7  |      |
|                                                              |                                                           | 1.8                  |                      | 5.2  |     | 5.6  |     | 6.0  |     | 6.5  |     | 7.0  |      |
|                                                              |                                                           | 1.5                  |                      | 5.5  |     | 5.9  |     | 6.3  |     | 6.8  |     | 7.3  |      |
| t <sub>PHZ</sub> ,<br>t <sub>PLZ</sub><br>(Note<br>NO TAG)   | Output<br>Disable,<br>OE to B <sub>n</sub>                | 4.5                  |                      | 4.4  |     | 4.8  |     | 5.2  |     | 5.7  |     | 6.2  | nS   |
|                                                              |                                                           | 3.3                  |                      | 4.7  |     | 5.1  |     | 5.5  |     | 6.0  |     | 6.5  |      |
|                                                              |                                                           | 2.8                  |                      | 4.9  |     | 5.3  |     | 5.7  |     | 6.2  |     | 6.7  |      |
|                                                              |                                                           | 1.8                  |                      | 5.2  |     | 5.6  |     | 6.0  |     | 6.5  |     | 7.0  |      |
|                                                              |                                                           | 1.5                  |                      | 5.5  |     | 5.9  |     | 6.3  |     | 6.8  |     | 7.3  |      |
| t <sub>OSHL</sub> ,<br>t <sub>OSLH</sub><br>(Note<br>NO TAG) | Output to<br>Output Skew,<br>Data to Out-<br>put          | 4.1                  |                      | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 | nS   |
|                                                              |                                                           | 3.6                  |                      | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |      |
|                                                              |                                                           | 2.8                  |                      | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |      |
|                                                              |                                                           | 1.8                  |                      | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |      |
|                                                              |                                                           | 1.2                  |                      | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |     | 0.15 |      |

1. Propagation delays defined per Figures 3 and 4.

## CAPACITANCE


| Symbol    | Parameter                     | Test Conditions                                                      | Typ (Note 2) | Unit |
|-----------|-------------------------------|----------------------------------------------------------------------|--------------|------|
| $C_{IN}$  | Control Pin Input Capacitance | $V_{CCA} = V_{CCB} = 3.3$ V, $V_I = 0$ V or $V_{CCA/B}$              | 3.5          | pF   |
| $C_{I/O}$ | I/O Pin Input Capacitance     | $V_{CCA} = V_{CCB} = 3.3$ V, $V_I = 0$ V or $V_{CCA/B}$              | 5.0          | pF   |
| $C_{PD}$  | Power Dissipation Capacitance | $V_{CCA} = V_{CCB} = 3.3$ V, $V_I = 0$ V or $V_{CCA}$ , $f = 10$ MHz | 20           | pF   |

2. Typical values are at  $T_A = +25^\circ C$ .

3.  $C_{PD}$  is defined as the value of the IC's equivalent capacitance from which the operating current can be calculated from:

$$I_{CC(operating)} \cong C_{PD} \times V_{CC} \times f_{IN} \times N_{SW} \text{ where } I_{CC} = I_{CCA} + I_{CCB} \text{ and } N_{SW} = \text{total number of outputs switching.}$$


# NLSV4T244E

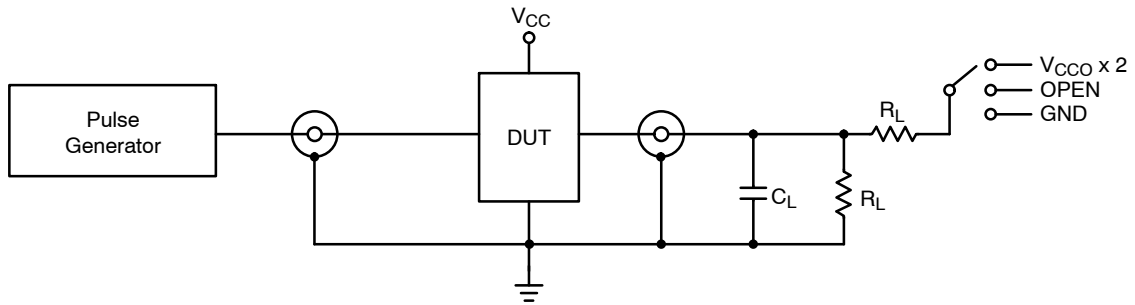

**Figure 3. AC (Propagation Delay) Test Circuit**


| Test                  | Switch             |
|-----------------------|--------------------|
| $t_{PLH}$ , $t_{PHL}$ | OPEN               |
| $t_{PLZ}$ , $t_{PZL}$ | $V_{CCO} \times 2$ |
| $t_{PHZ}$ , $t_{PZH}$ | GND                |

$C_L = 15 \text{ pF}$  or equivalent (includes probe and jig capacitance)  
 $R_L = 2 \text{ k}\Omega$  or equivalent  
 $Z_{OUT}$  of pulse generator =  $50 \Omega$

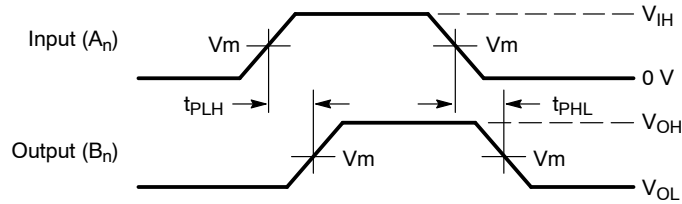

**Waveform 1 – Propagation Delays**

$t_R = t_F = 2.0 \text{ ns}$ , 10% to 90%;  $f = 1 \text{ MHz}$ ;  $t_W = 500 \text{ ns}$

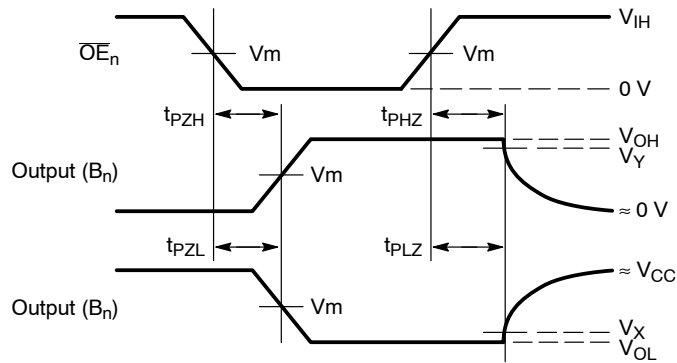

**Waveform 2 – Output Enable and Disable Times**

$t_R = t_F = 2.0 \text{ ns}$ , 10% to 90%;  $f = 1 \text{ MHz}$ ;  $t_W = 500 \text{ ns}$



**Figure 4. AC (Propagation Delay) Test Circuit Waveforms**

| Symbol   | $V_{CC}$            |                     |                     |                     |                     |
|----------|---------------------|---------------------|---------------------|---------------------|---------------------|
|          | 3.0 V – 4.5 V       | 2.3 V – 2.7 V       | 1.65 V – 1.95 V     | 1.4 V – 1.6 V       | 0.9 V – 1.3 V       |
| $V_{mA}$ | $V_{CCA}/2$         | $V_{CCA}/2$         | $V_{CCA}/2$         | $V_{CCA}/2$         | $V_{CCA}/2$         |
| $V_{mB}$ | $V_{CCB}/2$         | $V_{CCB}/2$         | $V_{CCB}/2$         | $V_{CCB}/2$         | $V_{CCB}/2$         |
| $V_X$    | $V_{OL} \times 0.1$ | $V_{OL} \times 0.1$ | $V_{OL} \times 0.1$ | $V_{OL} \times 0.1$ | $V_{OL} \times 0.1$ |
| $V_Y$    | $V_{OH} \times 0.9$ | $V_{OH} \times 0.9$ | $V_{OH} \times 0.9$ | $V_{OH} \times 0.9$ | $V_{OH} \times 0.9$ |

# NLSV4T244E

## PACKAGE DIMENSIONS

UQFN12 1.7x2.0, 0.4P  
CASE 523AE-01  
ISSUE A

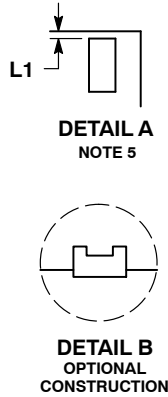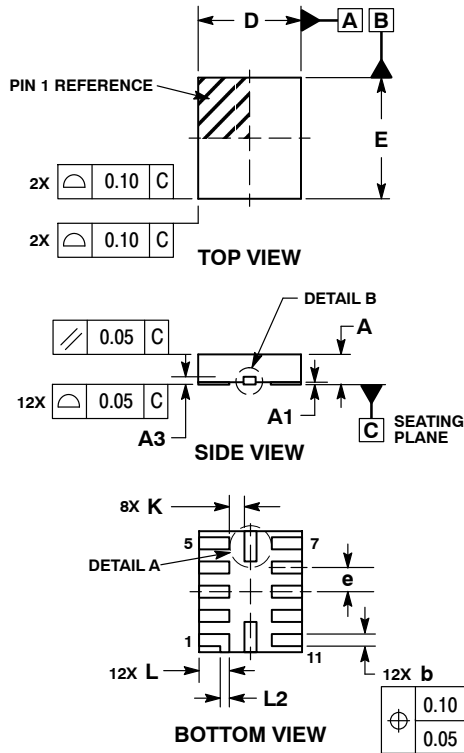


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 MM FROM TERMINAL TIP.
4. MOLD FLASH ALLOWED ON TERMINALS ALONG EDGE OF PACKAGE. FLASH 0.03 MAX ON BOTTOM SURFACE OF TERMINALS.
5. DETAIL A SHOWS OPTIONAL CONSTRUCTION FOR TERMINALS.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.45        | 0.55 |
| A1  | 0.00        | 0.05 |
| A3  | 0.127 REF   |      |
| b   | 0.15        | 0.25 |
| D   | 1.70 BSC    |      |
| E   | 2.00 BSC    |      |
| e   | 0.40 BSC    |      |
| K   | 0.20        | ---- |
| L   | 0.45        | 0.55 |
| L1  | 0.00        | 0.03 |
| L2  | 0.15 REF    |      |

### MOUNTING FOOTPRINT SOLDERMASK DEFINED

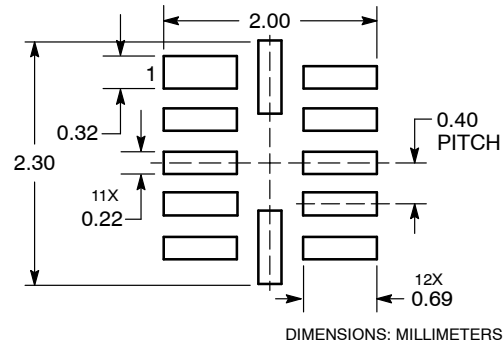


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NLSV4T244E

## PACKAGE DIMENSIONS


SOIC-14  
D SUFFIX  
CASE 751A-03  
ISSUE J

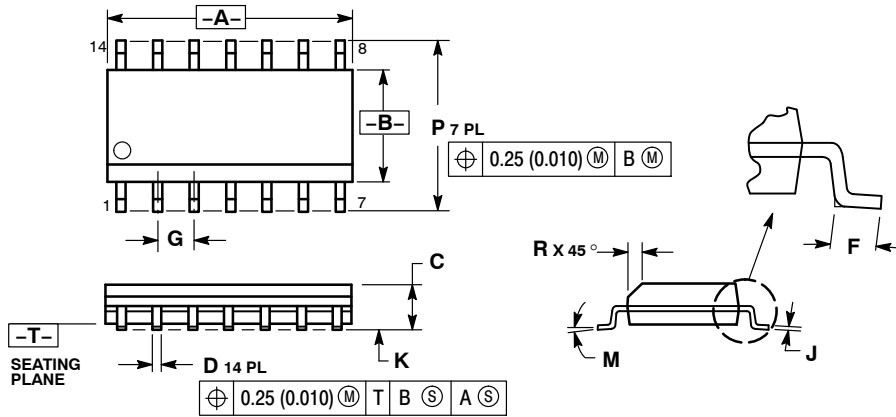

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.80        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |

## SOLDERING FOOTPRINT

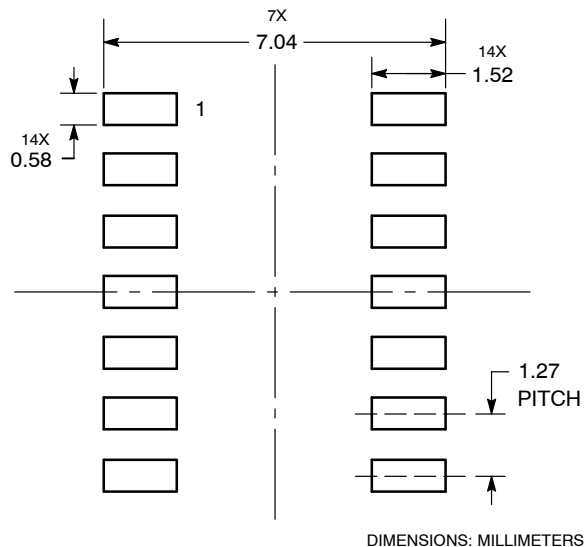




# NLSV4T244E

## PACKAGE DIMENSIONS

TSSOP-14  
DT SUFFIX  
CASE 948G-01  
ISSUE B

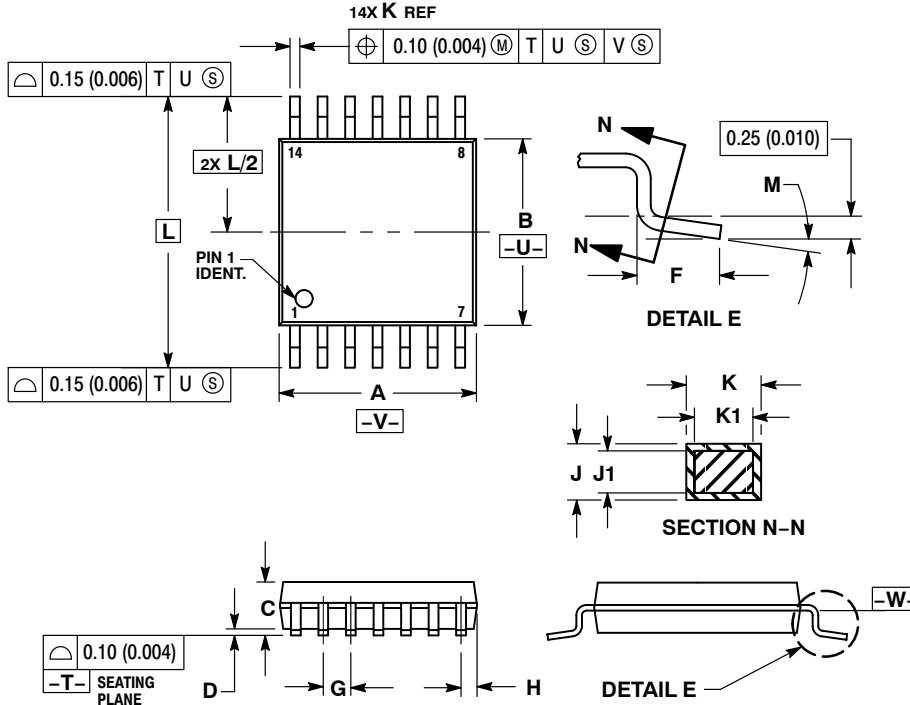


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.50        | 0.60 | 0.020     | 0.024 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

### SOLDERING FOOTPRINT

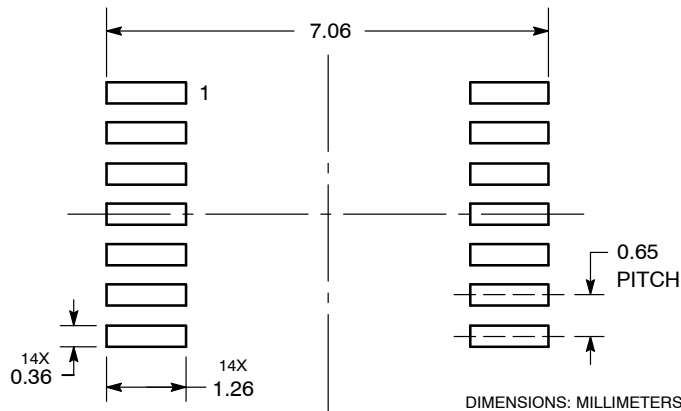

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

NLSV4T244E/D

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А