

NHD-12864AZ-FL-GBW

Graphic Liquid Crystal Display Module

NHD- Newhaven Display
12864- 128 x 64 pixels
AZ- Model
F- Transflective
L- Yellow/Green LED backlight
G- STN- Gray
B- 6:00 View
W- Wide Temperature (-20°C ~ +70°C)
RoHS Compliant

Newhaven Display International, Inc.

2511 Technology Drive, Suite 101

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com


Document Revision History

| Revision | Date | Description | Changed by |
|----------|------------|--|------------|
| 0 | 6/24/2009 | Initial Release | - |
| 1 | 4/2/2010 | User guide reformat | BE |
| 2 | 5/6/2010 | Block diagram/initialization updated | BE |
| 3 | 5/21/2010 | Updated Pin Out and Electrical Characteristics | MC |
| 4 | 12/17/2012 | Controller information updated | AK |

Functions and Features


- 128x64 pixels
- Built-in NT7108C controller
- +5.0V power supply
- 1/64 duty, 1/9 bias
- RoHS Compliant

Mechanical Drawing

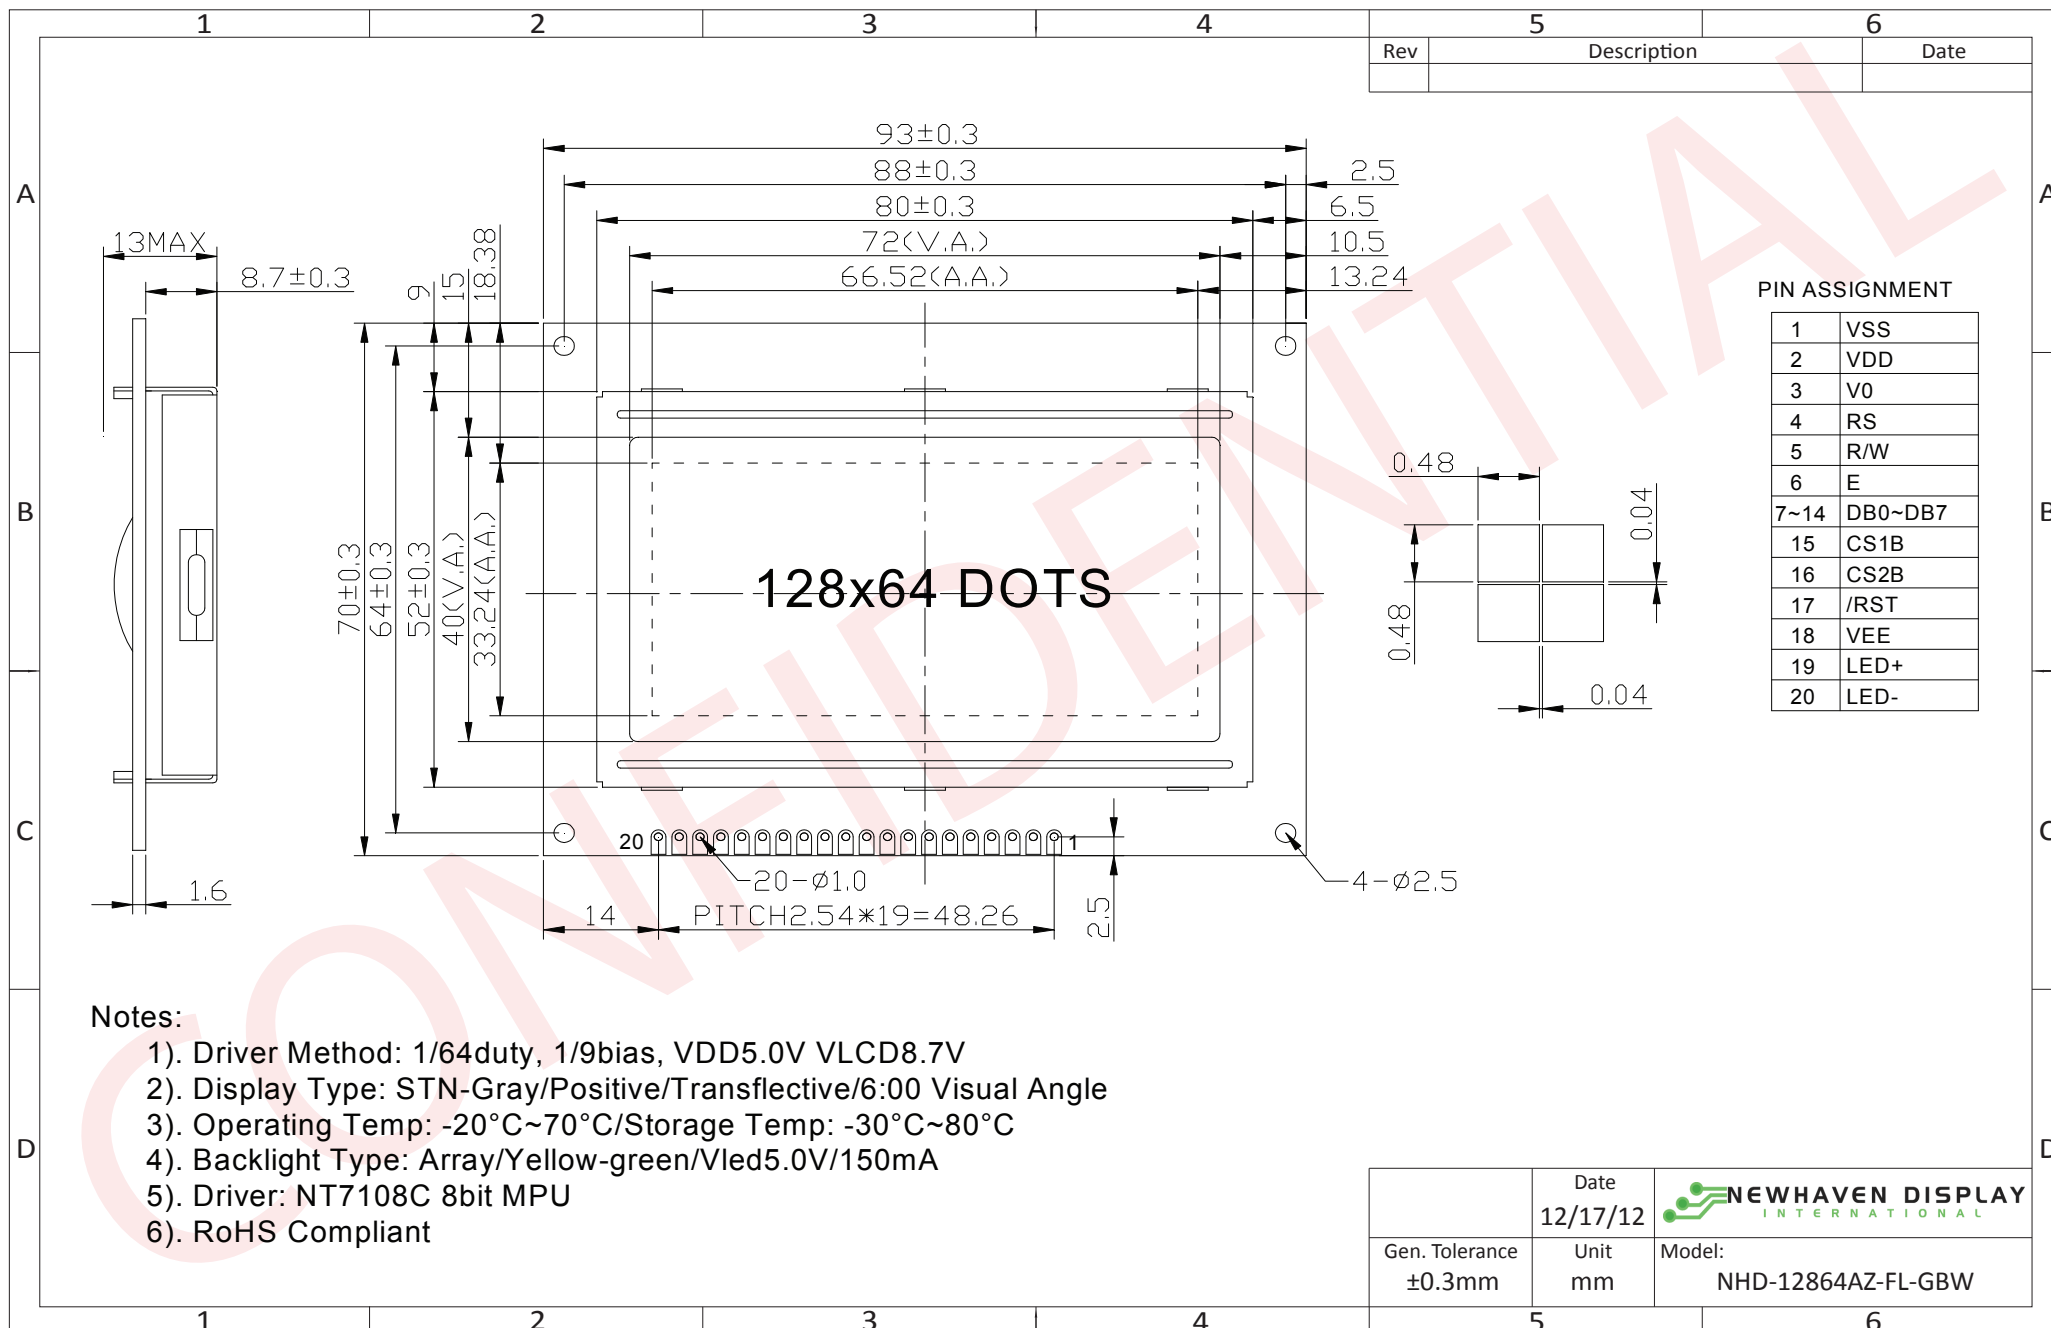

Notes:

- 1). Driver Method: 1/64duty, 1/9bias, VDD5.0V VLCD8.7V
- 2). Display Type: STN-Gray/Positive/Transflective/6:00 Visual Angle
- 3). Operating Temp: -20°C~70°C/Storage Temp: -30°C~80°C
- 4). Backlight Type: Array/Yellow-green/Vled5.0V/150mA
- 5). Driver: NT7108C 8bit MPU
- 6). RoHS Compliant

| | | |
|--------------------------|------------------|--|
| | Date 12/17/12 |  NEWHAVEN DISPLAY <small>INTERNATIONAL</small> |
| Gen. Tolerance ±0.3mm | Unit mm | |


The drawing contained herein is the exclusive property of Newhaven Display International, Inc. and shall not be copied, reproduced, and/or disclosed in any format without permission.

Pin Description and Wiring Diagram

| Pin No. | Symbol | External Connection | Function Description |
|---------|---------|---------------------|---|
| 1 | VSS | Power Supply | Ground |
| 2 | VDD | Power Supply | Power supply for Logic (+5.0V) |
| 3 | V0 | Adj Power Supply | Power Supply for contrast (approx. -3.7V) |
| 4 | RS | MPU | Register select: 1=Data, 0=Instruction |
| 5 | R/W | MPU | Read/Write select signal, R/W=1: Read R/W: =0: Write |
| 6 | E | MPU | Operation enable signal. Falling edge triggered. |
| 7-14 | DB0-DB7 | MPU | This is an 8-bit-directional data bus |
| 15 | CS1B | MPU | Chip Selection: CS1=H, CS2=L → select IC1 (left side) CS1=L, CS2=H → select IC2 (right side) |
| 16 | CS2B | MPU | |
| 17 | /RES | MPU | Active LOW Reset signal |
| 18 | VEE | Power Supply | Negative voltage output (-5.0V) |
| 19 | LED+ | Power Supply | Power for LED backlight (+5.0V via on-board resistor) |
| 20 | LED- | Power Supply | Ground for Backlight |

Recommended LCD connector: 2.54mm pitch pins

Backlight connector: on LCD connector

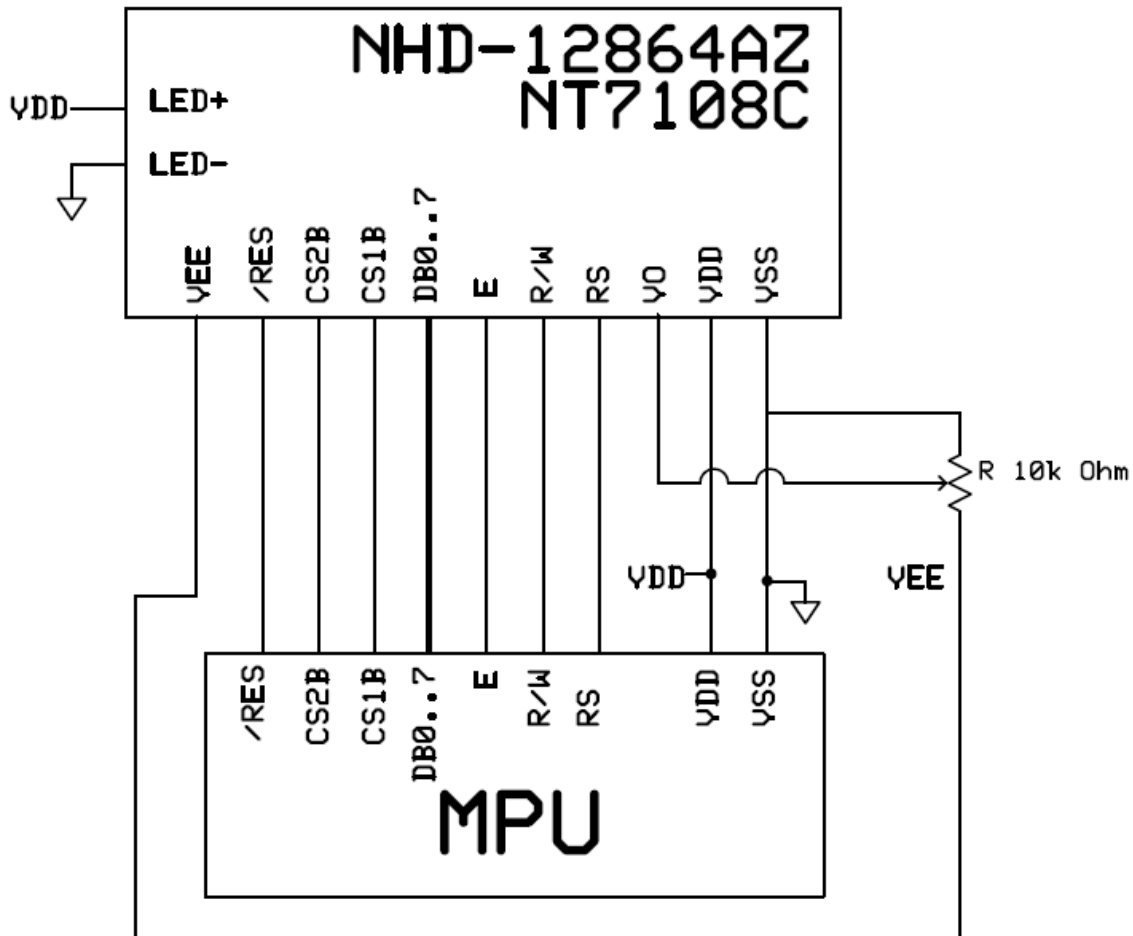

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|--------|------------------|---------|------|---------|------|
| Operating Temperature Range | Top | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | Tst | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | VDD | | 4.7 | 5.0 | 5.5 | V |
| Supply Current | IDD | Ta=25°, VDD=5.0V | - | 3.5 | 4.5 | mA |
| Supply for LCD (contrast) | VDD-V0 | Ta=25° | | 8.7 | 9.0 | V |
| "H" Level input | Vih | | 0.7*VDD | - | VDD | V |
| "L" Level input | Vil | | 0 | | 0.3*VDD | V |
| "H" Level output | Voh | | 2.4 | - | - | V |
| "L" Level output | Vol | | - | - | 0.4 | V |
| | | | | | | |
| Backlight Supply Voltage | Vled | | - | 5.0 | - | V |
| Backlight Supply Current | Iled | Vled=5.0V, R=68Ω | - | 120 | - | mA |

Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|-----------|------|------|------|------|
| Viewing Angle – Top | | Cr ≥ 2 | - | 35 | - | ° |
| Viewing Angle – Bottom | | | - | 60 | - | ° |
| Viewing Angle – Left | | | - | 40 | - | ° |
| Viewing Angle – Right | | | - | 40 | - | ° |
| Contrast Ratio | Cr | | 3 | 5 | - | |
| Response Time (rise) | Tr | | - | 150 | 250 | ms |
| Response Time (fall) | Tf | | - | 200 | 300 | ms |

Controller Information


Built-in NT7108C controller.

Please download specification at http://www.newhavendisplay.com/app_notes/NT7108.pdf

Table of Commands

| Instruction | RS | R/W | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 | Function | |
|--------------------------------|----|-----|------------|-----|---------------------------|-------|-----|------------|-----|-----|---|---|
| Display on/off | L | L | L | L | H | H | H | H | H | L/H | Controls the display on or off. Internal status and display RAM data is not affected. L:OFF, H:ON | |
| Set address (Y address) | L | L | L | H | Y address (0-63) | | | | | | Sets the Y address in the Y address counter. | |
| Set page (X address) | L | L | H | L | H | H | H | Page (0-7) | | | Sets the X address at the X address register. | |
| Display Start line (Z address) | L | L | H | H | Display start line (0-63) | | | | | | Indicates the display data RAM displayed at the top of the screen. | |
| Status read | L | H | Busy | L | On/Off | Reset | L | L | L | L | Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset | |
| Write display data | H | L | Write data | | | | | | | | | Writes data (DB0: 7) into display data RAM. After writing instruction, Y address is increased by 1 automatically. |
| Read display data | H | H | Read data | | | | | | | | | Reads data (DB0: 7) from display data RAM to the data bus. |

Timing Characteristics

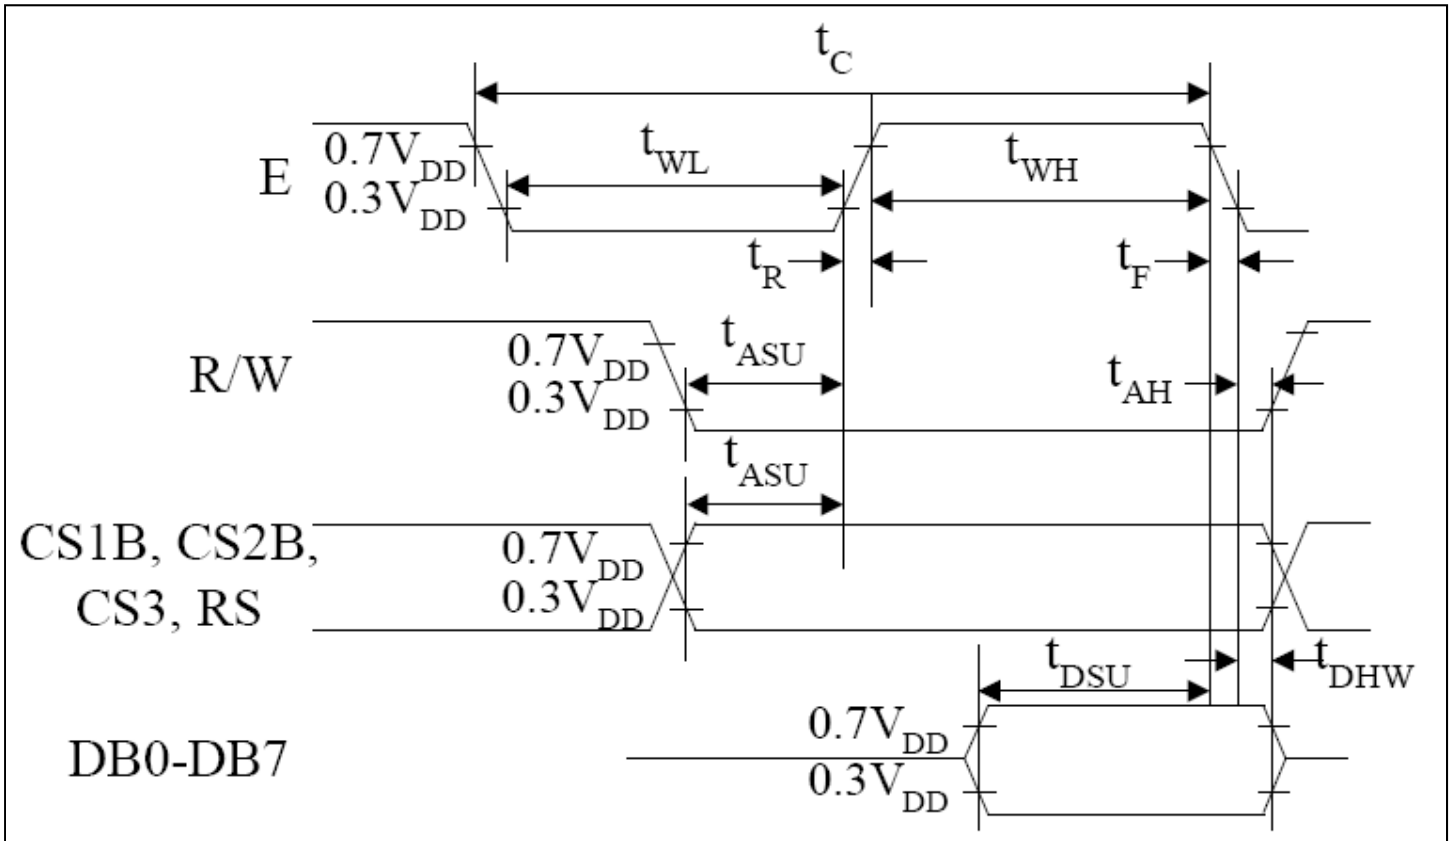

| Characteristic | Symbol | Min | Type | Max | Unit |
|------------------------|-----------|------|------|-----|------|
| E cycle | t_c | 1000 | - | - | ns |
| E high level width | t_{WH} | 450 | - | - | |
| E low level width | t_{WL} | 450 | - | - | |
| E rise time | t_R | - | - | 25 | |
| E fall time | t_F | - | - | 25 | |
| Address set-up time | t_{ASU} | 140 | - | - | |
| Address hold time | t_{AH} | 10 | - | - | |
| Data set-up time | t_{DSU} | 200 | - | - | |
| Data delay time | t_D | - | - | 320 | |
| Data hold time (write) | t_{DHW} | 10 | - | - | |
| Data hold time (read) | t_{DHR} | 20 | - | - | |

Example Initialization Program

```
'-----  
'DB0-DB7  7-14          P1  
'CS2      16           P3.6  
'CS1      15           P3.1  
'RST      17           P3.2  
'R/W      5            P3.7  
'D/I      4            P3.0  
'E        6            P3.4  
'-----  
Sub Init  
  Reset P3.2  
  Set P3.2  
  Reset P3.4  
  Reset P3.0  
  Reset P3.7  
  Reset P3.6  
  Reset P3.1  
  A = &H3F  
  Call Comleft           'display on  
  Call Comright         'display on  
End Sub  
'-----  
Sub Comleft  
  P1 = A  
  Set P3.6  
  Reset P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.6  
End Sub  
  
Sub Comright  
  P1 = A  
  Set P3.1  
  Reset P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.1  
End Sub  
  
Sub Writeleft  
  P1 = A  
  Set P3.6  
  Set P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.6  
End Sub  
  
Sub Writerright  
  P1 = A  
  Set P3.1  
  Set P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.1  
End Sub
```


Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|---|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C , 48hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C , 48hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C , 48hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C , 48hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +40°C , 90% RH , 48hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | 0°C,30min -> 25°C,5min -> 50°C,30min = 1 cycle 10 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz , 15mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=800V, RS=1.5kΩ, CS=100pF One time | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisply.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisply.com/index.php?main_page=terms

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А