


RoHS

Qxx25xx & Qxx25xHx Series

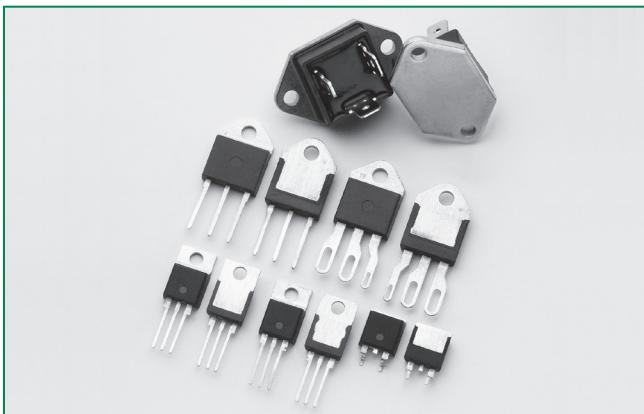


Agency Approval

| Agency | Agency File Number |
|--------|---|
| | TO-220L, TO-218K, TO-218J & Fastpak Packages: E71639 |

Main Features

| Symbol | Value | Unit |
|-------------------|----------|------|
| I_{TRMS} | 25 | A |
| V_{DRM}/V_{RRM} | 1000 | V |
| I_{GT} | 50 to 80 | mA |

Schematic Symbol

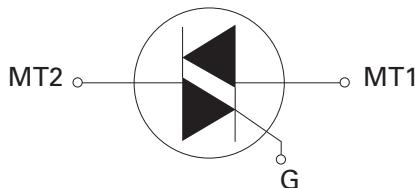

Description

25 Amp bi-directional solid state switch series is designed for AC switching and phase control applications such as motor speed and temperature modulation controls, lighting controls, and static switching relays.

Standard type devices normally operate in Quadrants I & III triggered from AC line.

Alternistor type devices only operate in quadrants I, II, & III and are used in circuits requiring high dv/dt capability.

Features & Benefits

- RoHS compliant
- Glass – passivated junctions
- Voltage capability up to 1000 V
- Surge capability up to 250 A

Applications

Excellent for AC switching and phase control applications such as heating, lighting, and motor speed controls.

Typical applications are AC solid-state switches, industrial power tools, exercise equipment, white goods and commercial appliances.

Alternistor Triacs (no snubber required) are used in applications with extremely inductive loads requiring highest commutation performance.

Internally constructed isolated packages are offered for ease of heat sinking with highest isolation voltage.

Absolute Maximum Ratings – Standard Triac

| Symbol | Parameter | Test Conditions | | Value | Unit |
|--------------|---|--------------------------------------|---|------------|------------------------|
| $I_{T(RMS)}$ | RMS on-state current | Qxx25R5 | $T_c = 85^\circ C$ | 25 | A |
| | | Qxx25N5 | $T_c = 57^\circ C$ | | |
| I_{TSM} | Peak non-repetitive surge current | Qxx25R5 | single half cycle; $f = 50\text{Hz}$; T_j (initial) = $25^\circ C$ | 167 | A |
| | | Qxx25N5 | single half cycle; $f = 60\text{Hz}$; T_j (initial) = $25^\circ C$ | 200 | |
| | | Qxx25P5 | single half cycle; $f = 50\text{Hz}$; T_j (initial) = $25^\circ C$ | 220 | |
| | | | single half cycle; $f = 60\text{Hz}$; T_j (initial) = $25^\circ C$ | 250 | |
| I^2t | I^2t Value for fusing | Qxx25R5 | $t_p = 8.3\text{ms}$ | 166 | A^2s |
| | | Qxx25N5 | | 260 | |
| | | Qxx25P5 | | | |
| di/dt | Critical rate-of-rise of on-state current | $f = 60\text{Hz}; T_j = 125^\circ C$ | | 100 | $\text{A}/\mu\text{s}$ |
| I_{GTM} | Peak gate current | $T_j = 125^\circ C$ | | 2 | A |
| $P_{G(AV)}$ | Average gate power dissipation | $T_j = 125^\circ C$ | | 0.5 | W |
| T_{stg} | Storage temperature range | | | -40 to 125 | $^\circ C$ |
| T_j | Operating junction temperature range | Qxx25R5 | -40 to 125 | $^\circ C$ | |
| | | Qxx25N5 | | | |
| | | Qxx25P5 | -25 to 125 | | |

Absolute Maximum Ratings – Alternistor Triac

| Symbol | Parameter | Test Conditions | | Value | Unit | |
|--------------|---|--------------------------------------|---|------------|------------------------|--|
| $I_{T(RMS)}$ | RMS on-state current | Qxx25LH5 | $T_c = 65^\circ C$ | 25 | A | |
| | | Qxx25L6 | $T_c = 85^\circ C$ | | | |
| | | Qxx25K6 | $T_c = 95^\circ C$ | | | |
| I_{TSM} | Peak non-repetitive surge current | Qxx25RH5 | single half cycle; $f = 50\text{Hz}$; T_j (initial) = $25^\circ C$ | 208 | A | |
| | | Qxx25NH5 | | 250 | | |
| I^2t | I^2t Value for fusing | Qxx25R6 | $t_p = 8.3\text{ms}$ | 260 | A^2s | |
| | | Qxx25NH6 | | | | |
| di/dt | Critical rate-of-rise of on-state current | $f = 60\text{Hz}; T_j = 125^\circ C$ | | 100 | $\text{A}/\mu\text{s}$ | |
| I_{GTM} | Peak gate current | $T_j = 125^\circ C$ | | 2 | A | |
| $P_{G(AV)}$ | Average gate power dissipation | $T_j = 125^\circ C$ | | 0.5 | W | |
| T_{stg} | Storage temperature range | | | -40 to 125 | $^\circ C$ | |
| T_j | Operating junction temperature range | | | -40 to 125 | $^\circ C$ | |

Note: xx = voltage

Electrical Characteristics ($T_j = 25^\circ\text{C}$, unless otherwise specified) — Standard Triac

| Symbol | Test Conditions | Quadrant | Value | | Unit | |
|--------------|--|--------------|--------------------|---------|------------------|---------------|
| | | | Qxx25R5 Qxx25N5 | Qxx25P5 | | |
| I_{GT} | $V_D = 12\text{V}; R_L = 60 \Omega$ | I - II - III | MAX. | 50 | mA | |
| | | IV | TYP. | 120 | | |
| V_{GT} | | I - II - III | MAX. | 1.3 | V | |
| | | IV | TYP. | 2.5 | | |
| V_{GD} | $V_D = V_{DRM}; R_L = 3.3 \text{k}\Omega; T_j = 125^\circ\text{C}$ | ALL | MIN. | 0.2 | V | |
| I_H | $I_T = 400\text{mA}$ (initial) | | MAX. | 100 | mA | |
| dv/dt | $V_D = V_{DRM}; \text{Gate Open}; T_j = 125^\circ\text{C}$ | 400V | MIN. | 275 | V/ μs | |
| | | 600V | | 225 | | |
| | | 800V | | 200 | | |
| | $V_D = V_{DRM}; \text{Gate Open}; T_j = 100^\circ\text{C}$ | 1000V | | 200 | | |
| (dv/dt)c | $(di/dt)c = 13.3 \text{ A/ms}; T_j = 125^\circ\text{C}$ | | MIN. | 5 | V/ μs | |
| t_{gt} | $I_G = 2 \times I_{GT}; PW = 15\mu\text{s}; I_T = 35.4 \text{ A}$ | | TYP. | 4 | 3 | μs |

Electrical Characteristics ($T_j = 25^\circ\text{C}$, unless otherwise specified) — Alternistor Triac

| Symbol | Test Conditions | Quadrant | Value | | Unit | |
|--------------|--|--------------|----------------------------------|--|------------------|---------------|
| | | | Qxx25RH5 Qxx25LH5 Qxx25NH5 | Qxx25R6 Qxx25L6 Qxx25NH6 Qxx25K6 Qxx25J6 | | |
| I_{GT} | $V_D = 12\text{V}; R_L = 60 \Omega$ | I - II - III | MAX. | 50 | mA | |
| | | I - II - III | MAX. | 1.3 | | |
| V_{GD} | $V_D = V_{DRM}; R_L = 3.3 \text{k}\Omega; T_j = 125^\circ\text{C}$ | I - II - III | MIN. | 0.2 | V | |
| I_H | $I_T = 400\text{mA}$ (initial) | | MAX. | 50 | mA | |
| dv/dt | $V_D = V_{DRM}; \text{Gate Open}; T_j = 125^\circ\text{C}$ | 400V | MIN. | 575 | V/ μs | |
| | | 600V | | 500 | | |
| | | 800V | | 400 | | |
| | $V_D = V_{DRM}; \text{Gate Open}; T_j = 100^\circ\text{C}$ | 1000V | | — | | |
| (dv/dt)c | $(di/dt)c = 13.3 \text{ A/ms}; T_j = 125^\circ\text{C}$ | | MIN. | 20 | V/ μs | |
| t_{gt} | $I_G = 2 \times I_{GT}; PW = 15\mu\text{s}; I_T = 35.4 \text{ A}$ | | TYP. | 3 | 5 | μs |

Static Characteristics

| Symbol | Test Conditions | | Value | | Unit | |
|---------------------|---|---------------------------|---|---------|------|---------------|
| | | | Qxx25R5 Qxx25N5 Qxx25xH5 Qxx25x6 Qxx25NH6 | Qxx25P5 | | |
| V_{TM} | $I_T = 35.4\text{A}; t_p = 380 \mu\text{s}$ | | MAX. | 1.8 | 1.4 | V |
| I_{DRM} / I_{RRM} | V_{DRM} / V_{RRM} | $T_j = 25^\circ\text{C}$ | 600 – 800V | MAX. | 10 | μA |
| | | | 1000V | | 20 | |
| | | $T_j = 100^\circ\text{C}$ | 600 – 800V | MAX. | 500 | |
| | | | 1000V | | 1000 | |
| | | $T_j = 125^\circ\text{C}$ | 600 – 800V | | 2000 | |
| | | | | | 5000 | |

Note: xx = voltage, x = package

Thermal Resistances

| Symbol | Parameter | Value | Unit |
|-------------------|-----------------------|--|------|
| $R_{\theta(J-C)}$ | Junction to case (AC) | Qxx25R5 / Qxx25N5 Qxx25R6 / Qxx25NH6 Qxx25RH5 / Qxx25NH5 | 0.89 |
| | | Qxx25P5 | 1.6 |
| | | Qxx25L6 / Qxx25LH5 | 2.0 |
| | | Qxx25K6 / Qxx25J6 | 1.32 |
| $R_{\theta(J-A)}$ | Junction to ambient | Qxx25Ry | 45 |
| | | Qxx25L6 / Qxx25LH5 | 50 |

Note: xx = voltage, y = sensitivity

Figure 1: Normalized DC Gate Trigger Current vs. Junction Temperature

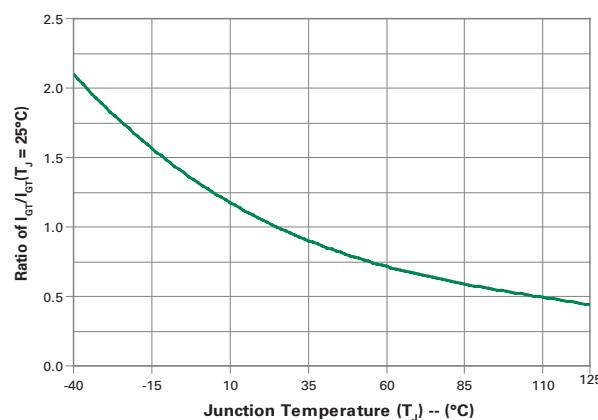


Figure 2: Normalized DC Gate Trigger Voltage vs. Junction Temperature

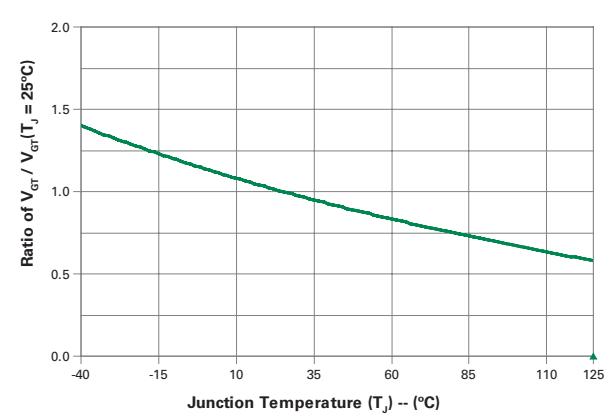


Figure 3: Normalized DC Holding Current vs. Junction Temperature

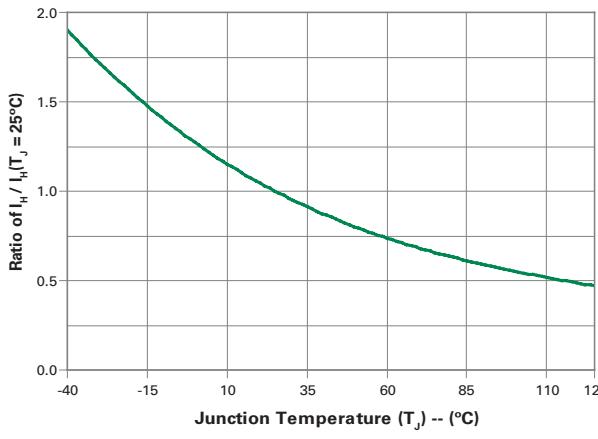


Figure 4: On-State Current vs. On-State Voltage (Typical)

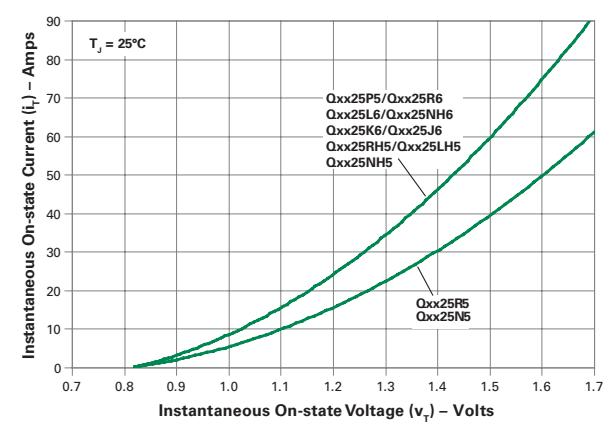


Figure 5: Power Dissipation (Typical) vs. RMS On-State Current

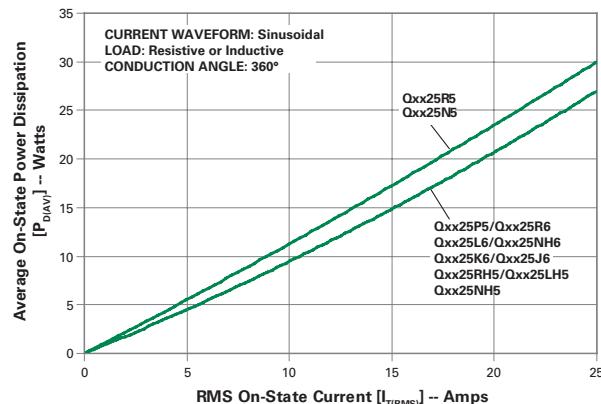


Figure 6: Maximum Allowable Case Temperature vs. RMS On-State Current

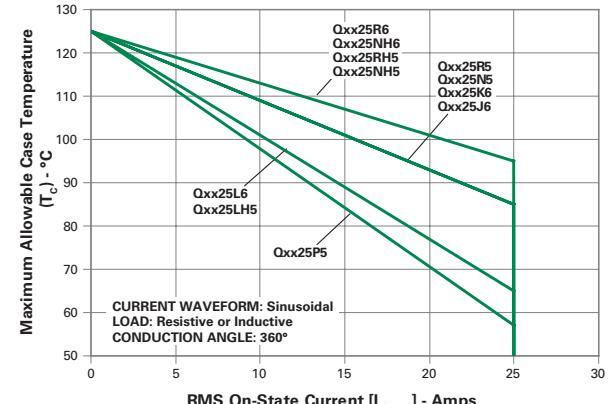


Figure 7: Maximum Allowable Ambient Temperature vs. RMS On-State Current (TO-220 packages only)


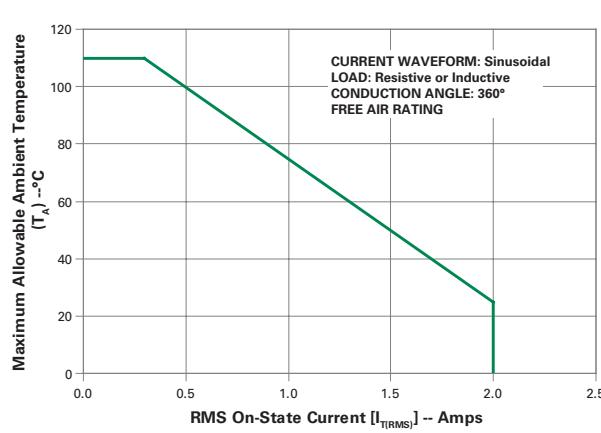


Figure 8: Surge Peak On-State Current vs. Number of Cycles

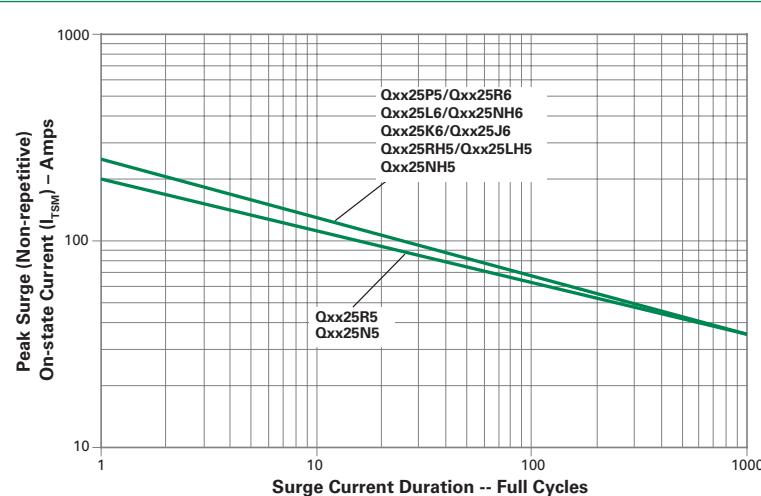


SUPPLY FREQUENCY: 60 Hz Sinusoidal
LOAD: Resistive
RMS On-State Current: [I_{T(RMS)}]: Maximum Rated Value at Specified Case Temperature

Notes:

1. Gate control may be lost during and immediately following surge current interval.
2. Overload may not be repeated until junction temperature has returned to steady-state rated value.

Soldering Parameters

| | | |
|--|---------------------------------------|-------------------------|
| Reflow Condition | | Pb – Free assembly |
| Pre Heat | -Temperature Min ($T_{s(\min)}$) | 150°C |
| | -Temperature Max ($T_{s(\max)}$) | 200°C |
| | -Time (min to max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp) (T_L) to peak | | 5°C/second max |
| Reflow | $T_{s(\max)}$ to T_L - Ramp-up Rate | 5°C/second max |
| | -Temperature (T_L) (Liquidus) | 217°C |
| | -Temperature (t_L) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 5°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 280°C |

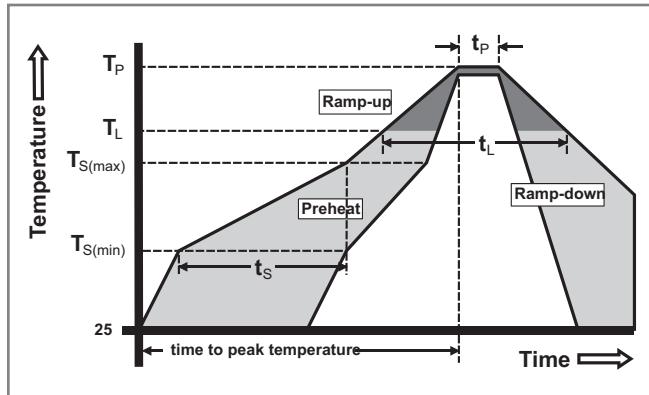

Physical Specifications

| | |
|------------------------|---|
| Terminal Finish | 100% Matte Tin-plated |
| Body Material | UL recognized epoxy meeting flammability classification 94V-0 |
| Lead Material | Copper Alloy |


Design Considerations

Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the device rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

Environmental Specifications


| Test | Specifications and Conditions |
|--|--|
| High Temperature Voltage Blocking | MIL-STD-750: Method 1040, Condition A Rated V_{BRM} , 125°C, 1008 hours |
| Temperature Cycling | MIL-STD-750: Method 1051 -40°C to 125°C, 15-minute dwell, 100 cycles |
| Biased Temp & Humidity | EIA/JEDEC: JESD22-A101 320VDC, 85°C, 85%RH, 1008 hours |
| High Temp. Storage | MIL-STD-750: Method 1031 150°C, 1008 hours |
| Low-Temp Storage | -40°C, 1008 hours |
| Thermal Shock | MIL-STD-750: Method 1056 0°C to 100°C, 5-minute dwell, 10-second transfer, 10 cycles |
| Autoclave (Pressure Cooker Test) | EIA/JEDEC: JESD22-A102 121°C, 100%RH, 2atm, 168 hours |
| Resistance to Solder Heat | MIL-STD-750: Method 2031 260°C, 10 seconds |
| Solderability | ANSI/J-STD-002, Category 3, Test A |
| Lead Bend | MIL-STD-750: Method 2036, Condition E |

Dimensions — TO-220AB (R Package) — Non-isolated Mounting Tab

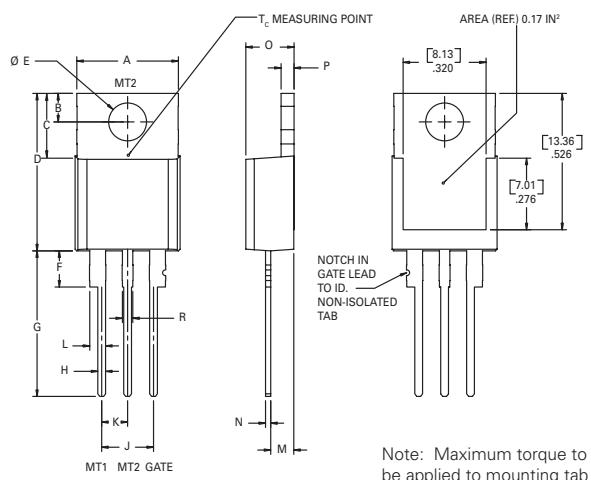


| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.380 | 0.420 | 9.65 | 10.67 |
| B | 0.105 | 0.115 | 2.67 | 2.92 |
| C | 0.230 | 0.250 | 5.84 | 6.35 |
| D | 0.590 | 0.620 | 14.99 | 15.75 |
| E | 0.142 | 0.147 | 3.61 | 3.73 |
| F | 0.110 | 0.130 | 2.79 | 3.30 |
| G | 0.540 | 0.575 | 13.72 | 14.61 |
| H | 0.025 | 0.035 | 0.64 | 0.89 |
| J | 0.195 | 0.205 | 4.95 | 5.21 |
| K | 0.095 | 0.105 | 2.41 | 2.67 |
| L | 0.060 | 0.075 | 1.52 | 1.91 |
| M | 0.085 | 0.095 | 2.16 | 2.41 |
| N | 0.018 | 0.024 | 0.46 | 0.61 |
| O | 0.178 | 0.188 | 4.52 | 4.78 |
| P | 0.045 | 0.060 | 1.14 | 1.52 |
| R | 0.038 | 0.048 | 0.97 | 1.22 |

Dimensions — TO-220AB (L Package) — Isolated Mounting Tab

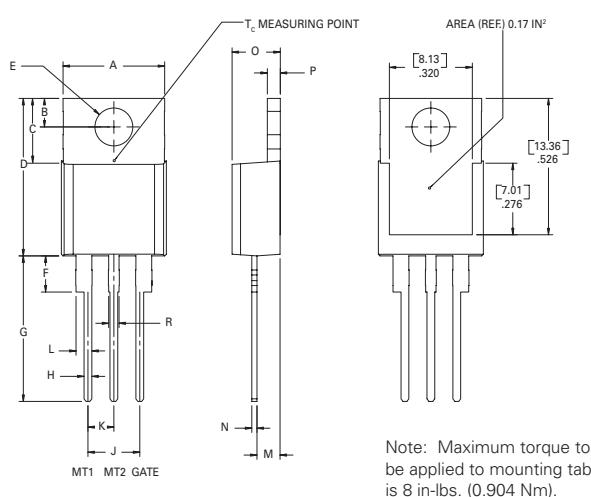


| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.380 | 0.420 | 9.65 | 10.67 |
| B | 0.105 | 0.115 | 2.66 | 2.92 |
| C | 0.230 | 0.250 | 5.85 | 6.35 |
| D | 0.590 | 0.620 | 14.98 | 15.75 |
| E | 0.142 | 0.147 | 3.61 | 3.73 |
| F | 0.110 | 0.130 | 2.80 | 3.30 |
| G | 0.540 | 0.575 | 13.71 | 14.60 |
| H | 0.025 | 0.035 | 0.63 | 0.89 |
| J | 0.195 | 0.205 | 4.95 | 5.21 |
| K | 0.095 | 0.105 | 2.41 | 2.67 |
| L | 0.060 | 0.075 | 1.52 | 1.91 |
| M | 0.085 | 0.095 | 1.78 | 2.16 |
| N | 0.018 | 0.024 | 0.45 | 0.61 |
| O | 0.178 | 0.188 | 4.52 | 4.78 |
| P | 0.045 | 0.060 | 1.14 | 1.53 |
| R | 0.038 | 0.048 | 0.97 | 1.22 |

Dimensions — TO-263 (N Package) — D²Pak Surface Mount

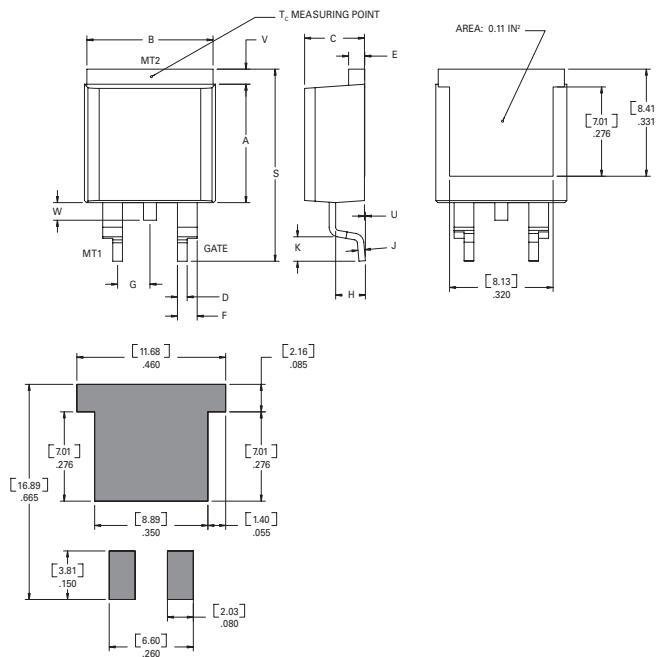


| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.360 | 0.370 | 9.14 | 9.40 |
| B | 0.380 | 0.420 | 9.65 | 10.67 |
| C | 0.178 | 0.188 | 4.52 | 4.78 |
| D | 0.025 | 0.035 | 0.64 | 0.89 |
| E | 0.045 | 0.060 | 1.14 | 1.52 |
| F | 0.060 | 0.075 | 1.52 | 1.91 |
| G | 0.095 | 0.105 | 2.41 | 2.67 |
| H | 0.092 | 0.102 | 2.34 | 2.59 |
| J | 0.018 | 0.024 | 0.46 | 0.61 |
| K | 0.090 | 0.110 | 2.29 | 2.79 |
| S | 0.590 | 0.625 | 14.99 | 15.88 |
| V | 0.035 | 0.045 | 0.89 | 1.14 |
| U | 0.002 | 0.010 | 0.05 | 0.25 |
| W | 0.040 | 0.070 | 1.02 | 1.78 |

Dimensions — TO-218AC (K Package) — Isolated Mounting Tab

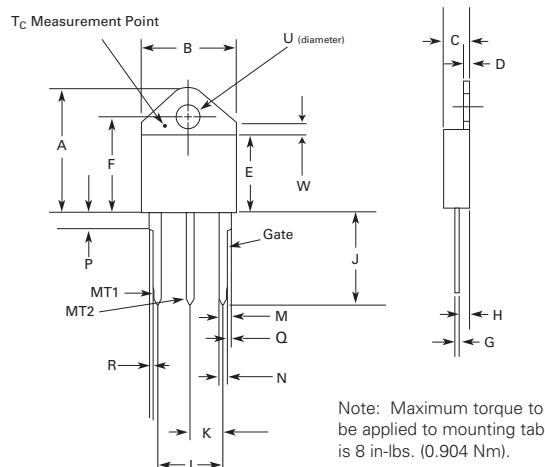


| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.810 | 0.835 | 20.57 | 21.21 |
| B | 0.610 | 0.630 | 15.49 | 16.00 |
| C | 0.178 | 0.188 | 4.52 | 4.78 |
| D | 0.055 | 0.070 | 1.40 | 1.78 |
| E | 0.487 | 0.497 | 12.37 | 12.62 |
| F | 0.635 | 0.655 | 16.13 | 16.64 |
| G | 0.022 | 0.029 | 0.56 | 0.74 |
| H | 0.075 | 0.095 | 1.91 | 2.41 |
| J | 0.575 | 0.625 | 14.61 | 15.88 |
| K | 0.211 | 0.219 | 5.36 | 5.56 |
| L | 0.422 | 0.437 | 10.72 | 11.10 |
| M | 0.058 | 0.068 | 1.47 | 1.73 |
| N | 0.045 | 0.055 | 1.14 | 1.40 |
| P | 0.095 | 0.115 | 2.41 | 2.92 |
| Q | 0.008 | 0.016 | 0.20 | 0.41 |
| R | 0.008 | 0.016 | 0.20 | 0.41 |
| U | 0.164 | 0.165 | 4.10 | 4.20 |
| W | 0.085 | 0.095 | 2.17 | 2.42 |

Dimensions — TO-218X (J Package) — Isolated Mounting Tab

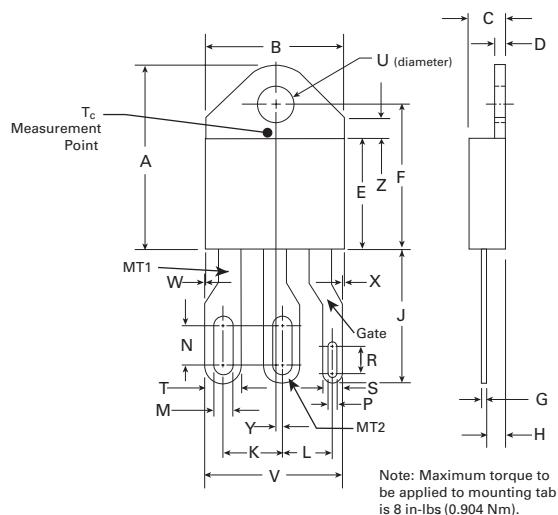

| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.810 | 0.835 | 20.57 | 21.21 |
| B | 0.610 | 0.630 | 15.49 | 16.00 |
| C | 0.178 | 0.188 | 4.52 | 4.78 |
| D | 0.055 | 0.070 | 1.40 | 1.78 |
| E | 0.487 | 0.497 | 12.37 | 12.62 |
| F | 0.635 | 0.655 | 16.13 | 16.64 |
| G | 0.022 | 0.029 | 0.56 | 0.74 |
| H | 0.075 | 0.095 | 1.91 | 2.41 |
| J | 0.575 | 0.625 | 14.61 | 15.88 |
| K | 0.256 | 0.264 | 6.50 | 6.71 |
| L | 0.220 | 0.228 | 5.58 | 5.79 |
| M | 0.080 | 0.088 | 2.03 | 2.24 |
| N | 0.169 | 0.177 | 4.29 | 4.49 |
| P | 0.034 | 0.042 | 0.86 | 1.07 |
| R | 0.113 | 0.121 | 2.87 | 3.07 |
| S | 0.086 | 0.096 | 2.18 | 2.44 |
| T | 0.156 | 0.166 | 3.96 | 4.22 |
| U | 0.164 | 0.165 | 4.10 | 0.420 |
| V | 0.603 | 0.618 | 15.31 | 15.70 |
| W | 0.000 | 0.005 | 0.00 | 0.13 |
| X | 0.003 | 0.012 | 0.07 | 0.30 |
| Y | 0.028 | 0.032 | 0.71 | 0.81 |
| Z | 0.085 | 0.095 | 2.17 | 2.42 |

Dimensions — TO-3 (P Package) Fastpak — Isolated Mounting Tab

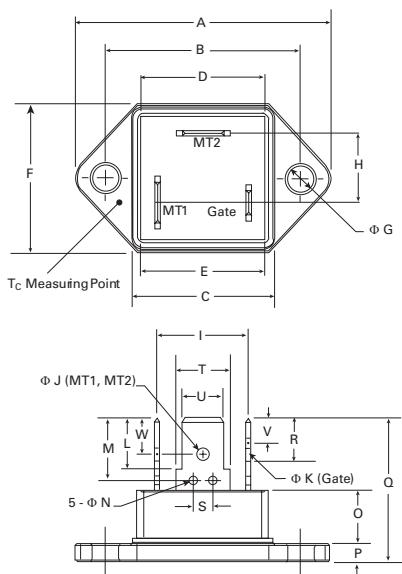

| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 1.531 | 1.543 | 38.90 | 39.20 |
| B | 1.177 | 1.185 | 29.90 | 30.10 |
| C | 0.843 | 0.850 | 21.40 | 21.60 |
| D | 0.780 | 0.795 | 19.80 | 20.20 |
| E | 0.783 | 0.791 | 19.90 | 20.10 |
| F | 0.874 | 0.906 | 22.20 | 23.00 |
| G | 0.161 | 0.169 | 4.10 | 4.30 |
| H | 0.386 | 0.465 | 9.80 | 11.80 |
| I | 0.508 | 0.587 | 12.90 | 14.90 |
| J | 0.079 | 0.087 | 2.00 | 2.20 |
| K | 0.047 | 0.055 | 1.20 | 1.40 |
| L | 0.307 | 0.319 | 7.80 | 8.10 |
| M | 0.372 | 0.396 | 9.45 | 10.05 |
| N | 0.043 | 0.059 | 1.10 | 1.50 |
| O | 0.315 | 0.331 | 8.00 | 8.40 |
| P | 0.098 | 0.106 | 2.50 | 2.70 |
| Q | 0.846 | 0.886 | 21.50 | 22.50 |
| R | 0.244 | 0.256 | 6.20 | 6.50 |
| S | 0.106 | 0.130 | 2.70 | 3.30 |
| T (MT1) | 0.321 | 0.329 | 8.15 | 8.35 |
| T (MT2) | 0.321 | 0.329 | 8.15 | 8.35 |
| T (Gate) | 0.220 | 0.228 | 5.60 | 5.80 |
| U (MT1) | 0.246 | 0.254 | 6.25 | 6.45 |
| U (MT2) | 0.246 | 0.254 | 6.25 | 6.45 |
| U (Gate) | 0.183 | 0.191 | 4.65 | 4.85 |
| V | 0.120 | 0.130 | 3.05 | 3.30 |
| W | 0.175 | 0.185 | 4.45 | 4.70 |

Maximum torque to be applied to mounting tab is 8 in-lbs (0.904Nm).

Product Selector


| Part Number | Voltage | | | | Gate Sensitivity Quadrants | | Package |
|-------------|---------|------|------|-------|----------------------------|--------------|----------------------------|
| | 400V | 600V | 800V | 1000V | I - II - III | IV | |
| Qxx25R5 | X | X | X | X | 50 mA | 120 mA (TYP) | TO-220R |
| Qxx25N5 | X | X | X | X | 50 mA | 120 mA (TYP) | TO-263 D ² -Pak |
| Qxx25P5 | | X | X | | 50 mA | 120 mA (TYP) | Fastpak |
| Qxx25RH5 | X | X | X | | 50 mA | | TO-220R |
| Qxx25LH5 | X | X | X | | 50 mA | | TO-220L |
| Qxx25NH5 | X | X | X | | 50 mA | | TO-263 D ² -Pak |
| Qxx25R6 | X | X | X | X | 80 mA | | TO-220R |
| Qxx25L6 | X | X | X | X | 80 mA | | TO-220L |
| Qxx25NH6 | X | X | X | X | 80 mA | | TO-263 D ² -Pak |
| Qxx25J6 | X | X | X | | 80 mA | | TO-218X |
| Qxx25K6 | X | X | X | X | 80 mA | | TO-218AC |

Packing Options


| Part Number | Marking | Weight | Packing Mode | Base Quantity |
|-------------|----------|--------|------------------|-------------------|
| Qxx25R5 | Qxx25R5 | 2.20g | Bulk | 500 |
| Qxx25R5TP | Qxx25R5 | 2.20g | Tube | 500 (50 per tube) |
| Qxx25N5TP | Qxx25N5 | 1.60g | Tube | 500 (50 per tube) |
| Qxx25N5RP | Qxx25N5 | 1.60g | Embossed Carrier | 500 |
| Qxx25RH5 | Qxx25RH5 | 2.20g | Bulk | 500 |
| Qxx25RH5TP | Qxx25RH5 | 2.20g | Tube | 500 (50 per tube) |
| Qxx25LH5 | Qxx25LH5 | 2.20g | Bulk | 500 |
| Qxx25LH5TP | Qxx25LH5 | 2.20g | Tube | 500 (50 per tube) |
| Qxx25NH5TP | Qxx25NH5 | 1.60g | Tube | 500 (50 per tube) |
| Qxx25NH5RP | Qxx25NH5 | 1.60g | Embossed Carrier | 500 |
| Qxx25P5 | Qxx25P5 | 21.4g | Bulk | 200 |
| Qxx25R6 | Qxx25R6 | 2.20g | Bulk | 500 |
| Qxx25R6TP | Qxx25R6 | 2.20g | Tube | 500 (50 per tube) |
| Qxx25L6 | Qxx25L6 | 2.20g | Bulk | 500 |
| Qxx25L6TP | Qxx25L6 | 2.20g | Tube | 500 (50 per tube) |
| Qxx25NH6TP | Qxx25NH6 | 1.60g | Tube | 500 (50 per tube) |
| Qxx25NH6RP | Qxx25NH6 | 1.60g | Embossed Carrier | 500 |
| Qxx25J6TP | Qxx25J6 | 5.23g | Tube | 250 (25 per tube) |
| Qxx25K6TP | Qxx25K6 | 4.40g | Tube | 250 (25 per tube) |

TO-263 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-2 Standards

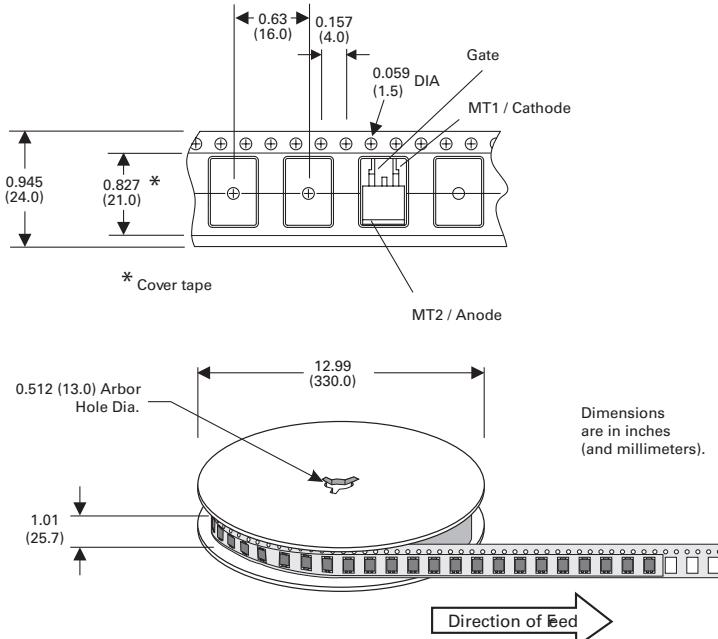

Part Numbering System

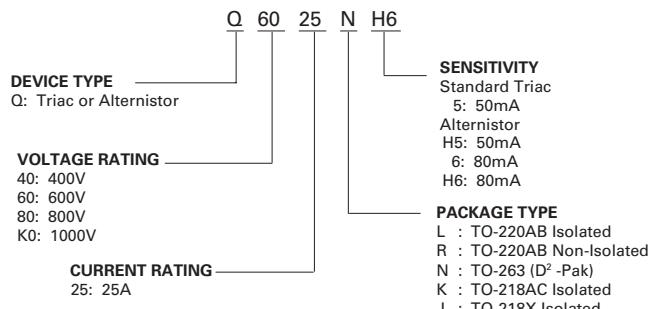


Part Marking System


TO-220 AB – (R Package)
TO-263 AB – (N Package)




TO-218AC (K Package)
TO-218X (J Package)

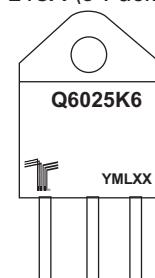

TO-220 AB – (L Package)



Fastpak (P Package)

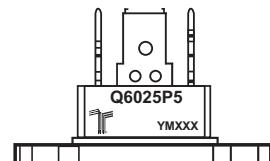



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А