

# Amplified Low Pressure Sensors

1 mbar (0.4 In H2O) to 60 In H2O Pressure Sensors



## Features

- 0 to 1 mbar to 0 to 60 In H2O Pressure Ranges
- Ratiometric 4V Output
- Temperature Compensated
- Calibrated Zero and Span

## Applications

- Medical Instrumentation
- Environmental Controls
- HVAC


## General Description

The Amplified line of low pressure sensors is based upon a proprietary technology to reduce all output offset or common mode errors. This model provides a ratiometric 4-volt output with superior output offset characteristics. Output offset errors due to change in temperature, stability to warm-up, stability to long time period, and position sensitivity are all significantly reduced when compared to conventional compensation methods. In addition the sensor utilizes a silicon, micromachined, stress concentration enhanced structure to provide a very linear output to measured pressure.


These calibrated and temperature compensated sensors give an accurate and stable output over a wide temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like.

The output of the device is ratiometric to the supply voltage over a supply voltage range of 4.5 to 5.5 volts.

## Physical Dimensions

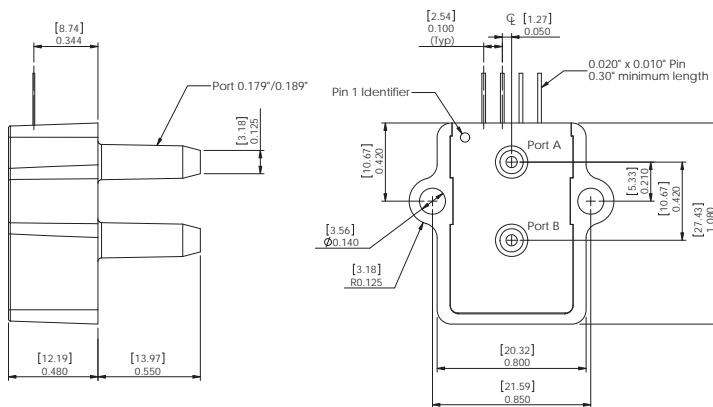

## Equivalent Circuit

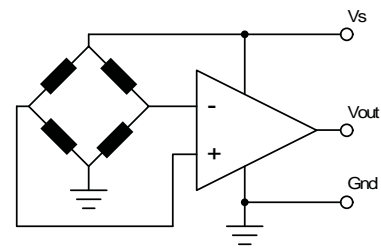

## Approvals

MKT	DATE	MFG	DATE	ENG	DATE	QA	DATE
<input type="checkbox"/> As Is <input type="checkbox"/> With Change		<input type="checkbox"/> As Is <input type="checkbox"/> With Change		<input type="checkbox"/> As Is <input type="checkbox"/> With Change		<input type="checkbox"/> As Is <input type="checkbox"/> With Change	



## Pressure Sensor Ratings

Supply Voltage VS	+4.5 to +5.5 Vdc
Common-mode pressure	-10 to +10 psig
Lead Temperature, max (soldering 2-4 sec.)	250°C

## Environmental Specifications

Temperature Ranges	
Compensated	5 to 50° C
Operating	-25 to 85° C
Storage	-40 to 125° C
Humidity Limits	0 to 95% RH (non condensing)

## Standard Pressure Ranges

Part Number	Operating Pressure	Nominal Span	Proof Pressure	Burst Pressure
1 MBAR-D-4V	±1 mbar	4 V	100 In H2O	200 In H2O
1 INCH-D-4V	±1 In H2O	4 V	100 In H2O	200 In H2O
1 INCH-G-4V	0 - 1 In H2O	4 V	100 In H2O	200 In H2O
2.5 INCH-D-4V	±2.5 In H2O	4 V	200 In H2O	300 In H2O
5 INCH-D-4V	± 5 In H2O	4 V	200 In H2O	300 In H2O
5 INCH-G-4V	0 - 5 In H2O	4 V	200 In H2O	300 In H2O
10 INCH-D-4V	±10 In H2O	4 V	200 In H2O	300 In H2O
10 INCH-G-4V	0 - 10 In H2O	4 V	200 In H2O	300 In H2O
20 INCH-D-4V	±20 In H2O	4 V	300 In H2O	500 In H2O
20 INCH-G-4V	0 - 20 In H2O	4 V	300 In H2O	500 In H2O
30 INCH-D-4V	±30 In H2O	4 V	500 In H2O	800 In H2O
30 INCH-G-4V	0 - 30 In H2O	4V	500 In H2O	800 In H2O
60 INCH-G-4V	0 - 60 In H2O	4V	500 InH2O	800 InH2O

## Performance Characteristics for: 1 MBAR-D-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±1.0		mbar
Output Span, NOTE 5	±1.80	±2.0	±2.20	V
Offset Voltage @ zero differential pressure	2.00	2.25	2.50	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±120	mV
Offset Warm-up Shift, NOTE 3		±20		mV
Offset Position Sensitivity (±1g)		±40		mV
Offset Long Term Drift (one year)		±20		mV
Linearity, hysteresis error, NOTE 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), NOTE 2			±4	%FSS

## Performance Characteristics for 1 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±1.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±60	mV
Offset Warm-up Shift, note 3		±10		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±10		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±2	%FSS

## Performance Characteristics for 1 INCH-G-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		1.0		inH2O
Output Span, note 5	3.90	4.0	4.10	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), note 2			±60	mV
Offset Warm-up Shift, note 3		±10		mV
Offset Position Sensitivity (±1g)		±15		mV
Offset Long Term Drift (one year)		±10		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±2	%FSS

## Performance Characteristics for 2.5 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±2.5		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±40	V
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±1	%FSS



## Performance Characteristics for 5 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±5.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±40	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±1	%FSS

## Performance Characteristics for: 5 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		5.0		inH2O
Output Span, NOTE 5	3.90	4.0	4.10	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±40	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), NOTE 2			±1	%FSS

## Performance Characteristics for: 10 INCH-D-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±10.0		inH2O
Output Span, NOTE 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), NOTE 2			±1	%FSS

## Performance Characteristics for: 10 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		10.0		inH2O
Output Span, NOTE 5	3.90	4.0	4.10	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	mV
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), NOTE 2			±1	%FSS

## Performance Characteristics for 20 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±20.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±20	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±1	%FSS

## Performance Characteristics for 20 INCH-G-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		20.0		inH2O
Output Span, note 5	3.90	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), note 2			±20	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±1	%FSS



## Performance Characteristics for 30 INCH-D-4V

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, differential pressure		±30.0		inH2O
Output Span, note 5	±1.90	±2.0	±2.10	V
Offset Voltage @ zero differential pressure	2.15	2.25	2.35	V
Offset Temperature Shift (5°C-50°C), note 2			±20	mV
Offset Warm-up Shift, note 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, note 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), note 2			±1	%FSS

## Performance Characteristics for 30 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		30.0		inH2O
Output Span, NOTE 5	3.9	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	V
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), NOTE 2			±1	%FSS

## Performance Characteristics for 60 INCH-G-4V

Parameter, NOTE 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		60.0		inH2O
Output Span, NOTE 5	3.9	4.0	4.1	V
Offset Voltage @ zero pressure	0.15	0.25	0.35	V
Offset Temperature Shift (5°C-50°C), NOTE 2			±20	V
Offset Warm-up Shift, NOTE 3		±5		mV
Offset Position Sensitivity (±1g)		±5		mV
Offset Long Term Drift (one year)		±5		mV
Linearity, hysteresis error, NOTE 4		0.05	0.25	%FSS
Span Shift (5°C-50°C), NOTE 2			±1	%FSS

**Pressure Response: for any pressure applied the response time to get to 90% of pressure applied is typically less than 500 useconds.**

### Specification Notes

NOTE 1: ALL PARAMETERS ARE MEASURED AT 5.0 VOLT EXCITATION, FOR THE NOMINAL FULL SCALE PRESSURE AND ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B.

NOTE 2: SHIFT IS RELATIVE TO 25°C.

NOTE 3: SHIFT IS WITHIN THE FIRST HOUR OF EXCITATION APPLIED TO THE DEVICE.

NOTE 4: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.

NOTE 5: THE SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN FULL SCALE OUTPUT VOLTAGE AND THE OFFSET VOLTAGE.

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А