

## DATASHEET

# UJ3C120040K3S

## 1200V-35mΩ SiC FET

Rev. D, December 2019

### Description


This SiC FET device is based on a unique ‘cascode’ circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device’s standard gate-drive characteristics allows for a true “drop-in replacement” to Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the TO-247-3L package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads, and any application requiring standard gate drive.

### Features

- ◆ Typical on-resistance  $R_{DS(on),typ}$  of 35mΩ
- ◆ Maximum operating temperature of 175°C
- ◆ Excellent reverse recovery
- ◆ Low gate charge
- ◆ Low intrinsic capacitance
- ◆ ESD protected, HBM class 2

### Typical applications

- ◆ EV charging
- ◆ PV inverters
- ◆ Switch mode power supplies
- ◆ Power factor correction modules
- ◆ Motor drives
- ◆ Induction heating

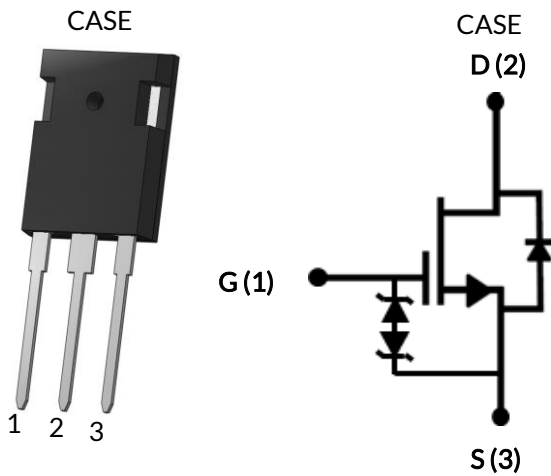

| Part Number   | Package   | Marking       |
|---------------|-----------|---------------|
| UJ3C120040K3S | TO-247-3L | UJ3C120040K3S |



## Maximum Ratings

| Parameter                                                            | Symbol         | Test Conditions                     | Value      | Units            |
|----------------------------------------------------------------------|----------------|-------------------------------------|------------|------------------|
| Drain-source voltage                                                 | $V_{DS}$       |                                     | 1200       | V                |
| Gate-source voltage                                                  | $V_{GS}$       | DC                                  | -25 to +25 | V                |
| Continuous drain current <sup>1</sup>                                | $I_D$          | $T_C = 25^\circ\text{C}$            | 65         | A                |
|                                                                      |                | $T_C = 100^\circ\text{C}$           | 47         | A                |
| Pulsed drain current <sup>2</sup>                                    | $I_{DM}$       | $T_C = 25^\circ\text{C}$            | 175        | A                |
| Single pulsed avalanche energy <sup>3</sup>                          | $E_{AS}$       | $L=15\text{mH}, I_{AS}=4.2\text{A}$ | 132.3      | mJ               |
| Power dissipation                                                    | $P_{tot}$      | $T_C = 25^\circ\text{C}$            | 429        | W                |
| Maximum junction temperature                                         | $T_{J,max}$    |                                     | 175        | $^\circ\text{C}$ |
| Operating and storage temperature                                    | $T_J, T_{STG}$ |                                     | -55 to 175 | $^\circ\text{C}$ |
| Max. lead temperature for soldering,<br>1/8" from case for 5 seconds | $T_L$          |                                     | 250        | $^\circ\text{C}$ |

1. Limited by  $T_{J,max}$

2. Pulse width  $t_p$  limited by  $T_{J,max}$

3. Starting  $T_J = 25^\circ\text{C}$

## Thermal Characteristics

| Parameter                            | Symbol          | Test Conditions | Value |      |      | Units                     |
|--------------------------------------|-----------------|-----------------|-------|------|------|---------------------------|
|                                      |                 |                 | Min   | Typ  | Max  |                           |
| Thermal resistance, junction-to-case | $R_{\theta JC}$ |                 |       | 0.27 | 0.35 | $^\circ\text{C}/\text{W}$ |

## Electrical Characteristics ( $T_J = +25^\circ\text{C}$ unless otherwise specified)

### Typical Performance - Static

| Parameter                      | Symbol       | Test Conditions                                       | Value |     |          | Units         |
|--------------------------------|--------------|-------------------------------------------------------|-------|-----|----------|---------------|
|                                |              |                                                       | Min   | Typ | Max      |               |
| Drain-source breakdown voltage | $BV_{DS}$    | $V_{GS}=0V, I_D=1mA$                                  | 1200  |     |          | V             |
| Total drain leakage current    | $I_{DSS}$    | $V_{DS}=1200V, V_{GS}=0V, T_J=25^\circ\text{C}$       |       | 8   | 150      | $\mu\text{A}$ |
|                                |              | $V_{DS}=1200V, V_{GS}=0V, T_J=175^\circ\text{C}$      |       | 35  |          |               |
| Total gate leakage current     | $I_{GSS}$    | $V_{DS}=0V, T_J=25^\circ\text{C}, V_{GS}=-20V / +20V$ |       | 6   | $\pm 20$ | $\mu\text{A}$ |
| Drain-source on-resistance     | $R_{DS(on)}$ | $V_{GS}=12V, I_D=40A, T_J=25^\circ\text{C}$           |       | 35  | 45       | m $\Omega$    |
|                                |              | $V_{GS}=12V, I_D=40A, T_J=125^\circ\text{C}$          |       | 56  |          |               |
|                                |              | $V_{GS}=12V, I_D=40A, T_J=175^\circ\text{C}$          |       | 73  |          |               |
| Gate threshold voltage         | $V_{G(th)}$  | $V_{DS}=5V, I_D=10mA$                                 | 4     | 5   | 6        | V             |
| Gate resistance                | $R_G$        | $f=1\text{MHz}, \text{open drain}$                    |       | 4.5 |          | $\Omega$      |

### Typical Performance - Reverse Diode

| Parameter                                     | Symbol        | Test Conditions                                                                                     | Value |      |     | Units |
|-----------------------------------------------|---------------|-----------------------------------------------------------------------------------------------------|-------|------|-----|-------|
|                                               |               |                                                                                                     | Min   | Typ  | Max |       |
| Diode continuous forward current <sup>1</sup> | $I_S$         | $T_C=25^\circ\text{C}$                                                                              |       |      | 65  | A     |
| Diode pulse current <sup>2</sup>              | $I_{S,pulse}$ | $T_C=25^\circ\text{C}$                                                                              |       |      | 175 | A     |
| Forward voltage                               | $V_{FSD}$     | $V_{GS}=0V, I_F=20A, T_J=25^\circ\text{C}$                                                          |       | 1.5  | 2   | V     |
|                                               |               | $V_{GS}=0V, I_F=20A, T_J=175^\circ\text{C}$                                                         |       | 1.95 |     |       |
| Reverse recovery charge                       | $Q_{rr}$      | $V_R=800V, I_F=40A, V_{GS}=0V, R_{G\_EXT}=15\Omega, di/dt=3000A/\mu\text{s}, T_J=150^\circ\text{C}$ |       | 482  |     | nC    |
| Reverse recovery time                         | $t_{rr}$      | $T_J=150^\circ\text{C}$                                                                             |       | 39   |     | ns    |

## Typical Performance - Dynamic

| Parameter                                    | Symbol        | Test Conditions                                                                                                                                                                | Value |      |     | Units   |
|----------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|---------|
|                                              |               |                                                                                                                                                                                | Min   | Typ  | Max |         |
| Input capacitance                            | $C_{iss}$     | $V_{DS}=100V, V_{GS}=0V$<br>$f=100kHz$                                                                                                                                         |       | 1500 |     | pF      |
| Output capacitance                           | $C_{oss}$     |                                                                                                                                                                                |       | 210  |     |         |
| Reverse transfer capacitance                 | $C_{rss}$     |                                                                                                                                                                                |       | 1.7  |     |         |
| Effective output capacitance, energy related | $C_{oss(er)}$ | $V_{DS}=0V$ to 800V,<br>$V_{GS}=0V$                                                                                                                                            |       | 112  |     | pF      |
| Effective output capacitance, time related   | $C_{oss(tr)}$ | $V_{DS}=0V$ to 800V,<br>$V_{GS}=0V$                                                                                                                                            |       | 280  |     | pF      |
| $C_{oss}$ stored energy                      | $E_{oss}$     | $V_{DS}=800V, V_{GS}=0V$                                                                                                                                                       |       | 35.6 |     | $\mu J$ |
| Total gate charge                            | $Q_G$         | $V_{DS}=800V, I_D=40A,$<br>$V_{GS} = -5V$ to 15V                                                                                                                               |       | 51   |     | nC      |
| Gate-drain charge                            | $Q_{GD}$      |                                                                                                                                                                                |       | 11   |     |         |
| Gate-source charge                           | $Q_{GS}$      |                                                                                                                                                                                |       | 19   |     |         |
| Turn-on delay time                           | $t_{d(on)}$   | $V_{DS}=800V, I_D=40A,$ Gate Driver = -5V to +15V,<br>Turn-on $R_{G,EXT}=1\Omega$ ,<br>Turn-off $R_{G,EXT}=20\Omega$<br>Inductive Load,<br>FWD: UJ3D1250K<br>$T_J=150^\circ C$ |       | 33   |     | ns      |
| Rise time                                    | $t_r$         |                                                                                                                                                                                |       | 20   |     |         |
| Turn-off delay time                          | $t_{d(off)}$  |                                                                                                                                                                                |       | 63   |     |         |
| Fall time                                    | $t_f$         |                                                                                                                                                                                |       | 20   |     |         |
| Turn-on energy                               | $E_{ON}$      |                                                                                                                                                                                |       | 930  |     | $\mu J$ |
| Turn-off energy                              | $E_{OFF}$     |                                                                                                                                                                                |       | 299  |     |         |
| Total switching energy                       | $E_{TOTAL}$   |                                                                                                                                                                                |       | 1229 |     |         |

## Typical Performance Diagrams

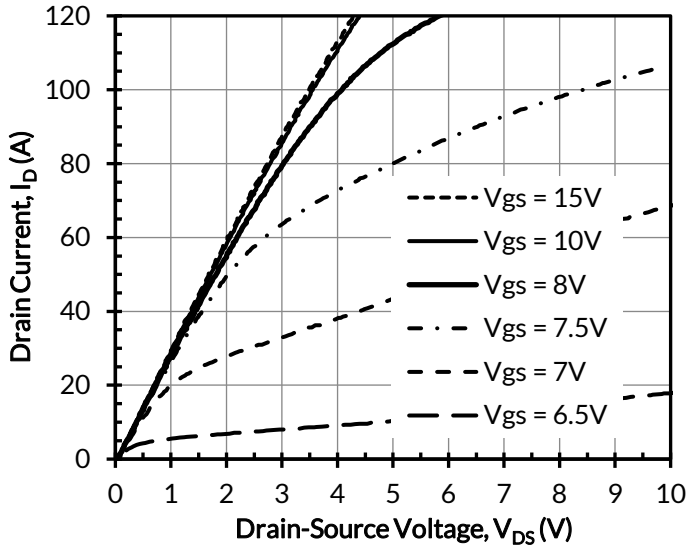


Figure 1. Typical output characteristics at  $T_J = -55^\circ\text{C}$ ,  $t_p < 250\mu\text{s}$

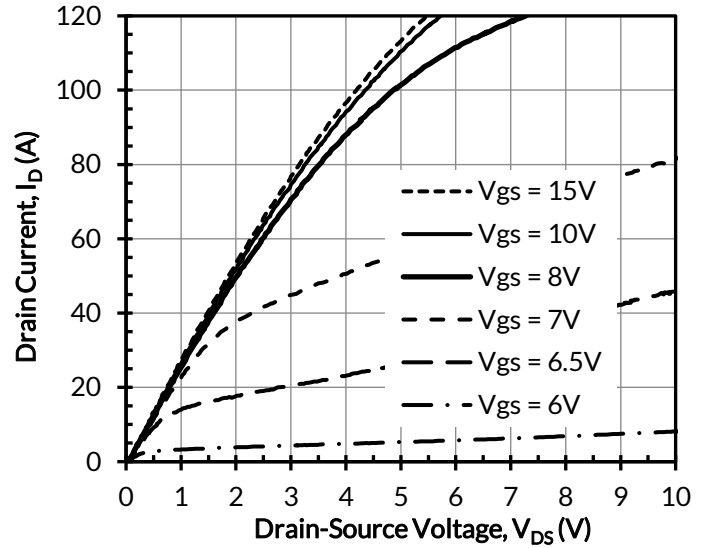


Figure 2. Typical output characteristics at  $T_J = 25^\circ\text{C}$ ,  $t_p < 250\mu\text{s}$

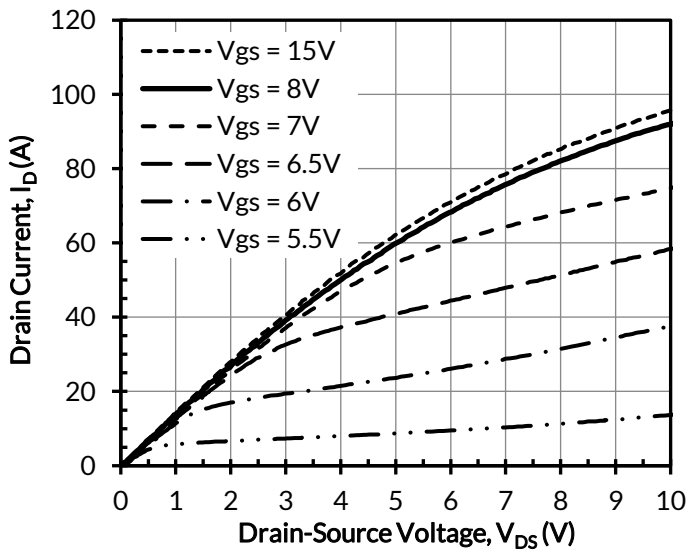


Figure 3. Typical output characteristics at  $T_J = 175^\circ\text{C}$ ,  $t_p < 250\mu\text{s}$

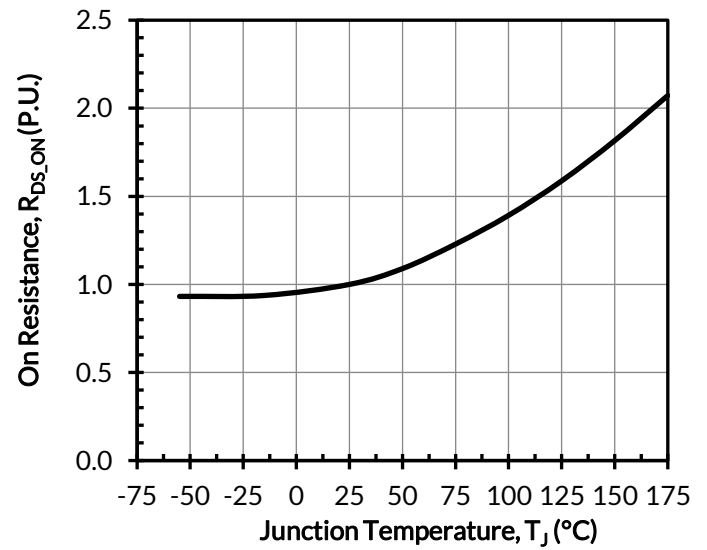


Figure 4. Normalized on-resistance vs. temperature at  $V_{GS} = 12\text{V}$  and  $I_D = 40\text{A}$

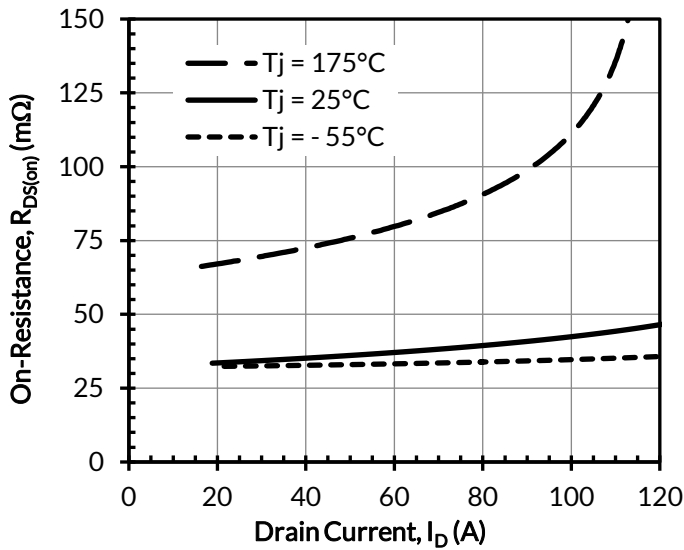


Figure 5. Typical drain-source on-resistances at  $V_{GS} = 12V$

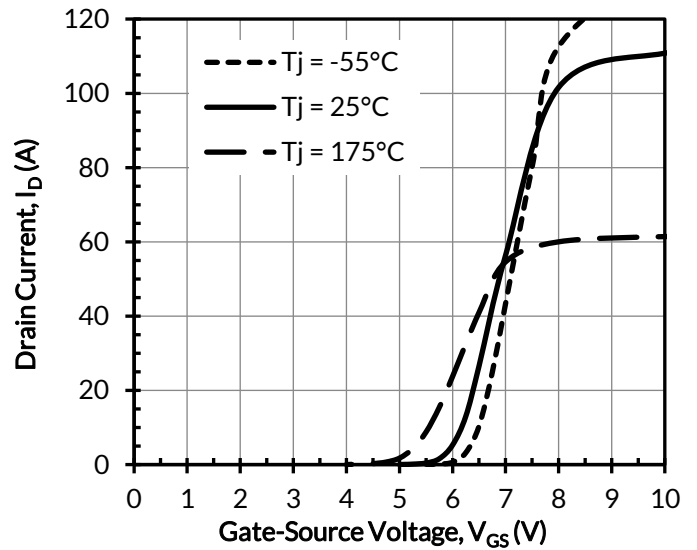


Figure 6. Typical transfer characteristics at  $V_{DS} = 5V$

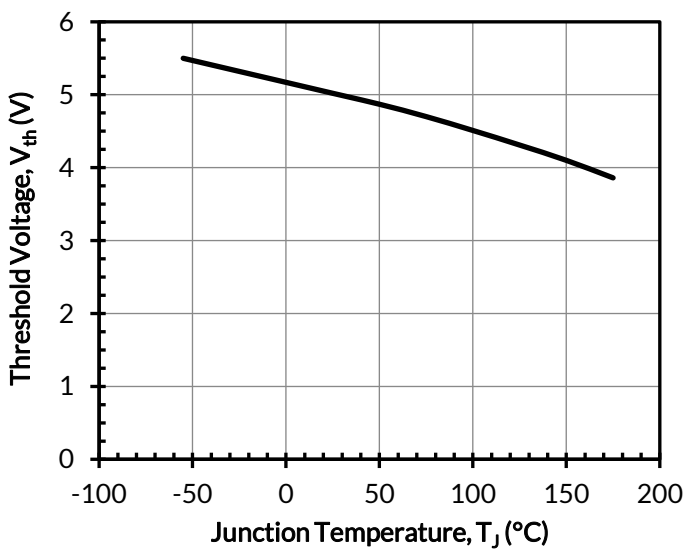


Figure 7. Threshold voltage vs. junction temperature at  $V_{DS} = 5V$  and  $I_D = 10mA$

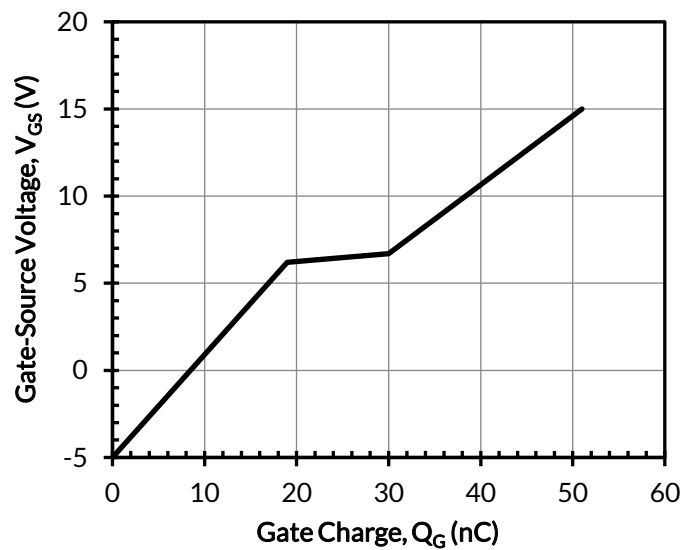


Figure 8. Typical gate charge at  $V_{DS} = 800V$  and  $I_D = 40A$

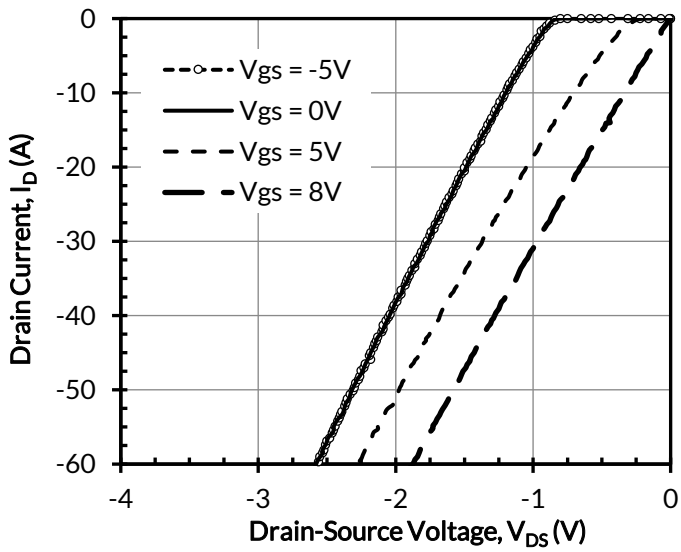


Figure 9. 3rd quadrant characteristics at  $T_j = -55^\circ\text{C}$

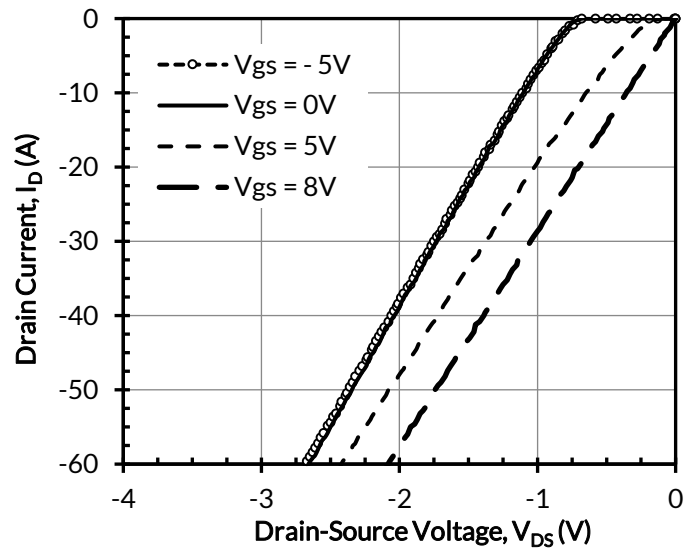


Figure 10. 3rd quadrant characteristics at  $T_j = 25^\circ\text{C}$

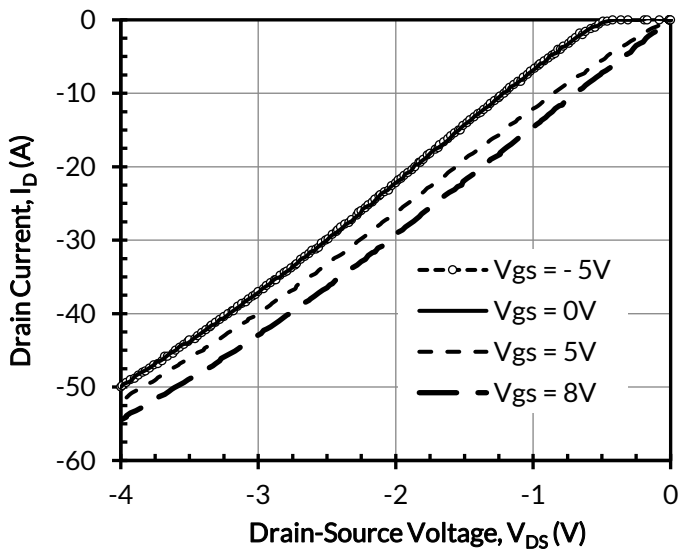


Figure 11. 3rd quadrant characteristics at  $T_j = 175^\circ\text{C}$

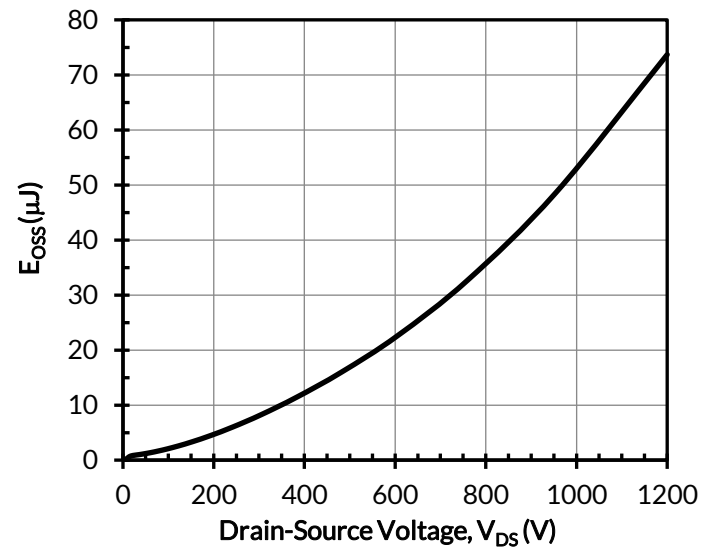


Figure 12. Typical stored energy in  $C_{OSS}$  at  $V_{GS} = 0\text{V}$

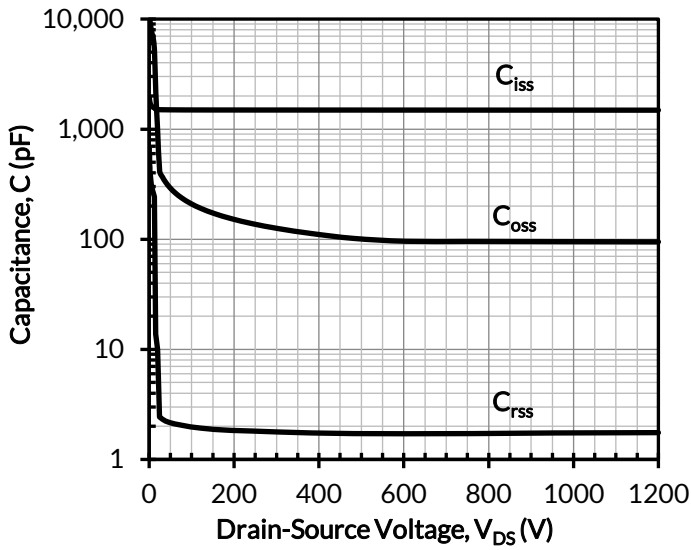


Figure 13. Typical capacitances at  $f = 100\text{kHz}$  and  $V_{GS} = 0\text{V}$

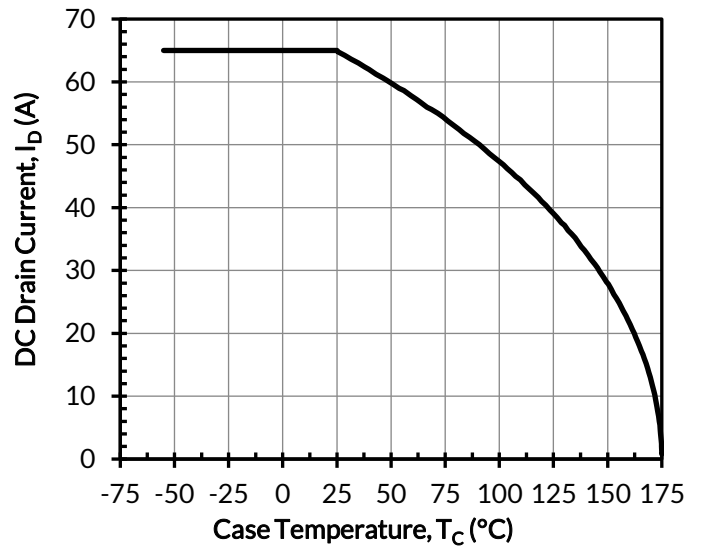


Figure 14. DC drain current derating

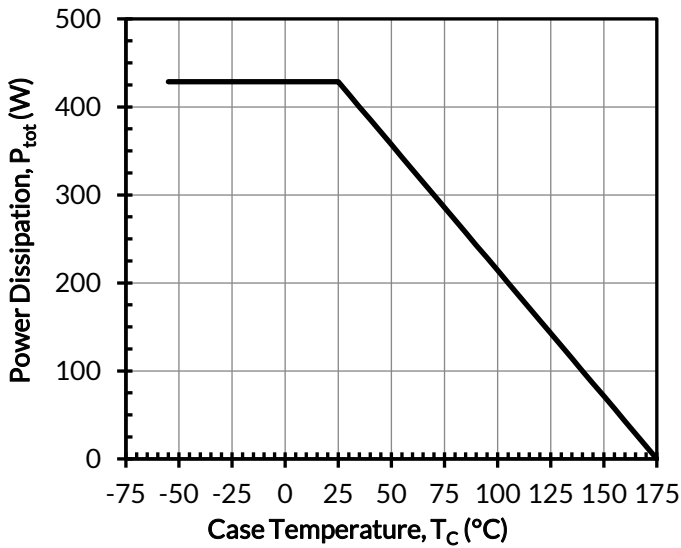


Figure 15. Total power dissipation

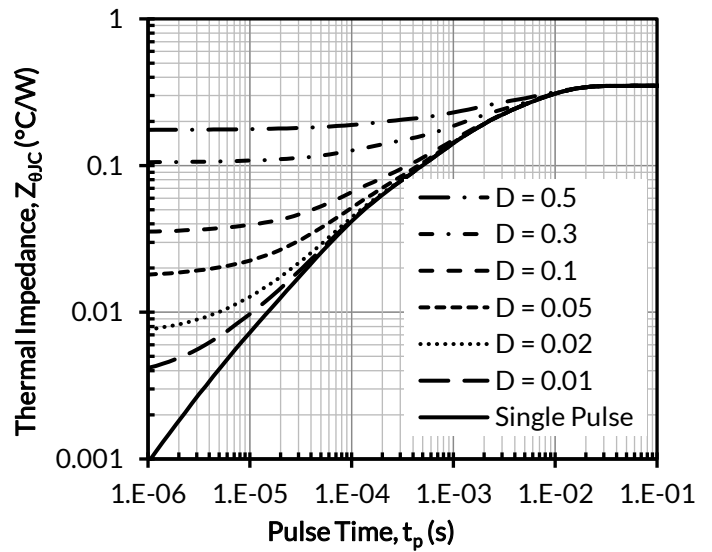


Figure 16. Maximum transient thermal impedance



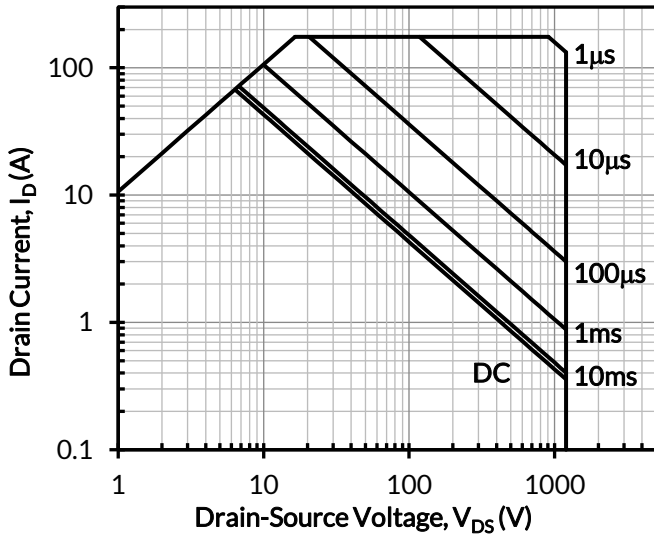


Figure 17. Safe operation area at  $T_C = 25^\circ\text{C}$ ,  $D = 0$ , Parameter  $t_p$

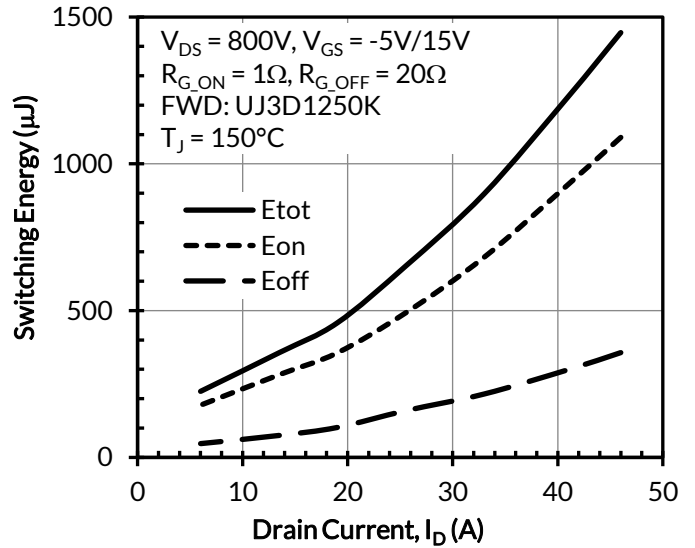


Figure 18. Clamped inductive switching energy vs. drain current at  $T_J = 150^\circ\text{C}$

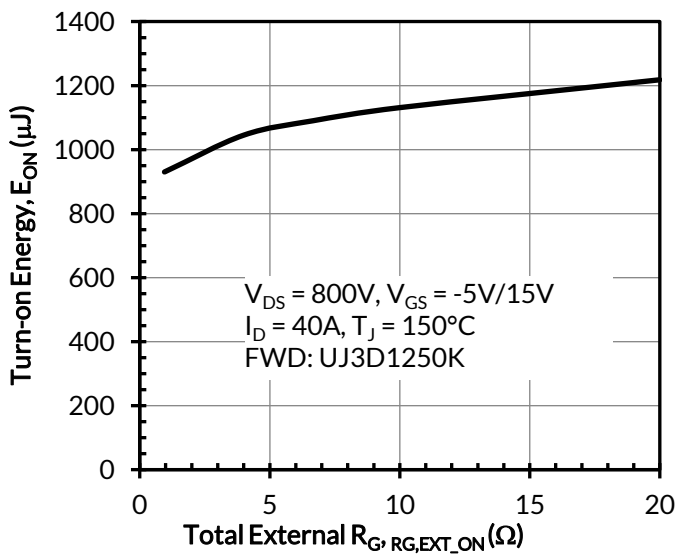


Figure 19. Clamped inductive switching turn-on energy vs.  $R_{G,EXT,ON}$

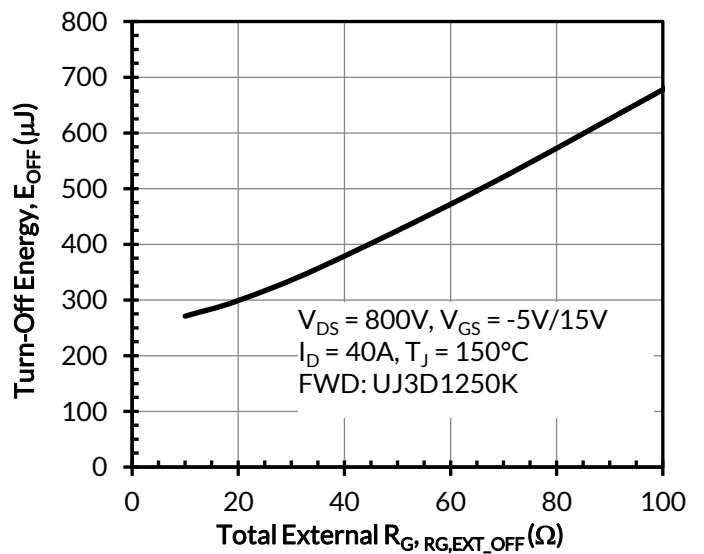


Figure 20. Clamped inductive switching turn-off energy vs.  $R_{G,EXT,OFF}$

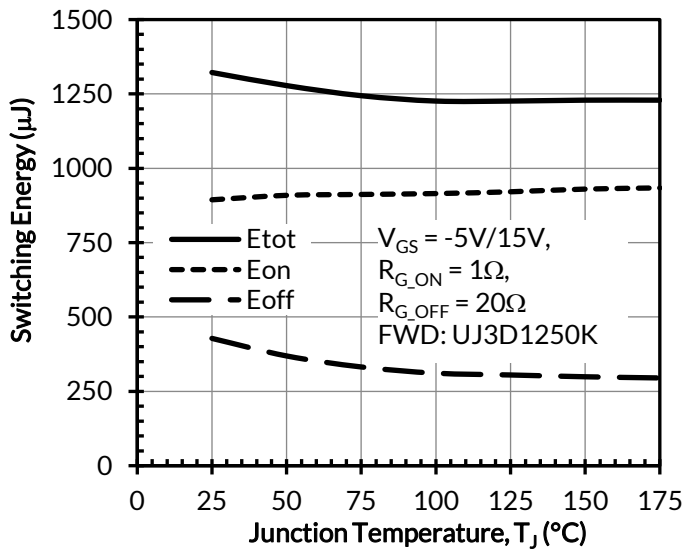


Figure 21. Clamped inductive switching energy vs. junction temperature at  $V_{DS} = 800V$  and  $I_D = 40A$

## Applications Information

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ( $R_{DS(on)}$ ), output capacitance ( $C_{oss}$ ), gate charge ( $Q_G$ ), and reverse recovery charge ( $Q_{rr}$ ) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high  $dv/dt$  and  $di/dt$  rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see [www.unitedsic.com](http://www.unitedsic.com).

## Disclaimer

UnitedSiC reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. UnitedSiC assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

UnitedSiC assumes no liability whatsoever relating to the choice, selection or use of the UnitedSiC products and services described herein.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А