


LOC	DIST	REVISIONS						
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			6	REVISED PER ECO-12-003841	14MAR2012	TY	KS	
			7	REVISED PER ECO-12-005533	05APR2012	JY	AC	
			A	REVISED PER ECR-13-019963	5NOV2013	RG	MC	
			B	REVISED PER ECO-14-016878	30EC2014	RG	MC	






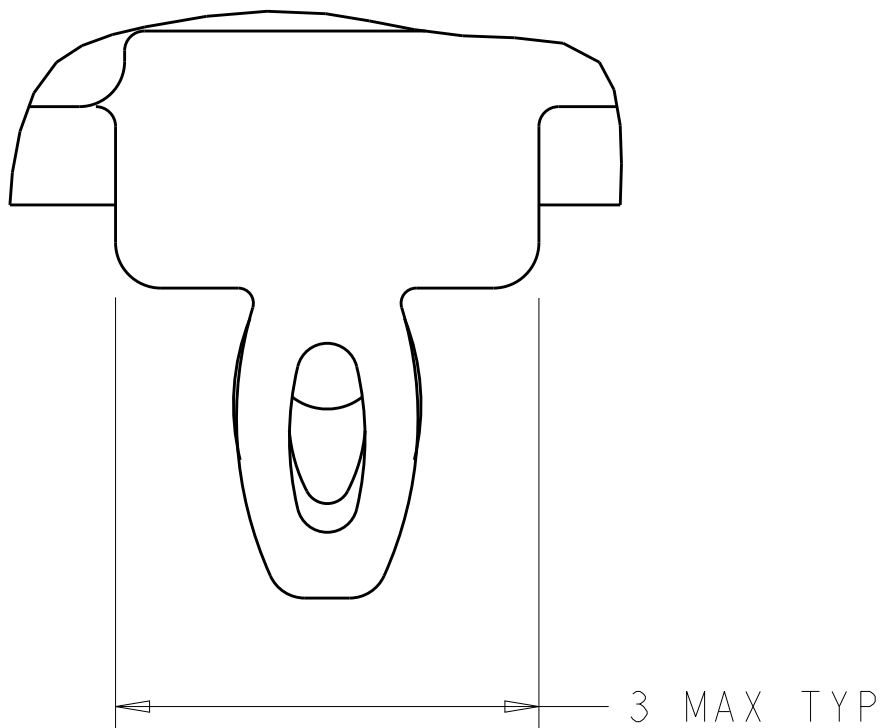


DETAIL S
SCALE 20:1

- 1 CAGE ASSEMBLY MATERIAL: NICKEL SILVER, 0.25 THICK
HEAT SINK MATERIAL: ALUMINUM
HEAT SINK CLIP MATERIAL: STAINLESS STEEL
EMI SPRING MATERIAL: COPPER ALLOY
FRONT FLANGE MATERIAL: ZINC ALLOY
LIGHT PIPE MATERIAL: CLEAR POLYCARBONATE
- 2 PITCH BETWEEN PORTS OF ONE 1X6 CAGE ASSEMBLY.
- 3 SPACING BETWEEN CAGES ON THE SAME PC BOARD, TO BE SPECIFIED BY CUSTOMER, MUST COMPLY WITH MINIMUM DIMENSIONS SHOWN.
- 4 REFERENCE APPLICATION SPEC 114-13218 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 DIMENSION F IS THE NOMINAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD,
SINGLE SIDED PC BOARD MINIMUM THICKNESS = 1.45mm
DOUBLE SIDED PC BOARD MINIMUM THICKNESS = 2.2mm PER QSFP.
- 7 HEAT SINKS, LIGHT PIPES, AND HEAT SINK CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED.
- 8 DATUM A IS TOP SURFACE OF PC BOARD.
- 9 DIMENSION APPLIES WITH MODULE INSERTED IN CAGE.
- 10 UNPLATED THRU HOLE.

- 15 REFERENCE APP SPEC 114-13218 FOR GASKET THICKNESS CALCULATION.
- 16 EMI SPRING FINISH: 2um MINIMUM TIN
FRONT FLANGE FINISH: 3um MINIMUM TIN OVER 1.27um MINIMUM NICKEL OVER 5.08um MINIMUM COPPER.
HEAT SINK FINISH: BLACK ANODIZED
- 17 HEAT SINKS AND CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED. LIGHT PIPES, SHIPPED UNATTACHED, MUST BE ASSEMBLED BY CUSTOMER AFTER THE CAGE IS SEATED IN THE PCB.
- 18 ROUND LIGHT PIPES PLEASE SEE SHEET 4/6


11. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER.
- 12 SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS, SHOWN IN DETAIL S, CONTACT PC BOARD.
- 13 BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE.
- 14 2D BARCODE AND DATE CODE (YYWWDD) MARKED ON SIDE OF CAGE ASSEMBLY.

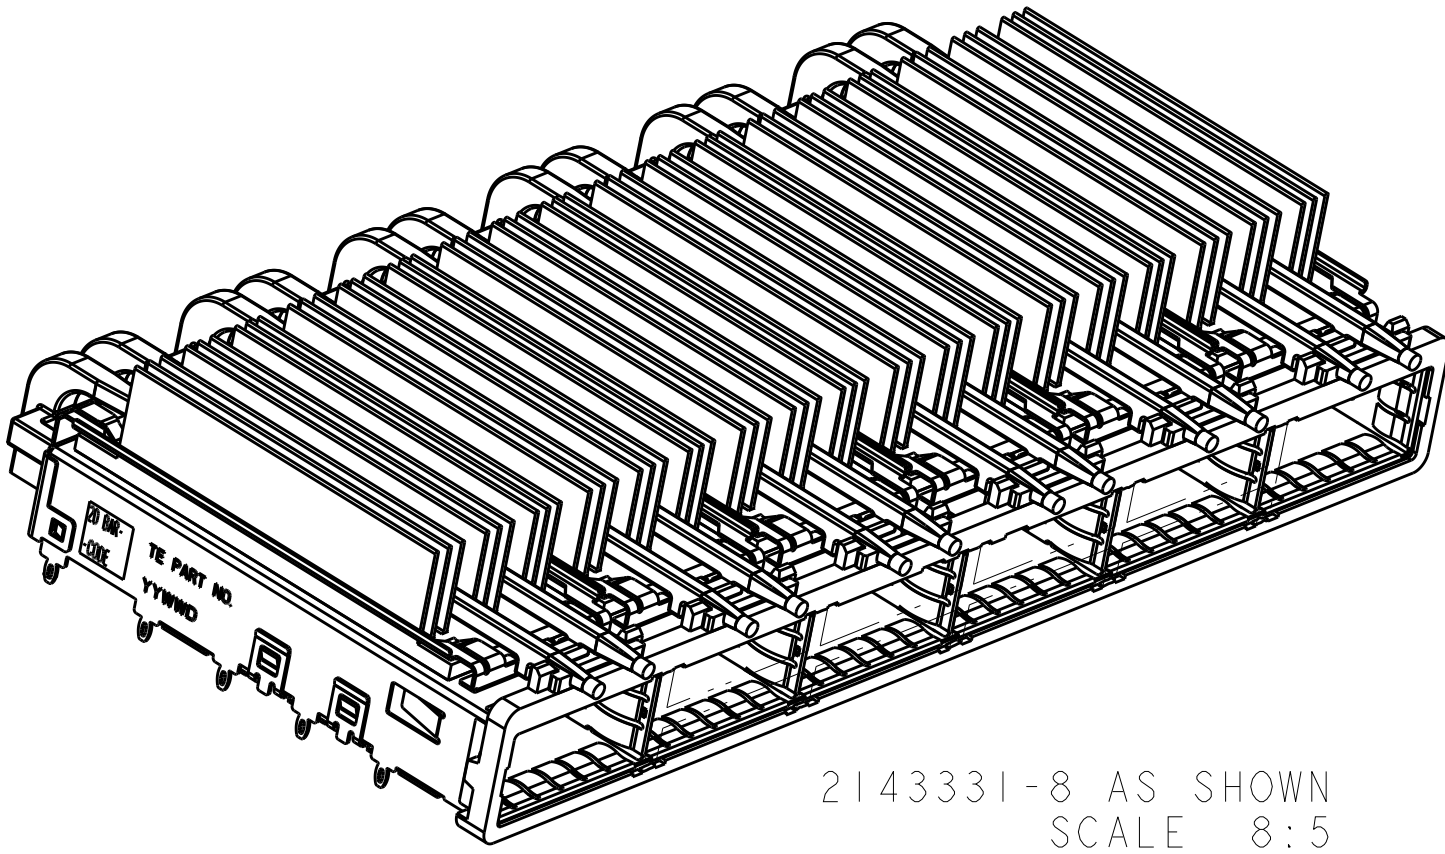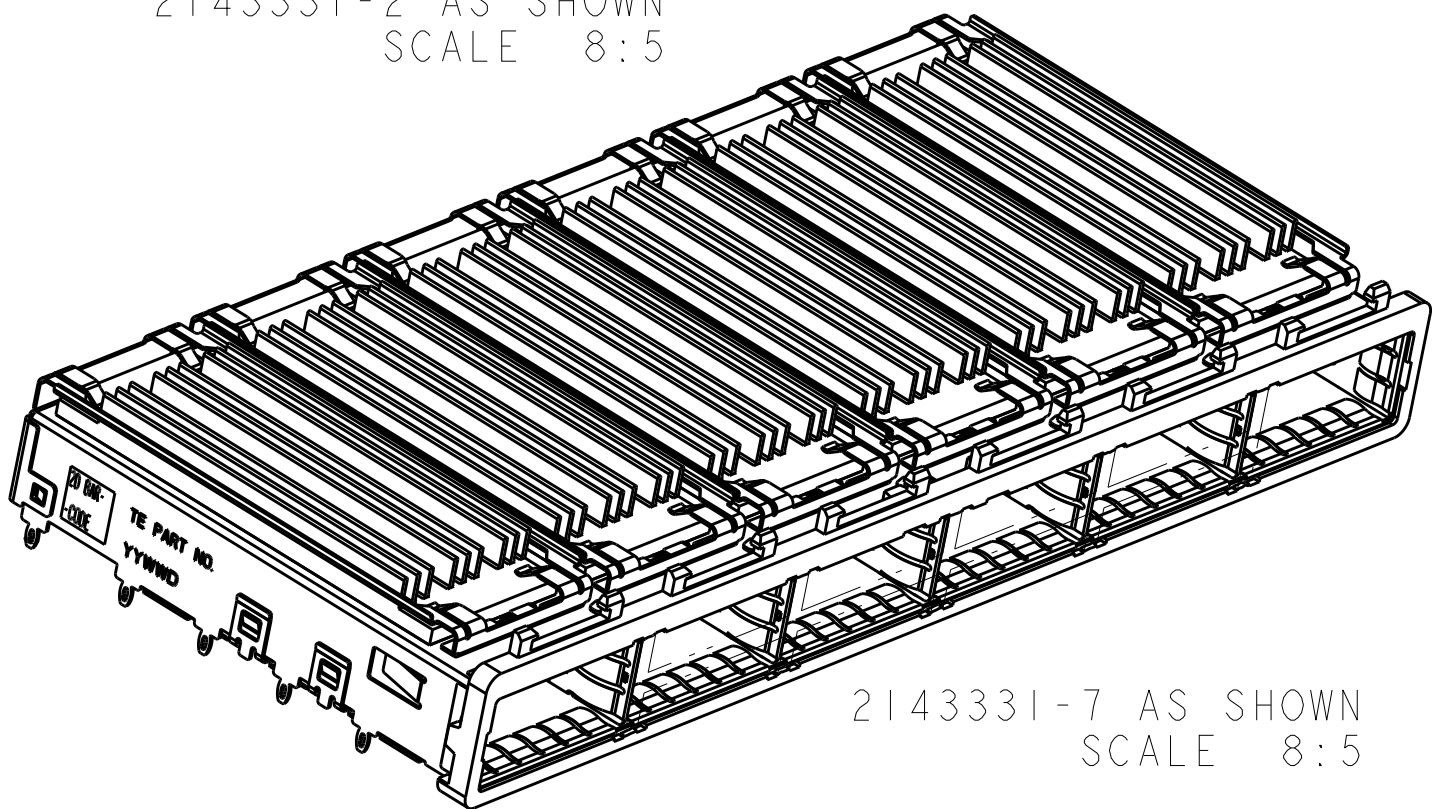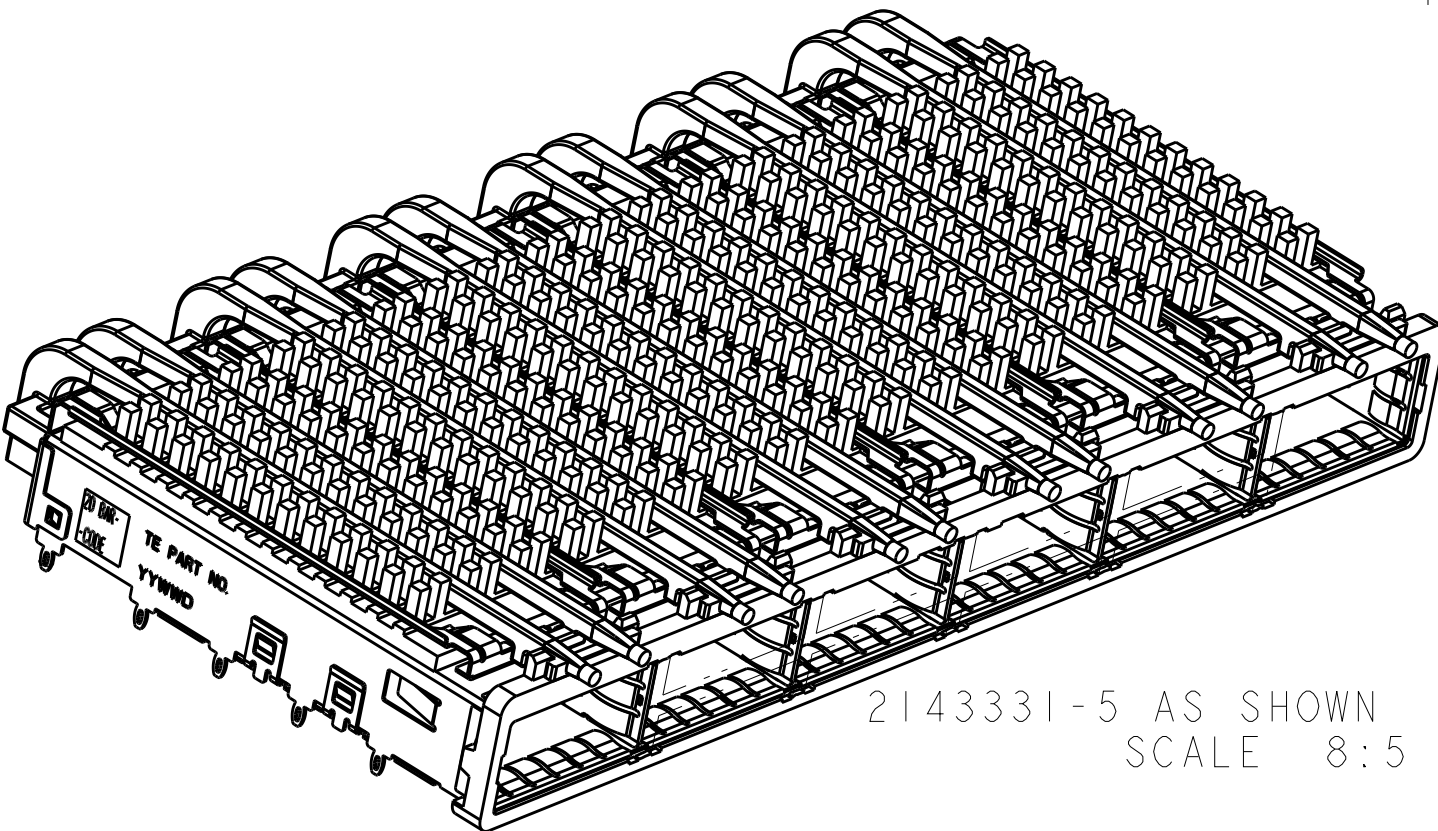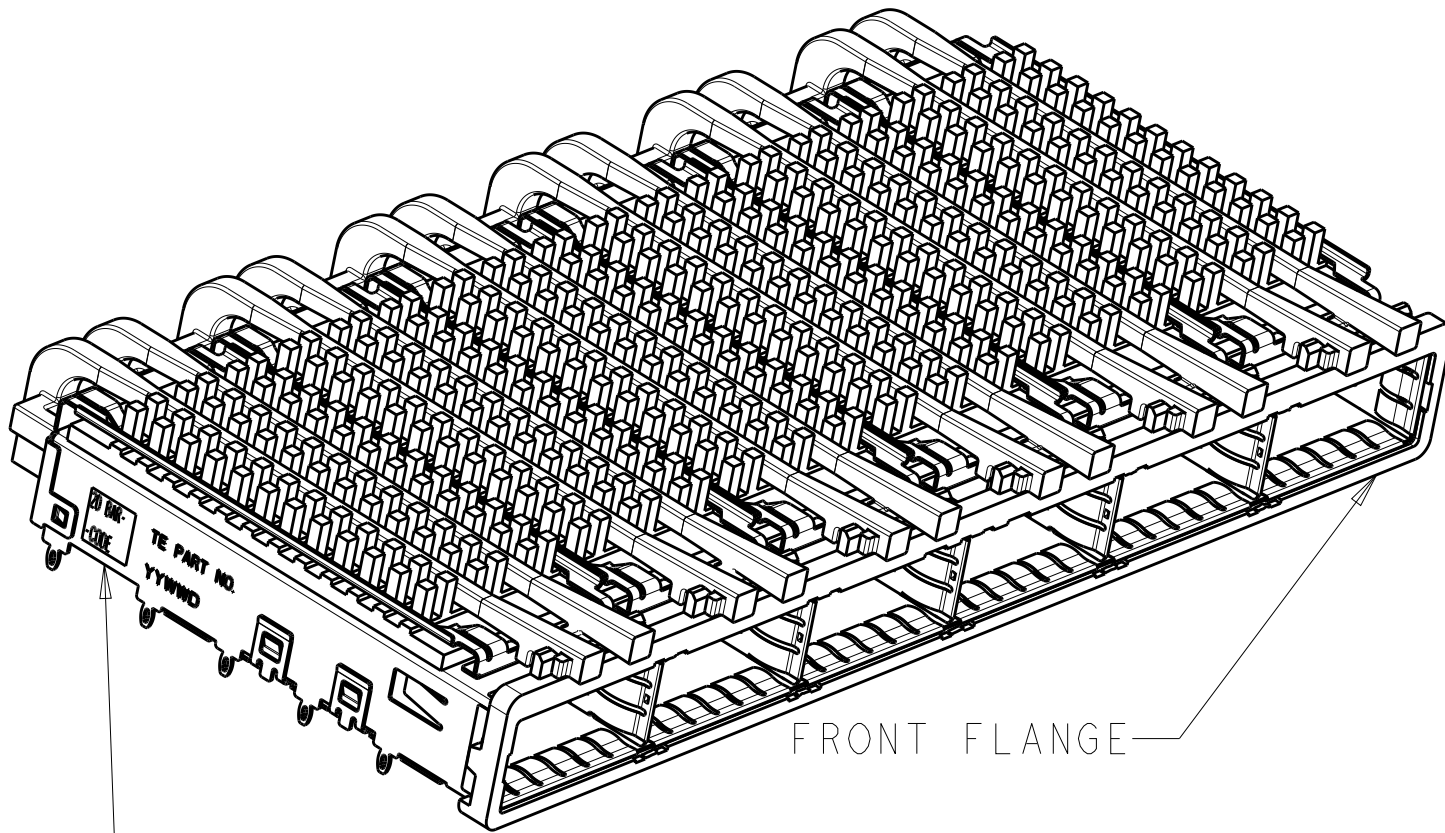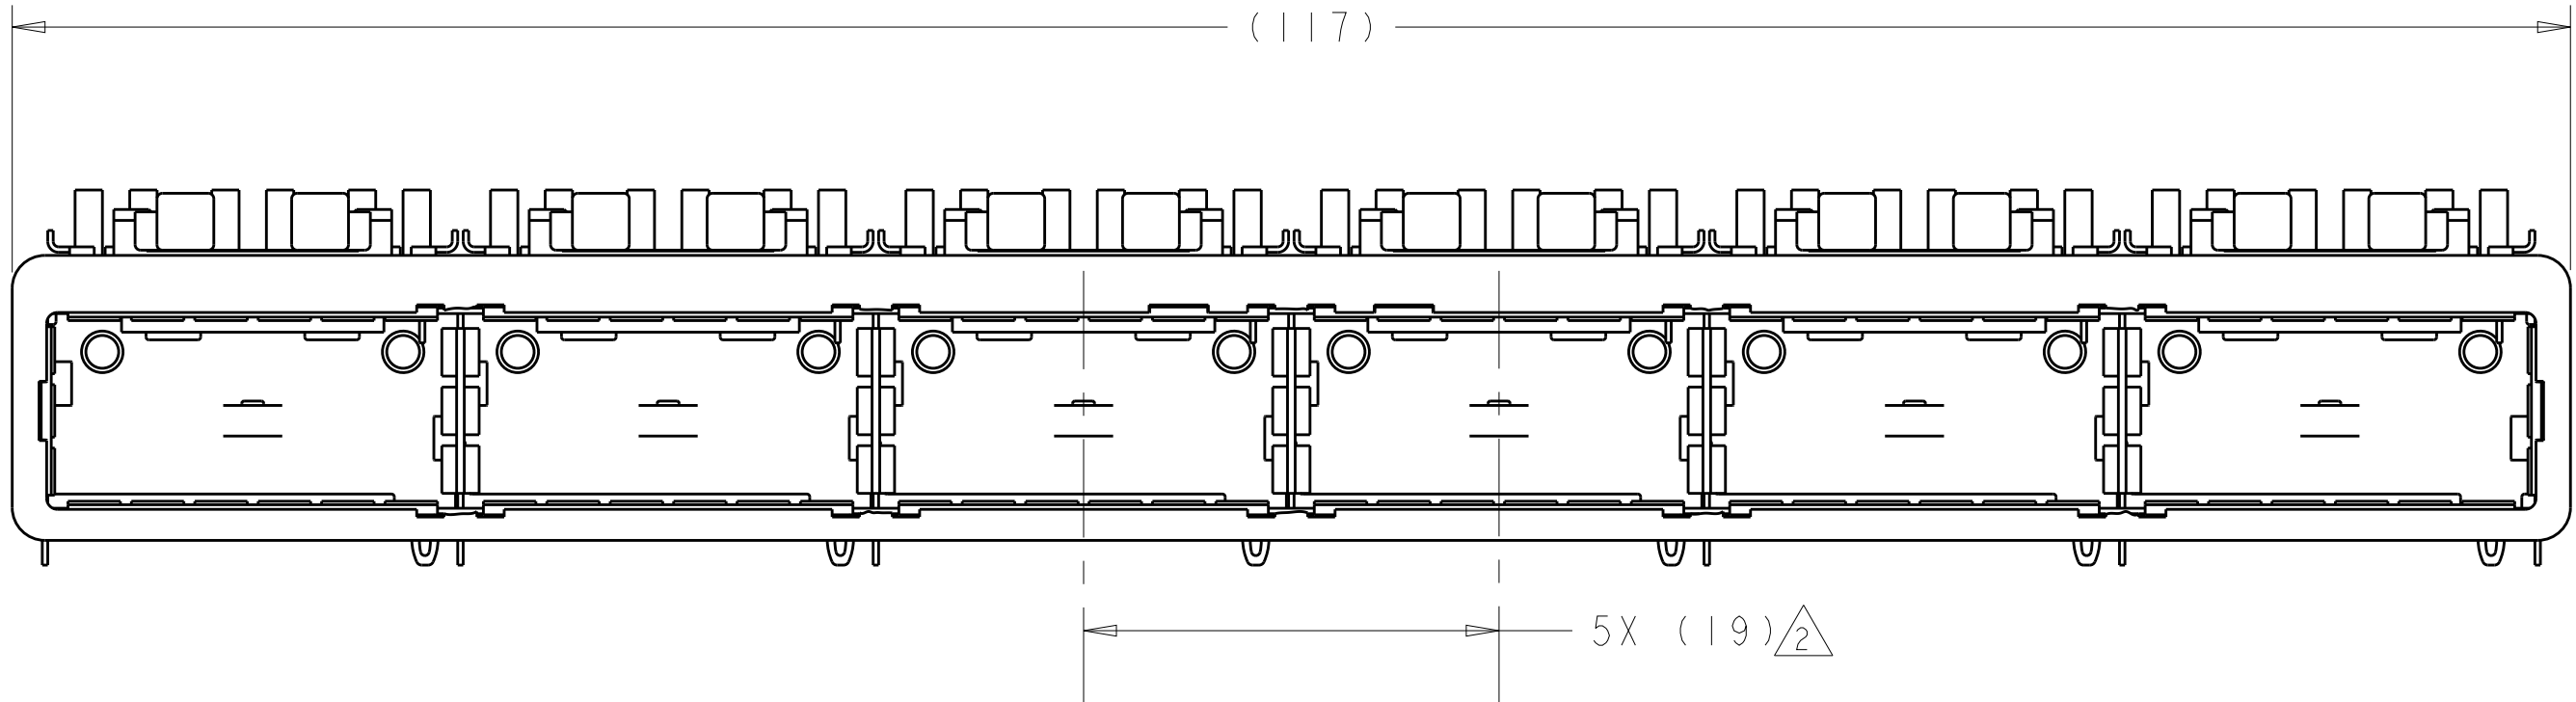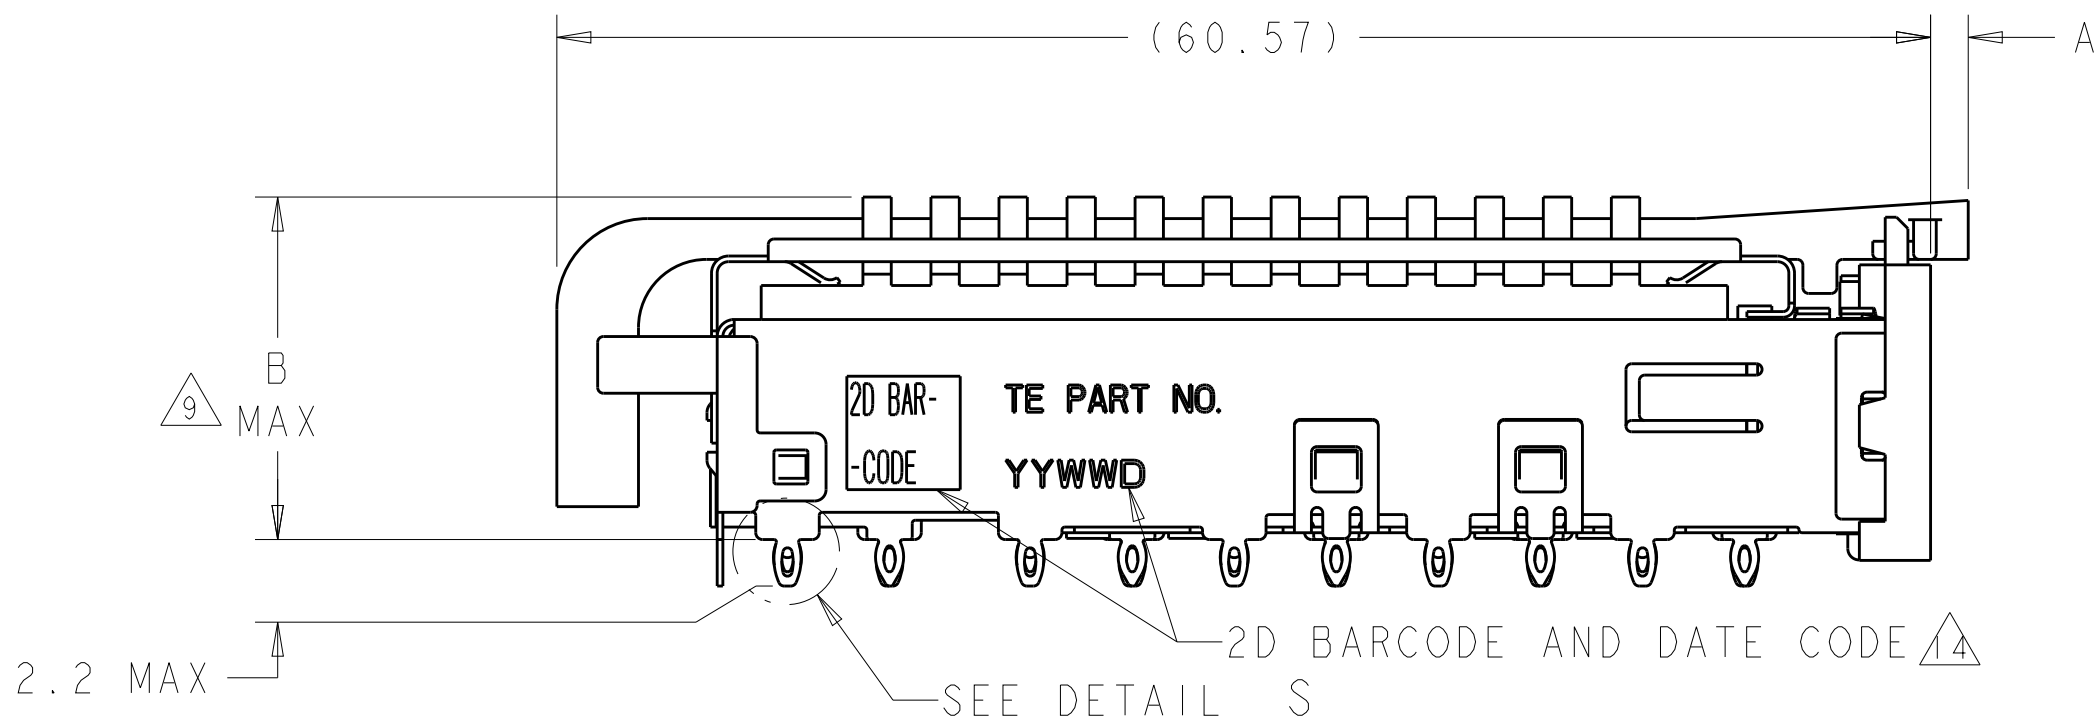

18	ROUND LIGHT PIPE	2.00	21.0	FIN TYPE	2143331-8
	N/A	N/A	15.0	FIN TYPE	2143331-7
18	ROUND LIGHT PIPES	1.66	23.0	NETWORKING	2143331-6
			16.0	SAN	2143331-5
			13.7	PCI	2143331-4
17	SQUARE LIGHT PIPES	1.66	23.0	NETWORKING	2143331-3
			16.0	SAN	2143331-2
			13.7	PCI	2143331-1
17	LIGHT PIPE TYPE	A	B	HEAT SINK PROFILE	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK J. PETERSON APVD J. PETERSON	18MAR2010 18MAR2010 18MAR2010	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.20 1 PLC ±0.20 2 PLC ±0.15 3 PLC ±. 4 PLC ±. ANGLES ±.		PRODUCT SPEC	
				APPLICATION SPEC	
MATERIAL		FINISH		SIZE	
1		16		A100779C=2143331	
		Customer Drawing		RESTRICTED TO	
		SCALE 3:1		SHEET 1 OF 6	
				REV B	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

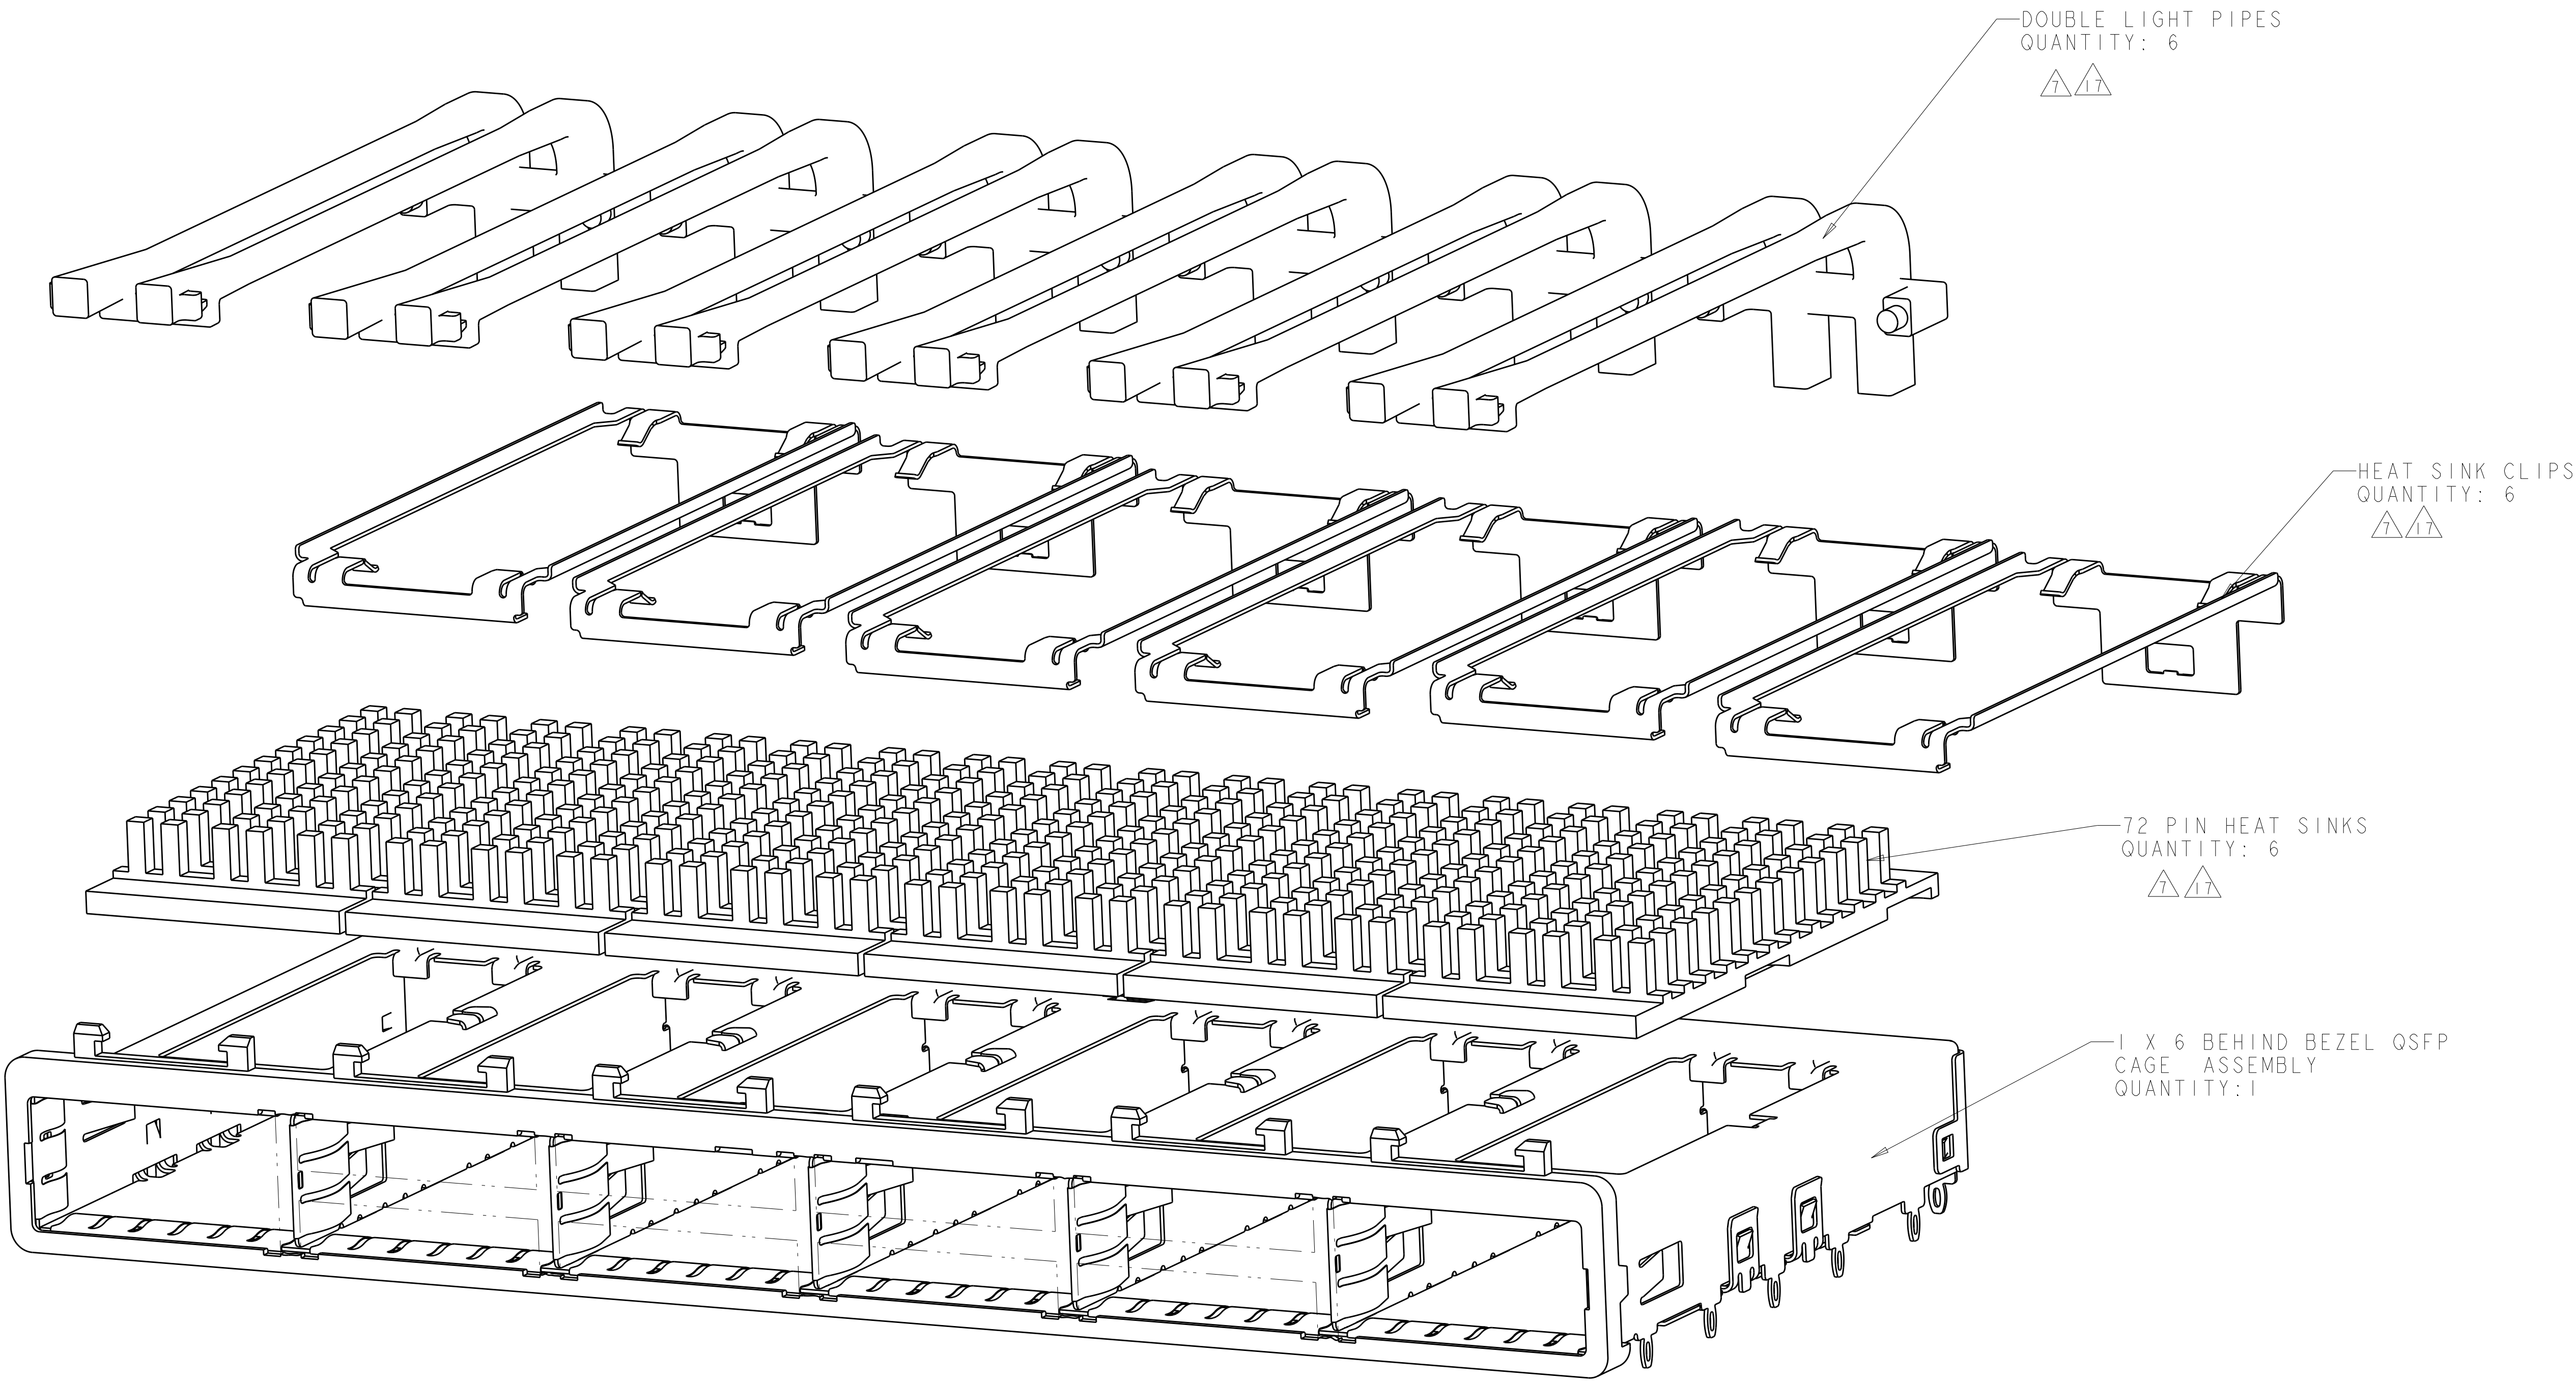


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C. VALENTINE	18MAR2010	TE Connectivity	
		CHK	J. PETERSON	18MAR2010		
		APVD	J. PETERSON	18MAR2010	NAME	
		PRODUCT SPEC			1X6 CAGE ASSEMBLY, BEHIND BEZEL,	
		APPLICATION SPEC			W/ SOR LIGHT PIPES AND HEAT SINKS,	
		WEIGHT			QSFP	
		Customer Drawing			RESTRICTED TO	
					A100779C=2143331	
					SCALE 4:1 SHEET 2 OF 6 REV B	

LOC		DIST		REVISONS			
GP		00		P	LTR	DESCRIPTION	DATE
				-	-	SEE SHEET 1	-

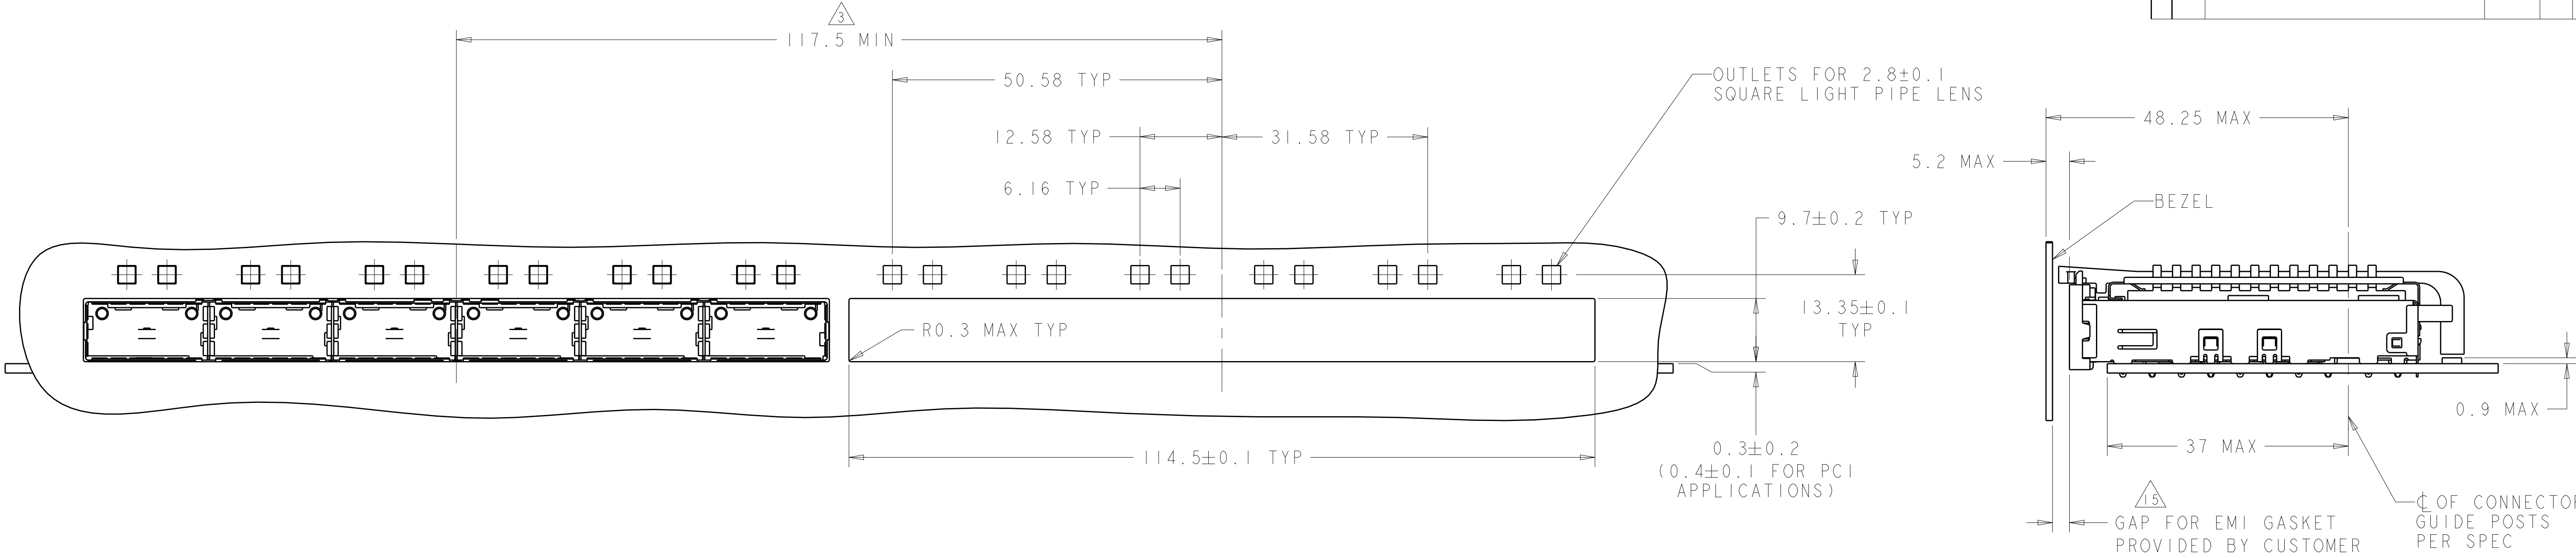



ONE SIDED CONFIGURATION
WITH SQUARE LIGHT PIPES
SCALE 2:1

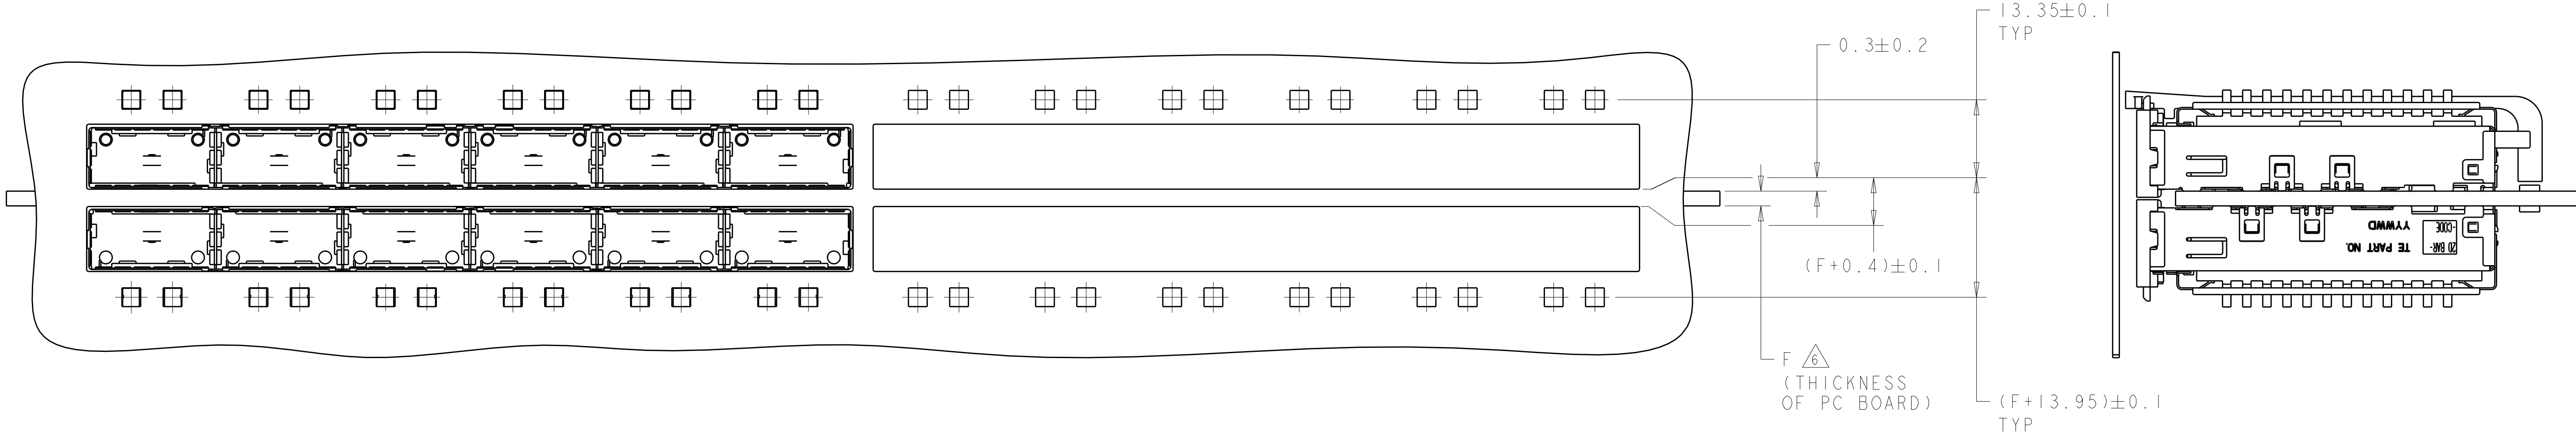



BELLY TO BELLY CONFIGURATION
WITH SQUARE LIGHT PIPES
SIMILAR TO ONE SIDED
EXCEPT WHERE NOTED
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK J. PETERSON APVD J. PETERSON	18MAR2010 18MAR2010 18MAR2010	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±.1 4 PLC ±.1 ANGLES ±.1 FINISH -		1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ SQR LIGHT PIPES AND HEAT SINKS, QSFP	
MATERIAL		PRODUCT SPEC 108-2286 APPLICATION SPEC 114-13218 WEIGHT -		SIZE CAGE CODE DRAWING NO	
		Customer Drawing		A100779C=2143331	
				RESTRICTED TO	
				SCALE 4:1 SHEET 3 OF 6 REV B	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

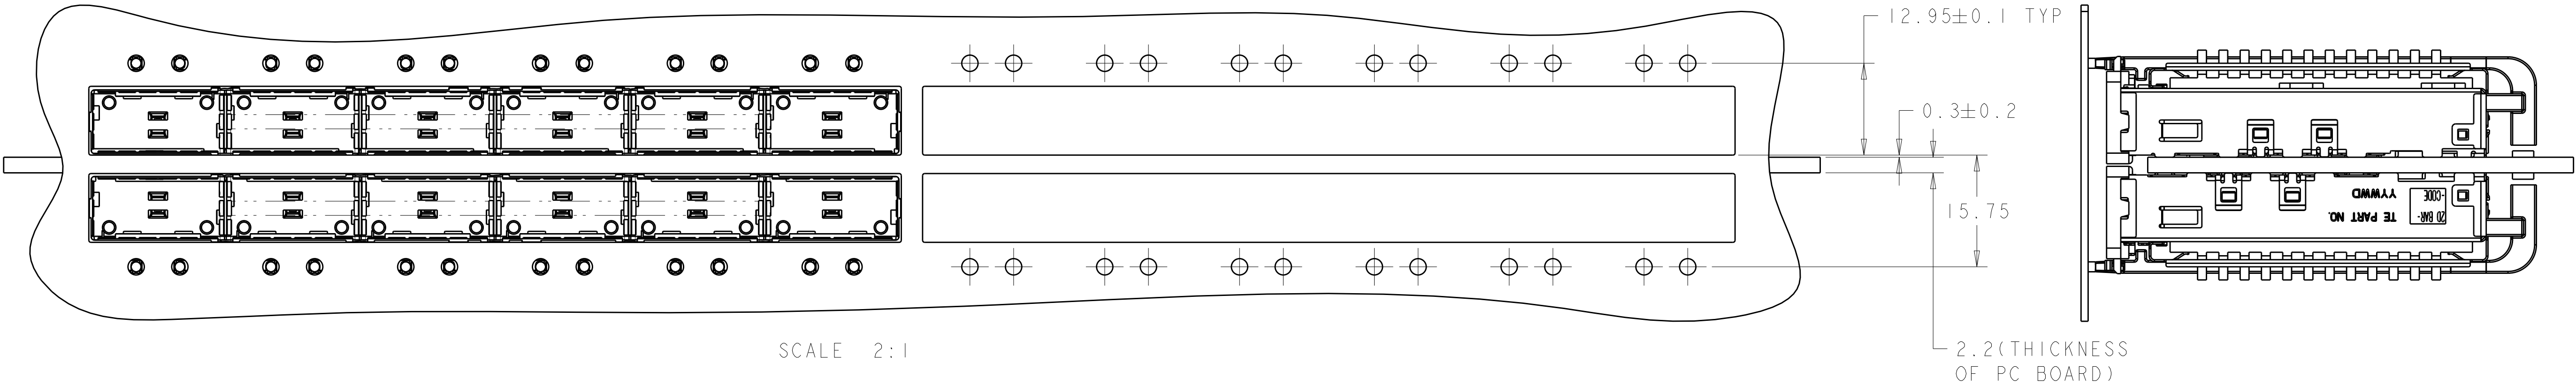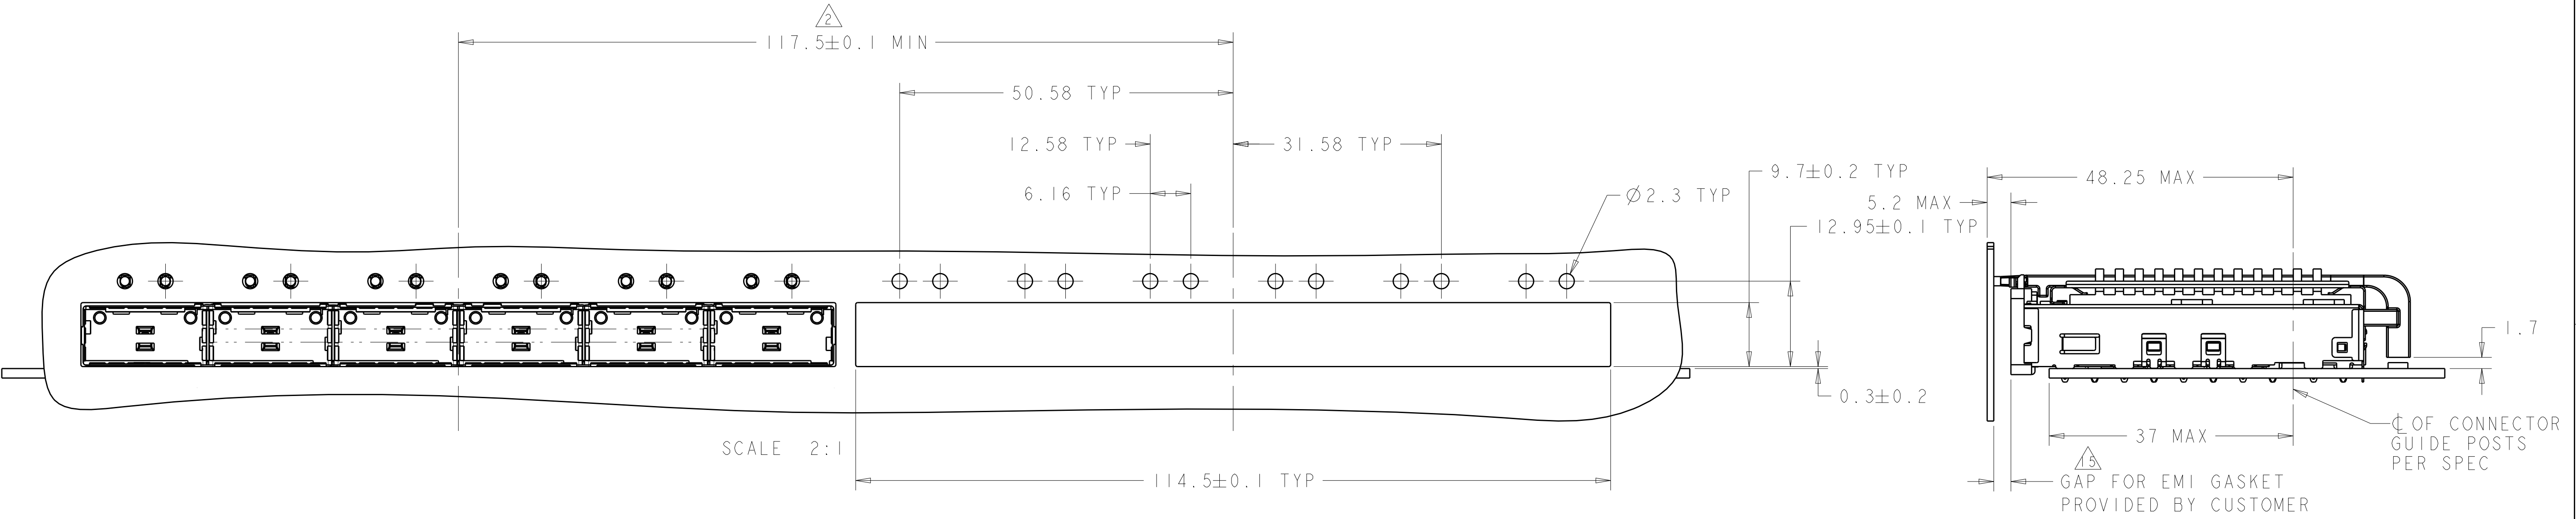

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 18MAR2010	TE Connectivity	
DIMENSIONS:		CHK J. PETERSON 18MAR2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. PETERSON 18MAR2010	NAME 1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ SOR LIGHT PIPES AND HEAT SINKS, QSFP	
	0 PLC ±.1	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
	1 PLC ±0.1	108-2286	A100779C=2143331	
	2 PLC ±.1	APPLICATION SPEC	RESTRICTED TO	
	3 PLC ±.1	114-13218		
	4 PLC ±.1	WEIGHT		
MATERIAL	FINISH	Customer Drawing	SCALE 3:1 SHEET 4 OF 6 REV B	

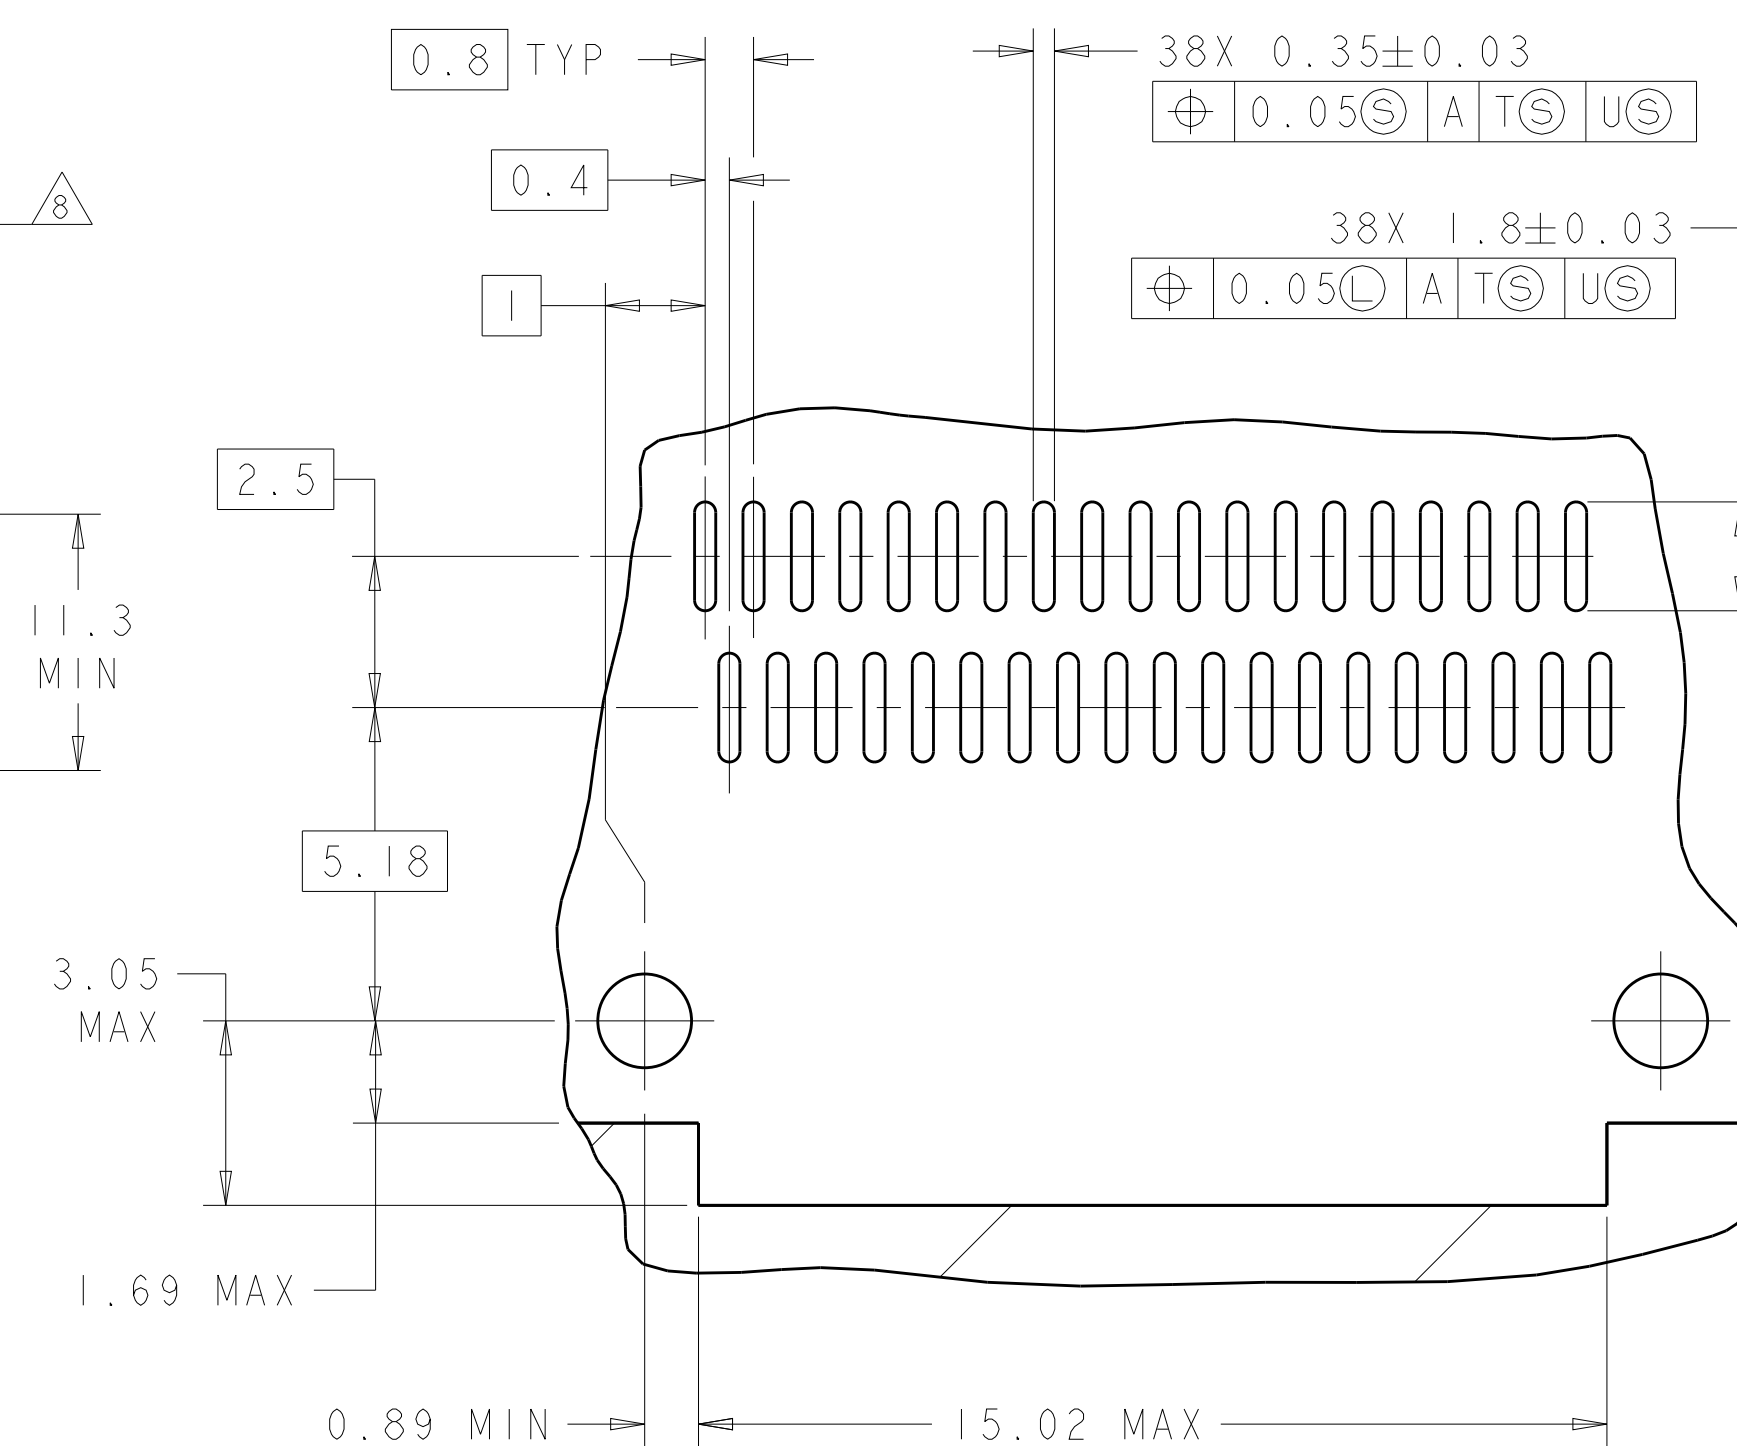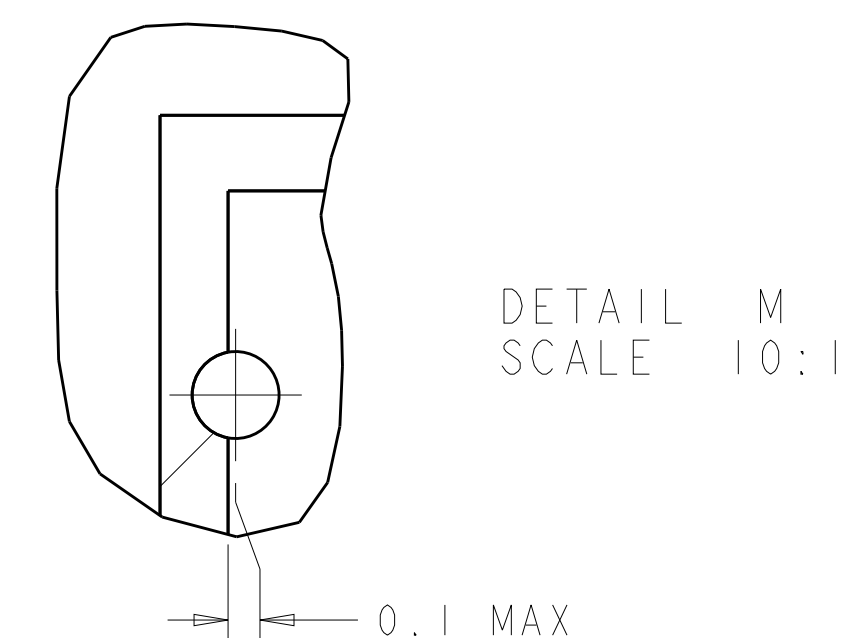


DETAIL J
6 PLACES
SCALE 8:1

RECOMMENDED PC BOARD LAYOUT
SINGLE SIDE MOUNT CONFIGURATION
SCALE 3:1

4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

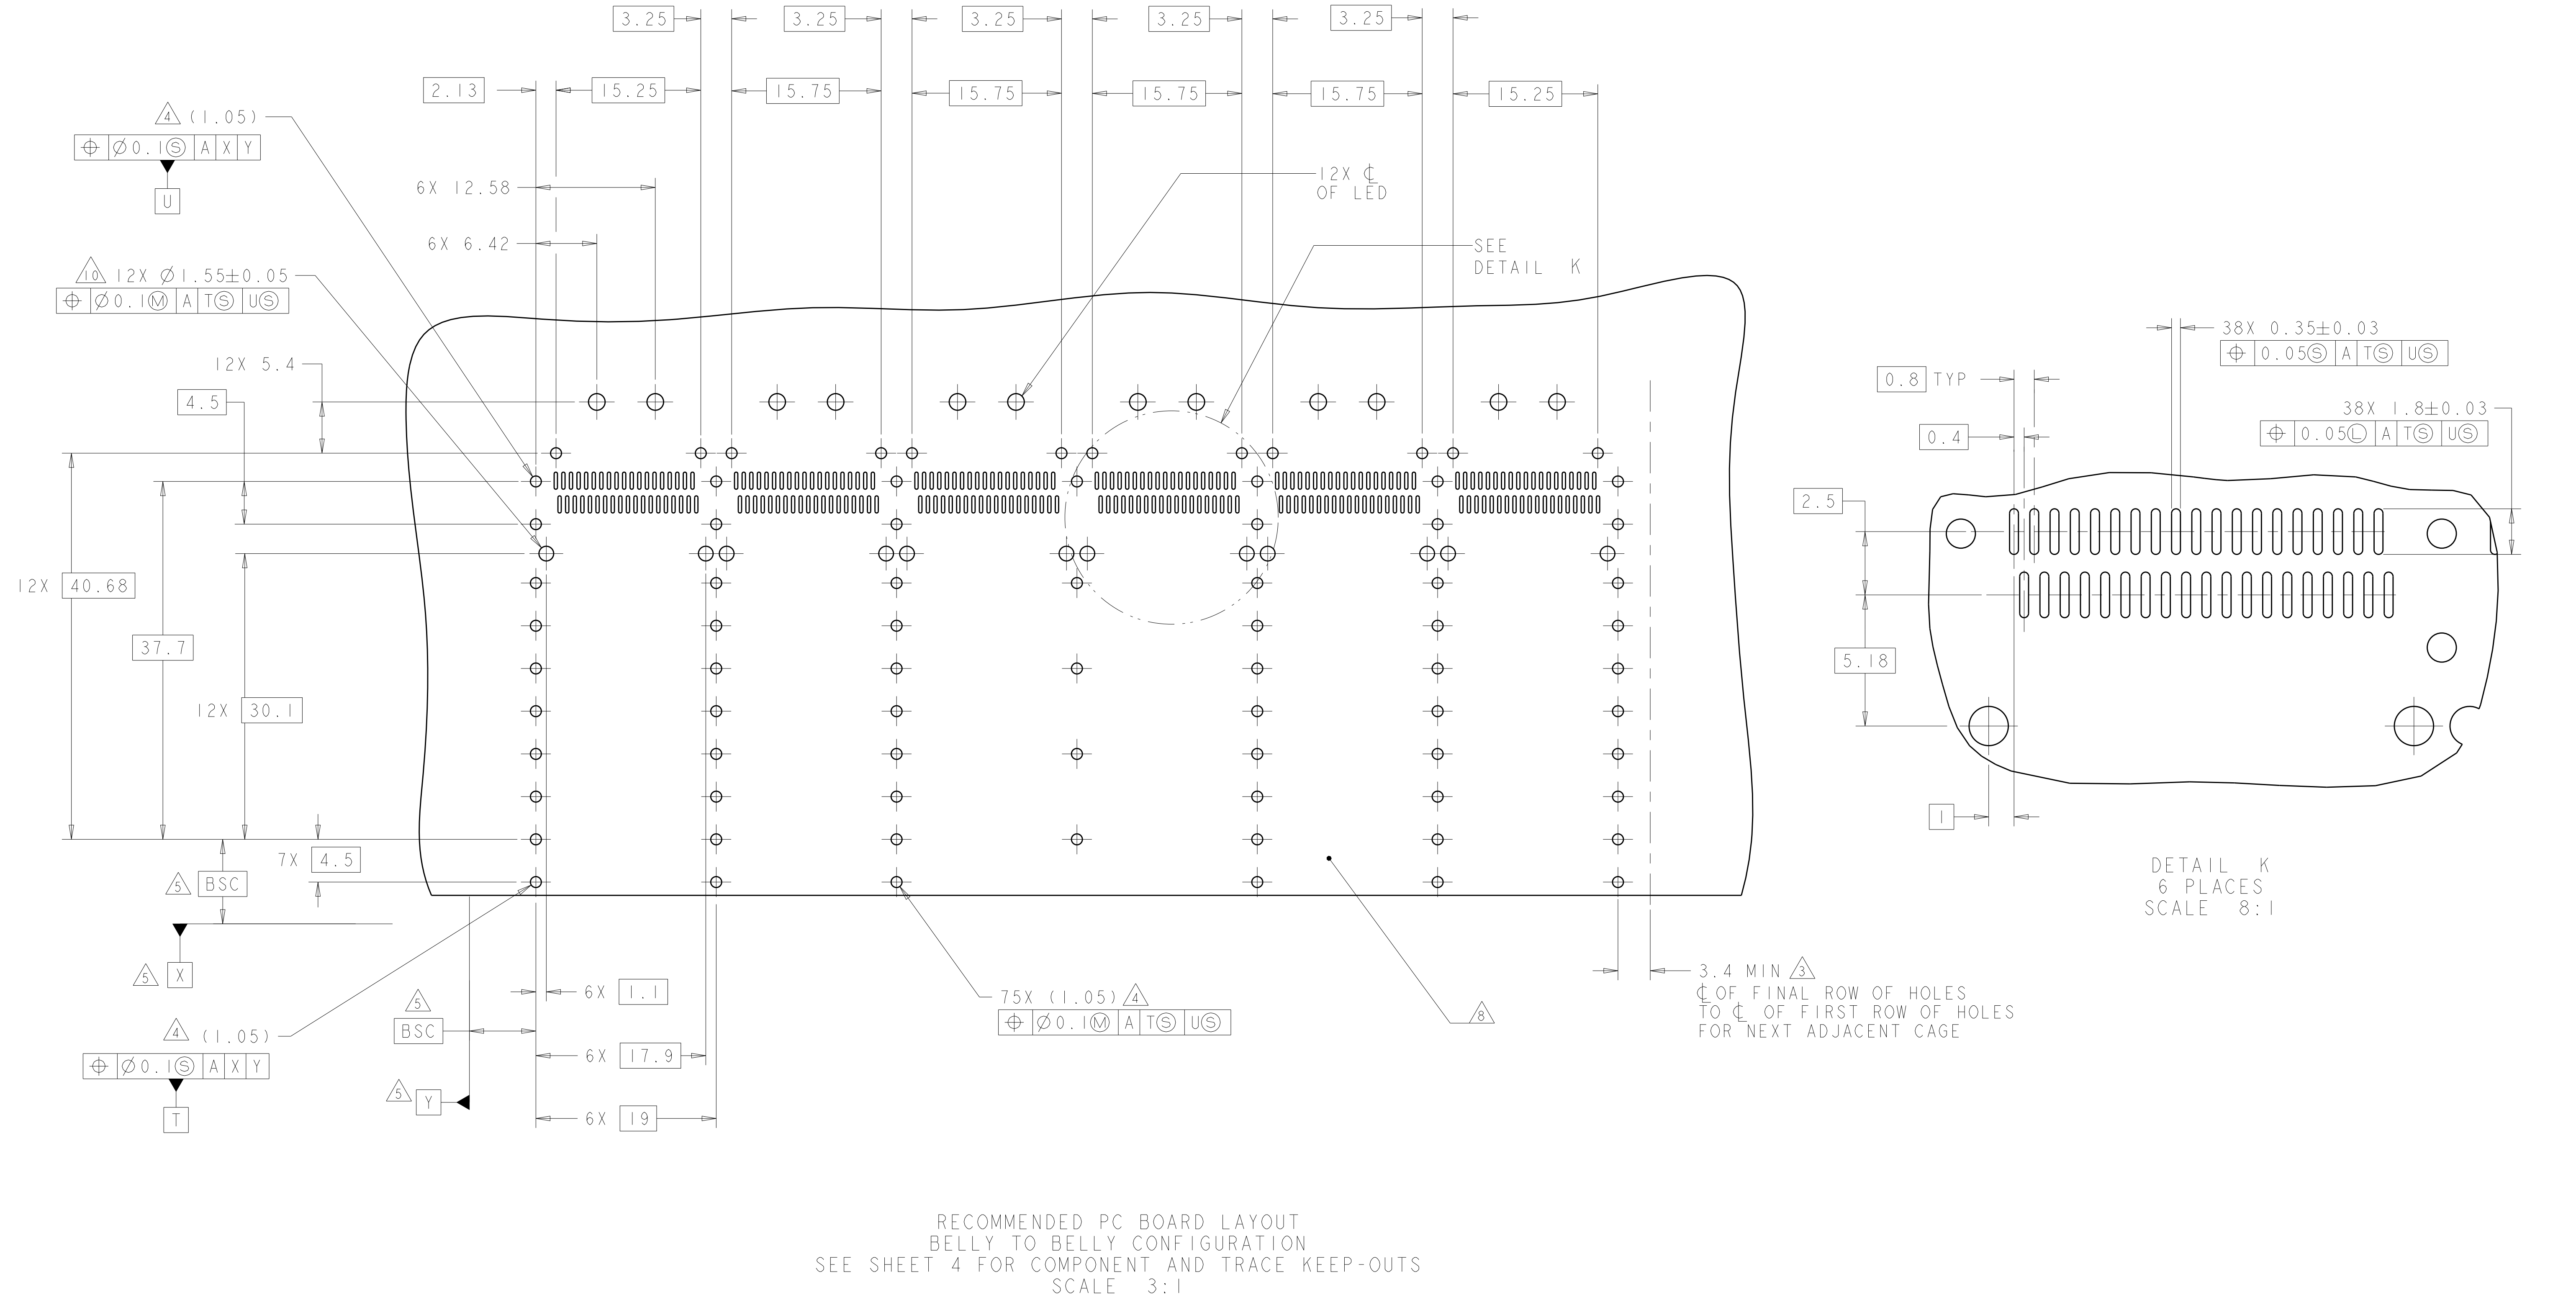

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK J. PETERSON APVD J. PETERSON	18MAR2010 8MAR2010 8MAR2010	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME IX6 CAGE ASSEMBLY, BEHIND BEZEL, W/ SOR LIGHT PIPES AND HEAT SINKS, QSFP	
		0 PLC ± 1 PLC ±0.1 2 PLC ±0.1 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-2286 APPLICATION SPEC 114-13218	
MATERIAL -		WEIGHT -		SIZE A100779C=2143331	
Customer Drawing		SCALE 4:1		SHEET 6 OF 6	
				REV B	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А