



SILEGO

An Ultra-small, Low-power 23 mΩ/4 A P-Channel Integrated Power Switch with Reverse-Current Blocking

SLG59M1649V

General Description


The SLG59M1649V is a self-powered, high-performance, 23 mΩ pFET integrated power switch designed for 1.5 to 5 V power rail applications up to 4 A. When enabled, internal reverse-current protection will quickly open the switch in the event of a reverse-voltage condition is detected (a $V_{OUT} + 50\text{mV} > V_{IN}$ condition opens the switch). Upon the detection of a reverse condition, an open-drain FAULT output is asserted. In the event the V_{IN} voltage is too low, the power switch also contains an internal UVLO threshold monitor to keep or to turn the switch OFF.

Designed to operate over a -40°C to 85°C range, the SLG59M1649V is available in a RoHS-compliant, ultra-small 1.0 x 1.6 mm STDFN package.

Features

- Steady-state Operating Current: Up to 4 A
- Low Typical $R_{DS(ON)}$:
 - 23 mΩ at $V_{IN} = 5\text{ V}$
 - 31 mΩ at $V_{IN} = 2.5\text{ V}$
 - 42 mΩ at $V_{IN} = 1.5\text{ V}$
- Operating Voltage: 1.5 V to 5.5 V
- Reverse-voltage Detection ON or OFF
- Internal Gate Drive and V_{OUT} Discharge
- Open-drain FAULT Signaling
- Operating temperature range: -40°C to 85°C
- Low θ_{JA} , 8-pin 1.0 mm x 1.6 mm STDFN Packaging
 - Pb-Free / Halogen-Free / RoHS compliant packaging


Pin Configuration

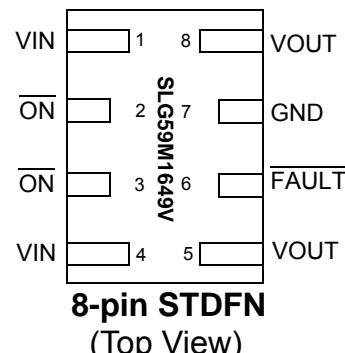

Applications

- Power-Rail Switching:
 - Notebook/Laptop/Tablet PCs
 - Smartphones/Wireless Handsets
 - High-definition Digital Cameras
 - Set-top Boxes
- Point of Sales Pins
- GPS Navigation Devices

Block Diagram

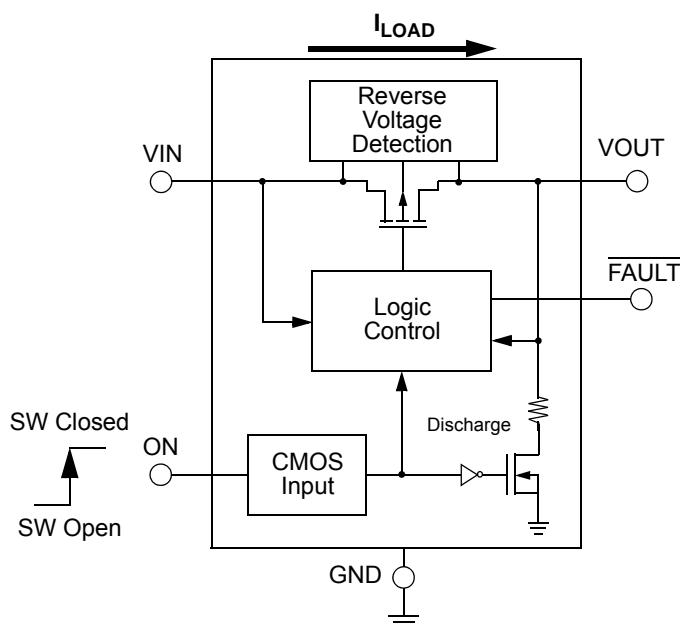

Preliminary

**SILEGO****SLG59M1649V****Pin Description**

Pin #	Pin Name	Type	Pin Description
1, 4	VIN	Power/Input	With an internal 1.2V UVLO threshold, VIN supplies the power for the operation of the power switch, the internal control circuitry, and the source terminal of pFET. Bypass the VIN pin to GND with a 2.2 μ F (or larger), low-ESR capacitor.
2, 3	ON	Input	A low-to-high transition on this pin initiates the operation of the power switch. ON is an asserted-HIGH, level-sensitive CMOS input with $V_{IL} < 0.3$ V and $V_{IH} > 1$ V. As the ON input circuitry does not have an internal pull-down resistor, connect the ON pin directly to a GPIO controller – do not allow this pin to be open circuited.
5, 8	VOUT	Output	Output and drain terminal of MOSFET.
6	FAULT	Output	An open drain output, FAULT is asserted within T_{FAULT_LOW} when a $(V_{OUT} + V_{REVERSE} > VIN)$ condition is detected. The FAULT output is deasserted within T_{FAULT_HIGH} when the fault condition is removed. Connect an external 10-k Ω resistor from the FAULT pin to the system's local logic supply.
7	GND	GND	Ground connection. Connect this pin to system analog or power ground plane.

Ordering Information

Part Number	Type	Production Flow
SLG59M1649V	STDFN	Industrial, -40 °C to 85 °C
SLG59M1649VTR	STDFN (Tape and Reel)	Industrial, -40 °C to 85 °C



SILEGO

SLG59M1649V

Absolute Maximum Ratings

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Power Supply		-0.3	--	6	V
T _S	Storage Temperature		-65	--	150	°C
ESD _{HBM}	ESD Protection	Human Body Model	2000	--	--	V
ESD _{CDM}	ESD Protection	Charged Device Model	1000	--	--	V
MSL	Moisture Sensitivity Level			1		
Θ _{JA}	Thermal Resistance	1.0 x 1.6 mm 8L STDFN	--	82	--	°C/W
T _{J,MAX}	Maximum Junction Temperature		--	150	--	°C
MOSFET IDS _{CONT}	Continuous Current from V _{IN} to V _{OUT}	Each channel, T _J < 150°C	--	--	2	A
MOSFET IDS _{PK}	Peak Current from Drain to Source	Maximum pulsed switch current, pulse width < 1 ms, 1% duty cycle	--	--	2.5	A

Note: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Electrical Characteristics1.5 V ≤ V_{IN} ≤ 5.5 V; C_{IN} = 2.2 μF, T_A = -40 °C to 85 °C, unless otherwise noted.Typical values are at T_A = 25°C (unless otherwise stated)

Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Switch Input Voltage		1.5	--	5.5	V
V _{IN(UVLO)}	VIN Undervoltage Lockout Threshold	V _{IN} ↑, V _{ON} = 0V, I _{OUT} = -100mA	--	--	1.2	V
		V _{IN} ↓, V _{ON} = 0V, R _{LOAD} = 10Ω	0.5	--	--	V
I _{IN}	Quiescent Supply Current, Both Channels	V _{IN} = 5.25V, V _{ON} = HIGH, I _{OUT} = 0 mA	--	6.6	11	μA
		V _{IN} = 1.5 V, V _{ON} = HIGH, I _{OUT} = 0 mA	--	5	8	μA
I _{IN(OFF)}	OFF Mode Supply Current, Both Channels	V _{IN} = 5.25 V, V _{ON} = LOW, R _{LOAD} = 1 MΩ	--	2	3	μA
		V _{IN} = 1.5 V, V _{ON} = LOW, R _{LOAD} = 1 MΩ	--	0.8	2	μA
RDS _{ON}	Static Drain to Source ON Resistance	T _A = 25°C, V _{IN} = 5.0 V, I _{LOAD} = -200 mA	--	23	28	mΩ
		T _A = 25°C, V _{IN} = 2.5 V, I _{LOAD} = -200 mA	--	31	38	mΩ
		T _A = 25°C, V _{IN} = 1.5 V, I _{LOAD} = -200 mA	--	42	50	mΩ
V _{REVERSE}	Reverse-current Voltage Threshold		--	50	--	mV
I _{REVERSE}	Reverse-current Leakage Current after Reverse Current Event	V _{OUT} - V _{IN} > V _{REVERSE} ; T _A = 25°C; ON = GND	--	1	--	μA
V _{ON}	ON Pin Voltage Range		0		V _{IN}	V
I _{ON(Leakage)}	ON Pin Leakage Current	1.4 V ≤ V _{ON} ≤ V _{IN} or V _{ON} = GND	--	--	1	μA
ON_V _{IH}	ON Pin Input High Voltage		1	--	V _{DD}	V
ON_V _{IL}	ON Pin Input Low Voltage		-0.3	0	0.3	V
ON _{HYS}	ON Hysteresis		--	60	--	mV

**SILEGO****SLG59M1649V****Electrical Characteristics (continued)**1.5 V ≤ V_{IN} ≤ 5.5 V; $C_{IN} = 2.2 \mu F$, $T_A = -40^\circ C$ to $85^\circ C$, unless otherwise noted.Typical values are at $T_A = 25^\circ C$ (unless otherwise stated)


Parameter	Description	Conditions	Min.	Typ.	Max.	Unit
R_{DSCHRG}	Output Discharge Resistance	$V_{IN} = 5 V$; $V_{OUT} < 0.4 V$	50	80	120	Ω
T_{REV}	Reverse-current Detect Response Delay	$V_{IN} = 5 V$	--	10	--	μs
T_{REARM}	Reverse Detect Rerarm Time		--	1.5	--	ms
T_{ON_Delay}	ON Delay Time	50% ON to 50% $V_{OUT} \uparrow$; $T_A = 25^\circ C$, $V_{IN} = 5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	180	235	μs
		50% ON to 50% $V_{OUT} \uparrow$; $T_A = 25^\circ C$, $V_{IN} = 1.5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	110	145	μs
$T_{VOUT(R)}$	VOUT Rise Time	10% to 90% $V_{OUT} \uparrow$; $T_A = 25^\circ C$, $V_{IN} = 5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	130	170	μs
		10% to 90% $V_{OUT} \uparrow$; $T_A = 25^\circ C$, $V_{IN} = 1.5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	66	86	μs
$T_{VOUT(F)}$	VOUT Fall Time	90% to 10% $V_{OUT} \downarrow$; $T_A = 25^\circ C$, $V_{IN} = 5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	2.2	3.6	μs
		90% to 10% $V_{OUT} \downarrow$; $T_A = 25^\circ C$, $V_{IN} = 1.5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	2.2	3.6	μs
T_{OFF_Delay}	OFF Delay Time	50% ON to 50% $V_{OUT} \downarrow$; $T_A = 25^\circ C$, $V_{IN} = 5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	3.5	5	μs
		50% ON to 50% $V_{OUT} \downarrow$; $T_A = 25^\circ C$, $V_{IN} = 1.5 V$; $R_{LOAD} = 10 \Omega$, $C_{LOAD} = 0.1 \mu F$	--	5	7	μs
T_{FAULT_LOW}	FAULT Assertion Time	Reverse-voltage Detection to $FAULT \downarrow$; $1.5 V \leq V_{IN} \leq 5 V$; ON = Low	--	2	--	μs
		$1.5 V \leq V_{IN} \leq 5 V$; ON = High	--	0.5	--	μs
T_{FAULT_HIGH}	FAULT De-assertion Time	Delay to $FAULT \uparrow$ after fault condition is removed; $1.5 V \leq V_{IN} \leq 5 V$; ON = Low	--	7	--	ms
		$1.5 V \leq V_{IN} \leq 5 V$; ON = High	--	2	--	ms
$FAULT_{VOL}$	FAULT Output Low Voltage	$I_{FAULT} = 1 mA$	--	--	0.2	V



SILEGO

SLG59M1649V

T_{Total_ON}, T_{ON_Delay} and Slew Rate Measurement

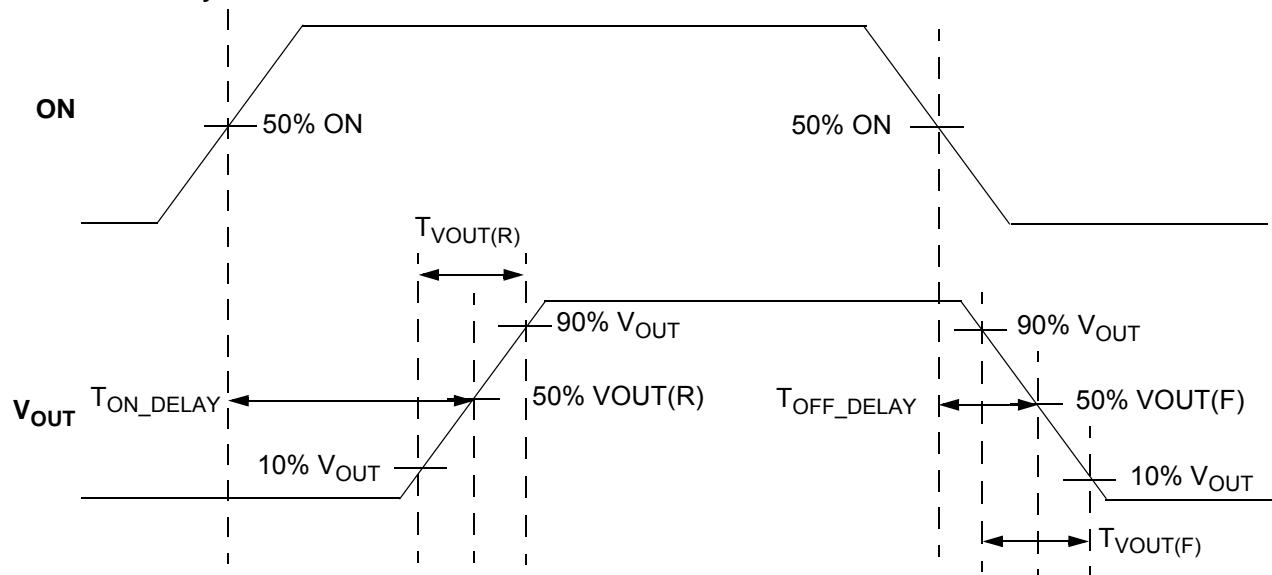





SILEGO

SLG59M1649V

RDS_{ON} vs. V_{IN} and Temperature

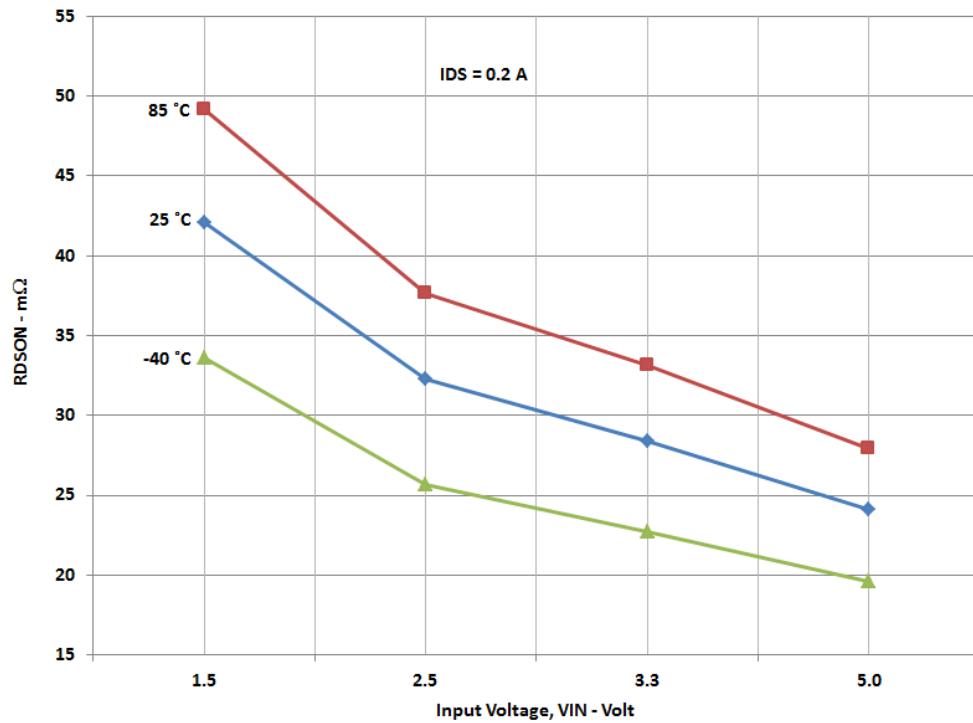

RDS_{ON} vs. Temperature and V_{IN}

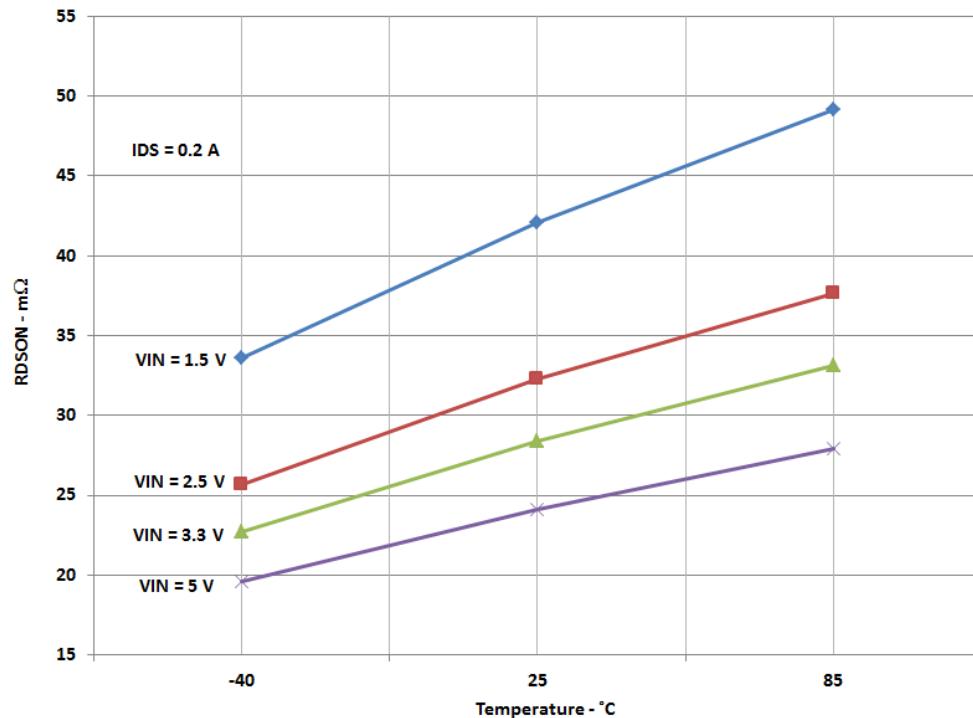



VIN Inrush Current Details

When the SLG59M1649V is enabled with ON ↑, the power switch closes to charge the VOUT output capacitor to VIN. The charging current drawn from VIN is commonly referred to as “VIN inrush current” and can cause the input power source to collapse if the VIN inrush current is too high.

Since the VOUT rise time of the SLG59M1649V is fixed, VIN inrush current is then a function of the output capacitance at VOUT. The expression relating VIN inrush current, the SLG59M1649V VOUT rise time, and COUT is:

$$\text{VIN Inrush Current} = \text{COUT} \times \frac{\Delta\text{VOUT}}{\text{VOUT Rise Time}}$$

where in this expression ΔVOUT is equivalent to VIN if the initial SLG59M1649V's output voltages are zero.

In the table below are examples of VIN inrush currents assuming zero initial charge on COUT as a function of VIN.

VIN	VOUT Rise Time	COUT	Inrush Current
1.5 V	66 μs	0.1 μF	2.3 mA
5 V	130 μs	0.1 μF	3.8 mA

Since the relationship is linear and if COUT were increased to 1 μF, then the VIN inrush currents would be 10x higher in either example. If a large COUT capacitor is required in the application and depending upon the strength of the input power source, it may very well be necessary to increase the CIN-to-COUT ratio to minimize VIN droop during turn-on.

For other VOUT rise time options, please contact Silego for additional information.

Power Dissipation

The junction temperature of the SLG59M1649V depends on factors such as board layout, ambient temperature, external air flow over the package, load current, and the RDS_{ON}-generated voltage drop across each power MOSFET. While the primary contributor to the increase in the junction temperature of the SLG59M1649V is the power dissipation of its power MOSFETs, its power dissipation and the junction temperature in nominal operating mode can be calculated using the following equations:

$$PD_{\text{TOTAL}} = RDS_{\text{ON}} \times I_{\text{OUT}}^2$$

where:

PD_{TOTAL} = Total package power dissipation, in Watts (W)

RDS_{ON} = Power MOSFET ON resistance, in Ohms (Ω)

I_{OUT} = Output current, in Amps (A)

and

$$T_J = PD_{\text{TOTAL}} \times \Theta_{JA} + T_A$$

where:

T_J = Die junction temperature, in Celsius degrees (°C)

Θ_{JA} = Package thermal resistance, in Celsius degrees per Watt (°C/W) – highly dependent on pcb layout

T_A = Ambient temperature, in Celsius degrees (°C)

**SILEGO****SLG59M1649V**

Power Dissipation (continued)

In nominal operating mode, the SLG59M1649V's power dissipation can also be calculated by taking into account the voltage drop across each switch ($V_{IN}-V_{OUT}$) and the magnitude of that channel's output current (I_{OUT}):

$$PD_{TOTAL} = (V_{IN}-V_{OUT}) \times I_{OUT} \text{ or}$$

$$PD_{TOTAL} = (V_{IN} - (R_{LOAD} \times I_{OUT})) \times I_{OUT}$$

where:

PD_{TOTAL} = Total package power dissipation, in Watts (W)


V_{IN} = Input Voltage, in Volts (V)

R_{LOAD} = Output Load Resistance, in Ohms (Ω)

I_{OUT} = Output current, in Amps (A)

V_{OUT} = Output voltage, or $R_{LOAD} \times I_{OUT}$

Power Dissipation Derating Curve

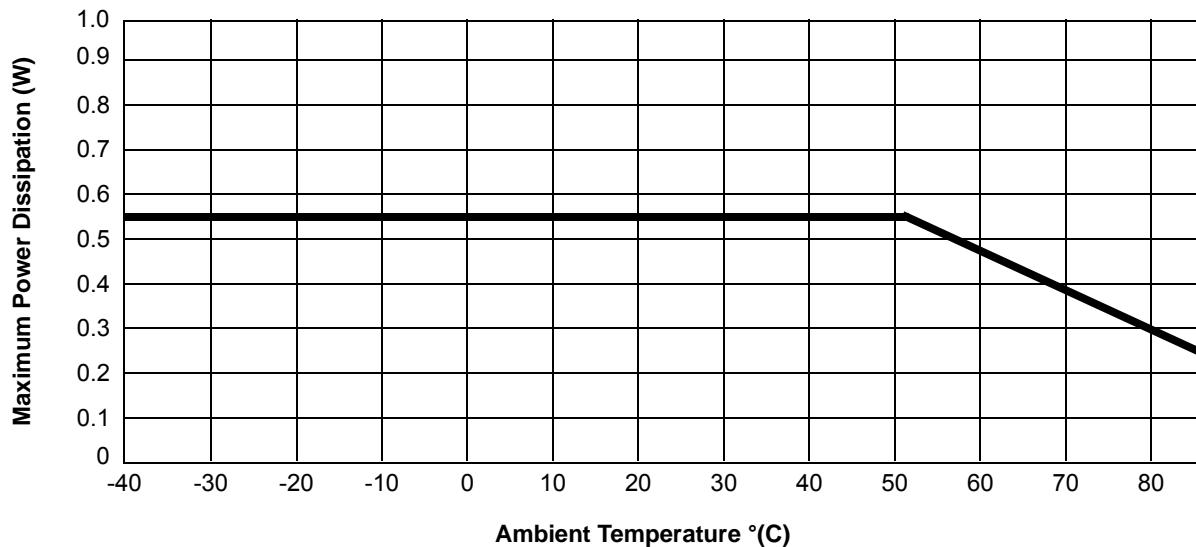

Note: Each V_{IN} , V_{OUT} = 1 in² 1.2 oz. copper on FR4



SILEGO

SLG59M1649V


SLG59M1649V Layout Suggestion



Exposed Pad
(PKG face down)




Recommended Land Pattern
(PKG face down)

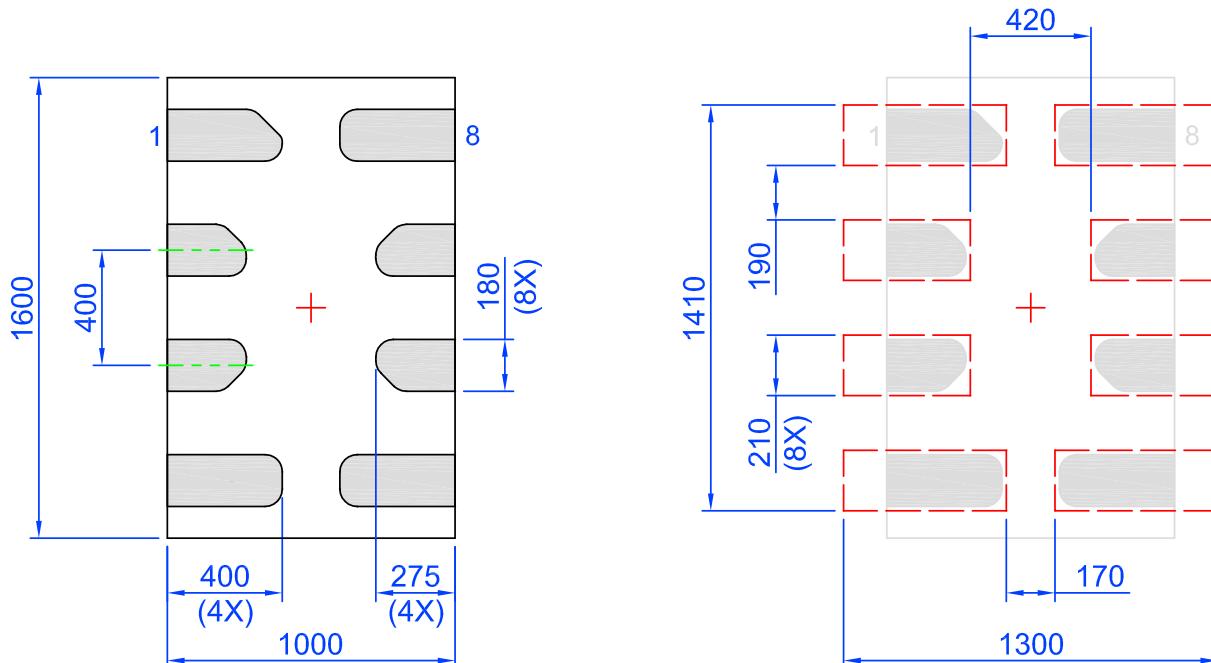

Note: All dimensions shown in micrometers (μm)

Recommended PCB Layout for external power traces

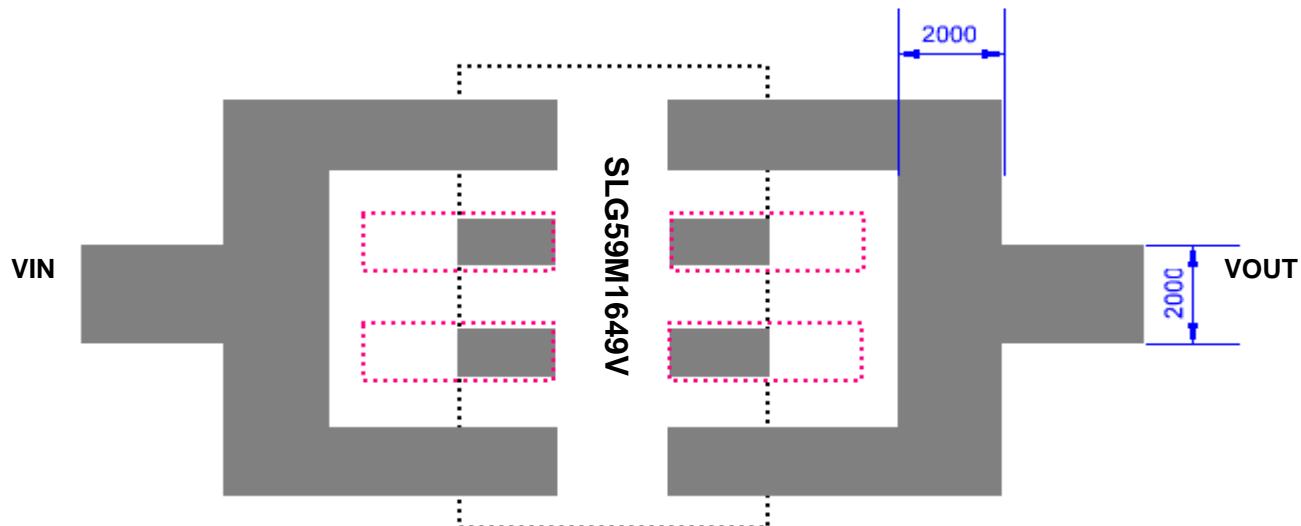


Note: All dimensions shown in μm (micrometers)



SILEGO

SLG59M1649V

Package Top Marking System Definition

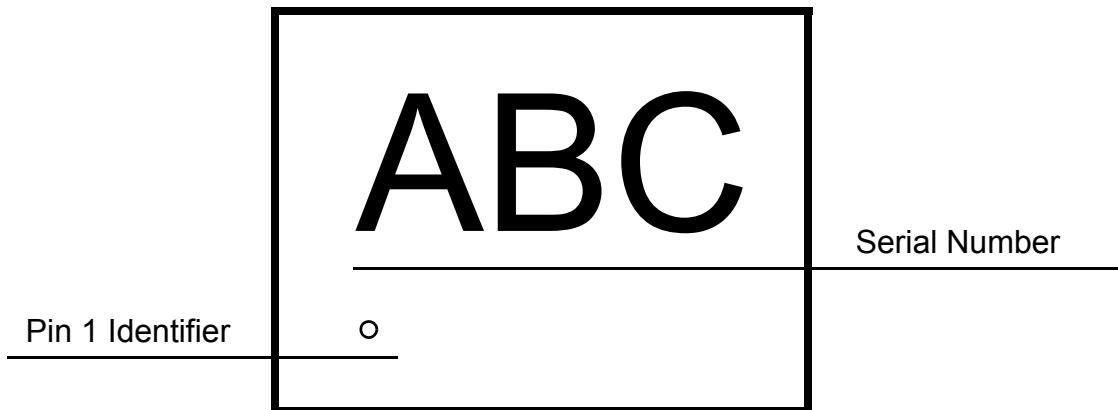

ABC - 3 alphanumeric Part Serial Number
where A, B, or C can be A-Z and 0-9




SILEGO

SLG59M1649V

Package Drawing and Dimensions

8 Lead STDFN Package 1.0 x 1.6 mm

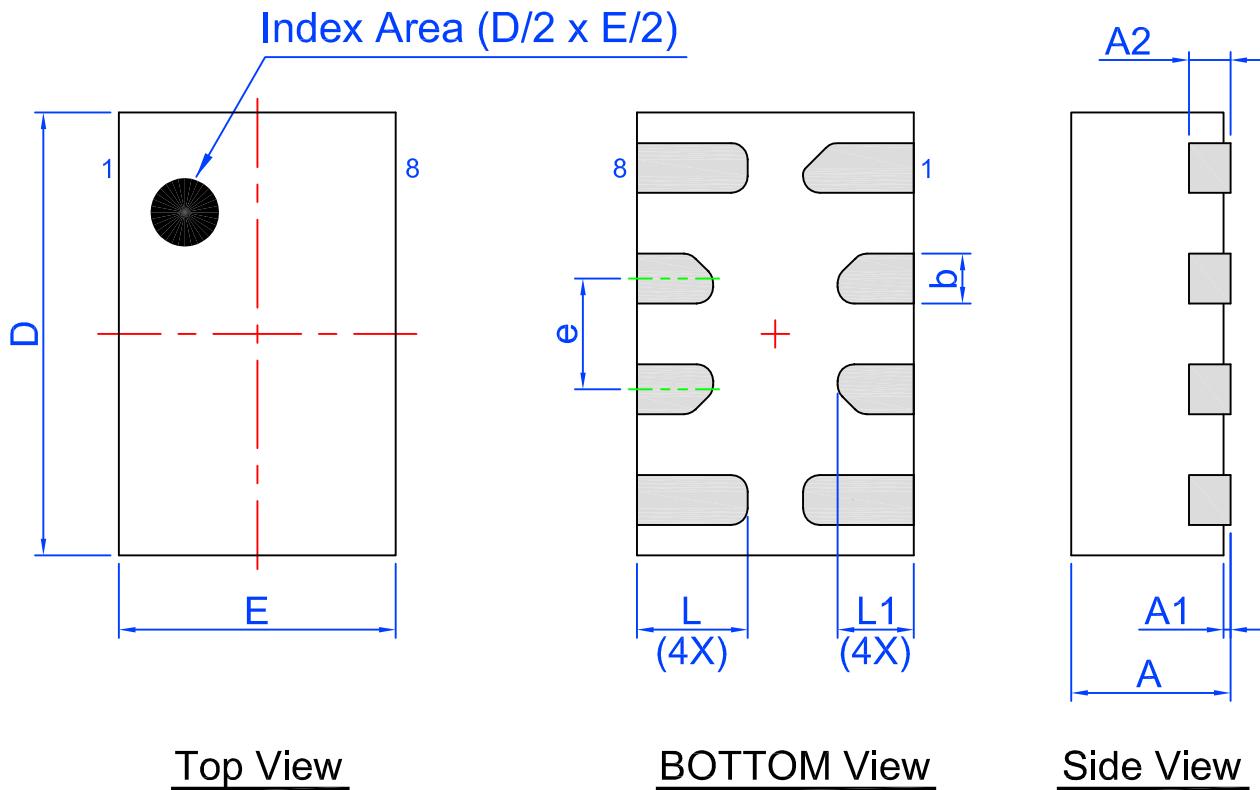

Top View

BOTTOM View

Side View

Unit: mm

Symbol	Min	Nom.	Max	Symbol	Min	Nom.	Max
A	0.50	0.55	0.60	D	1.55	1.60	1.65
A1	0.005	-	0.050	E	0.95	1.00	1.05
A2	0.10	0.15	0.20	L	0.35	0.40	0.45
b	0.13	0.18	0.23	L1	0.225	0.275	0.325
e	0.40 BSC						



SILEGO


SLG59M1649V

Tape and Reel Specifications

Package Type	# of Pins	Nominal Package Size [mm]	Max Units		Reel & Hub Size [mm]	Leader (min)		Trailer (min)		Tape Width [mm]	Part Pitch [mm]
			per Reel	per Box		Pockets	Length [mm]	Pockets	Length [mm]		
STDFN 8L 1x1.6mm 0.4P FCD Green	8	1.0 x 1.6 x 0.55	3,000	3,000	178 / 60	100	400	100	400	8	4

Carrier Tape Drawing and Dimensions

Package Type	Pocket BTM Length	Pocket BTM Width	Pocket Depth	Index Hole Pitch	Pocket Pitch	Index Hole Diameter	Index Hole to Tape Edge	Index Hole to Pocket Center	Tape Width
	A0	B0	K0	P0	P1	D0	E	F	W
STDFN 8L 1x1.6mm 0.4P FCD Green	1.12	1.72	0.7	4	4	1.55	1.75	3.5	8

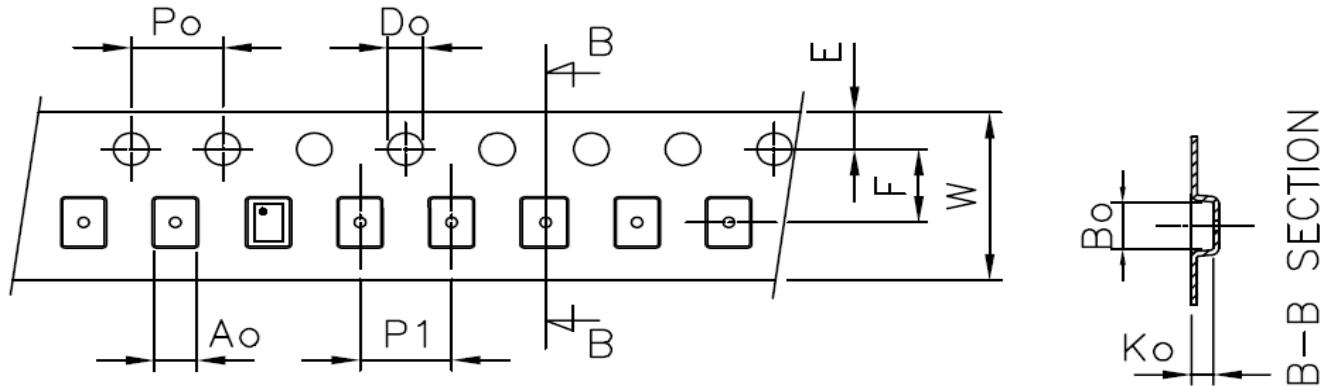

Recommended Reflow Soldering Profile

Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 0.88 mm³ (nominal). More information can be found at www.jedec.org.



SILEGO

SLG59M1649V

Revision History

Date	Version	Change
2/22/2016	0.52	Updated Electrical Characteristics Added Charts
2/17/2016	0.51	Updated POD and Landing Pattern
02/9/2016	0.50	Preliminary Release



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А