


3-TERMINAL NEGATIVE VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJM79L00 series of 3-Terminal Negative Voltage Regulators is constructed using the New JRC Planar epitaxial process. These regulators employ internal current-limiting, and thermal-shutdown, making them essentially indestructible. If adequate heat sinking is provided, they can deliver up to 100mA output current. They are intended as fixed voltage regulators in a wide range of applications including local or on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power pass elements to make high-current voltage regulators. The NJM79L00 used as a Zener diode/resistor combination replacement, offers an effective output impedance improvement of typically two orders of magnitude, along with lower quiescent current and lower noise.

■ PACKAGE OUTLINE




1. COMMON
2. IN
3. OUT

NJM79L00UA (SOT-89)

■ FEATURES

- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guarantee'd 100mA Output Current
- Output Capacitor recommended electrolytic capacitor
- Package Outline SOT-89
- Bipolar Technology

■ EQUIVALENT CIRCUIT

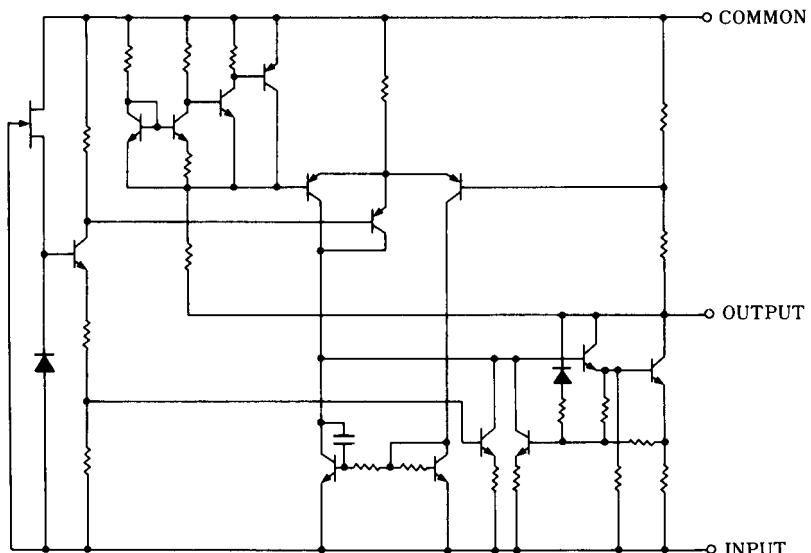

NJM79L00

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	(79L03A to 79L09A) - 30 (79L12A to 79L15A) - 35 (79L18A to 79L24A) - 40	V
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C
Power Dissipation	P _D	(SOT89) 350	mW

■ ELECTRICAL CHARACTERISTICS (C_{IN}=0.33μF, C_O=1.0μF, T_j=25°C)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79L03UA						
Output Voltage	V _O	V _{IN} =-10V, I _O =40mA	-2.88	-3.0	-3.12	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-7 to -20V, I _O =40mA	-	10	60	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-10V, I _O =1 to 100mA	-	4	72	mV
Quiescent Current	I _Q	V _{IN} =-10V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-8 to -18V, I _O =40mA, e _{in} =1V _{P,P} , f=120Hz	45	72	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-10V, BW=10Hz to 100kHz, I _O =40mA	-	70	-	μV
NJM79L05UA						
Output Voltage	V _O	V _{IN} =-10V, I _O =40mA	-4.8	-5.0	-5.2	V
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-7 to -20V, I _O =40mA	-	15	150	mV
Load Regulation	ΔV _O - I _O	V _{IN} =-10V, I _O =1 to 100mA	-	7	60	mV
Quiescent Current	I _Q	V _{IN} =-10V, I _O =0mA	-	3.5	6.0	mA
Ripple Rejection	RR	V _{IN} =-8 to -18V, I _O =40mA, e _{in} =1V _{P,P} , f=120Hz	41	71	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-10V, BW=10Hz to 100kHz, I _O =40mA	-	120	-	μV

■ ELECTRICAL CHARACTERISTICS ($C_{IN}=0.33\mu F$, $C_O=1.0\mu F$, $T_j=25^\circ C$)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79L06UA						
Output Voltage	V_O	$V_{IN}=-12V$, $I_O=40mA$	-5.76	-6.0	-6.24	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-8.5$ to $-20V$, $I_O=40mA$	-	18	150	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-12V$, $I_O=1$ to $100mA$	-	8	70	mV
Quiescent Current	I_Q	$V_{IN}=-12V$, $I_O=0mA$	-	3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-9$ to $-19V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	40	68	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-12V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	140	-	μV
NJM79L08UA						
Output Voltage	V_O	$V_{IN}=-14V$, $I_O=40mA$	-7.68	-8.0	-8.32	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-10.5$ to $-23V$, $I_O=40mA$	-	24	175	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-14V$, $I_O=1$ to $100mA$	-	10	80	mV
Quiescent Current	I_Q	$V_{IN}=-14V$, $I_O=0mA$	-	3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-11$ to $-21V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	39	68	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-14V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	190	-	μV
NJM79L09UA						
Output Voltage	V_O	$V_{IN}=-15V$, $I_O=40mA$	-8.64	-9.0	-9.36	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-11.5$ to $-24V$, $I_O=40mA$	-	27	200	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-15V$, $I_O=1$ to $100mA$	-	12	90	mV
Quiescent Current	I_Q	$V_{IN}=-15V$, $I_O=0mA$	-	3.5	6.0	mA
Ripple Rejection	RR	$V_{IN}=-12$ to $-22V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	38	67	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-15V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	210	-	μV
NJM79L12UA						
Output Voltage	V_O	$V_{IN}=-19V$, $I_O=40mA$	-11.5	-12.0	-12.5	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-14.5$ to $-27V$, $I_O=40mA$	-	36	250	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-19V$, $I_O=1$ to $100mA$	-	16	100	mV
Quiescent Current	I_Q	$V_{IN}=-19V$, $I_O=0mA$	-	3.5	6.5	mA
Ripple Rejection	RR	$V_{IN}=-15$ to $-25V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	37	64	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-19V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	210	-	μV


NJM79L00

■ ELECTRICAL CHARACTERISTICS ($C_{IN}=0.33\mu F$, $C_O=1.0\mu F$, $T_j=25^\circ C$)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM79L15UA						
Output Voltage	V_O	$V_{IN}=23V$, $I_O=40mA$	-14.4	-15.0	-15.6	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-17.5$ to $-30V$, $I_O=40mA$	-	45	300	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=23V$, $I_O=1$ to $100mA$	-	20	150	mV
Quiescent Current	I_Q	$V_{IN}=23V$, $I_O=0mA$	-	3.5	6.5	mA
Ripple Rejection	RR	$V_{IN}=18.5$ to $-28.5V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	34	63	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=23V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	340	-	μV
NJM79L18UA						
Output Voltage	V_O	$V_{IN}=27V$, $I_O=40mA$	-17.3	-18.0	-18.7	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-20.7$ to $-33V$, $I_O=40mA$	-	54	325	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=27V$, $I_O=1$ to $100mA$	-	23	170	mV
Quiescent Current	I_Q	$V_{IN}=27V$, $I_O=0mA$	-	3.5	6.5	mA
Ripple Rejection	RR	$V_{IN}=23$ to $-33V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	33	60	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=27V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	410	-	μV
NJM79L24UA						
Output Voltage	V_O	$V_{IN}=-33V$, $I_O=40mA$	-23.0	-24.0	-25.0	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-27$ to $-38V$, $I_O=40mA$	-	72	350	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-33V$, $I_O=1$ to $100mA$	-	30	200	mV
Quiescent Current	I_Q	$V_{IN}=-33V$, $I_O=0mA$	-	3.5	6.5	mA
Ripple Rejection	RR	$V_{IN}=-29$ to $-35V$, $I_O=40mA$, $e_{in}=1V_{P-P}$, $f=120Hz$	31	55	-	dB
Output Noise Voltage	V_{NO}	$V_{IN}=-33V$, $BW=10Hz$ to $100kHz$, $I_O=40mA$	-	550	-	μV

■ SOT-89 MARK

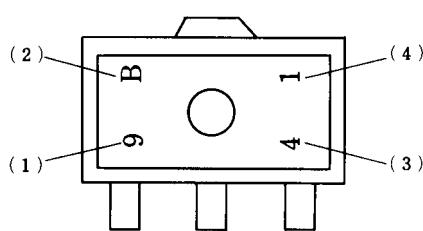

(1) 9: Negative Output

(2) Vo Rank

(3) The end of A. D.

(4) Production Month

Oct. ...X

Nov. ...Y


Dec. ...Z

(1) (2)


NJM79L03UA	9	B
NJM79L05UA	9	C
NJM79L06UA	9	E
NJM79L08UA	9	G
NJM79L09UA	9	H
NJM79L12UA	9	K
NJM79L15UA	9	L
NJM79L18UA	9	M
NJM79L24UA	9	P

■ TEST CIRCUIT


1. Output Voltage, Output Current, Line Regulation, Load Regulation, Quiescent Current, Output Noise Voltage

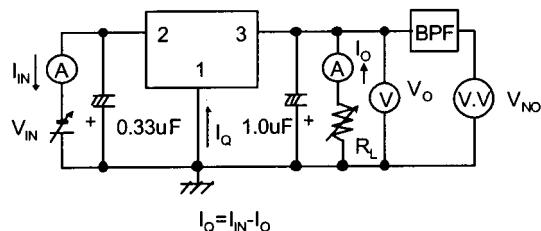

2. Ripple Rejection

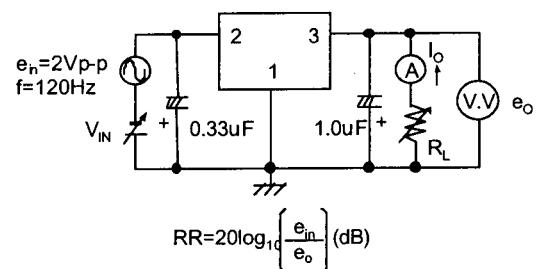


■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

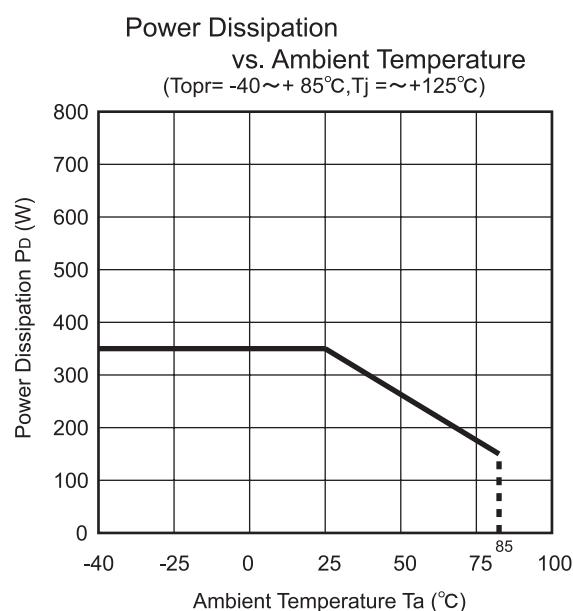


NJM79L00

■ TYPICAL CHARACTERISTICS


NJM79L00 Input Voltage vs. Output Voltage

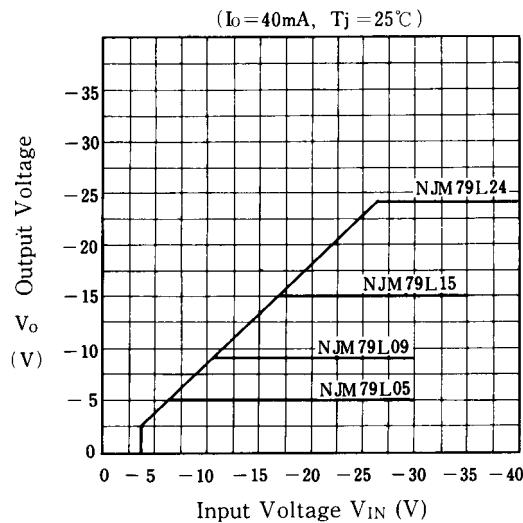


NJM79L00 Series Short Circuit Current

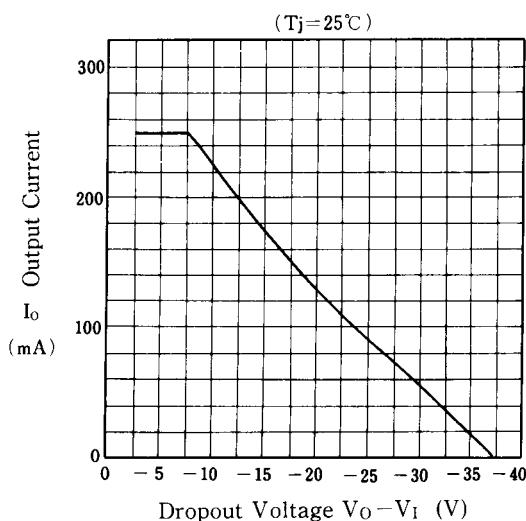


NJM79L05/15/24 Ripple Rejection vs. Frequency

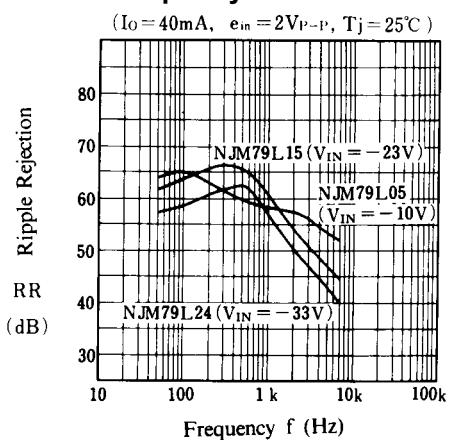


NJM79L05/15/24 Load Characteristics

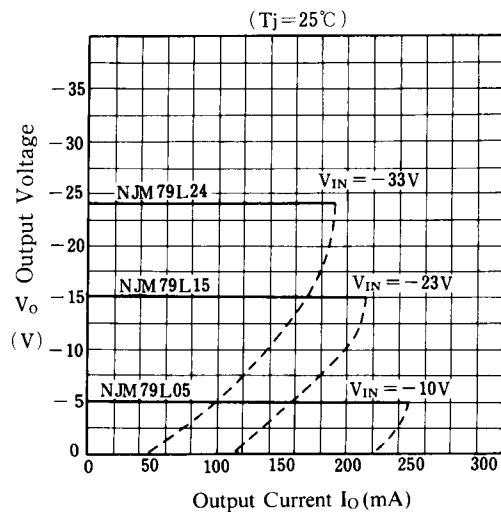

NJM79L05/12/24 Output Voltage vs. Junction Temperature

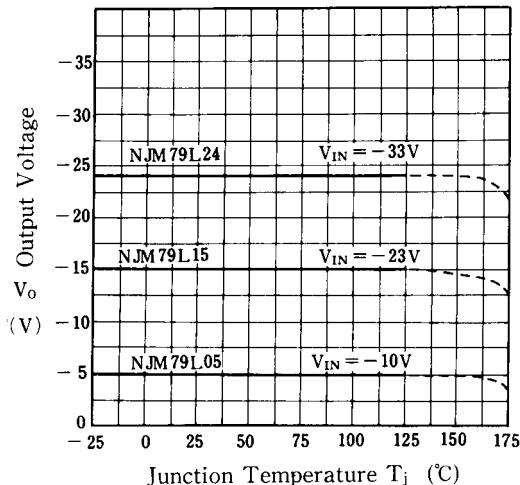


Quiescent Current vs. Input Voltage

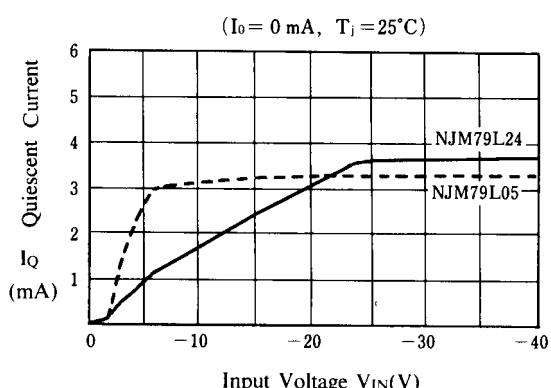


■ TYPICAL CHARACTERISTICS


NJM79L05 Dropout Characteristics

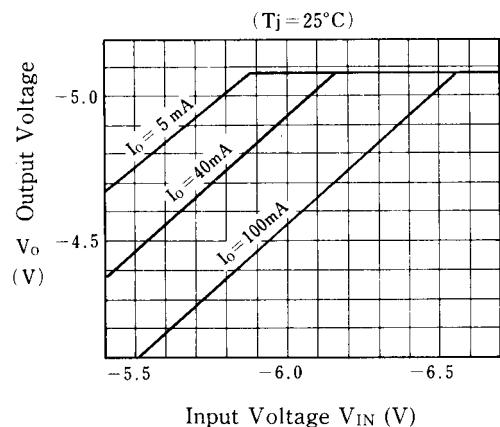


NJM79L08 Dropout Characteristics

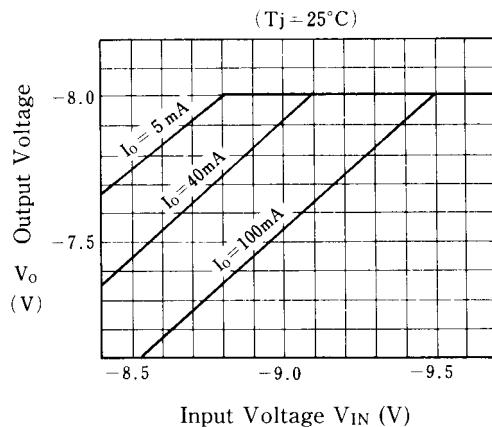

NJM79L05 Output Voltage vs. Temperature

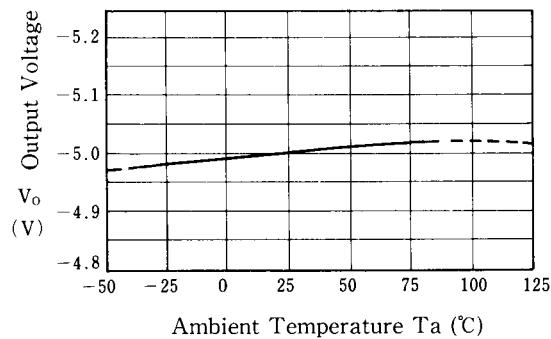

NJM79L08 Output Voltage vs. Temperature

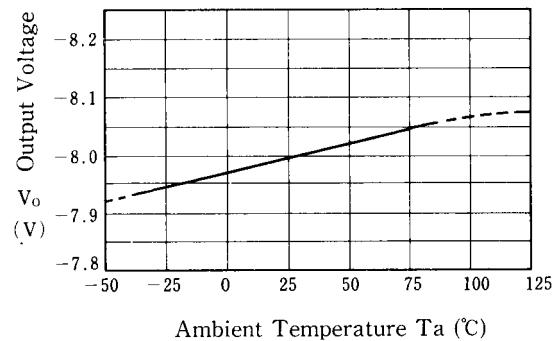

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

[NJM79L24UA](#) [NJM79L12UA](#) [NJM79L05UA-TE2](#) [NJM79L24UA-TE1](#) [NJM79L12UA-TE2](#) [NJM79L15UA-TE2](#)
[NJM79L12UA-TE1](#) [NJM79L05UA](#) [NJM79L09UA](#) [NJM79L06UA](#) [NJM79L05UA-TE1](#) [NJM79L06UA-TE1](#)
[NJM79L07UA-TE1](#) [NJM79L03UA-TE1](#) [NJM79L08UA](#) [NJM79L15UA](#) [NJM79L03UA](#) [NJM79L08UA-TE1](#)
[NJM79L08UA-TE2](#) [NJM79L09UA-TE2](#) [NJM79L09UA-TE1](#) [NJM79L18UA](#)



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А