

## Molded Metal Film High Stability (< 0.25 % after 1000 h) High Temperature (up to 175 °C) Precision Resistors



The performance of the RCMT resistors exceed the requirements of NF C 83-230 standards. They are particularly relevant to the more stringent military and industrial applications especially when high ambient temperatures such as + 175 °C are to be encountered.

The RCMT resistors are qualified and released to the NF C UTE 83-230 standard styles RS56C, RS60E and C, RS65E and C, RS70E and C.


### FEATURES

- 0.1 W to 2 W at 125 °C
- EN140100
- CECC 40 101-044
- High climatic performance - 65 °C/+ 175 °C/56 days
- High long term stability drift < 0.25 % after 1000 h
- Tight temperature coefficient to ± 15 ppm/°C
- Temperature coefficient tracking 5 ppm/°C
- Wide ohmic range from 1 Ω to 5 MΩ
- Tight tolerances up to ± 0.1 %
- Matching tolerance to 0.05 %
- Termination: Pure matte tin
- Compliant to RoHS directive 2002/95/EC



**RoHS**  
COMPLIANT

### DIMENSIONS in millimeters

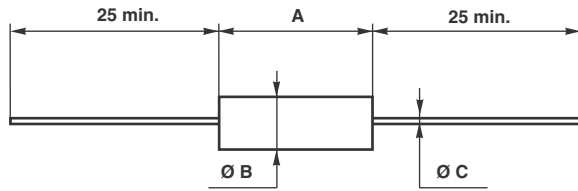

SERIES	A max.	Ø B max.	Ø C	WEIGHT g
RCMT01	4.32	2.03	0.4	0.11
RCMT02	6.7	2.5	0.6	0.28
RCMT05	10.4	3.66	0.6	0.46
RCMT08	16.5	6.4	0.8	1.3
RCMT1	19.3	6.4	0.8	1.5
RCMT2	29	10.2	0.8	4.4
RCMT4	54	10.2	0.8	13

### TEMPERATURE COEFFICIENT

TCR CODE	TEMPERATURE RANGE	NOMINAL TEMPERATURE COEFFICIENT	TEMPERATURE RANGE	TYPICAL TEMPERATURE COEFFICIENT
K5	0 °C to + 155 °C	± 15 ppm/°C	0 °C to + 70 °C	± 10 ppm/°C
K4	- 55 °C to + 175 °C	± 25 ppm/°C	- 10 °C to + 70 °C	± 15 ppm/°C
K3	- 55 °C to + 175 °C	± 50 ppm/°C	- 10 °C to + 70 °C	± 30 ppm/°C

### ENVIRONMENTAL SPECIFICATIONS

**Insulation Resistance** > 10<sup>7</sup> MΩ  
**Voltage Coefficient** 10 ppm/V  
**Environmental Specifications** - 65 °C/+ 175 °C/56 days

### PRACTICAL OPERATING TOLERANCES

After the 10 000 h load life test, at nominal power rating, 90'/30' cycles, + 125 °C ambient temperature, the total actual drifts measured at + 125 °C are the following:


Manufacturing tolerance	± 0.1 %	± 1 %
Drift due to TCR (K4) + life drift	± 0.25 %	± 0.35 %
Max. total deviation from nominal ohmic value, including the manufacturing tolerance	± 0.35 %	± 1.35 %

TECHNICAL SPECIFICATIONS											
VISHAY SFERNICE SERIES	NF C 83-230 CECC 40 101-044	POWER RATING AT + 70 °C	POWER RATING AT + 125 °C	RESISTANCE VALUE RANGE IN RELATION TO - TEMPERATURE COEFFICIENT - TOLERANCE						MAXIMUM VOLTAGE	CRITICAL RESISTANCE
				K3		K4		K5			
				± 0.2 %	± 0.5 % ± 1 %	± 0.1 % ± 0.2 %	± 0.5 % ± 1 %	± 0.1 % ± 0.2 %	± 0.5 % ± 1 %		
RCMT01 K3	-	0.063 W	0.05 W	10 Ω	1 Ω	49.9 Ω	49.9 Ω	100 Ω	100 Ω	200 V	-
RCMT01 K4	-			511 kΩ	511 kΩ	100 kΩ	511 kΩ	100 kΩ	100 kΩ		
RCMT02 K3	RS 56C	0.125 W	0.1 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	300 V	-
RCMT02 K4	RS 56E			332 kΩ	332 kΩ	332 kΩ	332 kΩ	100 kΩ	332 kΩ		
RCMT05 K3	RS 60C	0.25 W	0.125 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	350 V	980 kΩ
RCMT05 K4	RS 60E			332 kΩ	1 MΩ	332 kΩ	1 MΩ	332 kΩ	1 MΩ		
RCMT08 K3	RS 65C	0.5 W	0.25 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	400 V	640 kΩ
RCMT08 K4	RS 65E			1 MΩ	1.5 MΩ	1 MΩ	1.5 MΩ	750 kΩ	1.5 MΩ		
RCMT1 K3	RS 70C	1 W	0.5 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	500 V	500 kΩ
RCMT1 K4	RS 70E			1 MΩ	2 MΩ	1 MΩ	2 MΩ	750 kΩ	2 MΩ		
RCMT2 K3	-	2 W	1 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	600 V	360 kΩ
RCMT2 K4	-			1 MΩ	2.5 MΩ	1 MΩ	2.5 MΩ	1 MΩ	2.5 MΩ		
RCMT4 K3	-	4 W	2 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	800 V	320 kΩ
RCMT4 K4	-			2.5 MΩ	5 MΩ	2.5 MΩ	5 MΩ	2 MΩ	2.5 MΩ		


**Note**

- Undergoes European Quality Insurance System (CECC)

**POWER RATING**

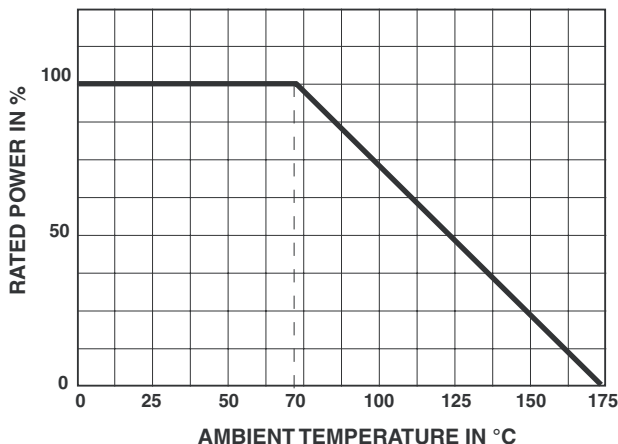

**TEMPERATURE RISE**

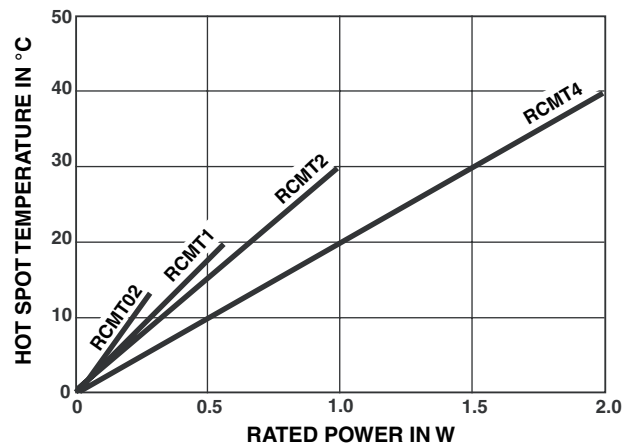



Molded Metal Film High Stability (< 0.25 % after 1000 h)  
High Temperature (up to 175 °C) Precision Resistors

Vishay Sfernice

<b>PERFORMANCE</b>				
EN140100 - CECC 40 101-044			<b>TYPICAL VALUES AND DRIFTS</b>	
<b>TESTS</b>	<b>CONDITIONS</b>	<b>REQUIREMENTS</b>		
<b>Dielectric Voltage</b>	2 $U_n$ /1 min	± 0.25 %	< ± 0.05 % or 0.05 Ω	
<b>Short Time Overload</b>	2.5 $U_m$ /5 s limited to 2 $U_n$	± 0.25 %	± 0.05 % or 0.05 Ω	
<b>Load Life at Maximum Category Temperature</b>	1000 h at + 155 °C 0 % of $P_r$	± 0.5 %	± 0.25 % or 0.05 Ω	
<b>Damp Heat Humidity (Steady State)</b>	56 days with low load	± 0.5 %	± 0.2 % or 0.05 Ω Insulation resistance > 10 <sup>6</sup> MΩ	
<b>Rapid Temperature Change</b>	- 55 °C      + 175 °C	± 0.1 %	± 0.05 % or 0.05 Ω	
<b>Climatic Sequence</b>	- 65 °C      + 175 °C severity 1	± 0.5 % Insulation resistance > 10 <sup>3</sup> MΩ	± 0.2 % or 0.05 Ω Insulation resistance > 10 <sup>6</sup> MΩ	
<b>Terminal Strength</b>	Pull - twist - 2 bends	± 0.1 %	± 0.05 % or 0.05 Ω	
<b>Vibration</b>	Severity 55 B	± 0.1 %	± 0.05 % or 0.05 Ω	
<b>Soldering (Thermal Shock)</b>	+ 260 °C 10 s	± 0.1 %	± 0.05 % or 0.05 Ω	
<b>Load Life</b>	Cycle 90°/30' 70 °C ambient	1000 h at $P_n$	± 0.5 %	± 0.15 % or 0.05 Ω
		10 000 h at $P_n$	-	± 0.25 % or 0.05 Ω
<b>Shelf Life</b>	1 year ambient temperature	-	< ± 0.05 %	

**NOISE LEVEL**

In a frequency decade, the average noise level is 0.1 μV/V for models RCMT08, RCMT1, RCMT2 and RCMT4 in all ohmic values. It progressively increases as a function of the ohmic value and can reach 0.2 μV/V for the highest values of models RCMT02 and RCMT05 (0.1 μV/V for R < 10 kΩ).

**SPECIAL APPLICATIONS**

Temperature coefficient tracking to 5 ppm.

Tolerance matching to 0.05 %.

Selection of positive or negative TCR in temperature range of - 20 °C to + 125 °C.

For these applications and other requirements consult Vishay Sfernice.

**RECOMMENDATION**

The lower the ohmic value, the more important the influence of lead resistance is on measurements. The nominal resistance value is therefore measured at a distance of 5 mm from resistor body.

## MARKING

Printed: series, style, NF style if applicable, ohmic value (in  $\Omega$ ), tolerance (in %), temperature coefficient, manufacturing date. Due to lack of space, RCMT02 is referenced as MT02.

GLOBAL PART NUMBER INFORMATION																
R	C	M	T	0	2		1	3	0	0	1	F	H	S	1	4
GLOBAL MODEL	SIZE	SPECIAL	OHMIC VALUE				TOLERANCE	TEMPERATURE COEFFICIENT		PACKAGING						
RCMT	01 02 05 08 10 20 40	As applicable. Contact us.	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. <b>13001</b> = 13 k $\Omega$ <b>33001</b> = 33 k $\Omega$ <b>220R0</b> = 220 $\Omega$ <b>1R220</b> = 1.22 $\Omega$				B = 0.1 % A = 0.2 % D = 0.5 % F = 1 %	H = K3, 50 ppm/K E = K4, 25 ppm/K D = K5, 15 ppm/K		AM500 = <b>A20</b> BAG100 = <b>S14</b> BAG50 = <b>S09</b> BAG10 = <b>S03</b> BO50* = <b>B25</b>  *: possible in N/A						



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А