



TGM2635-CP

X-Band 100 W GaN Power Amplifier

Product Overview

Qorvo's TGM2635-CP is a packaged X-band, high power amplifier fabricated on Qorvo's production 0.25um GaN on SiC process. The TGM2635-CP operates from 7.9–11 GHz and provides 100 W of saturated output power with 22.5 dB of large signal gain and greater than 35 % power-added efficiency.

The TGM2635-CP is packaged in a 10-lead 19.05 x 19.05 mm bolt-down package with a pure Cu base for superior thermal management. Both RF ports are internally DC blocked and matched to 50 ohms allowing for simple system integration.

The TGM2635-CP is ideally suited for both commercial and military X-Band radar systems, satellite communications systems, and data links.

Lead-free and RoHS compliant.




Key Features

- Frequency Range: 7.9 – 11 GHz
- PSAT: > 50 dBm (PIN = 28 dBm)
- PAE: > 35% (PIN = 28 dBm)
- Large Signal Gain: > 22 dB (PIN = 28 dBm)
- Small Signal Gain: > 26 dB
- Bias: VD = 28 V, IDQ = 1.3 A, VG = -2.6 V Typical
- Package Dimensions: 19.05 x 19.05 x 4.52 mm
- Performance Under Pulsed Operation

Functional Block Diagram

Applications

- X-band Radar
- Satellite Communications
- Data Links

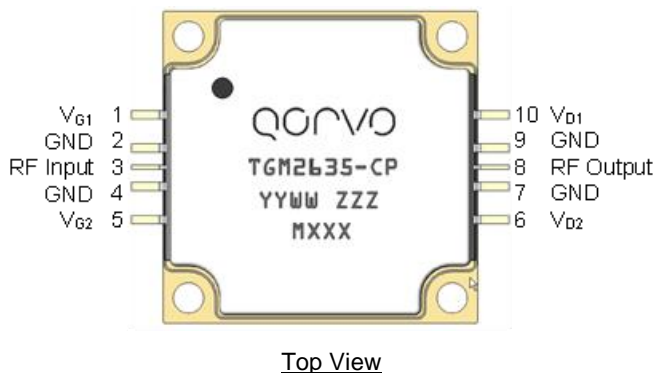

Ordering Information

Part	Description
TGM2635-CP	X-band 100 W GaN Power Amplifier

Absolute Maximum Ratings

Parameter	Rating
Drain Voltage (VD)	40 V
Gate Voltage Range (VG)	-8 to -0 V
Drain Current (ID)	16 A
Gate Current (IG) at TCH = 200 °C	-52 / 124 mA
Power Dissipation (PDISS), 85°C, Pulsed; PW = 100 us, DC = 10%	316 W
Input Power (PIN), 50 Ω, 85°C, VD = 28 V, Pulsed; PW = 100 us, DC = 10%	33 dBm
Input Power (PIN), 85°C, VSWR 3:1, VD = 28 V, Pulsed; PW = 100 us, DC = 10%	33 dBm
Mounting Temperature (30 seconds)	260 °C
Storage Temperature	-55 to 150 °C

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Drain Voltage (VD)		28		V
Drain Current (IDQ, total)		1.3		A
Gate Voltage (VG)		-2.6		V
Operating Temperature Range	-40		85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications







Parameter	Conditions ⁽¹⁾	Min	Typ	Max	Units
Frequency Range		7.9		11.0	GHz
Output Power	P _{IN} = 28 dBm, Pulsed				
	8 GHz	50.0	51.0		dBm
	9 GHz	50.0	51.0		
	10 GHz	49.5	51.0		
11 GHz	49.5	51.0			
Power Added Efficiency	P _{IN} = 28 dBm, Pulsed				%
	8 GHz	37	41		
	9 GHz	33	41		
	10 GHz	35	41		
	11 GHz	33	41		
Power Gain	P _{IN} = 28 dBm, Pulsed		23		dB
Output Power Temperature Coefficient	Temp: 25 °C to 85 °C, P _{IN} = 28 dBm)		-0.010		dB/°C
Input Return Loss			12		dB
Output Return Loss			12		dB
Small Signal Gain			26		dB
Recommended Operating Voltage		20	28	30	V

Notes:

1. Test conditions unless otherwise noted: 25 °C, V_D = 28 V, I_{DQ} = 1.3 A, V_G = -2.6 V typical, PW = 100 us, Duty Cycle = 10%







Performance Plots – Large Signal (Pulsed)

Test conditions unless otherwise noted: 25 °C , $V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$, $P_{IN} = 28\text{ dBm}$, $PW = 100\text{ us}$, Duty Cycle = 10%

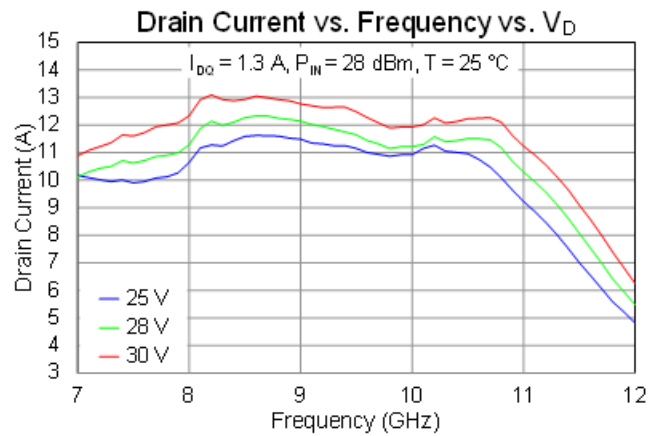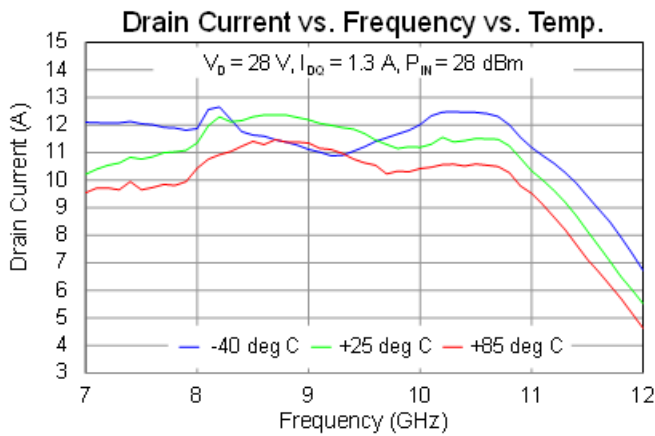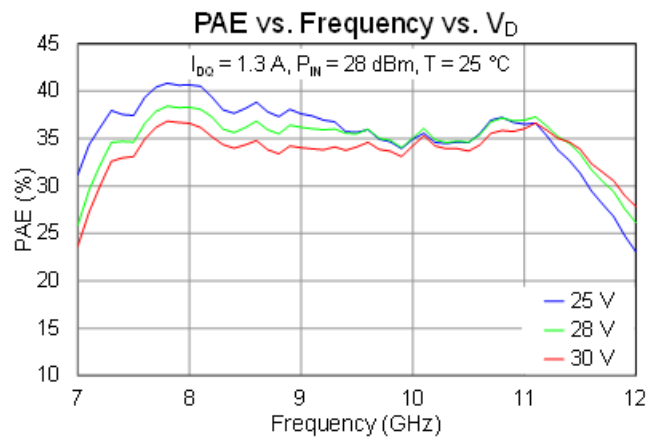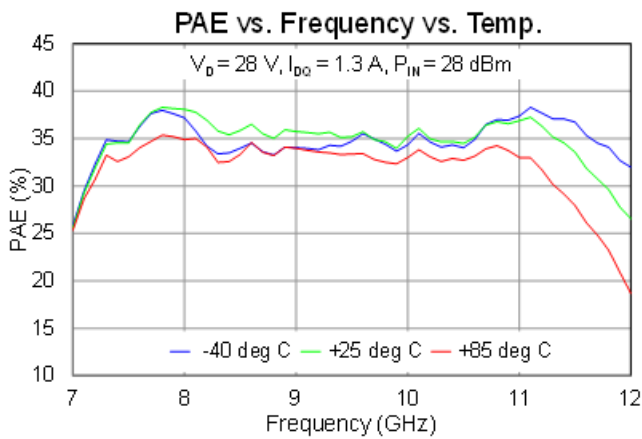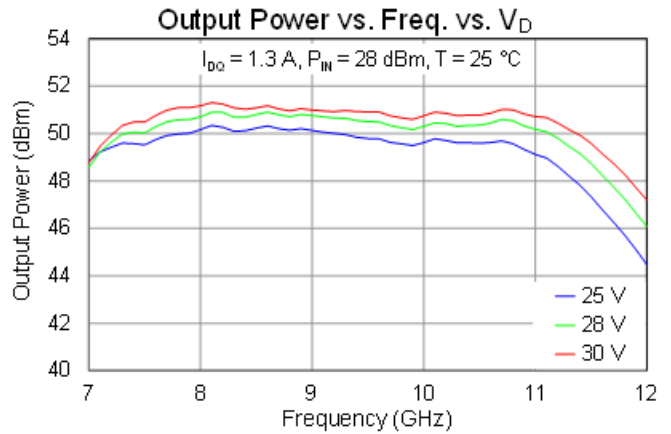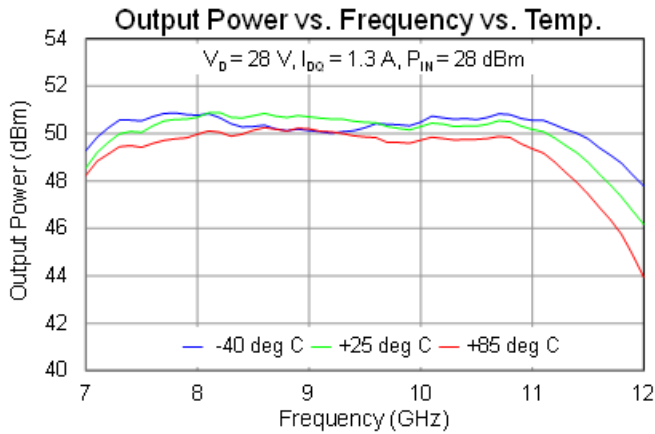





Performance Plots – Large Signal (Pulsed)

Test conditions unless otherwise noted: 25 °C , $V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$, $PW = 100\text{ us}$, Duty Cycle = 10%

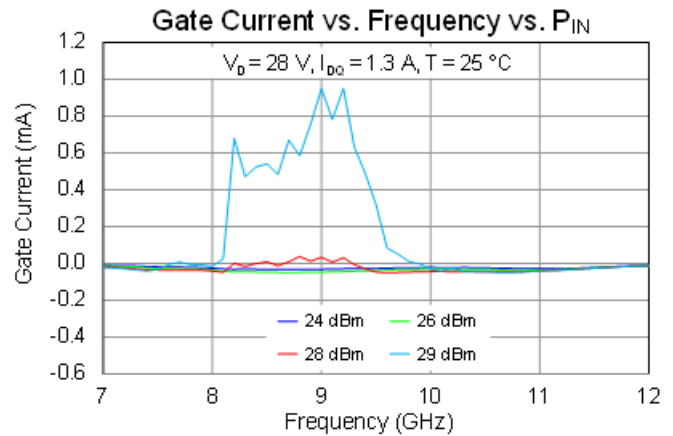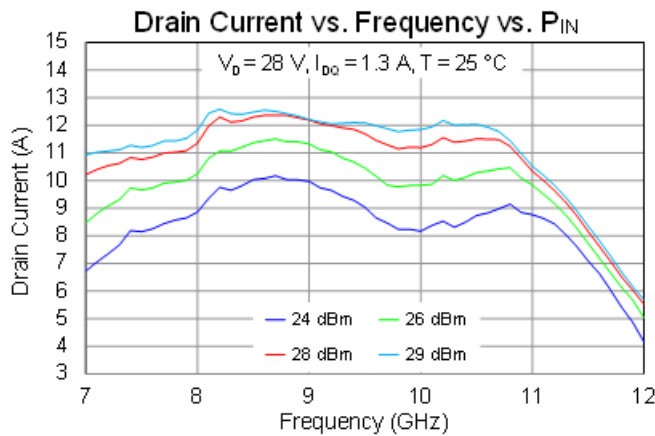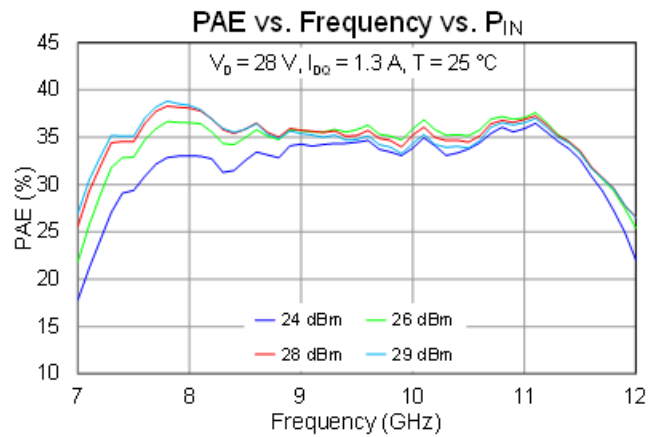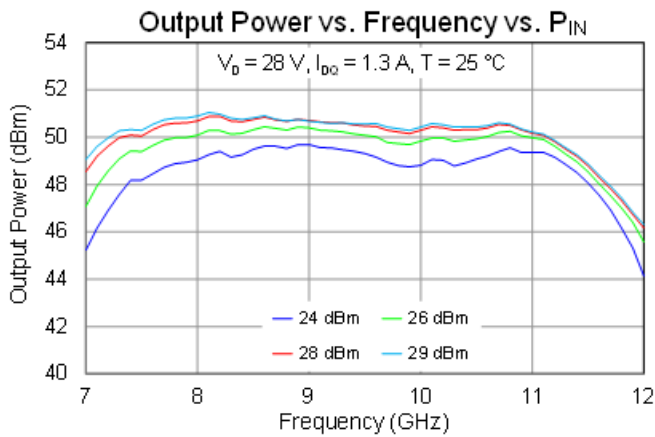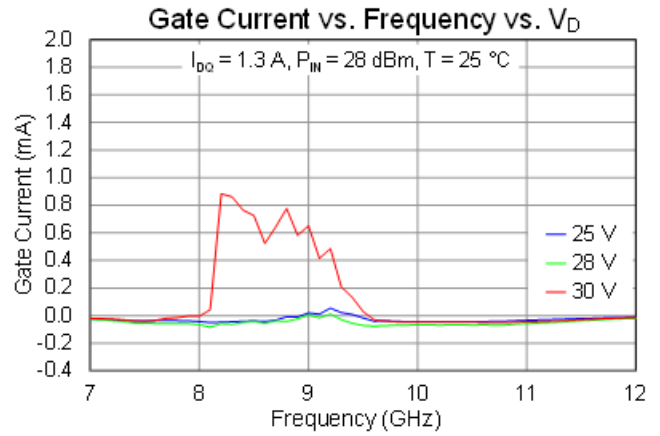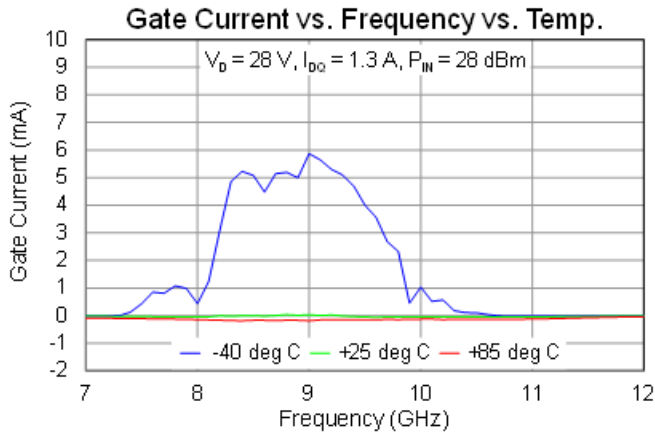







Performance Plots – Large Signal (Pulsed)

Test conditions unless otherwise noted: 25 °C , $V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$, $PW = 100\text{ us}$, Duty Cycle = 10%

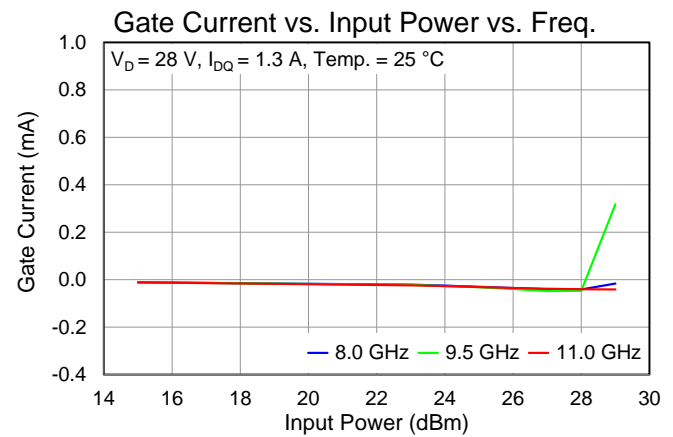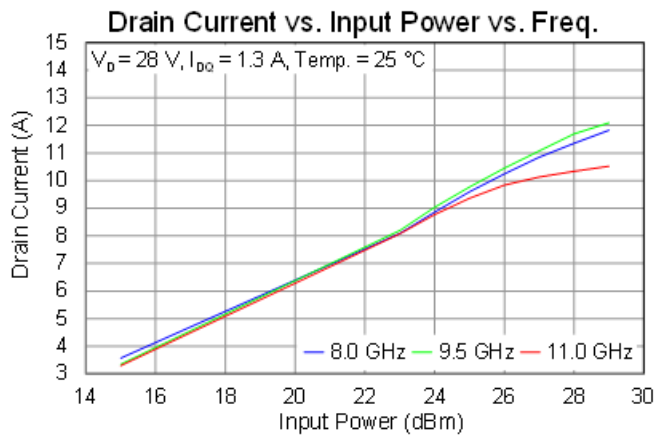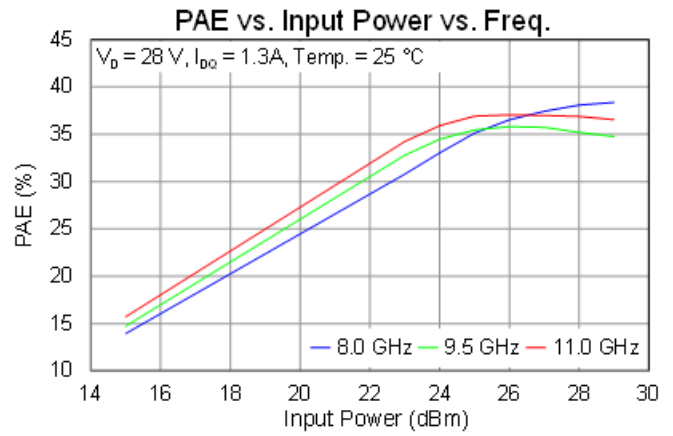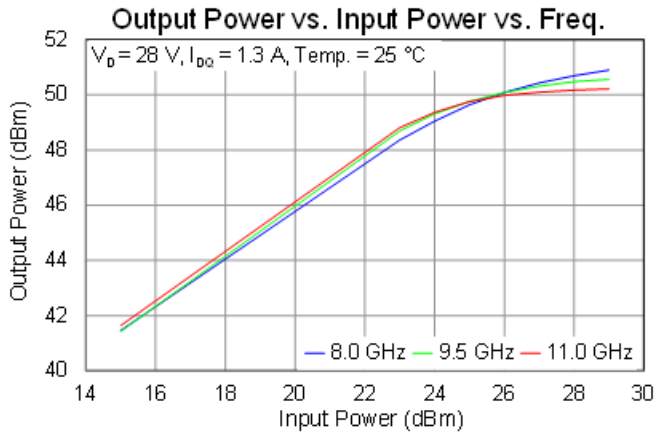






Performance Plots – Large Signal (Pulsed)

Test conditions unless otherwise noted: 25 °C , $V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$, $PW = 100\text{ us}$, Duty Cycle = 10%

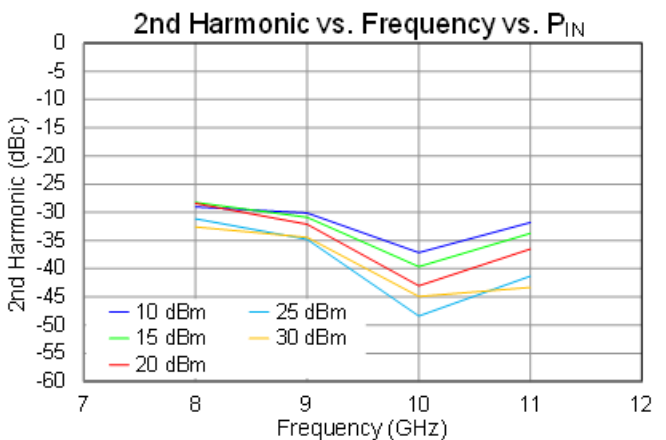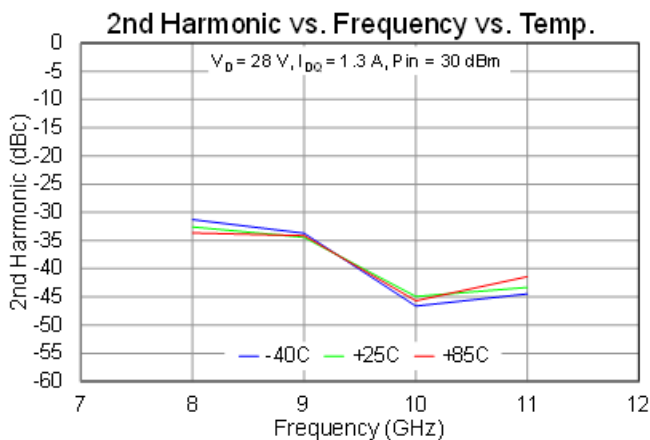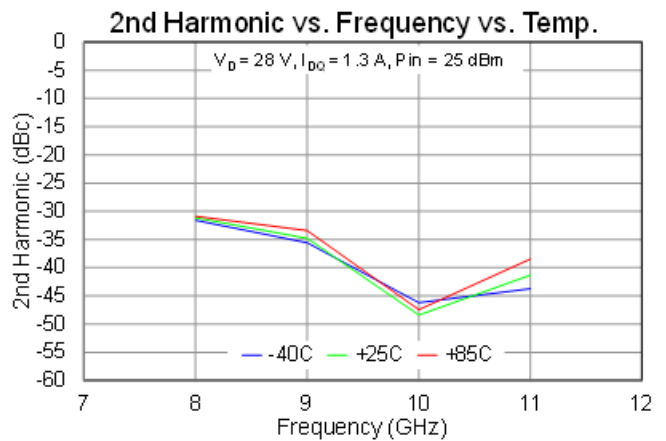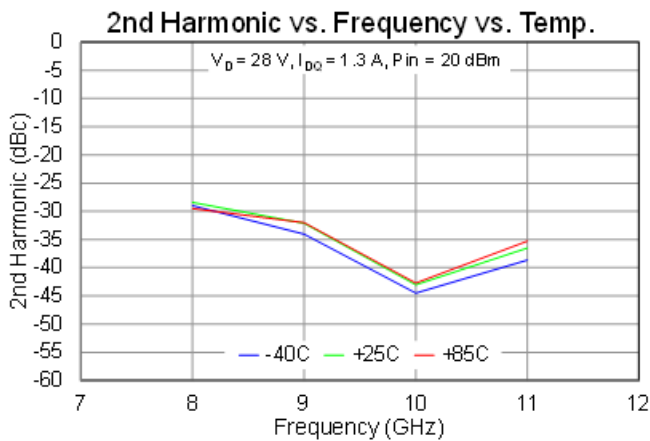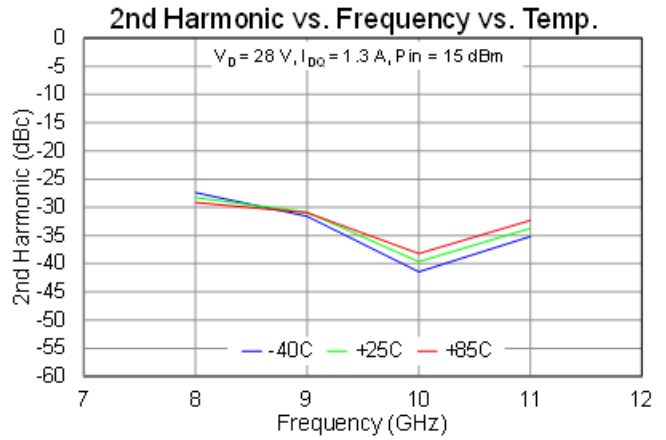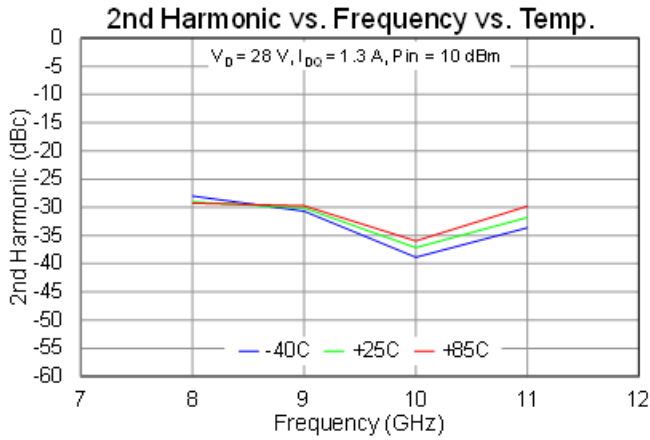





Performance Plots – Small Signal (CW)

Test conditions unless otherwise noted: 25 °C , $V_D = 28\text{ V}$

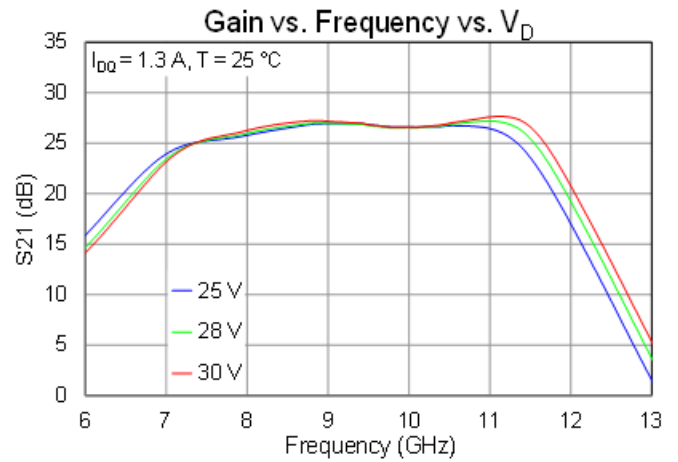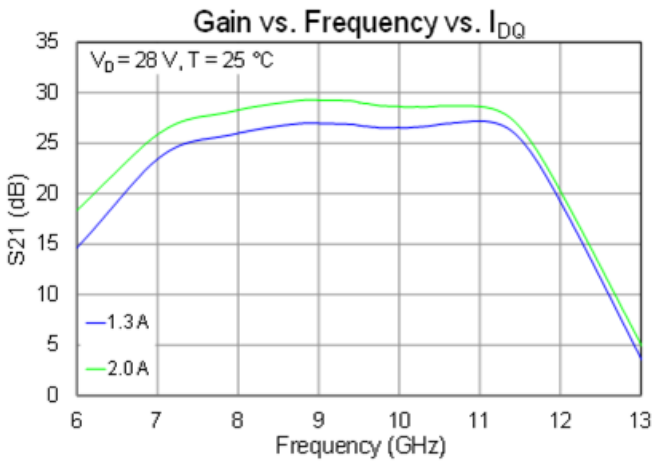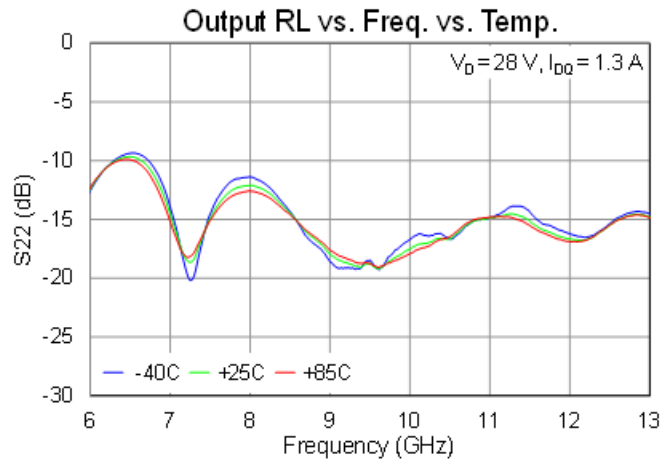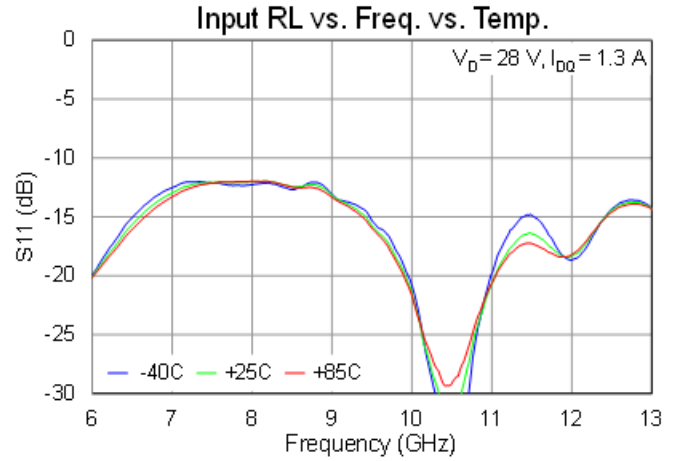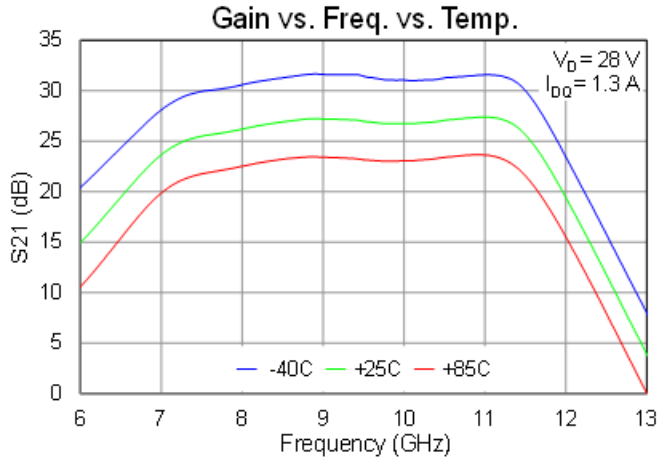

Performance Plots – Small Signal (CW)

Test conditions unless otherwise noted: 25 °C , $V_D = 28\text{ V}$

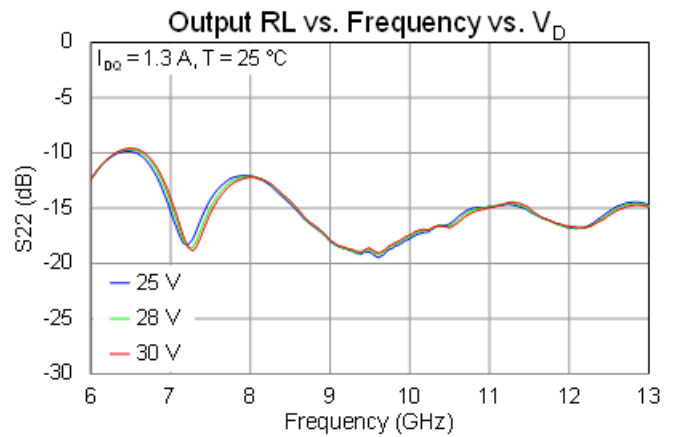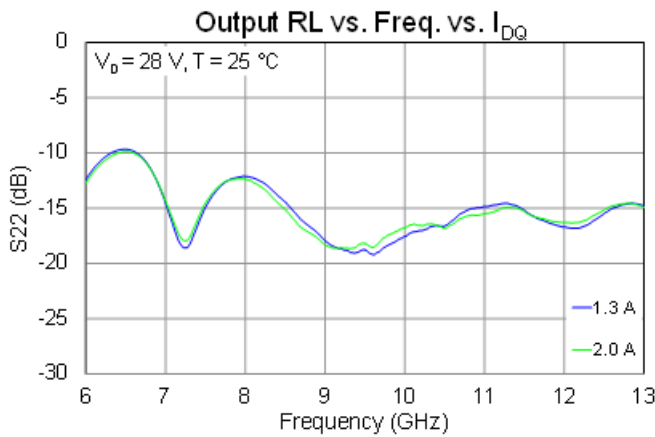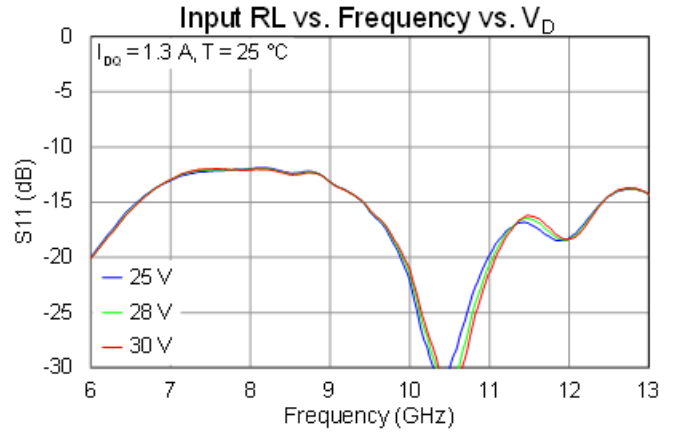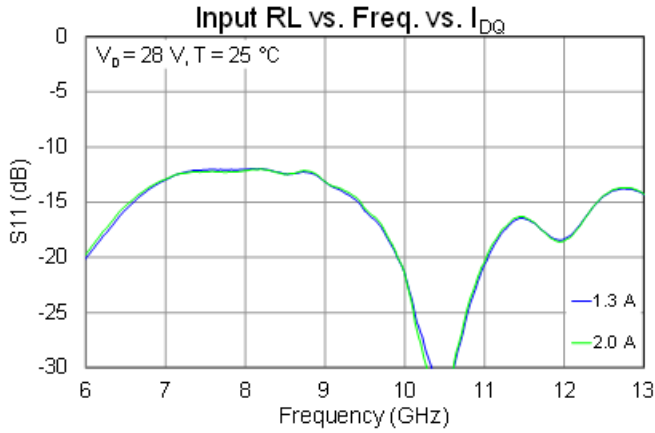




Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{Base} = 85\text{ }^{\circ}\text{C}$	0.30	$^{\circ}\text{C}/\text{W}$
Channel Temperature, T_{CH} (No RF drive)	$V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$ $P_{DISS} = 36.4\text{ W}$	96	$^{\circ}\text{C}$
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{Base} = 85\text{ }^{\circ}\text{C}$, $V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$, Freq = 9.0 GHz, $I_{D_Drive} = 11\text{ A}$, $P_{IN} = 28\text{ dBm}$, $P_{OUT} = 50.0\text{ dBm}$, $P_{DISS} = 173\text{ W}$, PW = 100 us, DC = 10%	0.33	$^{\circ}\text{C}/\text{W}$
Channel Temperature, T_{CH} (Under RF)		142	$^{\circ}\text{C}$
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{Base} = 85\text{ }^{\circ}\text{C}$, $V_D = 28\text{ V}$, $I_{DQ} = 1.3\text{ A}$, Freq = 9.0 GHz, $I_{D_Drive} = 12\text{ A}$, $P_{IN} = 31\text{ dBm}$, $P_{OUT} = 50.5\text{ dBm}$, $P_{DISS} = 195\text{ W}$, PW = 100 us, DC = 10%	0.34	$^{\circ}\text{C}/\text{W}$
Channel Temperature, T_{CH} (Under RF)		150	$^{\circ}\text{C}$


Notes:

1. Thermal resistance measured at back of package.
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

Power Dissipation

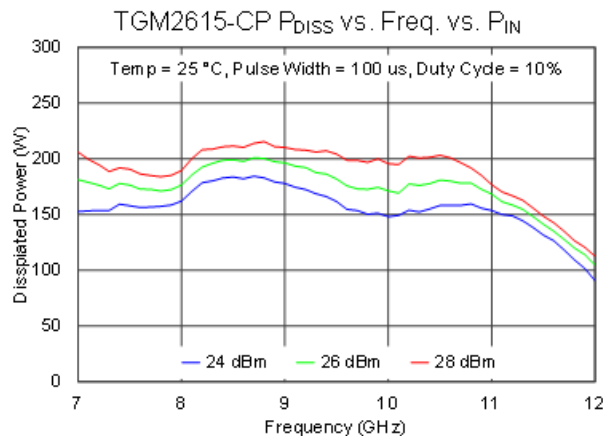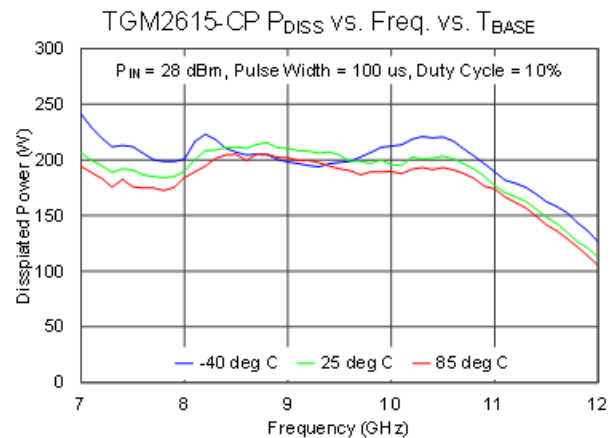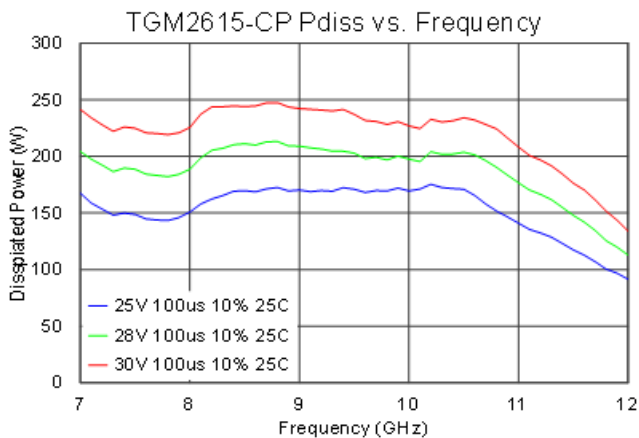

Evaluation Board (EVB) and Application Circuit

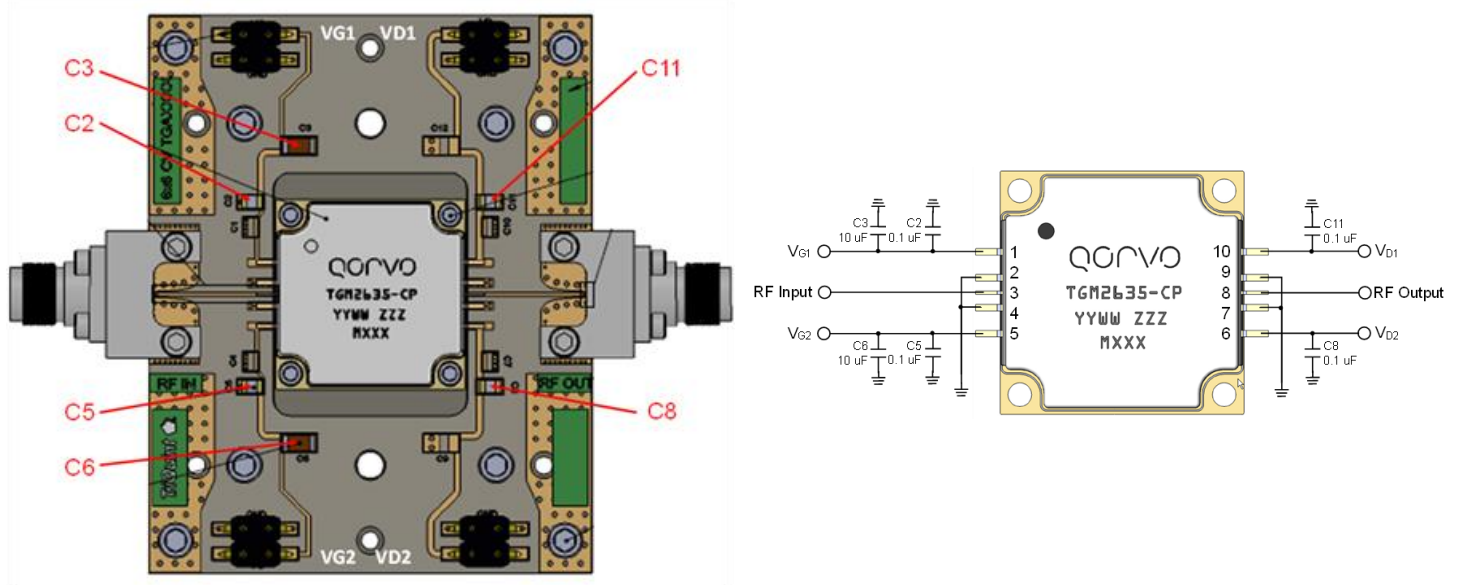

Notes:

1. See Evaluation Board PCB Information for material and stack up.
2. Part requires biasing from both sides of the EVB.

Bill of Material

Ref. Des.	Value	Description	Manuf.	Part Number
n/a	n/a	Printed Circuit Board	Qorvo	
U1	n/a	X-Band 100 W GaN Power Amplifier	Qorvo	TGM2635-CP
C3, C6	10 uF, ±20 %, 50 V (1206), X5R	Surface Mount Cap	Various	
C2, C5, C8, C11	0.1 uF, ±10 %, 50 V (0805), X7R	Surface Mount Cap	Various	
J1, J2	2.92 mm	2.92 mm End Launch Connector	Southwest Microwave	1092-02A-5

EVB Bias-Up Procedure

1. Set I_D limit to 16 A, I_G limit to 124 mA
2. Set V_G to -5.0 V
3. Set V_D +28 V
4. Adjust V_G more positive until $I_{DQ} = 1.3$ A ($V_G \sim -2.6$ V Typical)
5. Apply RF signal

EVB Bias-Down Procedure

1. Turn off RF signal
2. Reduce V_G to -5.0 V. Ensure $I_{DQ} \sim 0$ mA
3. Set V_D to 0V
4. Turn off V_D supply
5. Turn off V_G supply

Pad Configuration and Description





Top View


Pad No.	Label	Description
1	V _{G1}	Gate voltage stage 1. Bias network is required; see Application Circuit as an example
2, 4, 7, 9	GND	RF Ground
3	RF Input	RF Input; matched to 50Ω; DC Blocked
5	V _{G2}	Gate voltage stage 2. Bias network is required; see Application Circuit as an example
6	V _{D2}	Drain voltage stage 2. Bias network is required; see Application Circuit as an example.
8	RF Output	RF Output; matched to 50Ω; DC Blocked, DC Shorted
10	V _{D1}	Drain voltage stage 1. Bias network is required; see Application Circuit as an example

Evaluation Board PCB Information

EVB PC Board Layout

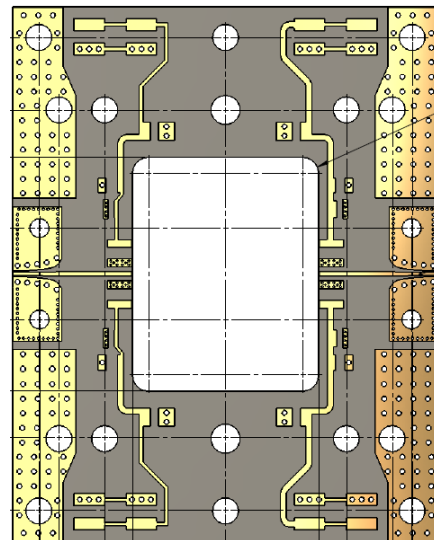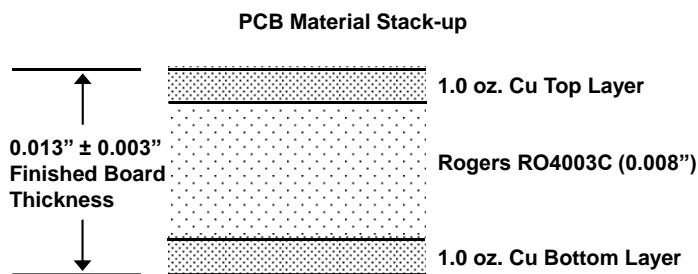

Package Marking and Dimensions

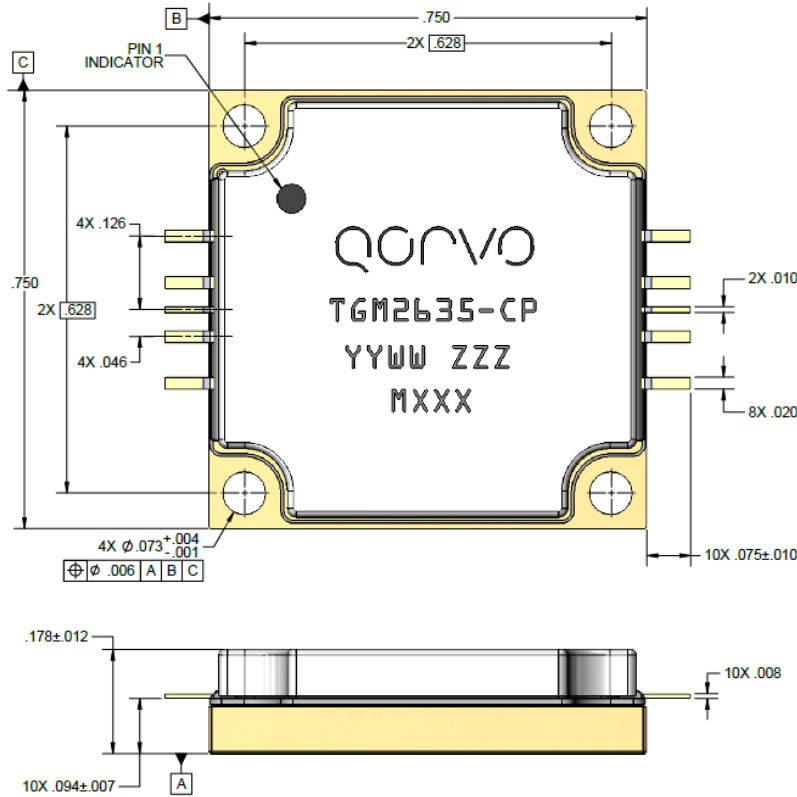


- NOTES:
- MATERIALS:
 PACKAGE BASE: COPPER
 FINISH: GOLD
 LEADS: ALLOY 194
 FINISH: GOLD
 LID: LCP (LIQUID CRYSTAL POLYMER)
 - PART IS EPOXY SEALED.
- LASER MARK NOTES:
- MARK PER SPE-000429.
 - YY IS THE LAST TWO DIGITS OF THE CALENDAR YEAR.
 - WW IS THE WEEK NUMBER OF ASSEMBLY LOT START.
 - ZZZ IS SERIAL NUMBER.
 - MXXX IS THE BATCH ID.
- TOLERANCES .XX = $\pm .01$ ANGLES = 0.5°
 .XXX = $\pm .005$
 .XXXX = $\pm .0010$

- Notes:
- Contact plating: Ni-Au

Assembly Notes

1. Carefully clean the PC board and package leads with alcohol. Allow it to dry fully.
2. To improve the thermal and RF performance, Qorvo recommends attaching a heat sink to the bottom of the PCB and apply thermal compound (Arctic Silver 5 recommended) or 4 mil indium shim between the heat sink and the package.
3. (The following is for *information only*. There are many variables in a second level assembly that Qorvo does not control, so Qorvo does not recommend an absolute torque value.) Use screws to attach the component to the heat sink. A suggested torque value is 16 in-oz. for a 0-80 screw. Start with screws finger tight, then torque to 8 in-oz., then torque to final value. Use the following tightening pattern:



4. Apply no-flux solder to each pin of the TGM2635-CP. The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. The use of no-clean solder to avoid washing after soldering is recommended.

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 0B	ANSI / ESDA / JEDEC JS-001
ESD – Charged Device Model (CDM)	Class C3	ANSI / ESDA / JEDEC JS-002
MSL – Moisture Sensitivity Level	N/A	



Caution!
ESD-Sensitive Device

Solderability

The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. Soldering of the component leads is compatible with the latest version of J-STD-020, lead-free solder, 260 °C. The use of no-clean solder to avoid washing after soldering is recommended.

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А