



TABLE OF CONTENTS	
SHEET NO.	SHEET DESCRIPTION
1	NOTES
2, 3	CONFIGURATIONS
4	RECEPTACLE CONNECTOR ASSEMBLY
5	MOLEX INTERFACE

NOTES: VALID UNLESS OTHERWISE SPECIFIED


1. GENERAL:
 - a. APPLICATION SPECIFICATION SEE: AS-34062-000
-CONTAINS: PRODUCT INTRODUCTION, PRODUCT SUMMARY, CONNECTOR ASSEMBLY, PACKAGING INFORMATION, CONNECTOR MATING, SERVICE INSTRUCTIONS, ELECTRICAL CONTINUITY CHECKING, CRIMPING, AND TROUBLESHOOTING.
 2. PRODUCT SPECIFICATION SEE: PS-34062-000
CONTAINS: SCOPE, PRODUCT DESCRIPTION, INTEGRAL COMPONENTS AND ACCESSORIES, APPLICABLE DOCUMENTS AND SPECIFICATIONS, RATINGS, PERFORMANCE, PACKAGING, GAUGE AND FIXTURES, AND OTHER INFORMATION.
 - a. PACKAGING SPECIFICATION PER MOLEX DRAWING: PK-30907-879
 - b. PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: ES-40000-5016
 - c. DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
 - d. DESIGNED TO MATE WITH DEVICE CONNECTION AS SPECIFIED IN DRAWING EWCAP 150-S-002-1-Z01. AVAILABLE AT <http://ewcap.uscarteams.org/>.
2. DESIGN - MATERIALS:
 - a. SEE BOM TABLE IN SD-34062-004
3. DESIGN - GEOMETRY:
 - a. THIS IS A 100% CAD GENERATED PART. THE CAD MATHEMATICAL DATA IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.
 - b. GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994
 - c. EDGES AND UNDIMENSIONED DETAILS PER ISO13715
 - d. CORNERS SHOWN AS SHARP TO BE R 0.2 MAX.
 - e. LETTERING SHALL BE 0.15 MAX RAISED IN 0.25 MAX RECESS PAD. THIS INCLUDES RECYCLING CODE, CAVITY ID, VENDOR IDENTIFICATION, AND CUSTOMER MATERIAL NUMBER.
 - f. VISUAL DEFECTS SHALL MEET COSMETIC STANDARD PS-45499-002 (Class B)
 - g. LASER MARKING: TBD

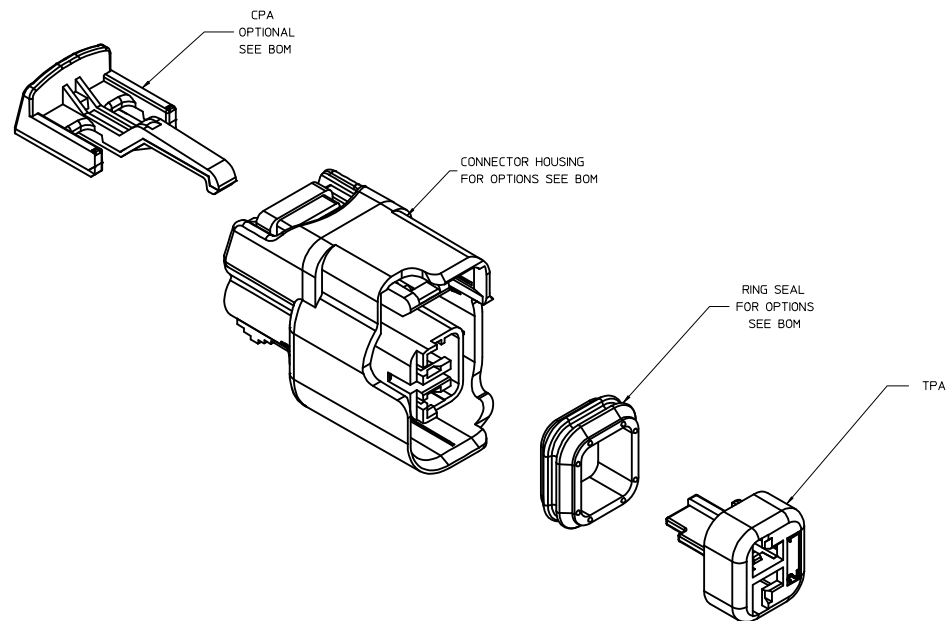


INSPECTION NUMBER LOG
LAST NUMBER USED:
ADDED:
REMOVED:

J11	MOVED BOM TO MOLEX DRAWING E-34062-004
J10	P/N 34062-0048 THRU 0055 & 0056 SALEABLE
J9	UPDATED VIEWS
J8	UPDATE 34062-0057
J7	ADDED P/N 34062-0057
J6	P/N 34062-0041, 0043, 0044, & 0046 SALEABLE
J5	ADDED P/N 34062-0056
J4	ADDED P/N 34062-4003 & 34062-4004
J3	34062-0042 & 34062-0045 SALEABLE
J2	UPDATED VIEWS
REV	DESCRIPTION


ENTER DESCRIPTION IEC NO: UAU2016-0110 DRAWN: BORUSZENSKI 2015/07/23 CHKD: APPR: WOSHY	J12	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.3 ± --- 0 PLACE ± ± ANGULAR ± 3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY DATE KCUNNINGHAM 2011/11/08 CHECKED BY DATE MYANSLAMBROU 1/26/2012 APPROVED BY DATE	SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE MX150 2 WAY CABLE SEAL RECEPTACLE CONN. SYSTEM (5.0MM PITCH) molex	DOCUMENT NO. SD-34062-002	SHEET NO. 1 OF 5

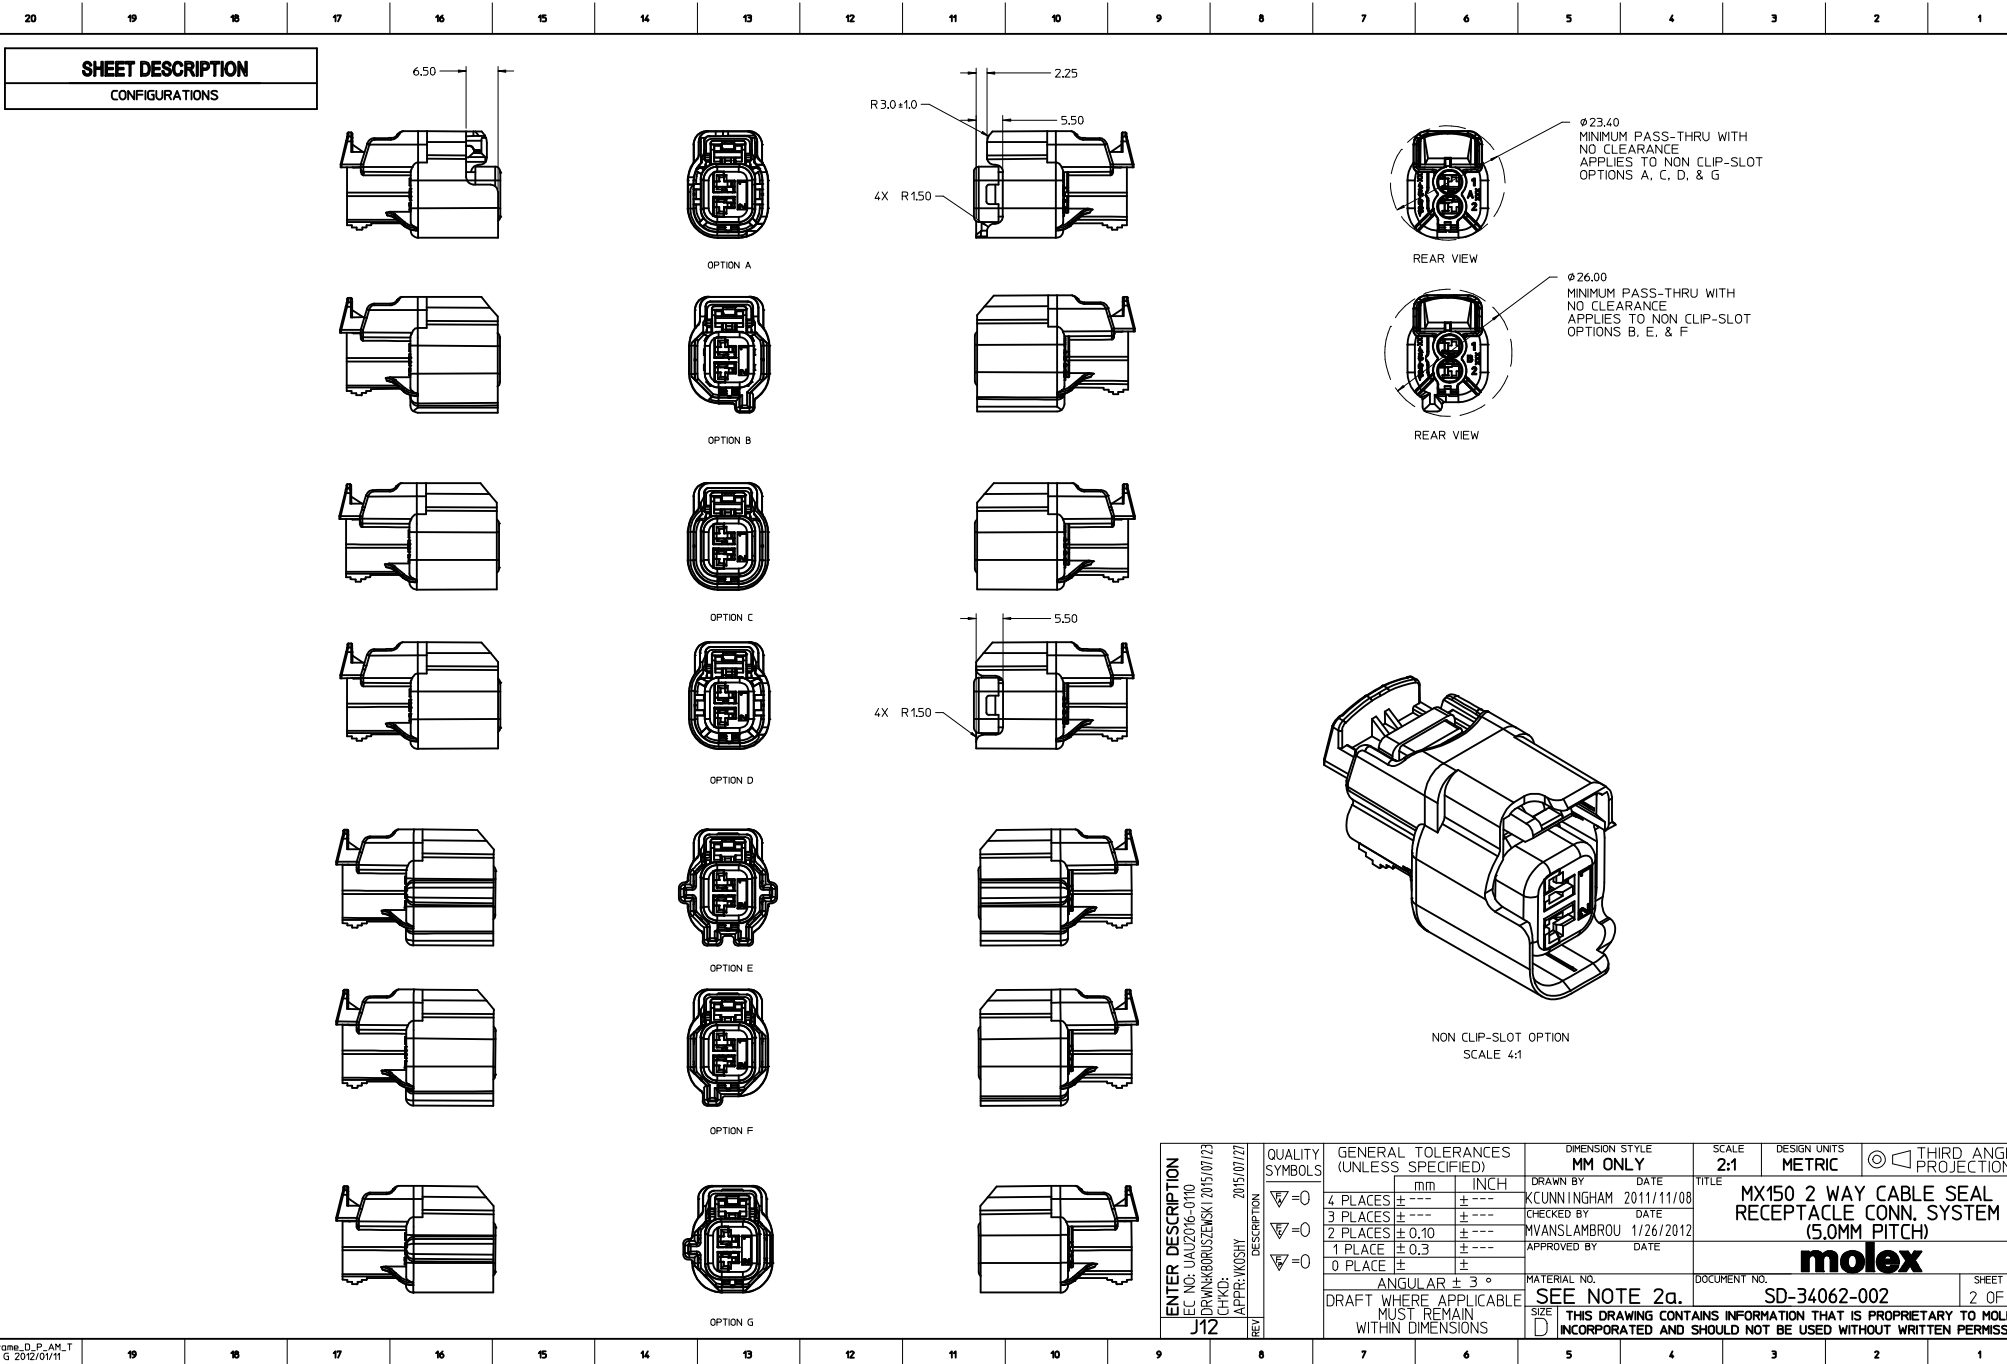


SHEET DESCRIPTION
CONFIGURATIONS



Ø 23.40
MINIMUM PASS-THRU WITH
NO CLEARANCE
APPLIES TO NON CLIP-SLOT
OPTIONS A, C, D, & G






Ø 26.00
MINIMUM PASS-THRU WITH
NO CLEARANCE
APPLIES TO NON CLIP-SLOT
OPTIONS B, E, & F




NON CLIP-SLOT OPTION
SCALE 4:1

ENTER DESCRIPTION IEC NO: UAU2016-0110 DRAWN: BORUSZENSKI 1/2015/07/23 CHKD: APPR: WOSHY J12	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					DRAWN BY DATE KCUNNINGHAM 2011/11/08		MX150 2 WAY CABLE SEAL RECEPTACLE CONN. SYSTEM (5.0MM PITCH) molex DOCUMENT NO. SD-34062-002 SHEET NO. 2 OF 5			
					CHECKED BY DATE MVANSLAMBROU 1/26/2012					
					APPROVED BY DATE					
					MATERIAL NO.					
					SIZE D					
			4 PLACES ± --- ± ---		ANGULAR ± 3 °		SEE NOTE 2a.		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
			3 PLACES ± --- ± ---							
			2 PLACES ± 0.10 ± ---							
			1 PLACE ± 0.3 ± ---							
0 PLACE ± ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								



OPTION A W/CLIP-SLOT




MINIMUM PASS-THRU WITH
NO CLEARANCE
APPLIES TO CLIP-SLOT
OPTIONS A, C AND D






OPTION B W/CLIP-SLOT




Ø 26.00
MINIMUM PASS-THRU WITH
NO CLEARANCE
APPLIES TO CLIP-SLOT
OPTIONS B





OPTION C W/CLIP-SLOT



CLIP-SLOT OPTION
SCALE 4:1



OPTION D W/CLIP-SLOT





ENTER DESCRIPTION EC NO.: IAU2016-0110 DRAWN BY: GURUSANKAR CHKD: APPR: WSOBY 2015/07/27 2015/07/27		QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION 4 PLACES ± 3 PLACES ± 2 PLACES ±0.10 1 PLACE ±0.3 0 PLACE ±	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH ± ± ± ± ± ± ± ± ± ± ± ±	DIMENSION STYLE MM ONLY DRAWN BY DATE CUNNINGHAM 2011/11/08 CHECKED BY DATE MYANSLAMBROU 11/26/2012 APPROVED BY DATE	SCALE 2:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE MX150 2 WAY CABLE SEAL RECEPTACLE CONN. SYSTEM (5.0MM PITCH) molex	MATERIAL NO. SEE NOTE 2a.	DOCUMENT NO. SD-34062-002	SHEET NO. 3 OF 5
J12		REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					





SHEET DESCRIPTION

RECEPTACLE CONNECTOR ASSEMBLY


OPTIONAL LASER MARKING SURFACE
SEE NOTE h.

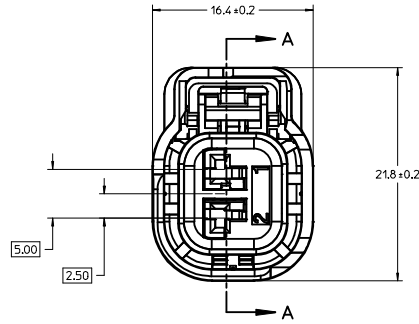

OPTIONAL LASER MARKING SURFACE
SEE NOTE h.

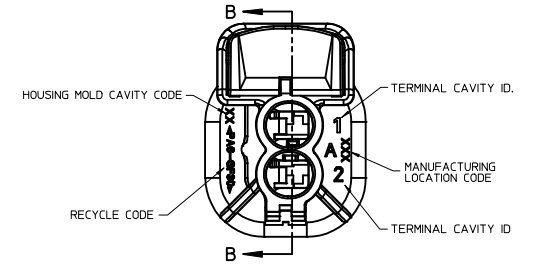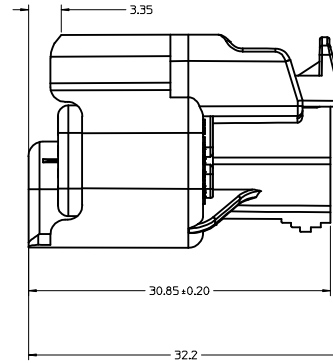

TPA SHOWN IN THE
PRE-STAGED POSITION
SECTION A-A




SECTION B-B

TPA SHOWN IN
FINAL-LOCK POSITION


ENTER DESCRIPTION EC NO: UAU2016-0110 DRAWN BY: BORUSZENSKI 2015/07/23 CHKD: WOSHY APPR: WOSHY J12	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION 2015/07/27	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE 4:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION									
			mm		INCH		DRAWN BY	DATE	TITLE													
			4 PLACES		±	---	KCUNNINGHAM		2011/11/08		MX150 2 WAY CABLE SEAL											
			3 PLACES		±	---	CHECKED BY		DATE		RECEPTACLE CONN. SYSTEM											
			2 PLACES		±	0.10	MYANSLAMBROU		1/26/2012		(5.0MM PITCH)											
			1 PLACE		±	0.3	APPROVED BY		DATE		molex											
			0 PLACE		±	---	MATERIAL NO.		DOCUMENT NO.								SHEET NO.					
					ANGULAR ± 3 °		SEE NOTE 2a.		SD-34062-002								4 OF 5					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		

Figure 1: Connector Shroud Detail View. This technical drawing shows a cross-section of a connector shroud. It features a central vertical slot and two side slots. Dimension lines indicate a width of 13.90 MIN. for the left side and 11.80 MIN. for the right side. Callouts include "CD 1" for the left side, "CD 2" for the right side, and "CD 3" for the central slot, which is specified as 15.65 MIN. MIN ALL AROUND FOR MATING CONNECTOR SHROUD CLEARANCE. Datum A is indicated at the top surface, and Datum B is indicated at the bottom surface.




A technical line drawing of a U-shaped metal profile. The profile has a semi-circular cutout on one of its long sides. The drawing shows the top, bottom, and side views of the profile, with lines indicating its three-dimensional structure.


OPTION E




OPTION G
SAME AS OPTION F
EXCEPT AS SHOWN




DETAIL 2
SCALE 10:1

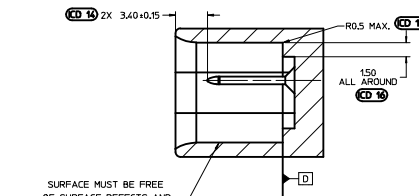


SECTION W-W

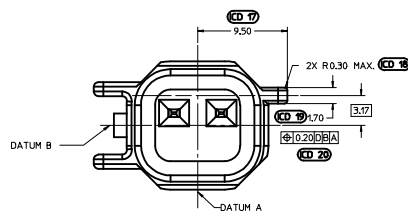


OPTION F

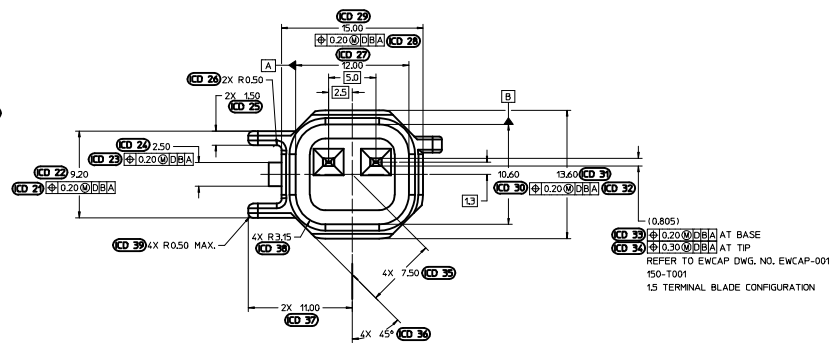

OPTION F

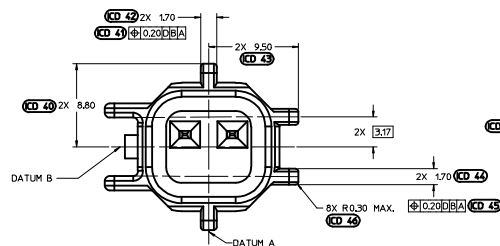

OPTION E
SAME AS OPTION F
EXCEPT AS SHOWN

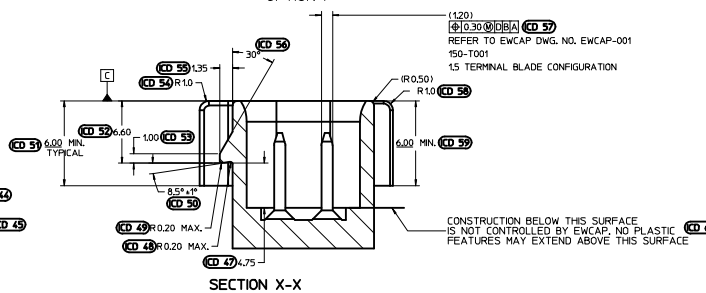


SECTION X-X

1. ALL DIMENSIONS SHOWN IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
3. 0.25 RADII ON ALL CORNERS SHOWN SHARP.
4. UNSPECIFIED RADII: 0.25 EXCEPT AS NOTED.
5. STANDARD COLORS FOR POLARIZATION (SEE CHART).
DEVIATION REQUIRES APPROVAL OF AUTHORIZED PERSON.
6. REFER TO SAE/USCAR 12 CONNECTOR GUIDELINES
FOR ADDITIONAL REQUIREMENTS.
7. EXCEPT WHERE NOTED, DRAFT ON OUTSIDE SURFACES IS PERMISSIBLE
WITHIN TOLERANCE.
8.  SYMBOL INDICATES DRAFT DIRECTION.
9. FOR TERMINAL MATERIAL, DIMENSIONAL, AND COATING REQUIREMENTS
AND ANY BLADE TERMINAL DESIGN INFORMATION NOT SHOWN ON THIS
DRAWING SEE EWCAP DWG. NO. EWCAP-001
10. A FULL SHROUD ON THE MATING CONNECTOR IS REQUIRED
TO INSURE THAT THE CONNECTOR-HEADER POLARIZATION
FEATURES (OPTIONS A THRU D) WILL FUNCTION. THE FULL
SHROUD ALSO PREVENTS SCOOP DAMAGE TO THE HEADER
PINS. REFER TO SAE/USCAR-12 CONNECTOR DESIGN
GUIDE LINES FOR ADDITIONAL INFORMATION.
11. REFER TO SAE/USCAR PART LIST AS FOUND ON WEBSITE
<http://www.uscarteams.org>
12. THIS IS A 100% CAD GENERATED PART. THE CAT MATHEMATICAL DATA
IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY INFORMATION
NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.

ENTER DESCRIPTION EC NO. UA0206-070 CHCD: 08/09/2006 APPR: WOSH DATE: 2015/07/27	QUALITY SYMBOLS ▽=0 ▽=0.1 ▽=0.10 ▽=0.3 ▽=0 PLACE	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY	5:1	METRIC		
				DRAWN BY	TITLE			
				XCUNNINGHAM	MX150 2 WAY CABLE SEAL RECEPTACLE CONN. SYSTEM (5.0MM PITCH)			
				CHECKED BY	DATE			
				WANSIAMBROU	11/26/2012			
112	REV	ANGULAR ± 3 °		APPROVED BY	DATE	molex		
				MATERIAL NO.		DOCUMENT NO.		
		DRAFT WORK APPLICABLE MUST BE WITH DIMENSIONS		N/A		SD-34062-002	SHEET NO. 5 OF 5	
				DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

MX150 2 WAY CABLE SEAL RECEPTACLE CONNECTION SYSTEM (5.0mm PITCH)

BOM AND PIN OUT SHEET

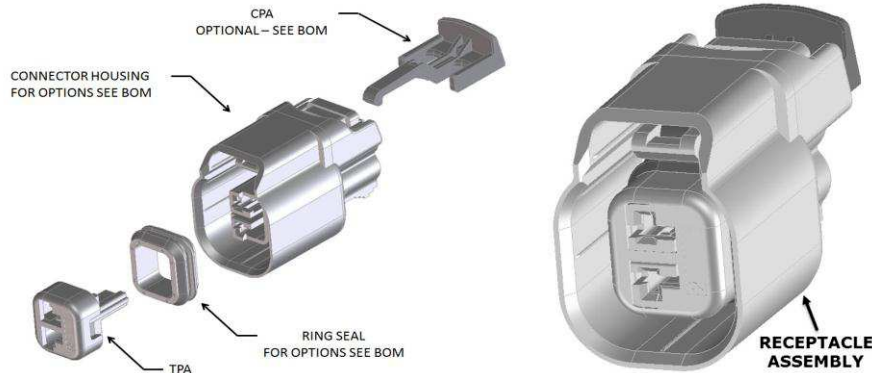

RECOMMENDED MATING DEVICE TABLE			
ABBREVIATION	DESCRIPTION	DRAWING INFORMATION	ADDITIONAL INFORMATION
1	USCAR INTERFACE	150-S-002-1-Z01	http://ewcap.uscarteam.s.org
2	MOLEX INTERFACE	SD-34062-002 SHEET 5	
3	MOLEX INLINE MALE CONNECTOR	E-34675-001	

BOM/ APPLICABLE COMPONENTS TABLE			
ABBREVIATION	DESCRIPTION	COLOR	MATERIAL
A-BLK	HOUSING KEYING OPTION A	BLACK	PA6 GF30
B-LG	HOUSING KEYING OPTION B	LIGHT GRAY	PA6 GF30
C-BLK	HOUSING KEYING OPTION C	BLACK	PA6 GF30
D-BLK	HOUSING KEYING OPTION D	BLACK	PA6 GF30
D-LG	HOUSING KEYING OPTION D	LIGHT GRAY	PA6 GF30
E-BLK	HOUSING KEYING OPTION E	BLACK	PA6 GF30
F-LG	HOUSING KEYING OPTION F	LIGHT GRAY	PA6 GF30
G-BLK	HOUSING KEYING OPTION G	BLACK	PA6 GF30
A-BLK-CLIP	HOUSING KEYING OPTION A WITH CLIPSLOT	BLACK	PA6 GF30
B-LG-CLIP	HOUSING KEYING OPTION B WITH CLIPSLOT	LIGHT GRAY	PA6 GF30
C-BLK-CLIP	HOUSING KEYING OPTION C WITH CLIPSLOT	BLACK	PA6 GF30
D-BLK-CLIP	HOUSING KEYING OPTION D WITH CLIPSLOT	BLACK	PA6 GF30
D-LG-CLIP	HOUSING KEYING OPTION D WITH CLIPSLOT	LIGHT GRAY	PA6 GF30
C-BLK-SV	HOUSING KEYING OPTION C - SEVERE VIBRATION	BLACK	PA6 GF30
D-BLK-SV	HOUSING KEYING OPTION D - SEVERE VIBRATION	BLACK	PA6 GF30
R3	RING SEAL TEMP. CLASS 3	MEDIUM BLUE	INHERENTLY LUBRICATED SILICONE
R4	RING SEAL TEMP. CLASS 4	GREEN	INHERENTLY LUBRICATED SILICONE
CPA	CPA	RED	PBT GF30
TPA	INSERT, TPA	NATURAL	PBT GF30

FOR ADDITIONAL INFORMATION SEE SD-34062-002

ASSEMBLY DESCRIPTION	ASSEMBLY PART NUMBER	COMPONENT				ASSEMBLY OPERATING TEMPERATURE	RECOMMENDED MATING DEVICE			PRODUCTION TOOL STATUS	COMMENTS	
		THE PRESENCE OF AN ABBREVIATION INDICATES THE PRESENCE OF THAT COMPONENT.					1	2	3			
		HOUSING KEY/COLOR	TPA	CPA	RING SEAL							
KEY A, BLACK, W/O CPA	34062-0021	A-BLK	TPA		R3	-40°C TO 125°C	1			SALEABLE		
KEY B, LIGHT GRAY, W/O CPA	34062-0022	B-LG	TPA		R3	-40°C TO 125°C	1			SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, W/O CPA	34062-0023	C-BLK	TPA		R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY D, BLACK, W/O CPA	34062-0024	D-BLK	TPA		R3	-40°C TO 125°C	1			SALEABLE		
KEY D, LIGHT GRAY, W/O CPA	34062-0029	D-LG	TPA		R3	-40°C TO 125°C	1			SALEABLE		
KEY A, BLACK, W/ CPA	34062-0025	A-BLK	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY B, LIGHT GRAY, W/ CPA	34062-0026	B-LG	TPA	CPA	R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, W/ CPA	34062-0027	C-BLK	TPA	CPA	R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY D, BLACK, W/ CPA	34062-0028	D-BLK	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY D, LIGHT GRAY, W/ CPA	34062-0030	D-LG	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY A, BLACK, WITH CLIPSLOT, W/O CPA	34062-0031	A-BLK-CLIP	TPA		R3	-40°C TO 125°C	1			SALEABLE		
KEY B, LIGHT GRAY, WITH CLIPSLOT, W/O CPA	34062-0032	B-LG-CLIP	TPA		R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, WITH CLIPSLOT, W/O CPA	34062-0033	C-BLK-CLIP	TPA		R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY D, BLACK, WITH CLIPSLOT, W/O CPA	34062-0034	D-BLK-CLIP	TPA		R3	-40°C TO 125°C	1			SALEABLE		
KEY D, LIGHT GRAY, WITH CLIPSLOT, W/O CPA	34062-0035	D-LG-CLIP	TPA		R3	-40°C TO 125°C	1			SALEABLE		
KEY A, BLACK, WITH CLIPSLOT, W/ CPA	34062-0036	A-BLK-CLIP	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY B, LIGHT GRAY, WITH CLIPSLOT, W/ CPA	34062-0037	B-LG-CLIP	TPA	CPA	R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, WITH CLIPSLOT, W/ CPA	34062-0038	C-BLK-CLIP	TPA	CPA	R3	-40°C TO 125°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY D, BLACK, WITH CLIPSLOT, W/ CPA	34062-0039	D-BLK-CLIP	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY D, LIGHT GRAY, WITH CLIPSLOT, W/ CPA	34062-0040	D-LG-CLIP	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY C, BLACK, SEVERE VIBRATION, W/ CPA	34062-4008	C-BLK-SV	TPA	CPA	R4	-40°C TO 155°C	1			SALEABLE	PREFERRED, FULLY SHROUDED	
KEY D, BLACK, SEVERE VIBRATION, W/ CPA	34062-4009	D-BLK-SV	TPA	CPA	R4	-40°C TO 155°C	1			SALEABLE		
KEY E, BLACK, W/O CPA	34062-0041	E-BLK	TPA		R4	-40°C TO 155°C		2		SALEABLE	PREFERRED, FULLY SHROUDED	
KEY F, LIGHT GRAY, W/O CPA	34062-0042	F-LG	TPA		R4	-40°C TO 155°C		2		SALEABLE	PREFERRED, FULLY SHROUDED	
KEY G, BLACK, W/O CPA	34062-0043	G-BLK	TPA		R4	-40°C TO 155°C		2		SALEABLE	PREFERRED, FULLY SHROUDED	
KEY E, BLACK, W/ CPA	34062-0044	E-BLK	TPA	CPA	R4	-40°C TO 155°C		2		SALEABLE	PREFERRED, FULLY SHROUDED	
KEY F, LIGHT GRAY, W/ CPA	34062-0045	F-LG	TPA	CPA	R4	-40°C TO 155°C		2		SALEABLE	PREFERRED, FULLY SHROUDED	
KEY G, BLACK, W/ CPA	34062-0046	G-BLK	TPA	CPA	R4	-40°C TO 155°C		2		SALEABLE	PREFERRED, FULLY SHROUDED	
KEY A, BLACK, W/ CPA	34062-0047	A-BLK	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		
KEY B, LIGHT GRAY, W/O CPA	34062-0048	B-LG	TPA		R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, W/O CPA	34062-0049	C-BLK	TPA		R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY B, LIGHT GRAY, W/ CPA	34062-0050	B-LG	TPA	CPA	R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, W/ CPA	34062-0051	C-BLK	TPA	CPA	R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY B, LIGHT GRAY, WITH CLIPSLOT, W/O CPA	34062-0052	B-LG-CLIP	TPA		R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, WITH CLIPSLOT, W/O CPA	34062-0053	C-BLK-CLIP	TPA		R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY B, LIGHT GRAY, WITH CLIPSLOT, W/ CPA	34062-0054	B-LG-CLIP	TPA	CPA	R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, WITH CLIPSLOT, W/ CPA	34062-0055	C-BLK-CLIP	TPA	CPA	R4	-40°C TO 155°C	1		3	SALEABLE	PREFERRED, FULLY SHROUDED	
KEY C, BLACK, SEVERE VIBRATION, W/O CPA	34062-4003	C-BLK-SV	TPA		R4	-40°C TO 155°C	1			SALEABLE	PREFERRED, FULLY SHROUDED	
KEY D, BLACK, SEVERE VIBRATION, W/O CPA	34062-4004	D-BLK-SV	TPA		R4	-40°C TO 155°C	1			SALEABLE		
KEY D, BLACK, WITH CLIPSLOT, W/ CPA	34062-0056	D-BLK-CLIP	TPA	CPA	R4	-40°C TO 155°C	1			SALEABLE		
KEY A, BLACK, WITH CLIPSLOT, W/ CPA	34062-0057	A-BLK-CLIP	TPA	CPA	R3	-40°C TO 125°C	1			SALEABLE		

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А