

## FEATURES

- Replaces a Power Schottky Diode
- Internal  $20\text{m}\Omega$  N-Channel MOSFET
- $0.5\mu\text{s}$  Turn-Off Time Limits Peak Fault Current
- Operating Voltage Range: 9V to 26.5V
- Smooth Switchover without Oscillation
- No Reverse DC Current
- Available in 14-Pin ( $4\text{mm} \times 3\text{mm}$ ) DFN and 16-Lead TSSOP Packages

## APPLICATIONS

- N+1 Redundant Power Supplies
- High Availability Systems
- Telecom Infrastructure
- Automotive Systems

## DESCRIPTION


The LTC<sup>®</sup>4358 is a 5A ideal diode that uses an internal  $20\text{m}\Omega$  N-channel MOSFET to replace a Schottky diode when used in diode-OR and high current diode applications. The LTC4358 reduces power consumption, heat dissipation, and PC board area.

The LTC4358 easily ORs power supplies together to increase total system reliability. In diode-OR applications, the LTC4358 regulates the forward voltage drop across the internal MOSFET to ensure smooth current transfer from one path to the other without oscillation. If the power source fails or is shorted, a fast turnoff minimizes reverse current transients.


**LT**, **LT**, **LTC** and **LTM** are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

12V, 5A Diode-OR

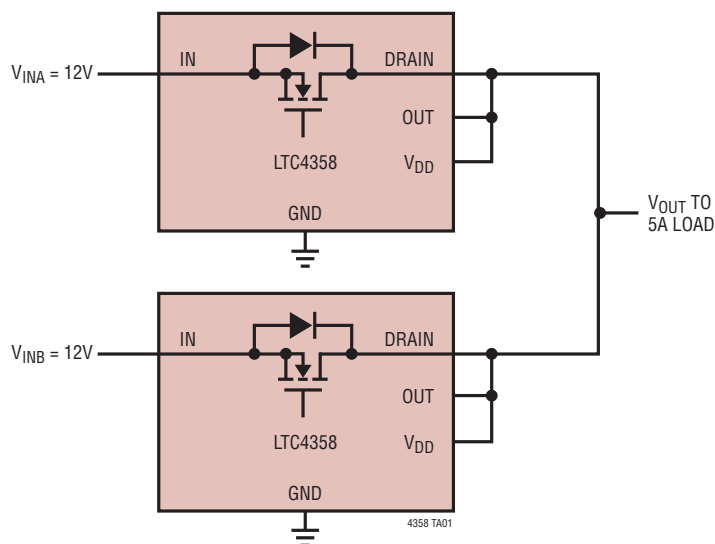

Power Dissipation vs Load Current

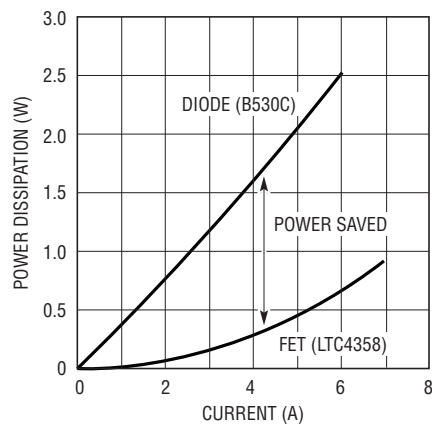


# LTC4358

## ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

|                                                |                                      |                |
|------------------------------------------------|--------------------------------------|----------------|
| Supply Voltages                                | Storage Temperature Range.....       | –65°C to 150°C |
| IN, OUT, V <sub>DD</sub> , DRAIN Voltage.....  | Lead Temperature (Soldering, 10 sec) |                |
| Output Voltage                                 | FE Package .....                     | 300°C          |
| GATE (Note 3).....                             |                                      |                |
| V <sub>IN</sub> – 0.2V to V <sub>IN</sub> + 6V |                                      |                |
| Operating Ambient Temperature Range            |                                      |                |
| LTC4358C .....                                 |                                      | 0°C to 70°C    |
| LTC4358I.....                                  |                                      | –40°C to 85°C  |

## PIN CONFIGURATION

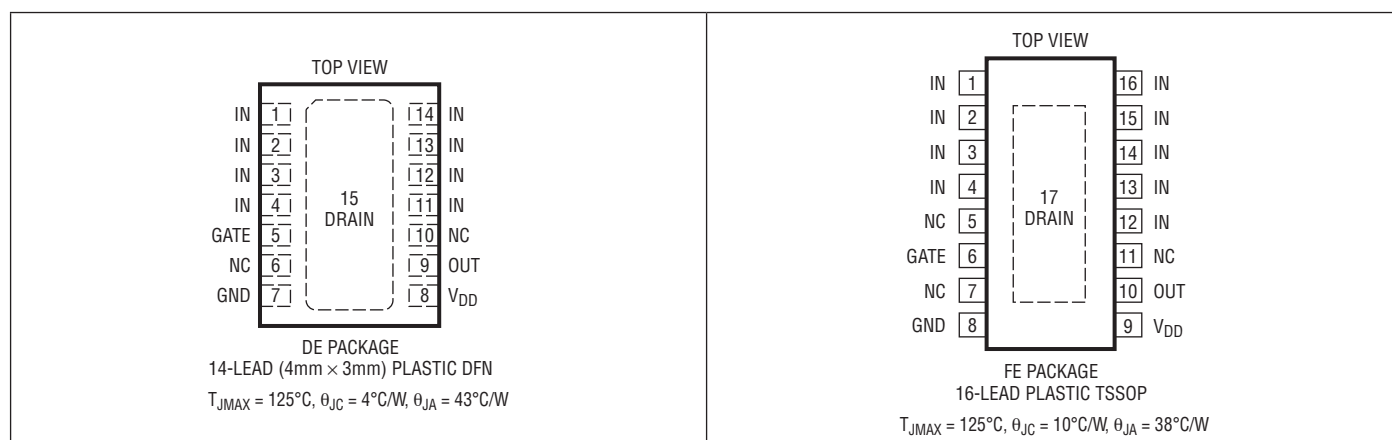

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL    | PART MARKING* | PACKAGE DESCRIPTION             | TEMPERATURE RANGE |
|------------------|------------------|---------------|---------------------------------|-------------------|
| LTC4358CDE#PBF   | LTC4358CDE#TRPBF | 4358          | 14-Lead (4mm × 3mm) Plastic DFN | 0°C to 70°C       |
| LTC4358IDE#PBF   | LTC4358IDE#TRPBF | 4358          | 14-Lead (4mm × 3mm) Plastic DFN | –40°C to 85°C     |
| LTC4358CFE#PBF   | LTC4358CFE#TRPBF | 4358FE        | 16-Lead Plastic TSSOP           | 0°C to 70°C       |
| LTC4358IFE#PBF   | LTC4358IFE#TRPBF | 4358FE        | 16-Lead Plastic TSSOP           | –40°C to 85°C     |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*Temperature grades are identified by a label on the shipping container. Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{OUT} = V_{DD}$ ,  $V_{DD} = 9\text{V}$  to  $26.5\text{V}$ , unless otherwise noted.







| SYMBOL            | PARAMETER                                              | CONDITIONS                                                                                                                             | MIN | TYP | MAX  | UNITS               |
|-------------------|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----|-----|------|---------------------|
| $V_{DD}$          | Operating Supply Range                                 | ●                                                                                                                                      | 9   |     | 26.5 | V                   |
| $I_{DD}$          | Operating Supply Current                               | ●                                                                                                                                      |     |     | 0.6  | mA                  |
| $I_{IN}$          | IN Pin Current                                         | $V_{IN} = V_{OUT} \pm 1\text{V}$ , No Load                                                                                             | ●   | 150 | 350  | 450 $\mu\text{A}$   |
| $I_{OUT}$         | OUT Pin Current                                        | $V_{IN} = V_{OUT} \pm 1\text{V}$ , No Load                                                                                             | ●   |     | 80   | 160 $\mu\text{A}$   |
| $I_{DRAIN}$       | DRAIN Pin Current                                      | $V_{IN} = 0\text{V}$ , $V_{OUT} = V_{DD} = V_{DRAIN} = 26.5\text{V}$                                                                   | ●   |     | 5    | 150 $\mu\text{A}$   |
| $\Delta V_{GATE}$ | N-Channel Gate Drive ( $V_{GATE} - V_{IN}$ )           | $V_{DD}$ , $V_{OUT} = 9\text{V}$ to $26.5\text{V}$                                                                                     | ●   | 4.5 |      | 15 V                |
| $I_{GATE(UP)}$    | N-Channel Gate Pull Up Current                         | $V_{GATE} = V_{IN}$ , $V_{IN} - V_{OUT} = 0.1\text{V}$                                                                                 | ●   | -14 | -20  | -26 $\mu\text{A}$   |
| $I_{GATE(DOWN)}$  | N-Channel Gate Pull Down Current in Fault Condition    | $V_{GATE} = V_{IN} + 5\text{V}$                                                                                                        | ●   | 1   | 2    | A                   |
| $t_{ON}$          | Turn-On Time                                           | $V_{IN} - V_{OUT} = -1\text{V} \downarrow 0.1\text{V}$ , $V_{DRAIN} = V_{IN}$ , $V_{OUT} = V_{DD}$ , $V_{GATE} - V_{IN} > 4.5\text{V}$ | ●   |     | 200  | 500 $\mu\text{s}$   |
| $t_{OFF}$         | Turn-Off Time                                          | $V_{IN} - V_{OUT} = 55\text{mV} \downarrow -1\text{V}$ , $V_{DRAIN} = V_{IN}$ , $V_{OUT} = V_{DD}$ , $V_{GATE} - V_{IN} < 1\text{V}$   | ●   |     | 300  | 500 ns              |
| $\Delta V_{SD}$   | Source-Drain Regulation Voltage ( $V_{IN} - V_{OUT}$ ) | $1\text{mA} < I_{IN} < 100\text{mA}$                                                                                                   | ●   | 10  | 25   | 55 mV               |
| $\Delta V_{SD}$   | Body Diode Forward Voltage Drop                        | $I_{IN} = 5\text{A}$ , MOSFET Off                                                                                                      | ●   | 0.6 | 0.8  | 1 V                 |
| $R_{DS(ON)}$      | Internal N-Channel MOSFET On Resistance                | $I_{IN} = 5\text{A}$                                                                                                                   | ●   |     | 20   | 40 $\text{m}\Omega$ |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** All currents into pins are positive, all voltages are referenced to GND unless otherwise specified.

**Note 3:** An internal clamp limits the GATE pin to a minimum of 6V above IN. Driving this pin to voltages beyond this clamp may damage the device.

TYPICAL PERFORMANCE CHARACTERISTICS

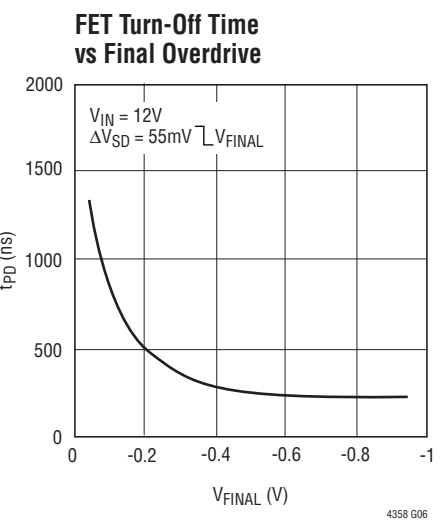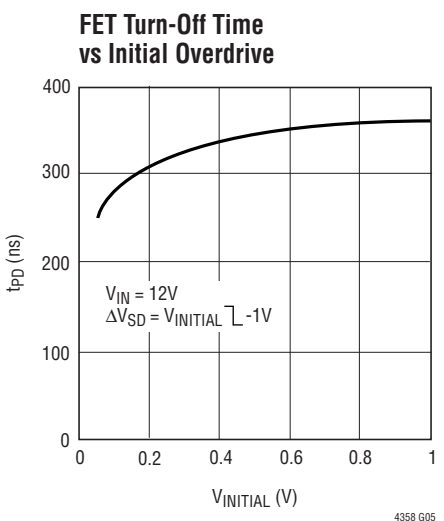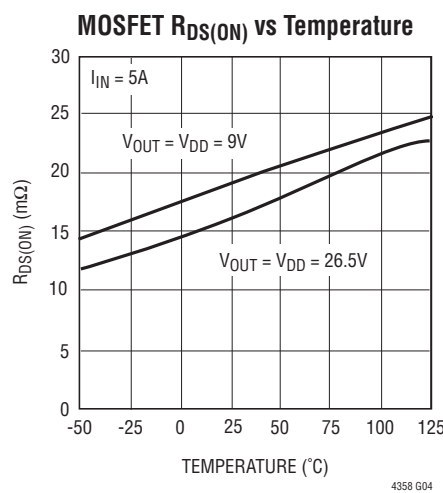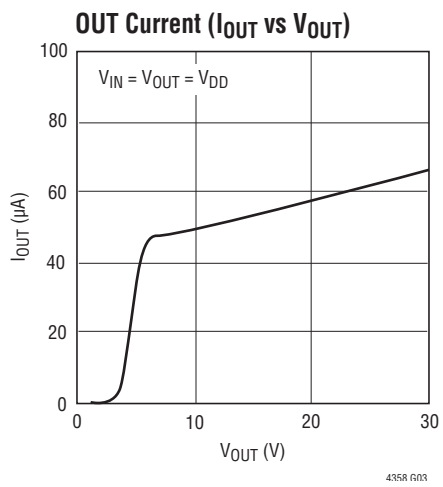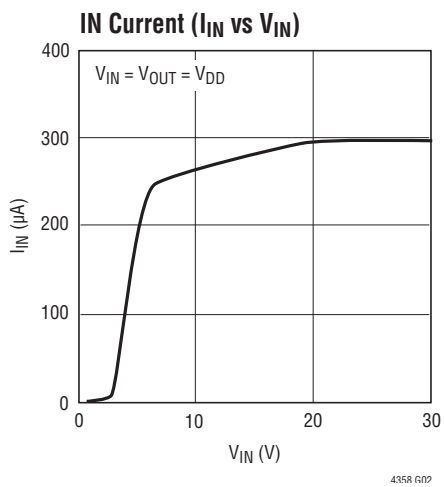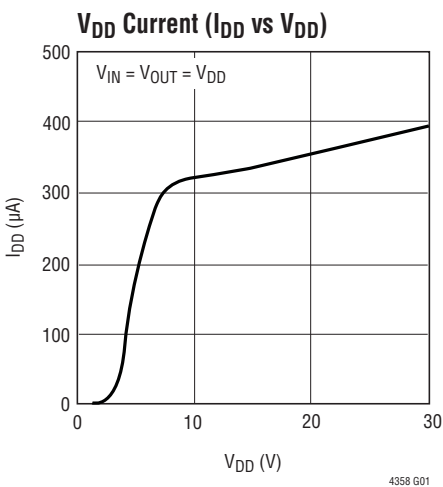

## PIN FUNCTIONS (DE/FE PACKAGES)

**DRAIN:** The exposed pad is the drain of the internal N-channel MOSFET. This pin must be connected to OUT (Pin 9/Pin 10).

**GATE:** Gate Drive Output. If reverse current flows, a fast pulldown circuit quickly connects the GATE pin to the IN pin, turning off the MOSFET. Leave open if unused.

**GND:** Device Ground.


**IN:** Input Voltage and Fast Pulldown Return. IN is the anode of the ideal diode. The voltage sensed at this pin is used to control the source-drain voltage drop across the internal MOSFET. If reverse current starts to flow, a fast pulldown circuit quickly turns off the internal MOSFET. The fast pulldown current is returned through this pin.

**NC:** No Connection. Not internally connected.

**OUT:** Output Voltage. The OUT pin is the cathode of the ideal diode and the common output when multiple LTC4358s are configured as an ideal diode-OR. The voltage sensed at this pin is used to control the source-drain voltage drop across the MOSFET. Connect this pin to the drain of the internal N-channel MOSFET (Pin 15/Pin 17).

**V<sub>DD</sub>:** Positive Supply Input. The LTC4358 is powered from the V<sub>DD</sub> pin. Connect this pin to OUT either directly or through an RC hold-up circuit.

## BLOCK DIAGRAM

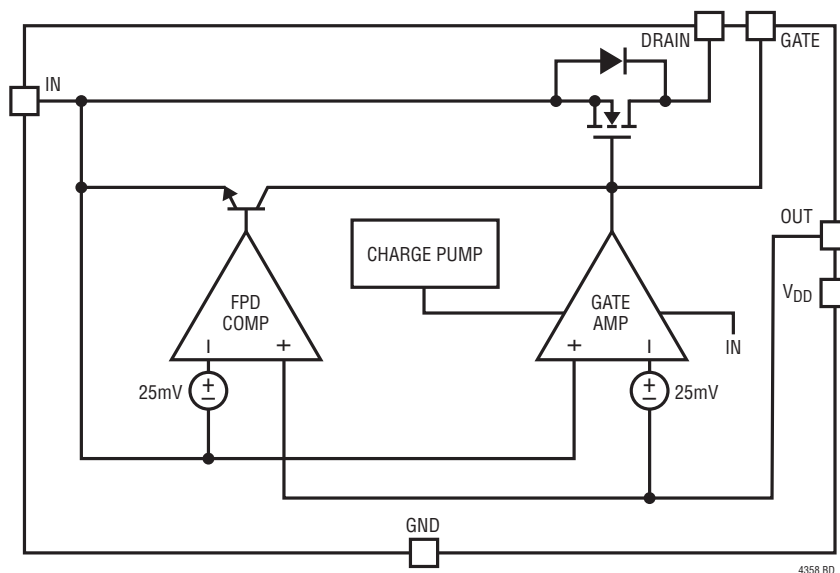

## OPERATION

High availability systems often employ parallel-connected power supplies or battery feeds to achieve redundancy and enhance system reliability. ORing diodes have been a popular means of connecting these supplies at the point of load. The disadvantage of this approach is the forward voltage drop and resulting efficiency loss. This drop reduces the available supply voltage and dissipates significant power. Using an N-channel MOSFET to replace a Schottky diode reduces the power dissipation and eliminates the need for costly heat sinks or large thermal layouts in high power applications.

The LTC4358 is a single positive voltage ideal diode controller that drives an internal N-channel MOSFET as a pass transistor to replace a Schottky diode. The IN and DRAIN pins form the anode and cathode of the ideal diode. The input supply is connected to the IN pins, while the DRAIN pin serves as the output. The OUT pin is connected directly to DRAIN and  $V_{DD}$ .  $V_{DD}$  is the supply for the LTC4358 and is derived from the output either directly or through an RC hold-up circuit.

At power-up, the load current initially flows through the body diode of the internal MOSFET. The internal MOSFET turns on and the amplifier tries to regulate the voltage drop across the IN and OUT connections to 25mV. If the load current causes more than 25mV of drop, the MOSFET is driven fully on and the voltage drop is equal to  $R_{DS(ON)} \cdot I_{LOAD}$ .

If the load current is reduced causing the forward drop to fall below 25mV, the internal MOSFET is driven lower by a weak pull-down in an attempt to maintain the drop at 25mV. If the load current reverses the MOSFET is turned off with a strong pull-down.

In the event of a power supply failure, such as if the supply that is conducting most or all of the current is shorted to ground, reverse current temporarily flows through the LTC4358 ideal diode that is on. This current is sourced from any load capacitance and from the other supplies. The ideal diode is turned off within 500ns, preventing reverse current from slewing up to a damaging level and minimizing any disturbance on the output.

## APPLICATIONS INFORMATION

### ORing Two Supply Outputs

Where LTC4358s are used to combine the outputs of two supplies, the power supply with the highest output voltage sources most or all of the current. If this supply's output is quickly shorted to ground while delivering load current, the current temporarily reverses and flows backwards through the LTC4358. When reverse current flows the LTC4358 ideal diode is quickly turned off.

If the other initially lower supply was not delivering load current at the time of the fault, the output falls until the LTC4358 body diode conducts. Meanwhile, the internal amplifier turns on the MOSFET until the forward drop is reduced to 25mV. If instead this supply was delivering load current at the time of the fault, its ORing MOSFET was already driven at least partially on, and will be driven harder in an effort to maintain a drop of 25mV.

### Load Sharing

Figure 1 combines the outputs of multiple, redundant supplies using a simple technique known as droop sharing. Load current is first taken from the highest output, with the low outputs contributing as the output voltage falls under increased loading. The 25mV regulation technique ensures smooth load sharing between outputs without oscillation. The degree of sharing depends on the 20mΩ resistance of the LTC4358 internal MOSFET, the output impedance of the supplies and their initial output voltages.

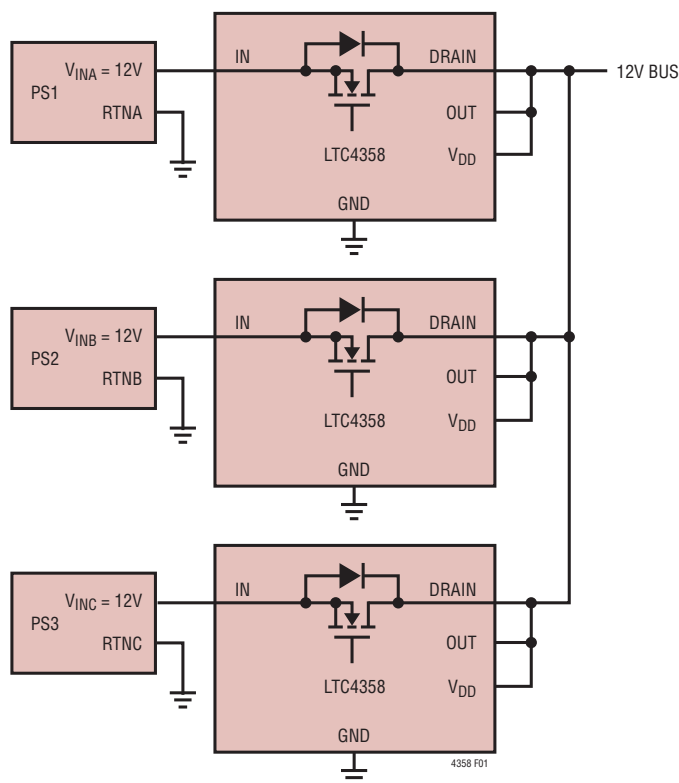


Figure 1. Droop Sharing Redundant Supplies

## APPLICATIONS INFORMATION

### $V_{DD}$ Hold-Up Circuit

In the event of an input short, parasitic inductance between the input supply of the LTC4358 and the load bypass capacitor may cause  $V_{DD}$  to glitch below its minimum operating voltage. This causes the turn-off time ( $t_{OFF}$ ) to increase. To preserve the fast turn-off time, local output bypassing of 39 $\mu$ F or more is sufficient or a 100 $\Omega$ , 0.1 $\mu$ F RC hold-up circuit on the  $V_{DD}$  pin can be used as shown in Figure 2a and Figure 2b.

### Layout Considerations

The following advice should be considered when laying out a printed circuit board for the LTC4358: The OUT pin should

be connected as closely as possible to the EXPOSED PAD (drain of the MOSFET) for good accuracy. Keep the traces to the IN and DRAIN wide and short. The PCB traces associated with the power path through the MOSFET should have low resistance. See Figure 4.

The DRAIN acts as a heatsink to remove the heat from the device. For a single layer PCB with the DFN package, use Figure 5 to determine the PCB area needed for a specified maximum current and ambient temperature. If using a two sided PCB, the maximum current is increased by 10%. If the FE package is used, the maximum current is increased by 4%.

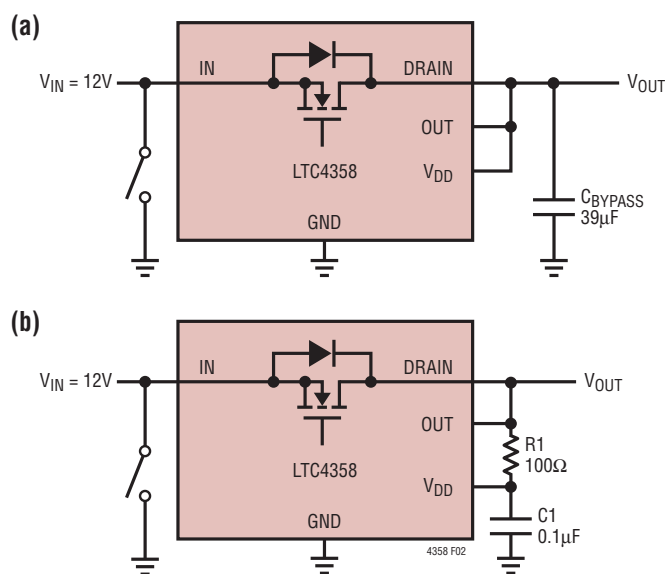


Figure 2. Two Methods of Protecting Against Collapse of  $V_{DD}$  From Input Short and Stray Inductance

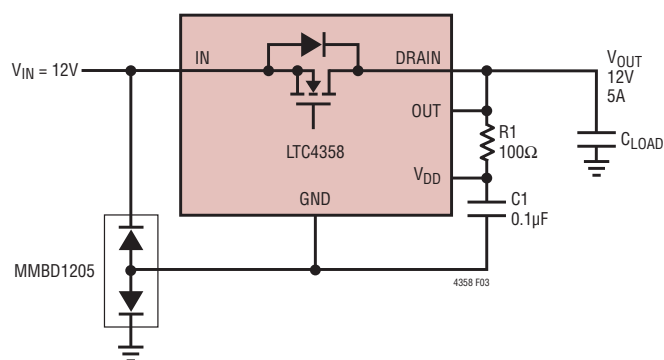


Figure 3. -12V Reverse Input Protection

## APPLICATIONS INFORMATION

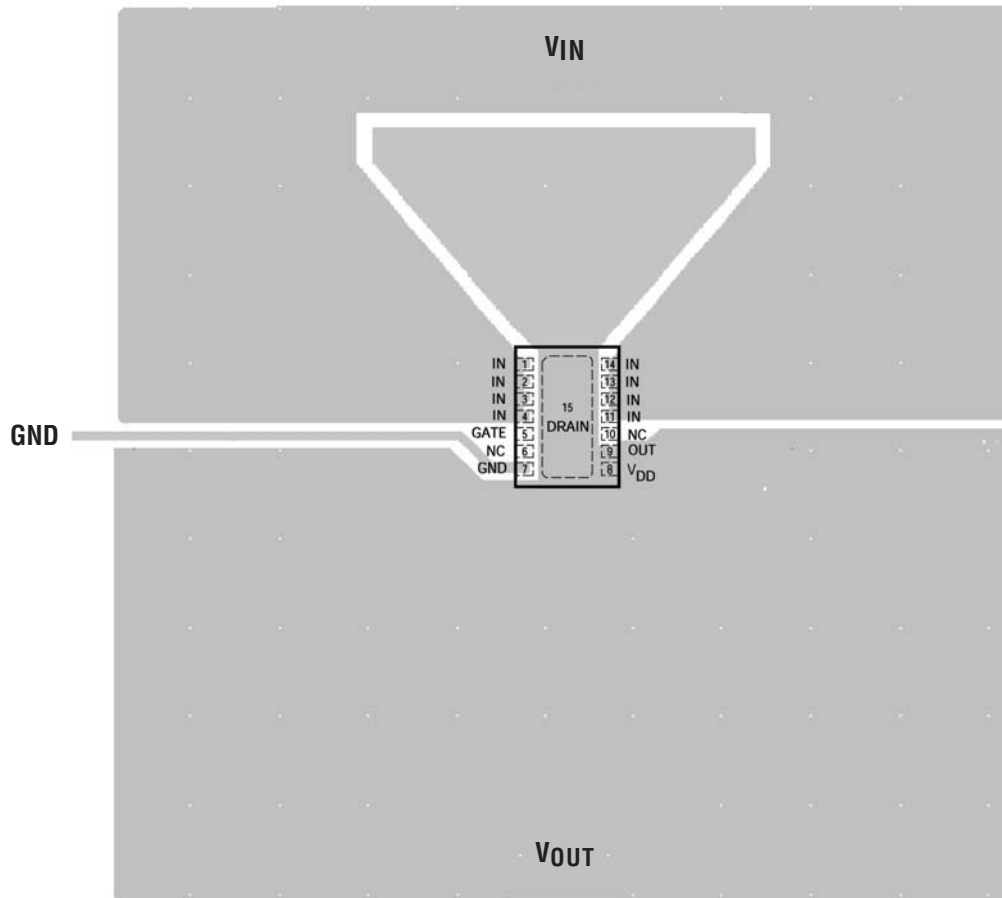


Figure 4. DFN Layout Considerations for 1" × 1" Single Sided PCB


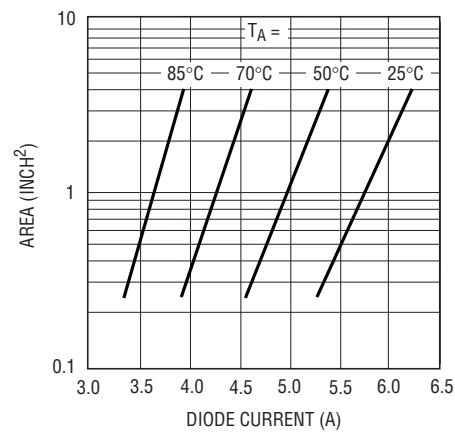




Figure 5. Maximum Diode Current vs PCB Area

# PACKAGE DESCRIPTION

## DE Package 14-Lead Plastic DFN (4mm × 3mm) (Reference LTC DWG # 05-08-1708)

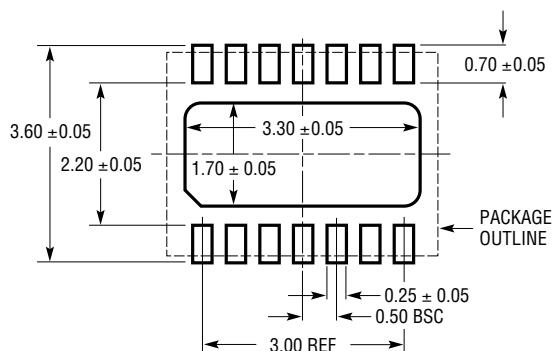

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

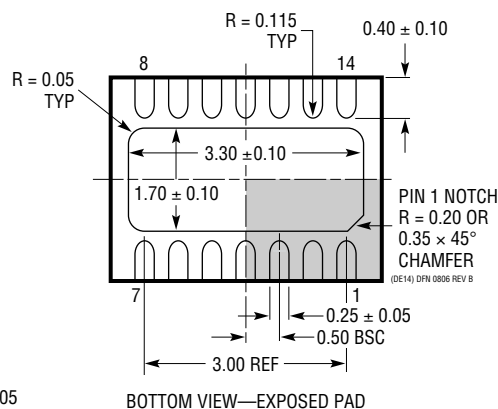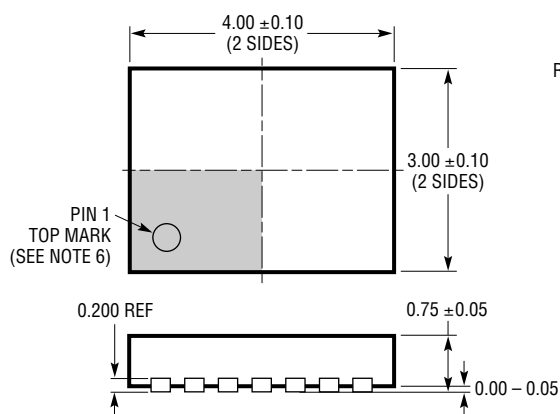


### NOTE:

1. DRAWING PROPOSED TO BE MADE VARIATION OF VERSION (WGED-3) IN JEDEC PACKAGE OUTLINE MO-229
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE



## TYPICAL APPLICATION

Plug-In Card Input Diode for Supply Hold-Up

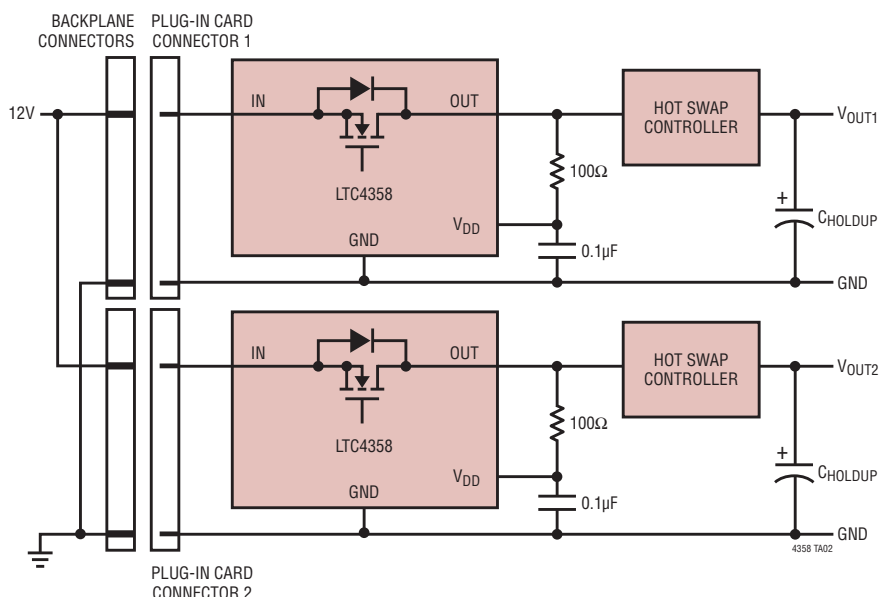

## RELATED PARTS

| PART NUMBER                                   | DESCRIPTION                                                           | COMMENTS                                                                                                   |
|-----------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| LT1640AH/LT1640AL                             | Negative High Voltage Hot Swap™ Controllers in SO-8                   | Negative High Voltage Supplies From –10V to –80V                                                           |
| LT1641-1/LT1641-2                             | Positive High Voltage Hot Swap Controllers                            | Active Current Limiting, Supplies From 9V to 80V                                                           |
| LT4250                                        | –48V Hot Swap Controller                                              | Active Current Limiting, Supplies From –20V to –80V                                                        |
| LTC4251/LTC4251-1/<br>LTC4251-2               | –48V Hot Swap Controllers in SOT-23                                   | Fast Active Current Limiting, Supplies From –15V                                                           |
| LTC4252-1/LTC4252-2/<br>LTC4252-1A/LTC4252-2A | –48V Hot Swap Controllers in MS8/MS10                                 | Fast Active Current Limiting, Supplies From –15V, Drain Accelerated Response                               |
| LTC4253                                       | –48V Hot Swap Controller with Sequencer                               | Fast Active Current Limiting, Supplies From –15V, Drain Accelerated Response, Sequenced Power Good Outputs |
| LT4256                                        | Positive 48V Hot Swap Controller with Open-Circuit Detect             | Foldback Current Limiting, Open-Circuit and Overcurrent Fault Output, Up to 80V Supply                     |
| LTC4260                                       | Positive High Voltage Hot Swap Controller                             | With I <sup>2</sup> C and ADC, Supplies from 8.5V to 80V                                                   |
| LTC4261                                       | Negative High Voltage Hot Swap Controller                             | With I <sup>2</sup> C and 10-Bit ADC, Adjustable Inrush and Overcurrent Limits                             |
| LTC4350                                       | Hot Swappable Load Share Controller                                   | Output Voltage: 1.2V to 20V, Equal Load Sharing                                                            |
| LT4351                                        | MOSFET Diode-OR Controller                                            | External N-Channel MOSFETs Replace ORing Diodes, 1.2V to 20V                                               |
| LTC4352                                       | Ideal Diode Controller with Monitor                                   | Controls N-Channel MOSFET, 0V to 18V Operation                                                             |
| LTC4354                                       | Negative Voltage Diode-OR Controller and Monitor                      | Controls Two N-Channel MOSFETs, 1μs Turn-Off, 80V Operation                                                |
| LTC4355                                       | Positive Voltage Diode-OR Controller and Monitor                      | Controls Two N-Channel MOSFETs, 0.5μs Turn-Off, 80V Operation                                              |
| LTC4357                                       | Positive High Voltage Ideal Diode Controller                          | Controls Single N-Channel MOSFET, 0.5μs Turn-Off, 80V Operation                                            |
| LTC4223-1/LTC4223-2                           | Dual Supply Hot Swap Controller for Advanced Mezzanine Cards and μTCA | Controls 12V Main and 3.3V Auxiliary Supplies                                                              |

Hot Swap is a trademark of Linear Technology Corporation.

4358fa

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А