

| DXM5S

OPTICAL INCREMENTAL ENCODERS



Features

- Adapted to food and beverage – pharmaceutical - river – offshore applications
- Stainless steel encoder (316) with hygienic design
- Flanges and shaft adapted to the market needs
- Robustness and excellent resistance to shocks / vibrations
- Double ball bearings with safety lock system
- Solid shaft version Ø10mm
- High protection level IP69K
- Universal power supply 5 to 30Vdc
- Industrial standard electronic RS422/TTL and HTL
- High performances in temperature –30°C to +100°C
- Optical technology, contactless
- Resolutions available : up to 80 000 ppr
- Adapted axial cable gland output



SPECIFICATIONS

Material	Shaft: Stainless steel 316 Cover: Stainless steel 316 Body: Stainless steel 316
Bearings	Double ball bearings
Maximum Loads	Axial: 250 N Radial: 500 N
Shaft Inertia	$\leq 1,2 \cdot 10^{-6} \text{ kg.m}^2$
Torque	$\leq 90 \cdot 10^{-3} \text{ N.m}$
Permissible Max. Speed	4,000 min ⁻¹
Continuous max. speed	3,000 min ⁻¹
Shocks (EN60068-2-27)	$\leq 500 \text{ m.s}^{-2}$ (during 6 ms)
Vibrations (EN60068-2-6)	$\leq 100 \text{ m.s}^{-2}$ (55 ... 2,000 Hz)
EMC	EN 50081-1, EN 61000-6-2
Isolation	1,000 Veff
Encoder weight (approx.)	0,600 kg
Operating temperature	- 30 ... + 100 °C (encoder T°)
Storage temperature	- 40 ... + 100 °C
Protection(EN 60529)	IP 69K

Theoretical mechanical lifetime 10^9 turns (F_{axial} / F_{radial})

50 N / 100 N

12


250 N / 500 N

0,5




DIGITAL OUTPUT SIGNALS (SQUARE WAVE SIGNALS)

Electronic 2G2 (100°C, 300kHz)




Supply	5Vdc ± 10%
Cons. without load	75mA max
Current per channel	40mA max
0 max (Is=20mA)	$V_{ol} = 0,5Vdc$
1 min (Is=20mA)	$V_{oh} = 4Vdc$

Electronic RG2 (100°C, 300kHz)




Supply	4,75 to 30Vdc
Cons. without load	75mA max
Current per channel	40mA max
0 max (Is=20mA)	$V_{ol} = 0,5Vdc$
1 min (Is=20mA)	$V_{oh} = 4Vdc$

Electronic PG5 (100°C, 300kHz)



Supply	5 to 30Vdc
Cons. without load	75mA max
Current per channel	40mA max
0 max (Is=20mA)	$V_{ol} = 0,5Vdc$
1 min (Is=20mA)	$V_{oh} = V_{cc}-2,5Vdc$

Electronic 5GT (70°C, 120kHz)




Supply	11 to 30Vdc
Cons. without load	75mA max
Current per channel	40mA max
0 max (Is=20mA)	$V_{ol} = 1,5Vdc$
1 min (Is=20mA)	$V_{oh} = V_{cc}-2,5Vdc$



SINE WAVE OUTPUT SIGNALS

Electronic 5GT (70°C, 120kHz)



Supply	11 to 30Vdc
Cons. without load	75mA max
Current per channel	40mA max
0 max (Is=20mA)	$V_{ol} = 1,5Vdc$
1 min (Is=20mA)	$V_{oh} = V_{cc}-2,5Vdc$

ELECTRONIC PROTECTIONS

Protection against short circuits of the electronics: 2G2, RG2, PG5, 5GT and 2WT


Protection against reverse polarity for all the electronics except 2G2 and 2WT

Consult us for special electronics: programmable resolution, 5 to 36Vdc, 100mA per channel...

STANDARD CONNECTIONS

Type	Cable	0V	+V	A or S	B or C	Z	A/ or S/	B/ or C/	Z/	Ground
G3	PVC cable 8 wires 8230/020	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General shielding

DIMENSIONS

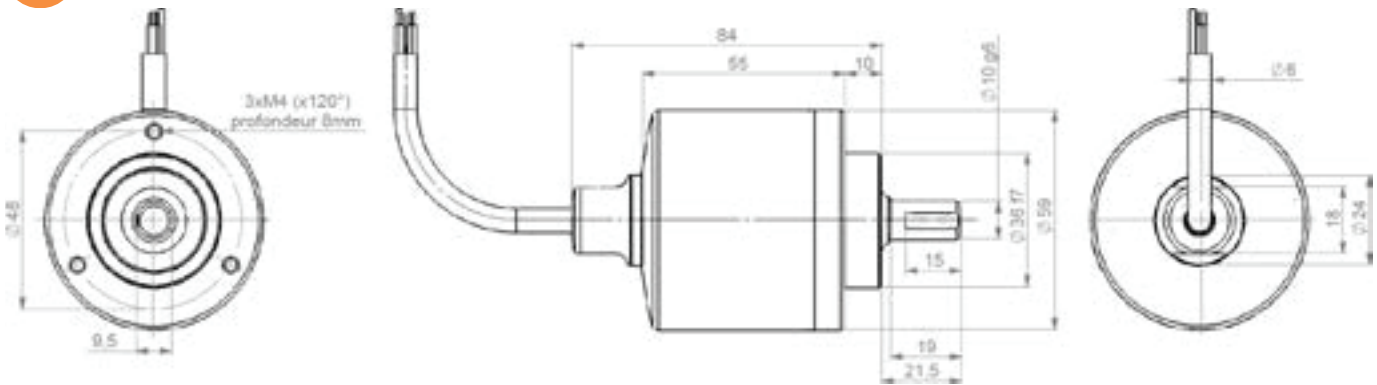

ORDERING OPTIONS

Example : DXM5S10/AA/RG59//01024//TEA050

	DXM5S	10/AA	/	RG5	9	//	010024	//	TEA	050
Family										
DXM5S: Solid shaft encoder/encoder										
Shaft Bore/ Mechanics										
10/AA: 10mm shaft										
316 stainless steel encoder with IP69K										
Voltage/ Output										
5GT: 11-30V voltage and push-pull output										
RG5: 4.75-30V voltage and push-pull output										
2G2: 5V voltage and RS422 output										
RG2: 4.75-30V voltage and RS422 output										
2WT: 5V voltage and 1Vpp output										
Channels										
9: AA/ BB/ ZZ/ B before A Z gated A&B										
For 2WT/encoder,										
N: SS/ CC/ ZZ/ C before S Z ungated										
Cycles/ Turns										
(Enter Cycles)										
See available resolutions above										
Output Termination										
TEA: Silicone cable										
Cable Length										
XXX: cable length ex. 020 = 2meters										



AVAILABLE RESOLUTIONS

Available resolutions digital signals: 50 60 100 120 125 127 150 180 200 240 250 256 300 314 360 375 400 500 512 600 720 750 768 800 927 1000 1024 1200 1250 1280 1440 1500 1800 2000 2048 2400 2500 3000 3600 4000 4096 5000

Interpolated available resolutions digital signals (limited to 70°C): 1080 1536 2560 2880 3072 4320 4500 5120 5400 5760 6000 6144 7200 7500 8000 8192 9000 10000 10240 10800 12000 12500 12288 14400 15000 16000 16384 18000 20000 20480 21600 24000 24576 25000 28800 30000 32000 32768 36000 40000 40960 43200 48000 49152 50000 57600 60000 64000 65536 80000

Available resolutions sine wave signals (2WT electronic) : 250 256 360 500 512 1000 1024 1500 1800 2000 2048 2500



AGENCY APPROVALS & CERTIFICATIONS



WARNINGS



RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

Failure to follow these instructions can result in serious injury, or equipment damage.



HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

Failure to follow these instructions will result in death or serious injury.

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727

sensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080

position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006
ext 2808

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А