5.0x7.0mm Surface Mount LVDS Clock Oscillator Series

CONNOR WINFIELD

2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com
US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Description

The Connor Winfield Lxxx - Series is a 5x7.5mm Surface Mount, LVDS, Fixed Frequency Crystal Controlled Oscillator (XO) designed for applications requiring tight frequency stability, wide temperature range and low jitter. Operating at 2.5V or 3.3V supply voltage, the Lxxx - Series provides an LVDS Differential Outputs with enable / disable function. The surface mount package is designed for high-density mounting and is optimum for mass production.

Features:

Model Lxxx - Series
5.0 x7.0mm Surface Mount Package
2.5V or 3.3V Operation
LVDS Output Logic
Frequency Stabilities Available:
- L14x / L24x / L34x / L44x: +/-20ppm
- L11x / L21x / L31x / L41x: +/-25ppm
- L12x / L22x / L32x / L42x: +/-50ppm
- L13x / L23x / L33x / L43x: +/-100ppm

Temperature Ranges Available:
- L1xx Series: 0 to 70°C
- L2xx Series: -40 to 85°C
- L3xx Series: 0 to 85°C
- L4xx Series: -20 to 70°C

Low Jitter <1pS RMS
Tri-State Enable/Disable on Pad 1 or 2
Tape and Reel Packaging
RoHS Compliant / Lead Free ✓RoHS

Model Specifications

Absolute Maximum Ratings

Table 1.0

Parameter	Units	Minimum	Nominal	Maximum	Units	Note
Storage Temperature		-55	-	125	°C	
Supply Voltage	(Vcc)	-0.5	-	4.6	Vdc	
Input Voltage		-0.5	-	Vcc+0.5	Vdc	

Operating Specifications

Table 2.0

Parameter		Minimum	Nominal	Maximum	Units	Note
Center Frequency	(Fo)	20	-	260	MHz	
Total Frequency Tolerance		(See Table 9 for full part number)				
Model Lx4x (See Table 9)		-20	-	20	ppm	1
Model Lx1x (See Table 9)		-25	-	25	ppm	1
Model Lx2x (See Table 9)		-50	-	50	ppm	1
Model Lx3x (See Table 9)		-100	-	100	ppm	1
Operating Temperature Range						
Model L1xx (See Table 9)		0	-	70	°C	
Model L3xx (See Table 9)		0	-	85	°C	
Model L2xx (See Table 9)		-40	-	85	°C	
Model L4xx (See Table 9)		-20	-	70	°C	
Supply Voltage	(Vcc)					
Model Lxx2 E/D Pad 1 (See Table 9)		2.375	2.500	2.625	Vdc	
Model Lxx3 E/D Pad 1 (See Table 9)		3.135	3.3	3.465	Vdc	
Model Lxx4 E/D Pad 2 (See Table 9)		2.375	2.500	2.625	Vdc	
Model Lxx5 E/D Pad 2 (See Table 9)		3.135	3.3	3.465	Vdc	
Supply Current	(Icc)	-	45	65	mA	
Period Jitter		-	3	5	ps RMS	
Phase Jitter (BW=12kHz to 20MHz)		-	0.5	1	ps RMS	
SSB Phase Noise at 10Hz offset		-	-60	-	dBc/Hz	
SSB Phase Noise at 100Hz offset		-	-90	-	dBc/Hz	
SSB Phase Noise at 1KHz offset		-	-125	-	dBc/Hz	
SSB Phase Noise at 10KHz offset		-	-140	-	dBc/Hz	
SSB Phase Noise at 100KHz offset		-	-145	-	dBc/Hz	

Input Characteristics

Table 3.0

Parameter		Minimum	Nominal	Maximum	Units	Note
Disable Input Voltage (Low)	(Vil)	-	-	0.3Vcc	Vdc	2
Enable Input Voltage (High)	(Vih)	0.7Vcc	-	-	Vdc	2
Enable Time		-	-	500	us	
Disable Time		-	-	200	ns	
Standby Current (when part is Disabled)	(Icc)	-	-	30	uA	

LVDS Output Characteristics

Table 4.0

Parameter		Minimum	Nominal	Maximum	Units	Note
LOAD		-	-	100	Ohms	
Output Differential Voltage	(Vod)	250	-	450	mV	3
Output Swing (Differential Output peak to peak)	(Vopp)	500	700	900	mV	
Duty Cycle measured at 50%		45	50	55	%	4
Differential Rise / Fall Time 20% to 80%		-	0.3	0.7	ns	

Package Characteristics

Table 5.0

Package	Hermetically sealed ceramic package and metal cover.
Soldering Process	RoHS compliant, lead free, see solder profile on page 2.

RoHS COMPLIANT

Bulletin	DS021
Page	1 of 2
Revision	04
Date	27 Oct 2008

Specifications subject to change without notice. All dimensions in inches. © Copyright 2007 The Connor-Winfield Corporation

CONNOR WINFIELD

2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com

Notes

1) Includes initial tolerance, deviation over temperature, supply and load variations, shock, vibration and 20 years aging.
2) When the oscillator is disabled, the outputs are at High Impedance. Output is enabled with no connection on E/D pad.
3) Vod measured with 100 ohm resistor between the true output and the complementary output.
4) Duty Cycle measured at 50% of output swing.

Ordering Information

L	1	4	3	-	155.52M
Type: LVDS Clock Series 5x7mm	Temperature Range: 1 = 0 to 70° C, 2 = -40 to 85° C, 3 = 0 to 85° C, 4 = -20 to 70° C	Frequency Stability: 4 = +/-20 ppm, 1 = +/-25 ppm, 2 = +/-50 ppm, 3 = +/-100 ppm	Supply Voltage: 2 = 2.5Vdc, E/D Pad 1, 3 = 3.3Vdc, E/D Pad 1, 4 = 2.5Vdc, E/D Pad 2, 5 = 3.3Vdc, E/D Pad 2.		Output Frequency: Frequency Format -xxx.xM Min.* -xxx.xxxxxxM Max.* *Amount of numbers after the decimal point. M = MHz

Example:
L143-155.52M = LVDS Output,
0 to 70, +/-20ppm, 3.3Vdc, E/D Pad 1, Output Frequency 155.52MHz

To order an L143 with an output frequency of:
25 MHz = L143-025.0M
44.736 MHz = L143-044.736M
155.52 MHz = L143-155.52M

Environmental Characteristics

Table 6

Vibration:	Vibration per Mil Std 883E Method 2007.3 Test Condition A
Shock:	Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B.
Soldering:	SMD product suitable for Convection Reflow soldering. Peak temperature 260 C. Maximum time above 220 C, 60 seconds.
Solderability	Solderability per Mil Std 883E Method 2003

Pad Connections - Enable / Disable Function

Table 7.0

Pad	Connection
1	Enable / Disable (Lxx2 or Lxx3 Models)
2	Enable / Disable (Lxx4 or Lxx5 Models)
3	Ground
4	Q Output
5	$\overline{Q}$ Output
6	Vcc

Table 8.0

Enable / Disable Function (Pad 1 or 2)	Output
High or Open	Enable
Low	Disable (High Impedance)

Model Matrix

Table 9.0

Frequency Tolerance ±20ppm	Frequency Tolerance ±25ppm	Frequency Tolerance ±50ppm	Frequency Tolerance ±100ppm	Supply Voltage	Temperature Range	Enable / Disable Function Pad
L142	**L112**	**L122**	**L132**	2.5Vdc	0 to 70°C	1
L342	**L312**	**L322**	**L332**	2.5Vdc	0 to 85°C	1
L242	**L212**	**L222**	**L232**	2.5Vdc	-40 to 85°C	1
L442	**L412**	**L422**	**L432**	2.5Vdc	-20 to 70°C	1
L143	**L113**	**L123**	**L133**	3.3Vdc	0 to 70°C	1
L343	**L313**	**L323**	**L333**	3.3Vdc	0 to 85°C	1
L243	**L213**	**L223**	**L233**	3.3Vdc	-40 to 85°C	1
L443	**L413**	**L423**	**L433**	3.3Vdc	-20 to 70°C	1
L145	**L115**	**L125**	**L135**	2.5Vdc	0 to 70°C	2
L345	**L315**	**L325**	**L335**	2.5Vdc	0 to 85°C	2
L245	**L215**	**L225**	**L235**	2.5Vdc	-40 to 85°C	2
L445	**L415**	**L425**	**L435**	2.5Vdc	-20 to 70°C	2
L144	**L114**	**L124**	**L134**	3.3Vdc	0 to 70°C	2
L344	**L314**	**L324**	**L334**	3.3Vdc	0 to 85°C	2
L244	**L214**	**L224**	**L234**	3.3Vdc	-40 to 85°C	2
L444	**L414**	**L424**	**L434**	3.3Vdc	-20 to 70°C	2

Tape and Reel Specifications

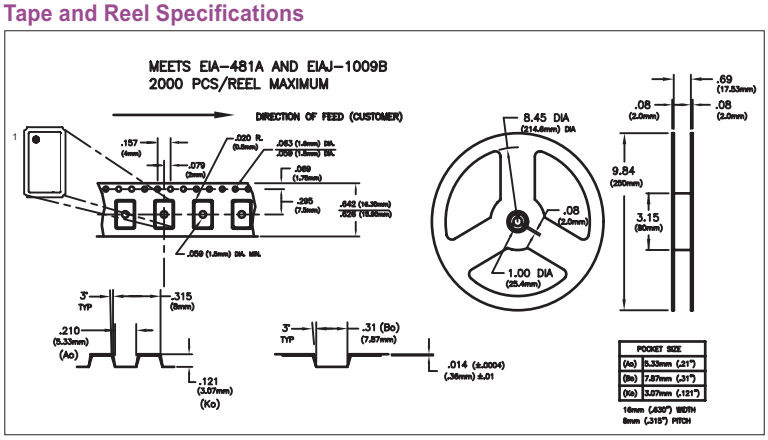

Package Outline

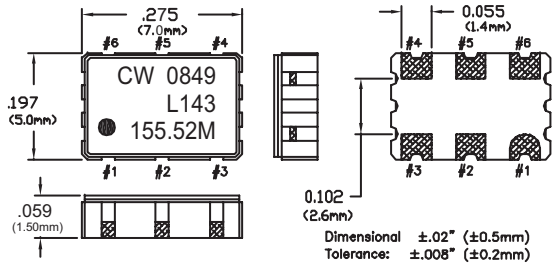

Suggested Pad Layout

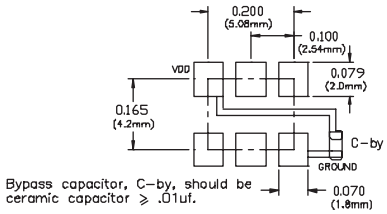

LVDS Output Waveform

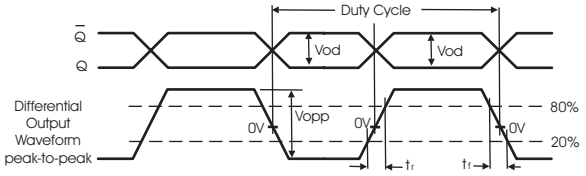

Test Circuit

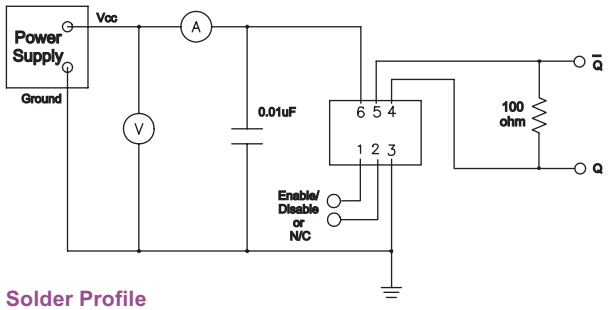

Solder Profile

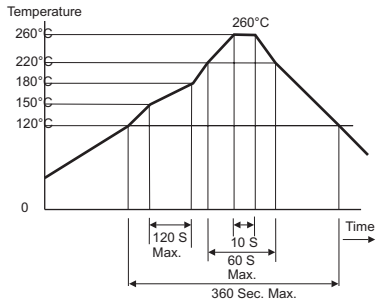

US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Specifications subject to change without notice. All dimensions in inches. © Copyright 2008 The Connor-Winfield Corporation

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А