


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
GP	00		A	RELEASED PER ECO-12-013192	06NOV2012	BMM	MRS	
			A1	RELEASED PER ECO-13-014600	11SEP2013	PP	SH	
			A3	RELEASED PER ECO-15-006578	20APR2015	PP	SH	

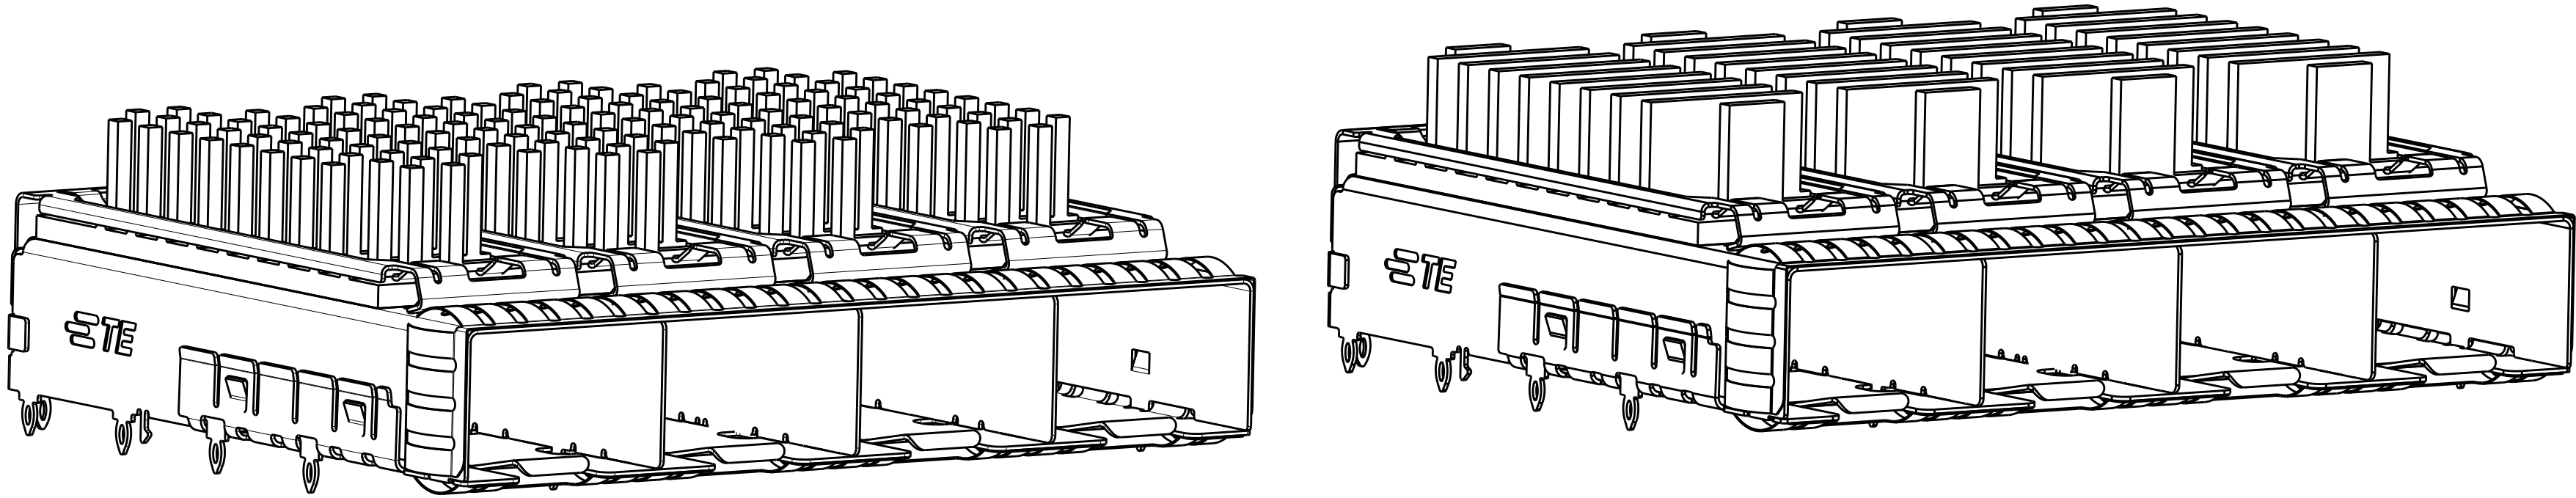

2149730-1,2,3,4,5
FINISHED ASSEMBLY WITH
PIN TYPE HEAT SINK

2149730-6,7,8,9,10
FINISHED ASSEMBLY WITH
FIN TYPE HEAT SINK

- 1

MATERIAL:
CAGE ASSEMBLY: 0.25mm THICK NICKEL SILVER ALLOY
HEATSINK CLIP: STAINLESS STEEL
HEATSINK: ALUMINUM
- 2

FINISH:
EMI SPRINGS: MINIMUM OF 0.8um TIN PLATE OVER A MINIMUM OF 0.8um NICKEL UNDERPLATE.
NON-PLATED EDGES PERMISSIBLE.
HEATSINK: ELECTROLESS NICKEL
HEATSINK CLIP: PASSIVATE
- 3

PADS AND VIAS CHASSIS GROUND.
- 4

DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 5

MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- 6

INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OF ASME Y14.5M-1994.
- 7

REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 8

REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 9


HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 14.25mm.
- 10

MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.50mm
DOUBLE SIDED = 2.25mm
- 11

CERTAIN MATING TRANSCEIVERS MAY REQUIRE ADDITIONAL PCB THICKNESS THAT WOULD BE DETERMINED BY THE CUSTOMER.
- 12

PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FROM FACTOR FOR SFP+ GANGED CAGES.


13 DIMENSION APPLIES PRIOR TO INSERTION OF SFP MODULE

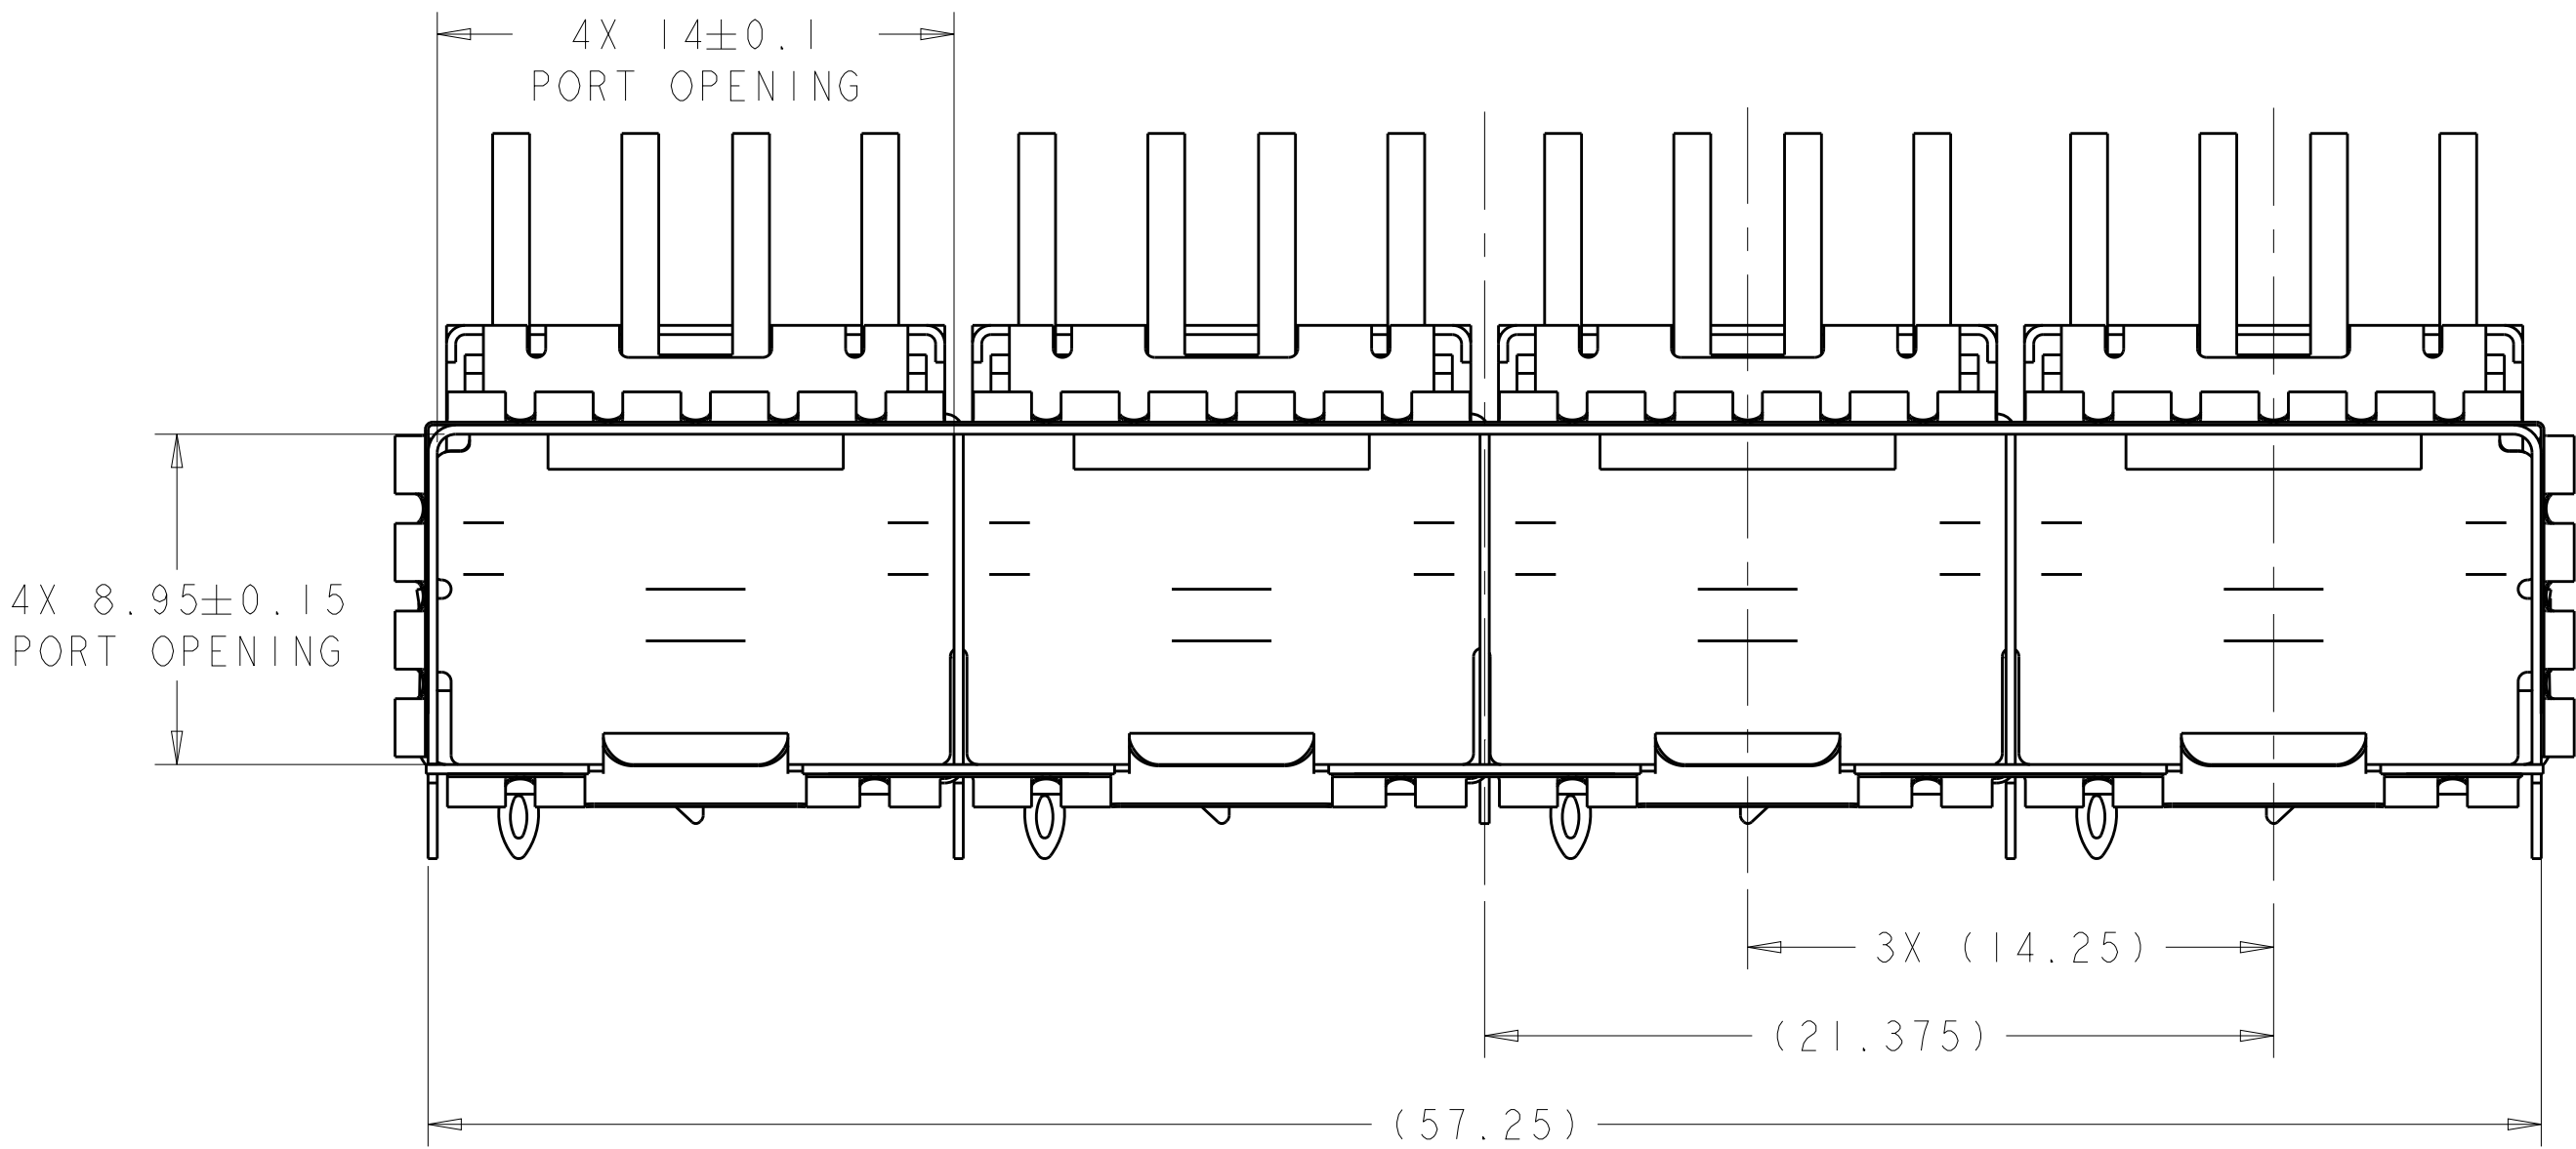


FIN TYPE	W/ INSULATING TAPE	22.5	NETWORKING, TALL	2149730-10
FIN TYPE	W/O INSULATING TAPE	22.5	NETWORKING, TALL	2149730-9
FIN TYPE	W/O INSULATING TAPE	15.5	SAN	2149730-8
FIN TYPE	W/O INSULATING TAPE	13.2	PCI	2149730-7
FIN TYPE	W/O INSULATING TAPE	18.1	NETWORKING, SHORT	2149730-6
PIN TYPE	W/ INSULATING TAPE	22.5	NETWORKING, TALL	2149730-5
PIN TYPE	W/O INSULATING TAPE	22.5	NETWORKING, TALL	2149730-4
PIN TYPE	W/O INSULATING TAPE	15.5	SAN	2149730-3
PIN TYPE	W/O INSULATING TAPE	13.2	PCI	2149730-2
PIN TYPE	W/O INSULATING TAPE	18.1	NETWORKING, SHORT	2149730-1
HEAT SINK TYPE	DESCRIPTION	A MAX	APPLICATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SCHMITT 23AUG2010	STE TE Connectivity	
DIMENSIONS:		CHK M. SCHMITT 23AUG2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD B. WERTZ 23AUG2010	NAME SFP+ ENHANCED 1X4 CAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK	
		PRODUCT SPEC 108-2364		
	0 PLC ±0.1	APPLICATION SPEC 114-13120	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
	1 PLC ±0.1			
	2 PLC ±0.1		A100779C=2149730	
	3 PLC ±0.1			
	4 PLC ±0.1		SCALE 5:1 SHEET 1 OF 7 REV A3	
	ANGLES ±1°			
MATERIAL	FINISH	WEIGHT	Customer Drawing	

2149730-1,2,3,4,5
MOUNTED BELLY TO BELLY ON PCB
SCALE 4:1

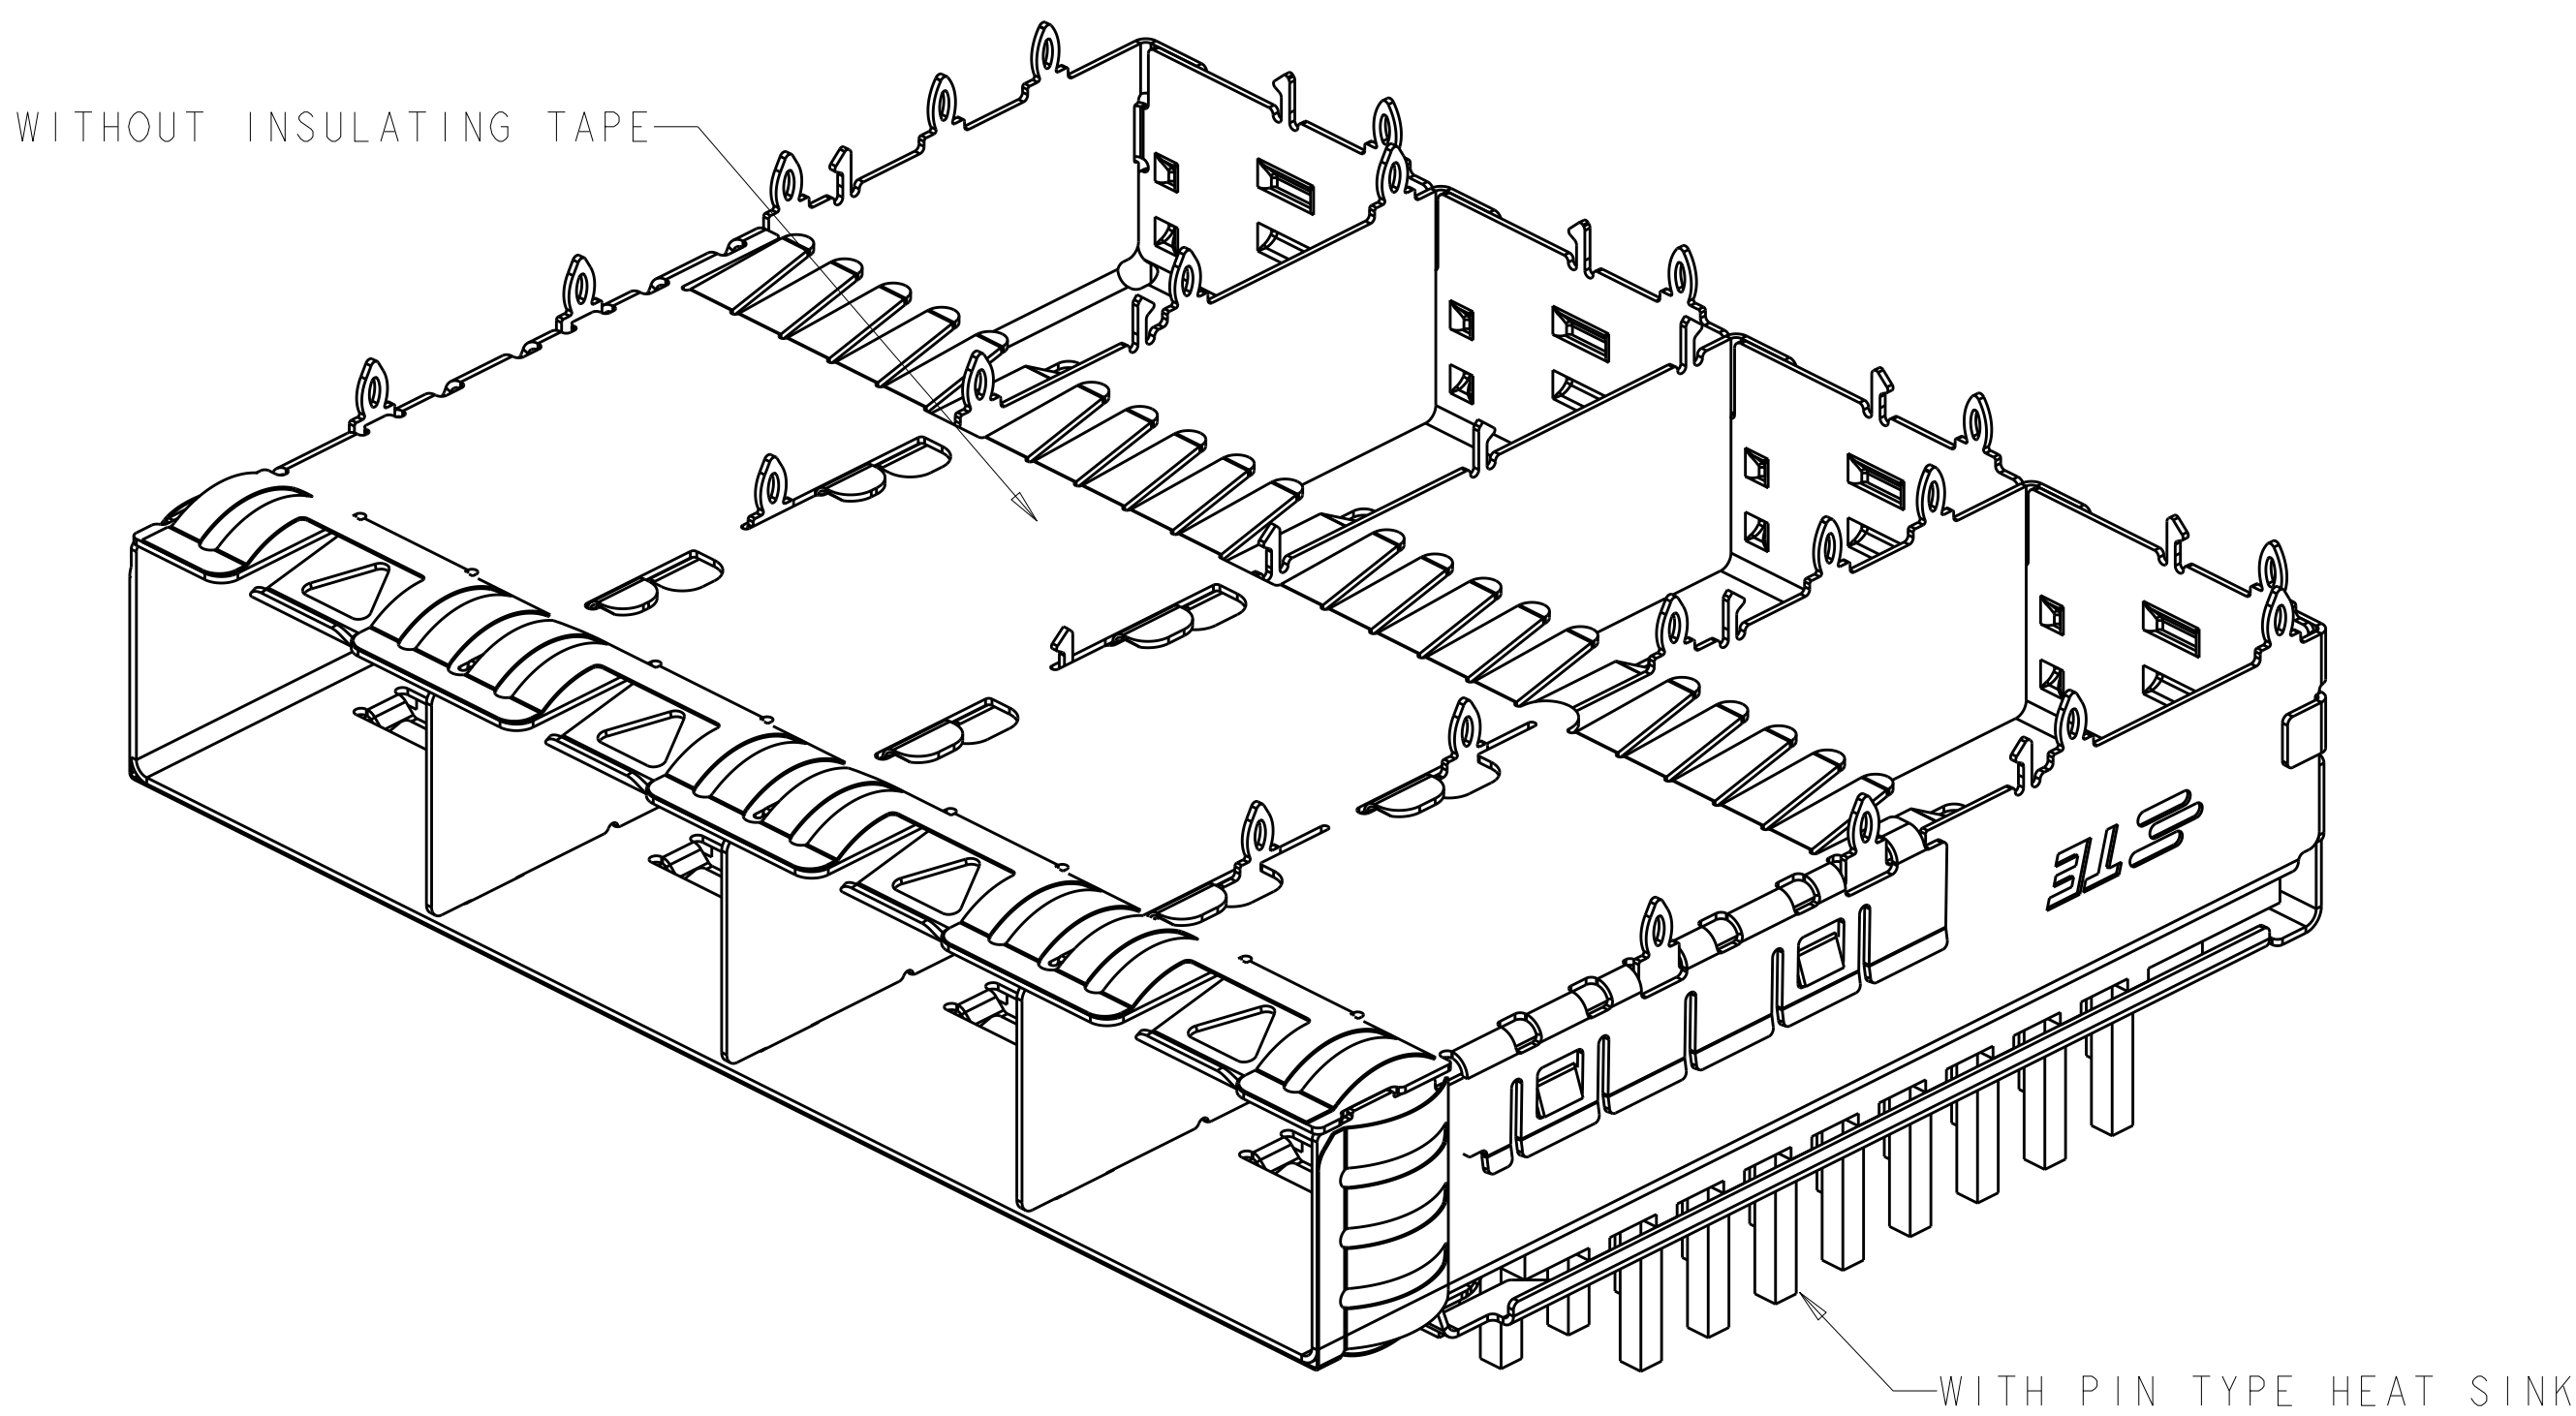





2149730-1,2,3,4 AS SHOWN WITHOUT INSULATING TAPE,WITH PIN TYPE HEAT SINK

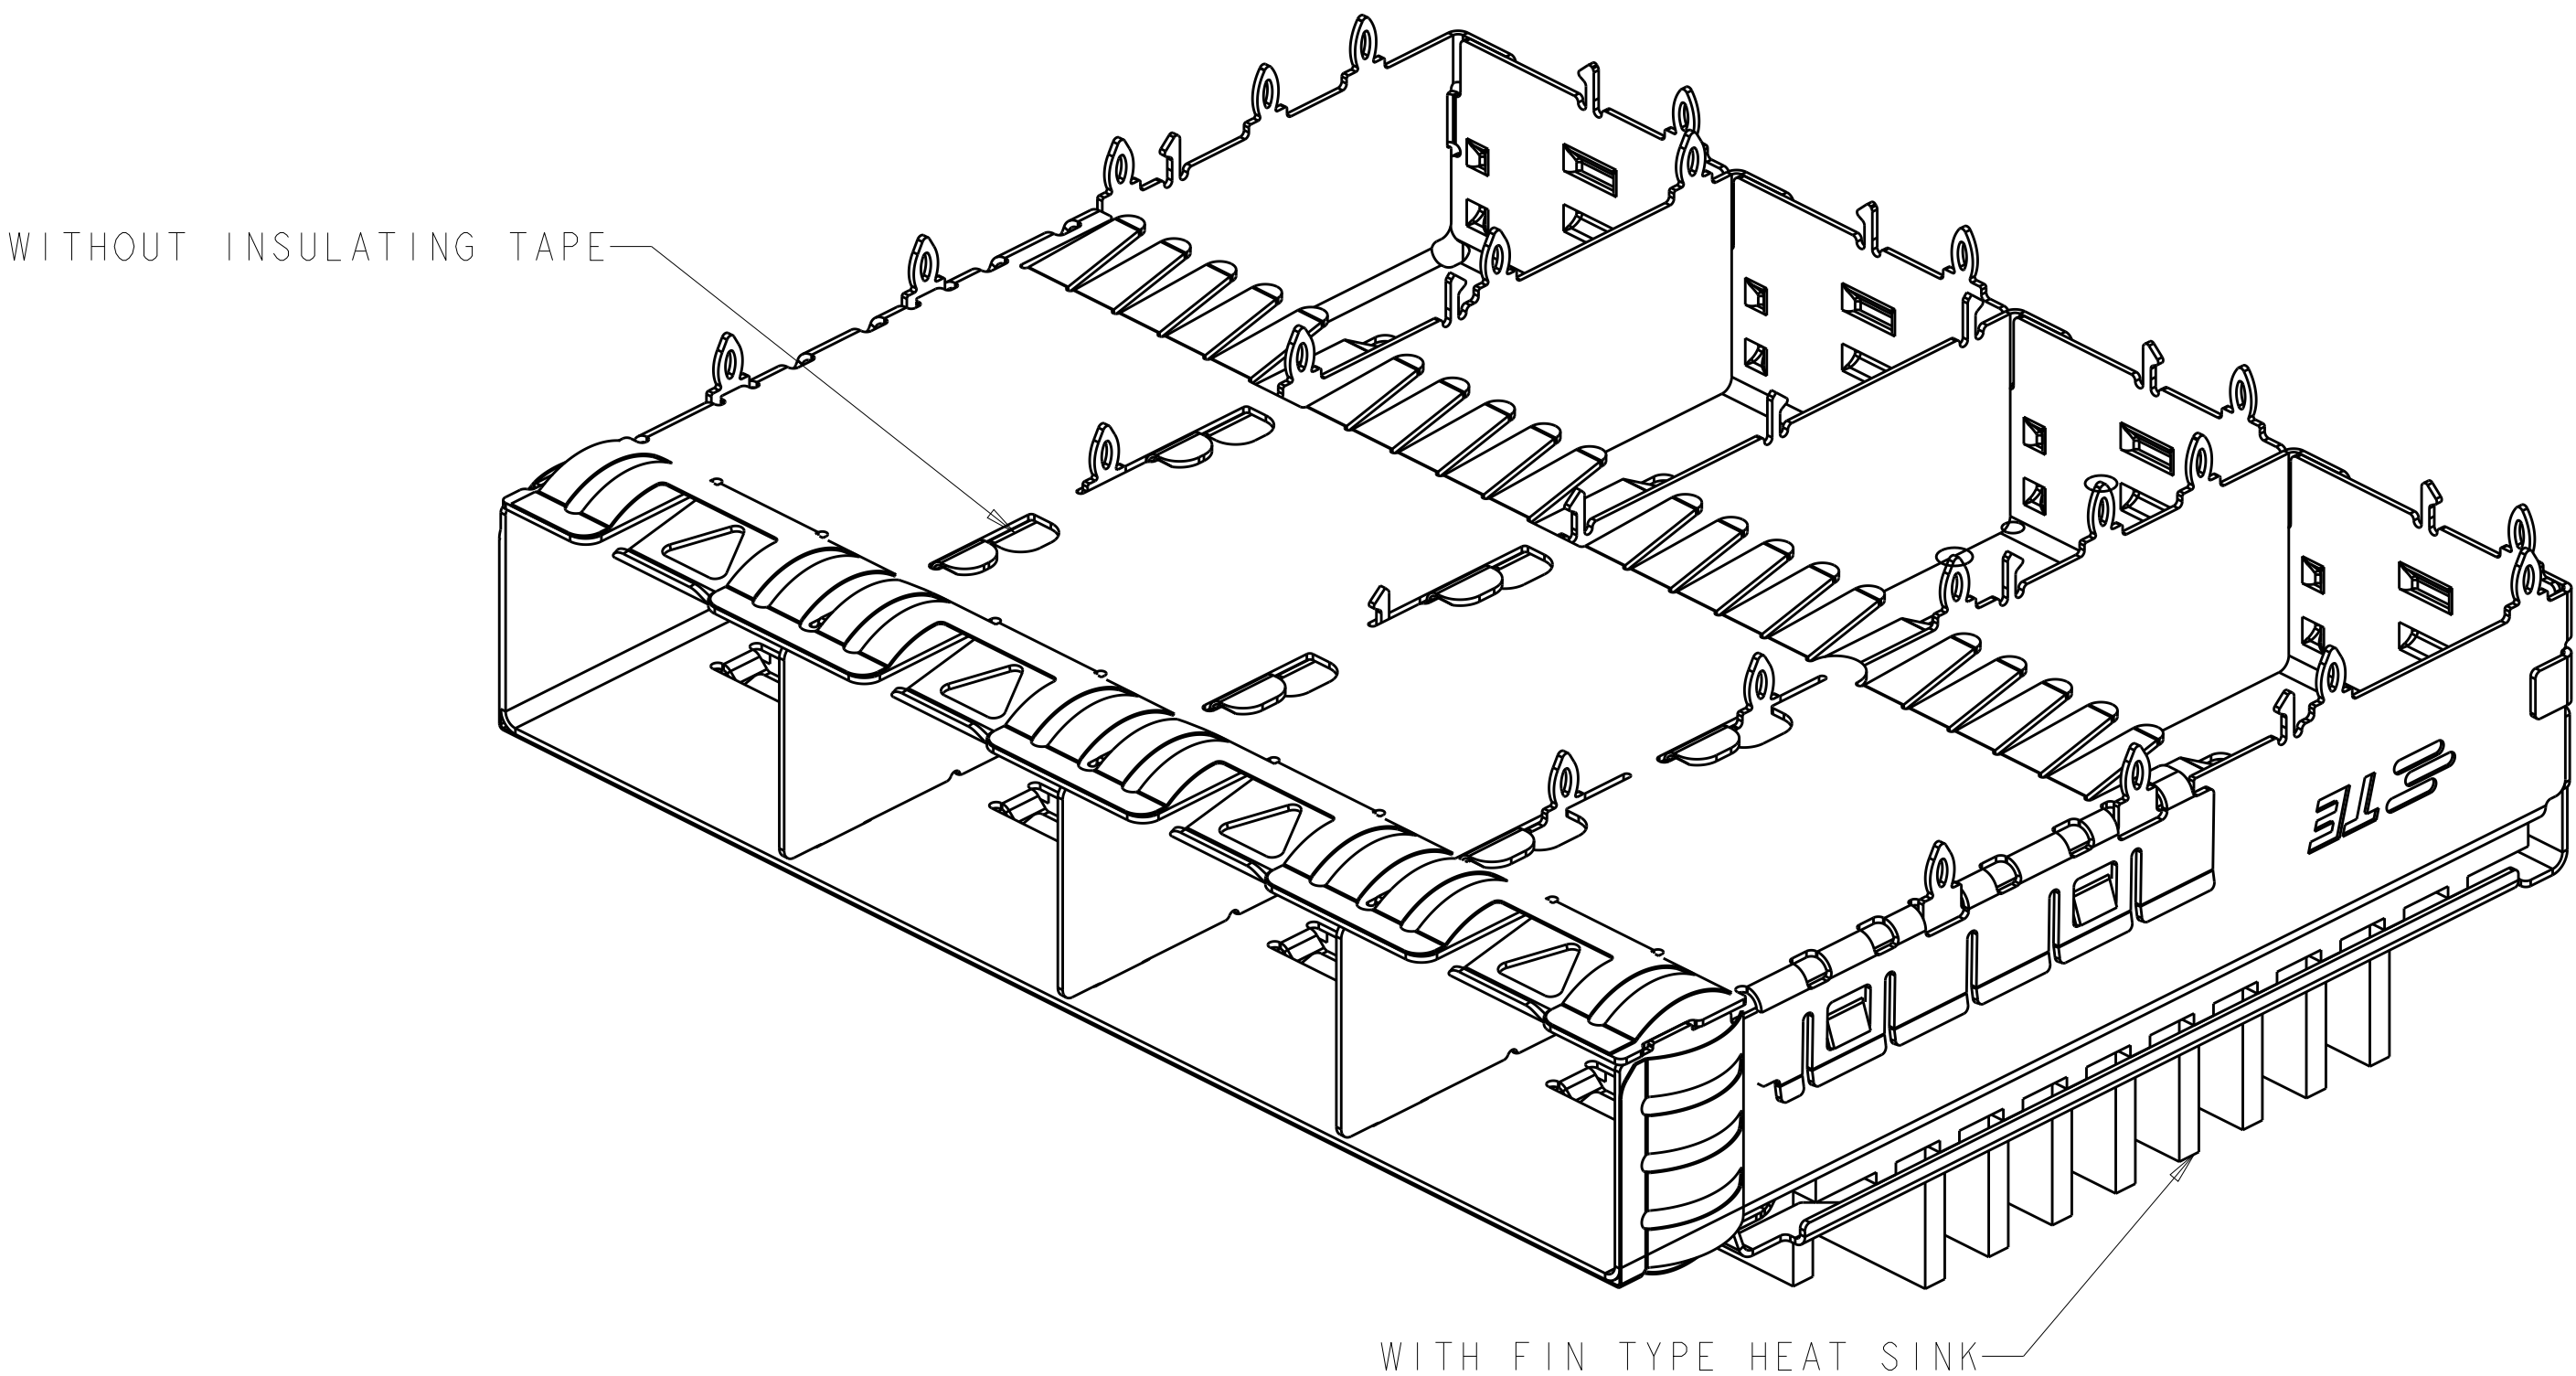


2149730-6,7,8,9 AS SHOWN WITHOUT INSULATING TAPE,WITH FIN TYPE HEAT SINK

[illegible]


LOC		DIST		REVISIONS			
GP		P	LYR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

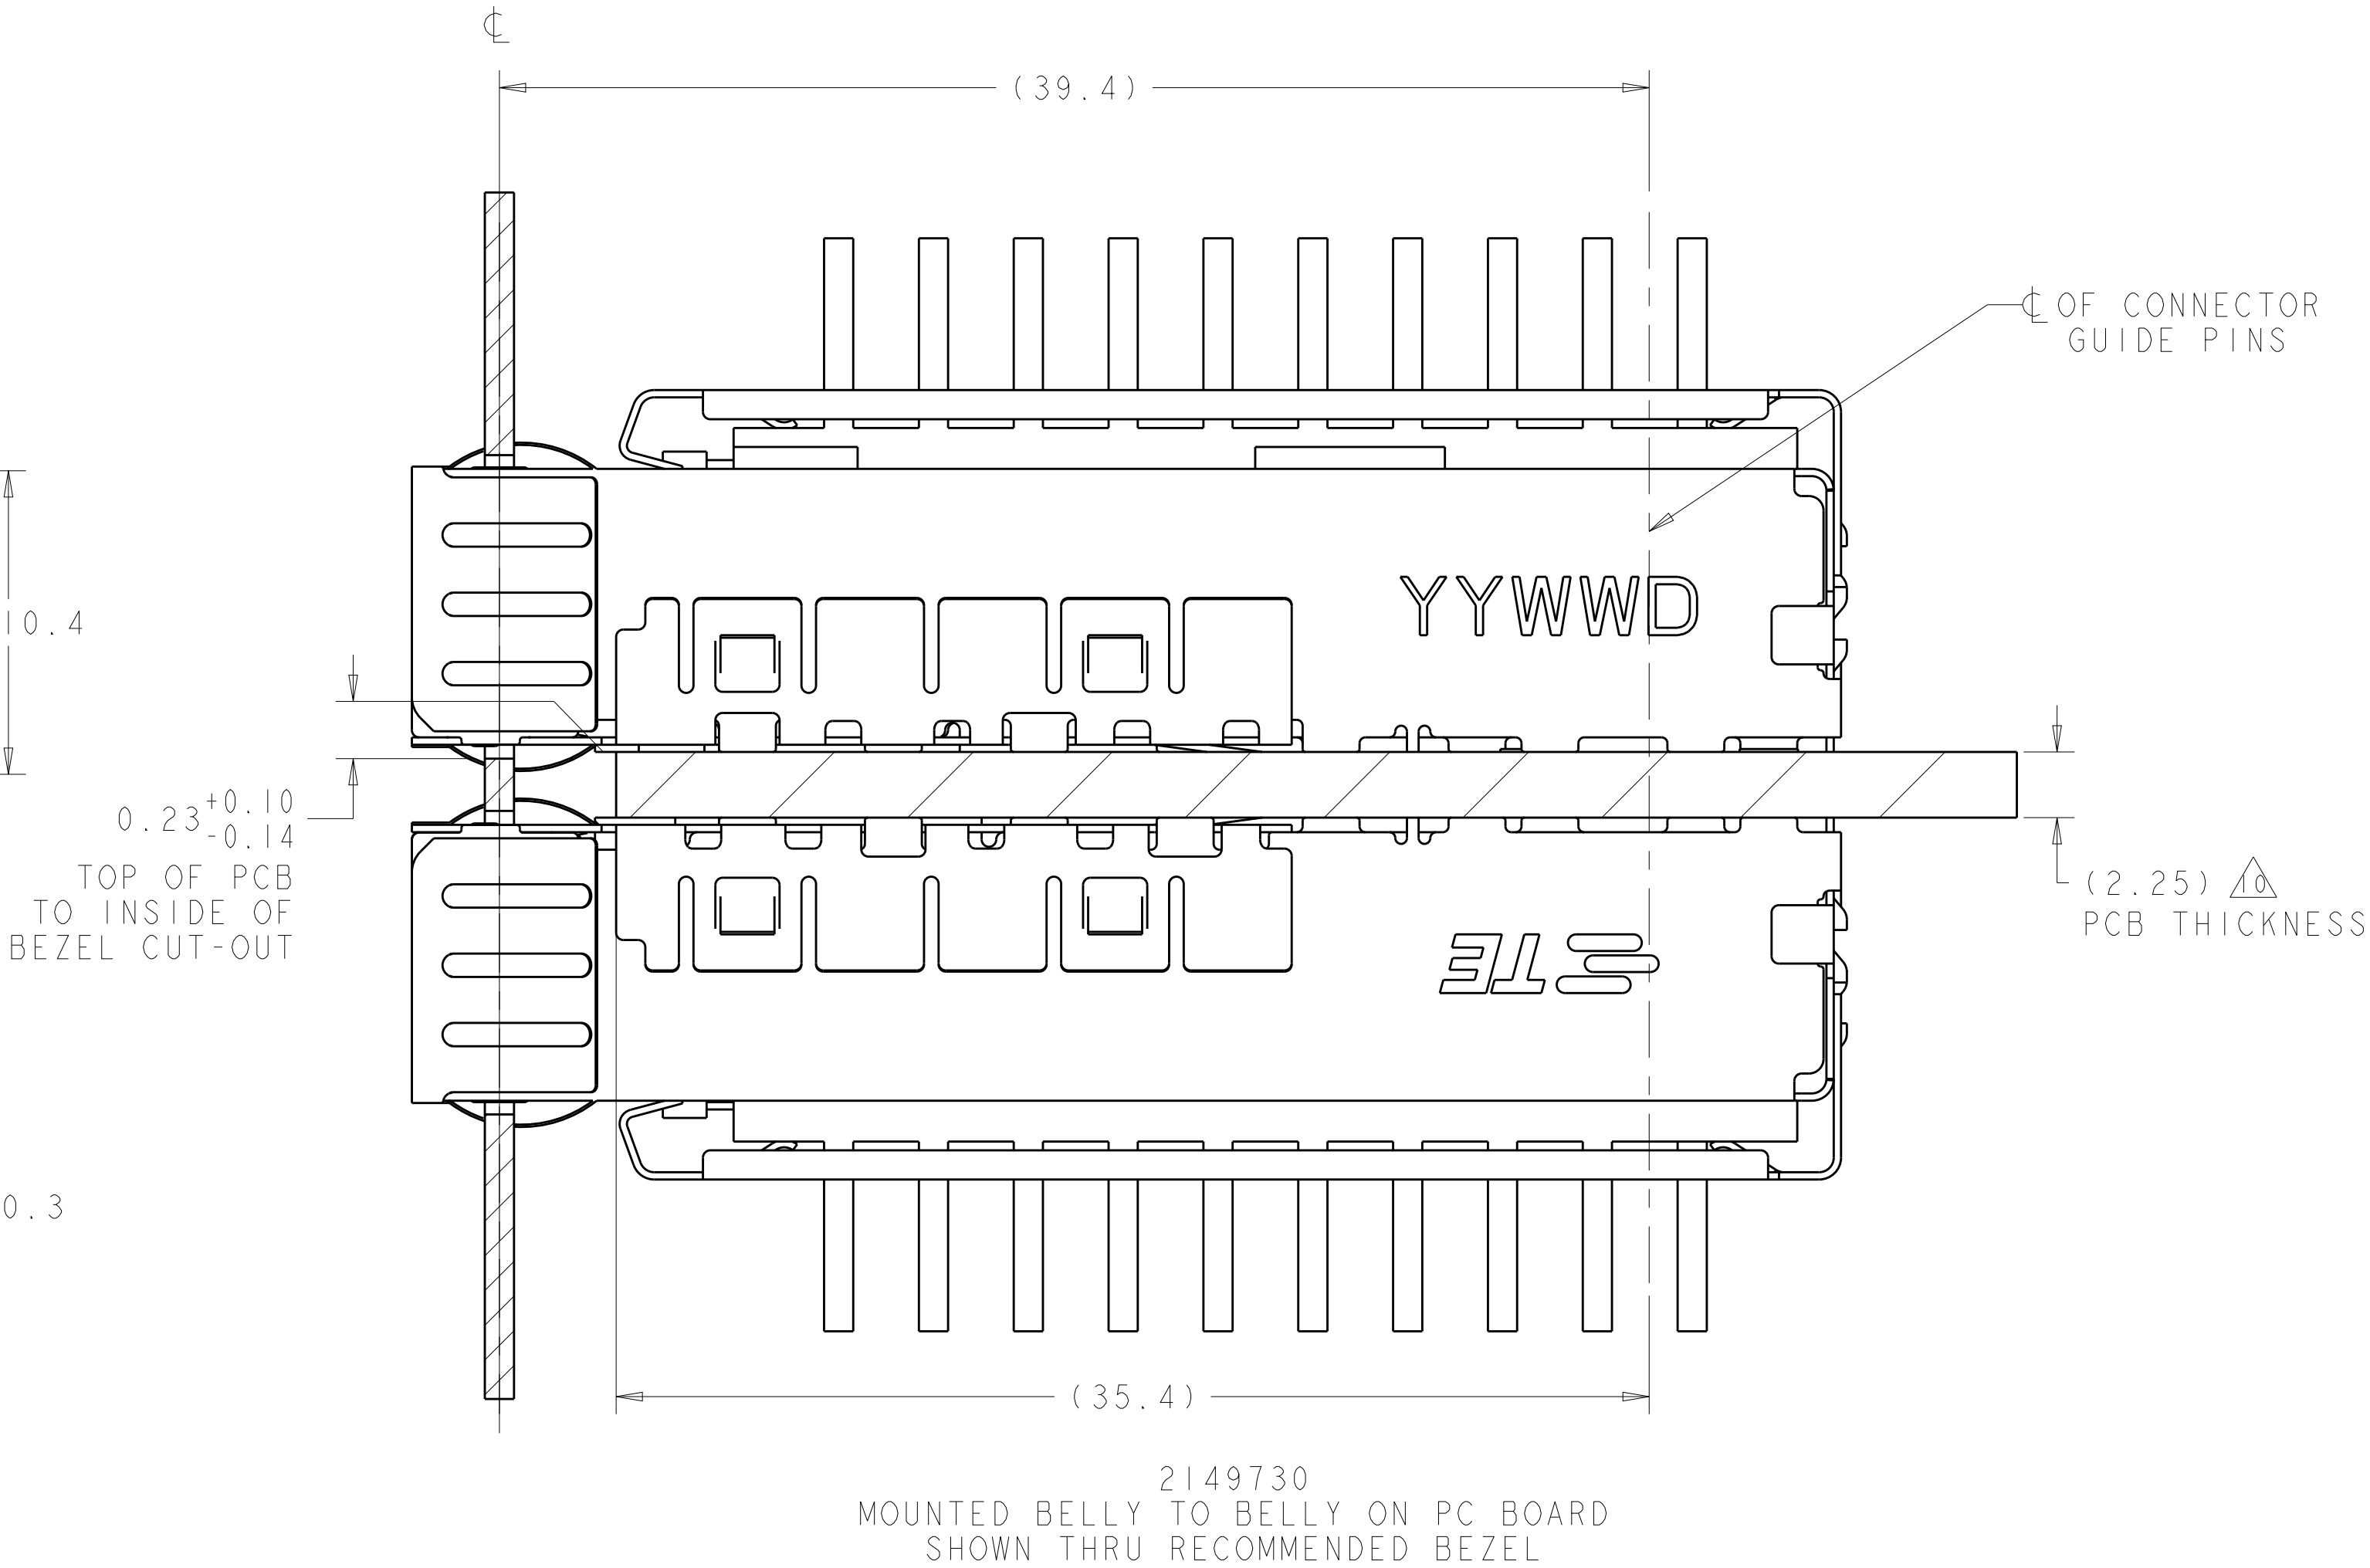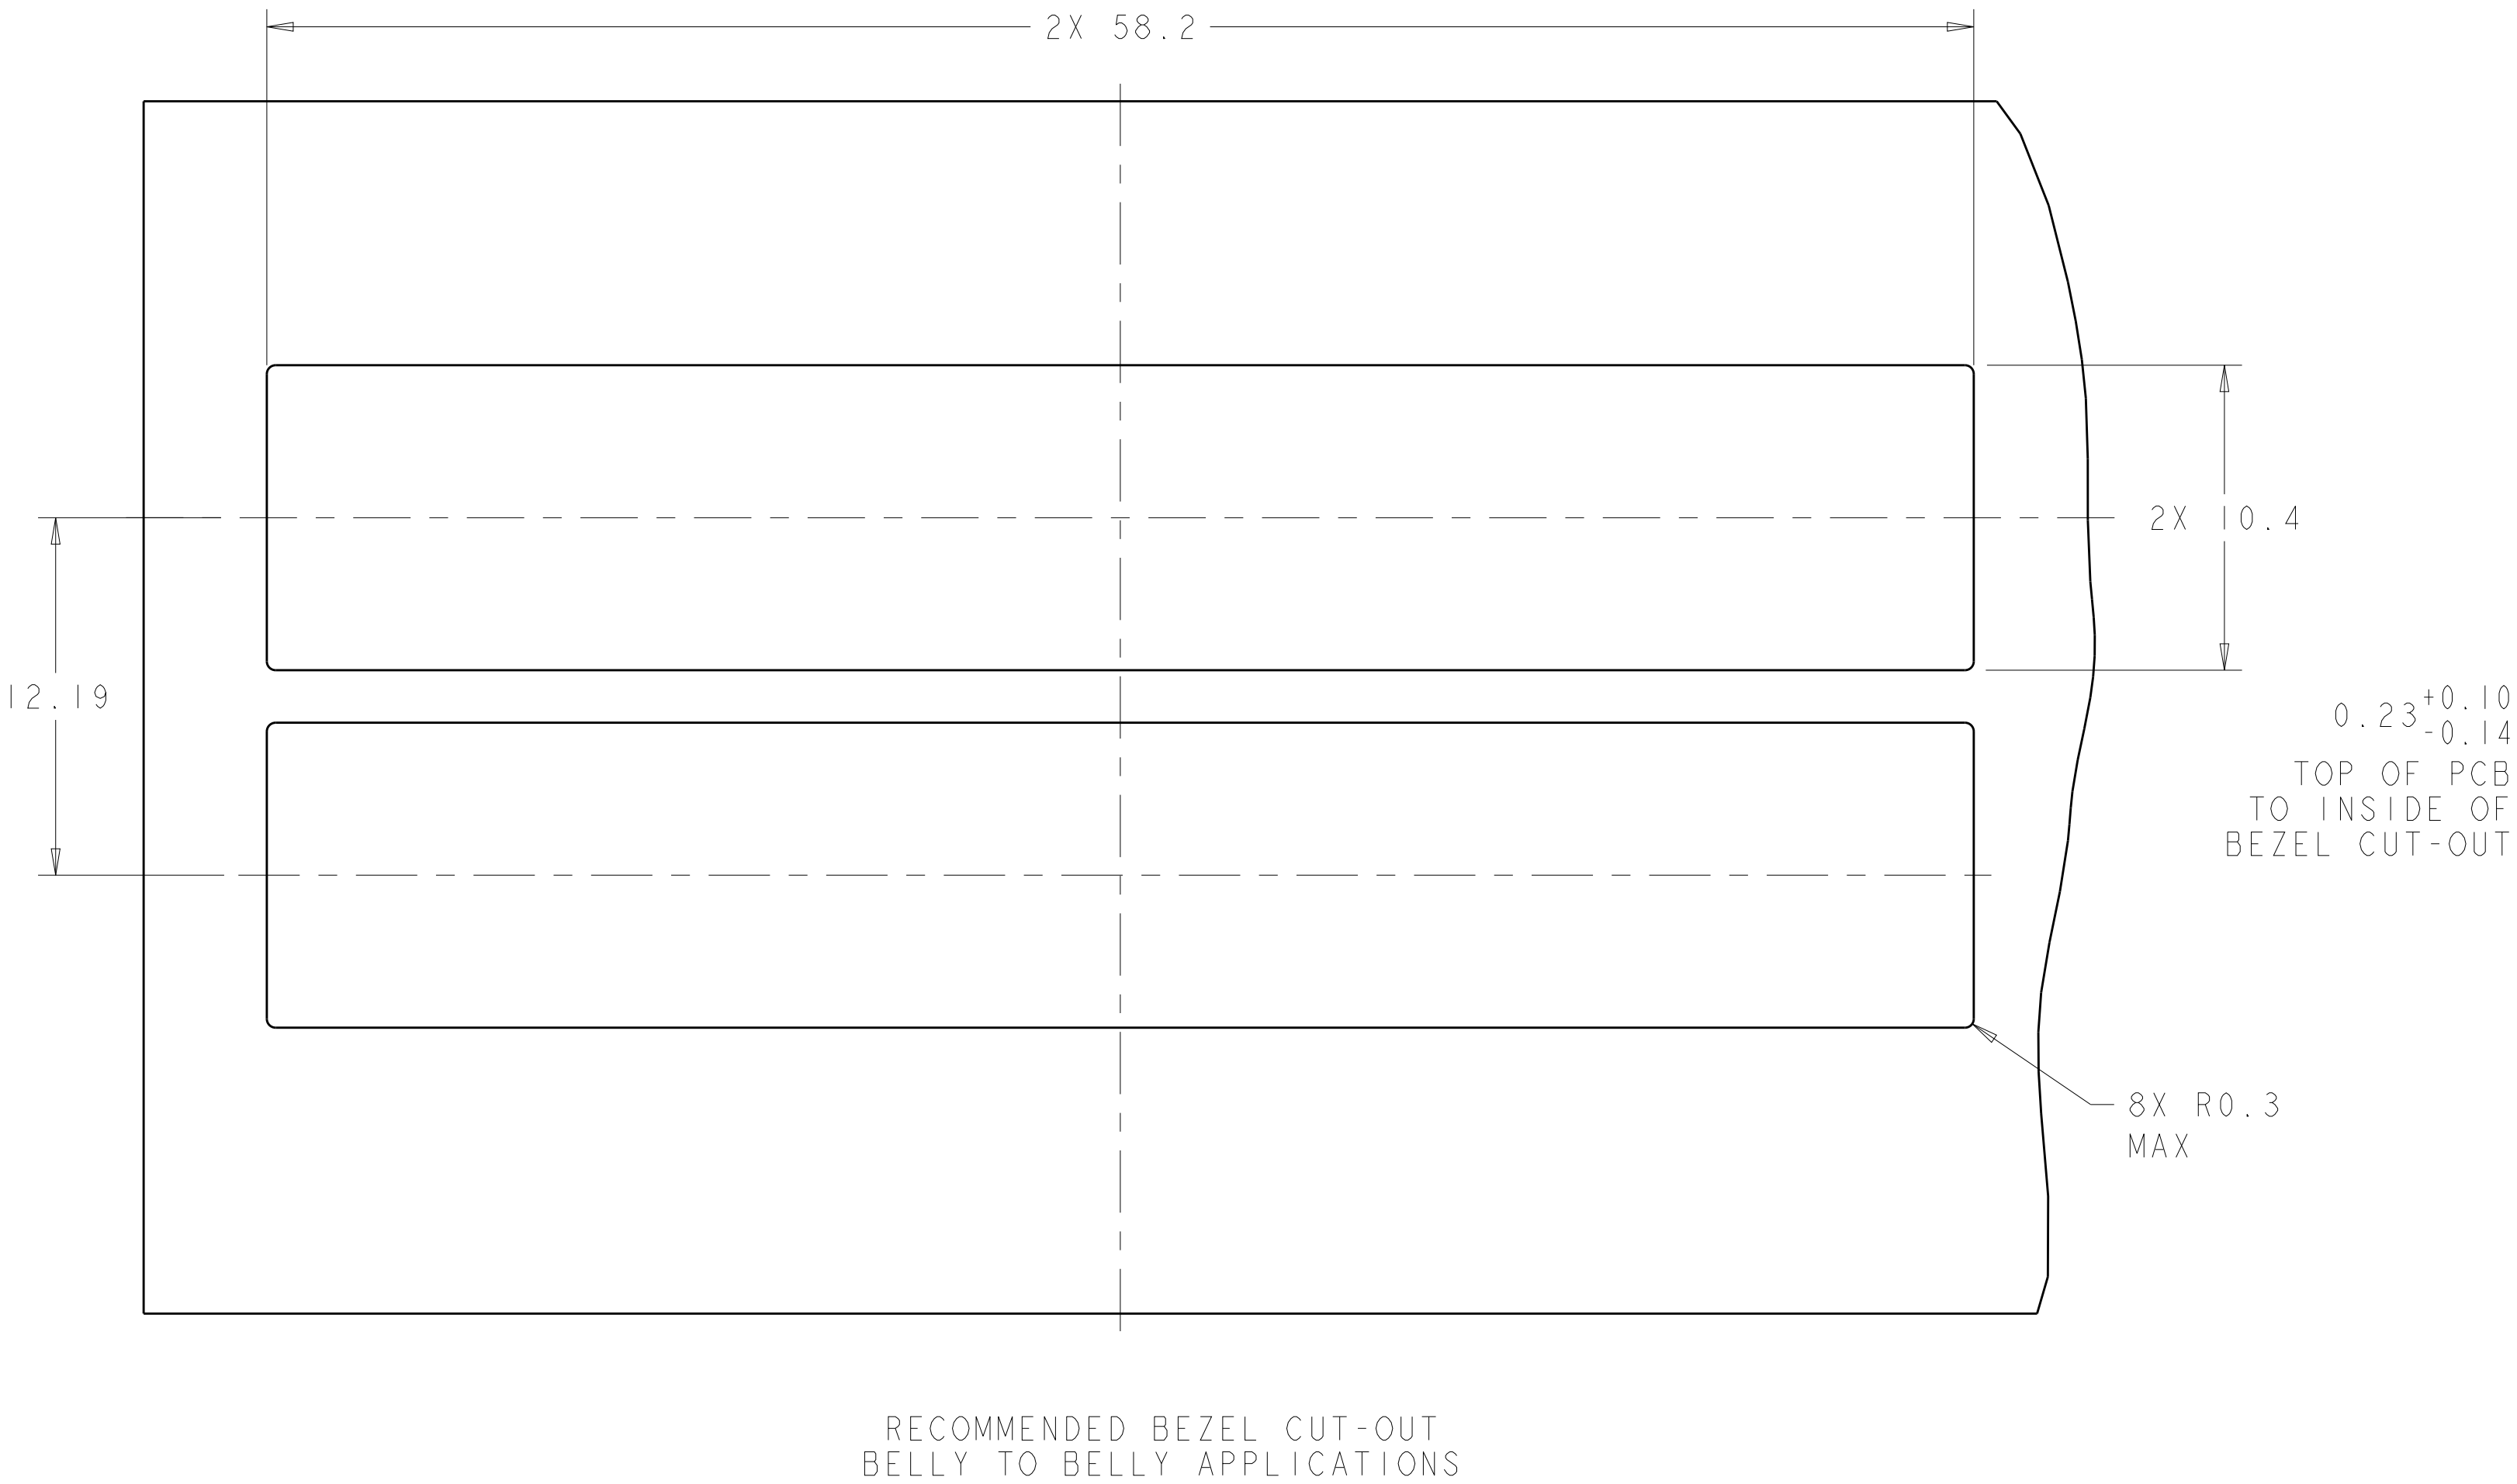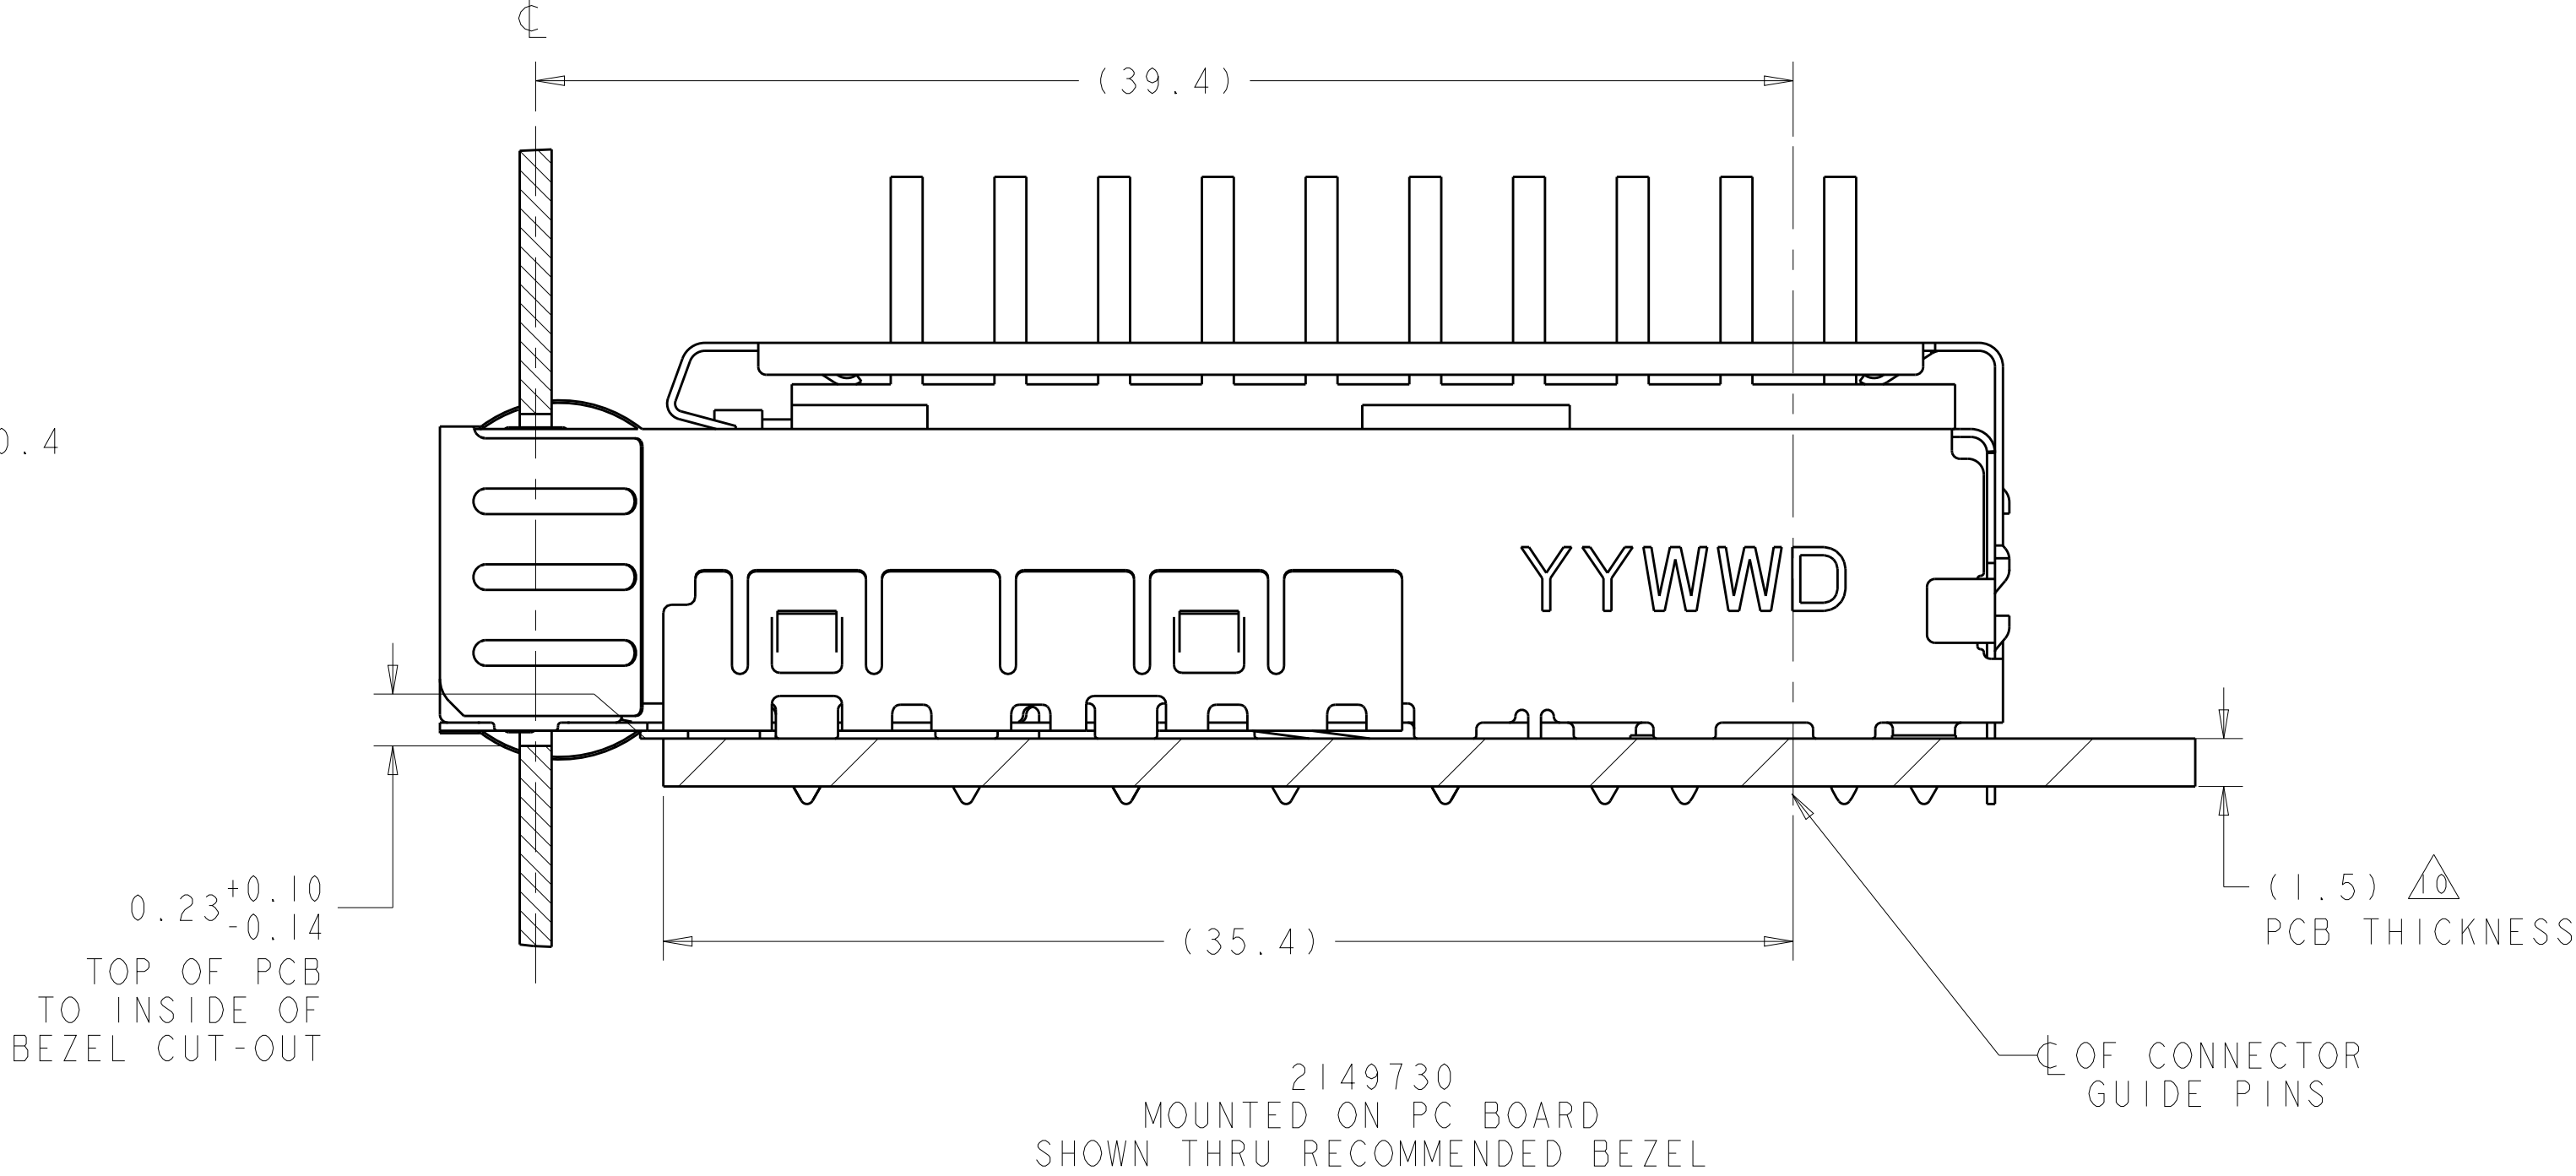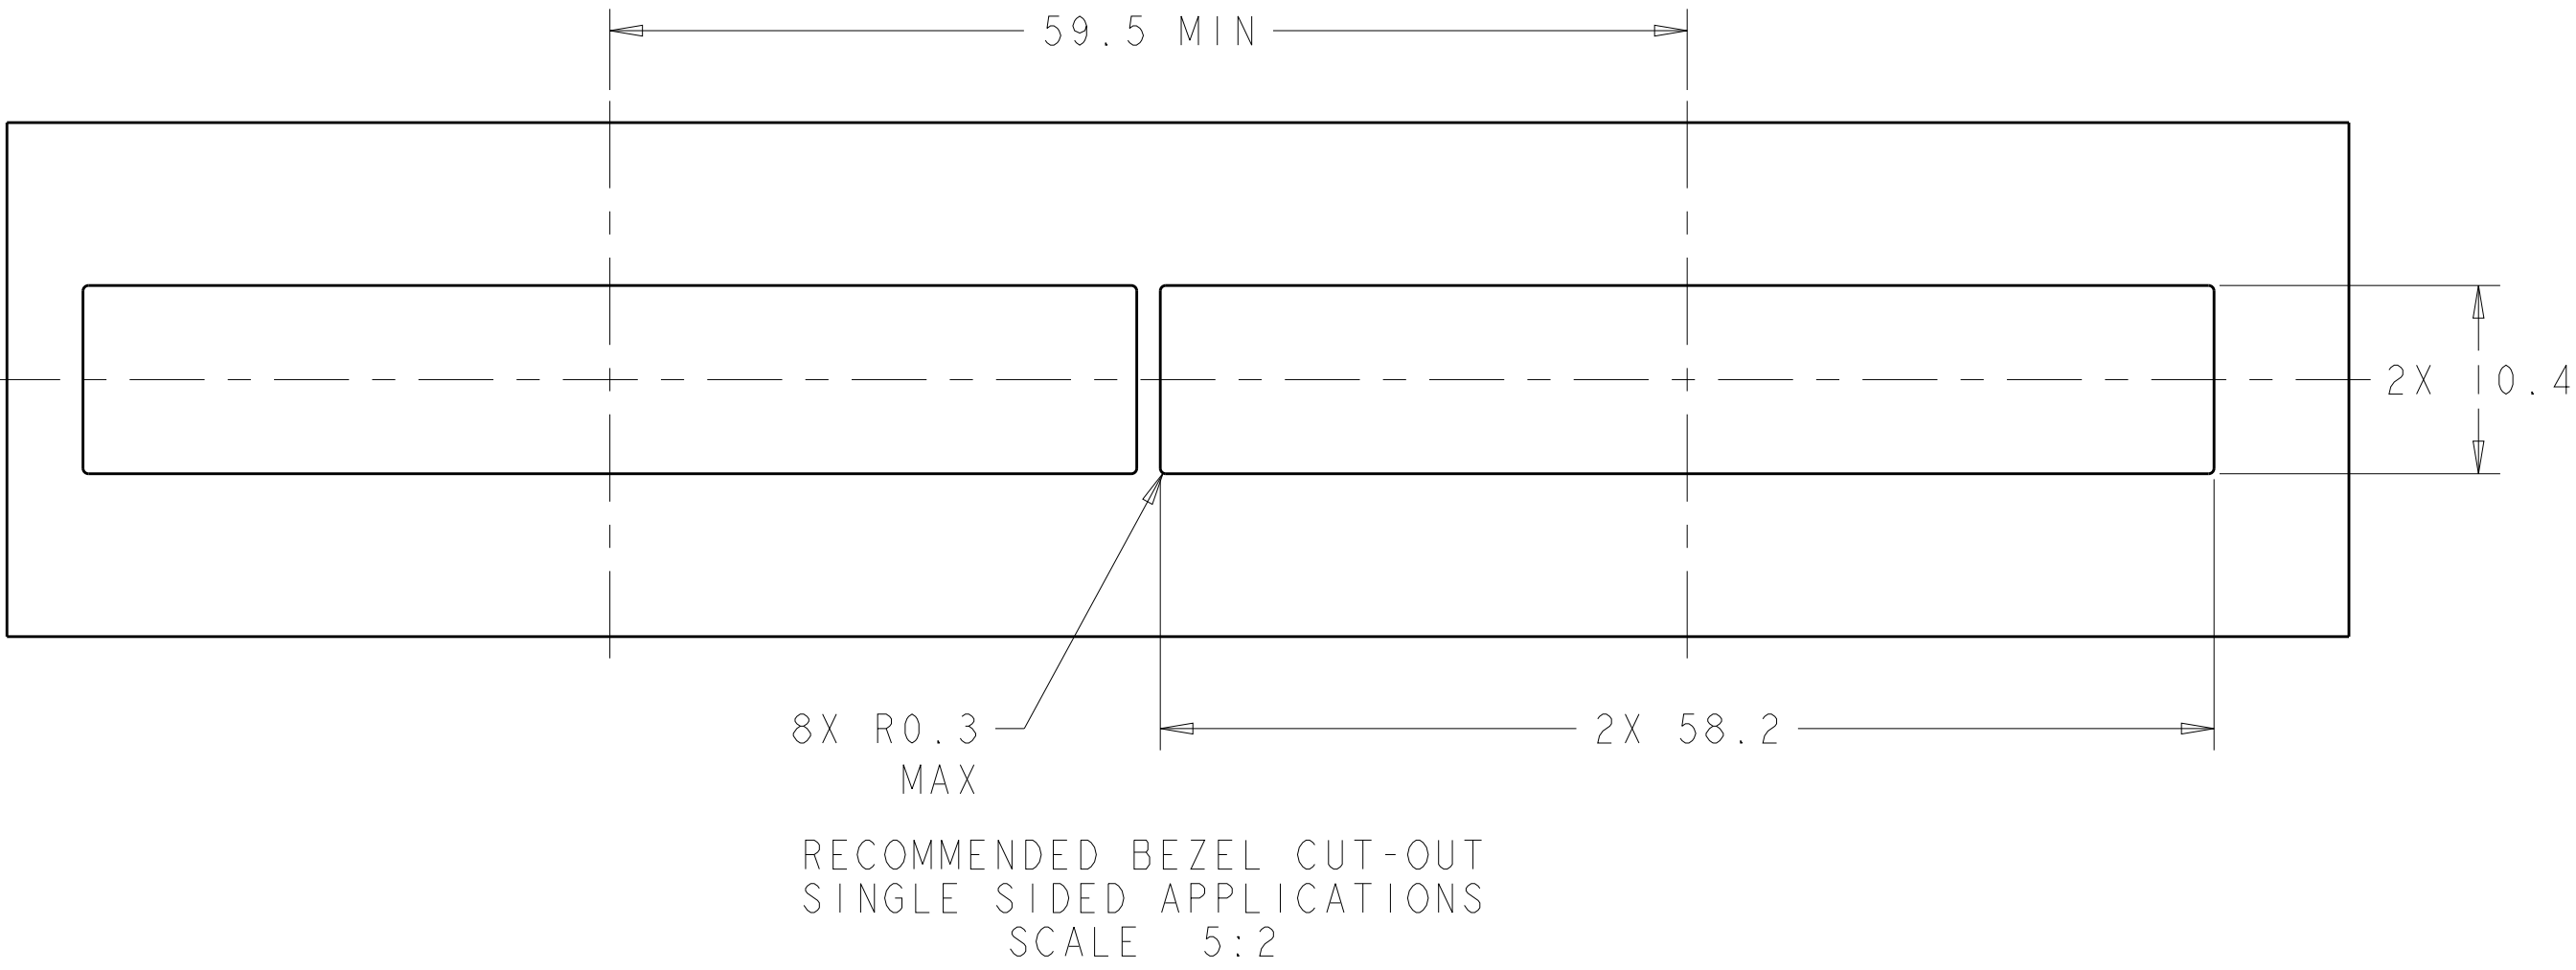


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SCHMITT 23AUG2010	 TE Connectivity	
DIMENSIONS:		CHK M. SCHMITT 23AUG2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD B. WERTZ 23AUG2010	NAME	SFP+ ENHANCED 1X4 CAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK
	0 PLC ±0.1	PRODUCT SPEC	SIZE	CAGE CODE DRAWING NO
	1 PLC ±0.1	108-2364	A100779	C=2149730
	2 PLC ±0.1	APPLICATION SPEC	RESTRICTED TO	
	3 PLC ±0.1	114-13120	-	
MATERIAL	FINISH	WEIGHT	-	
		Customer Drawing	SCALE	5:1
			SHEET	3 OF 7
			REV	A3

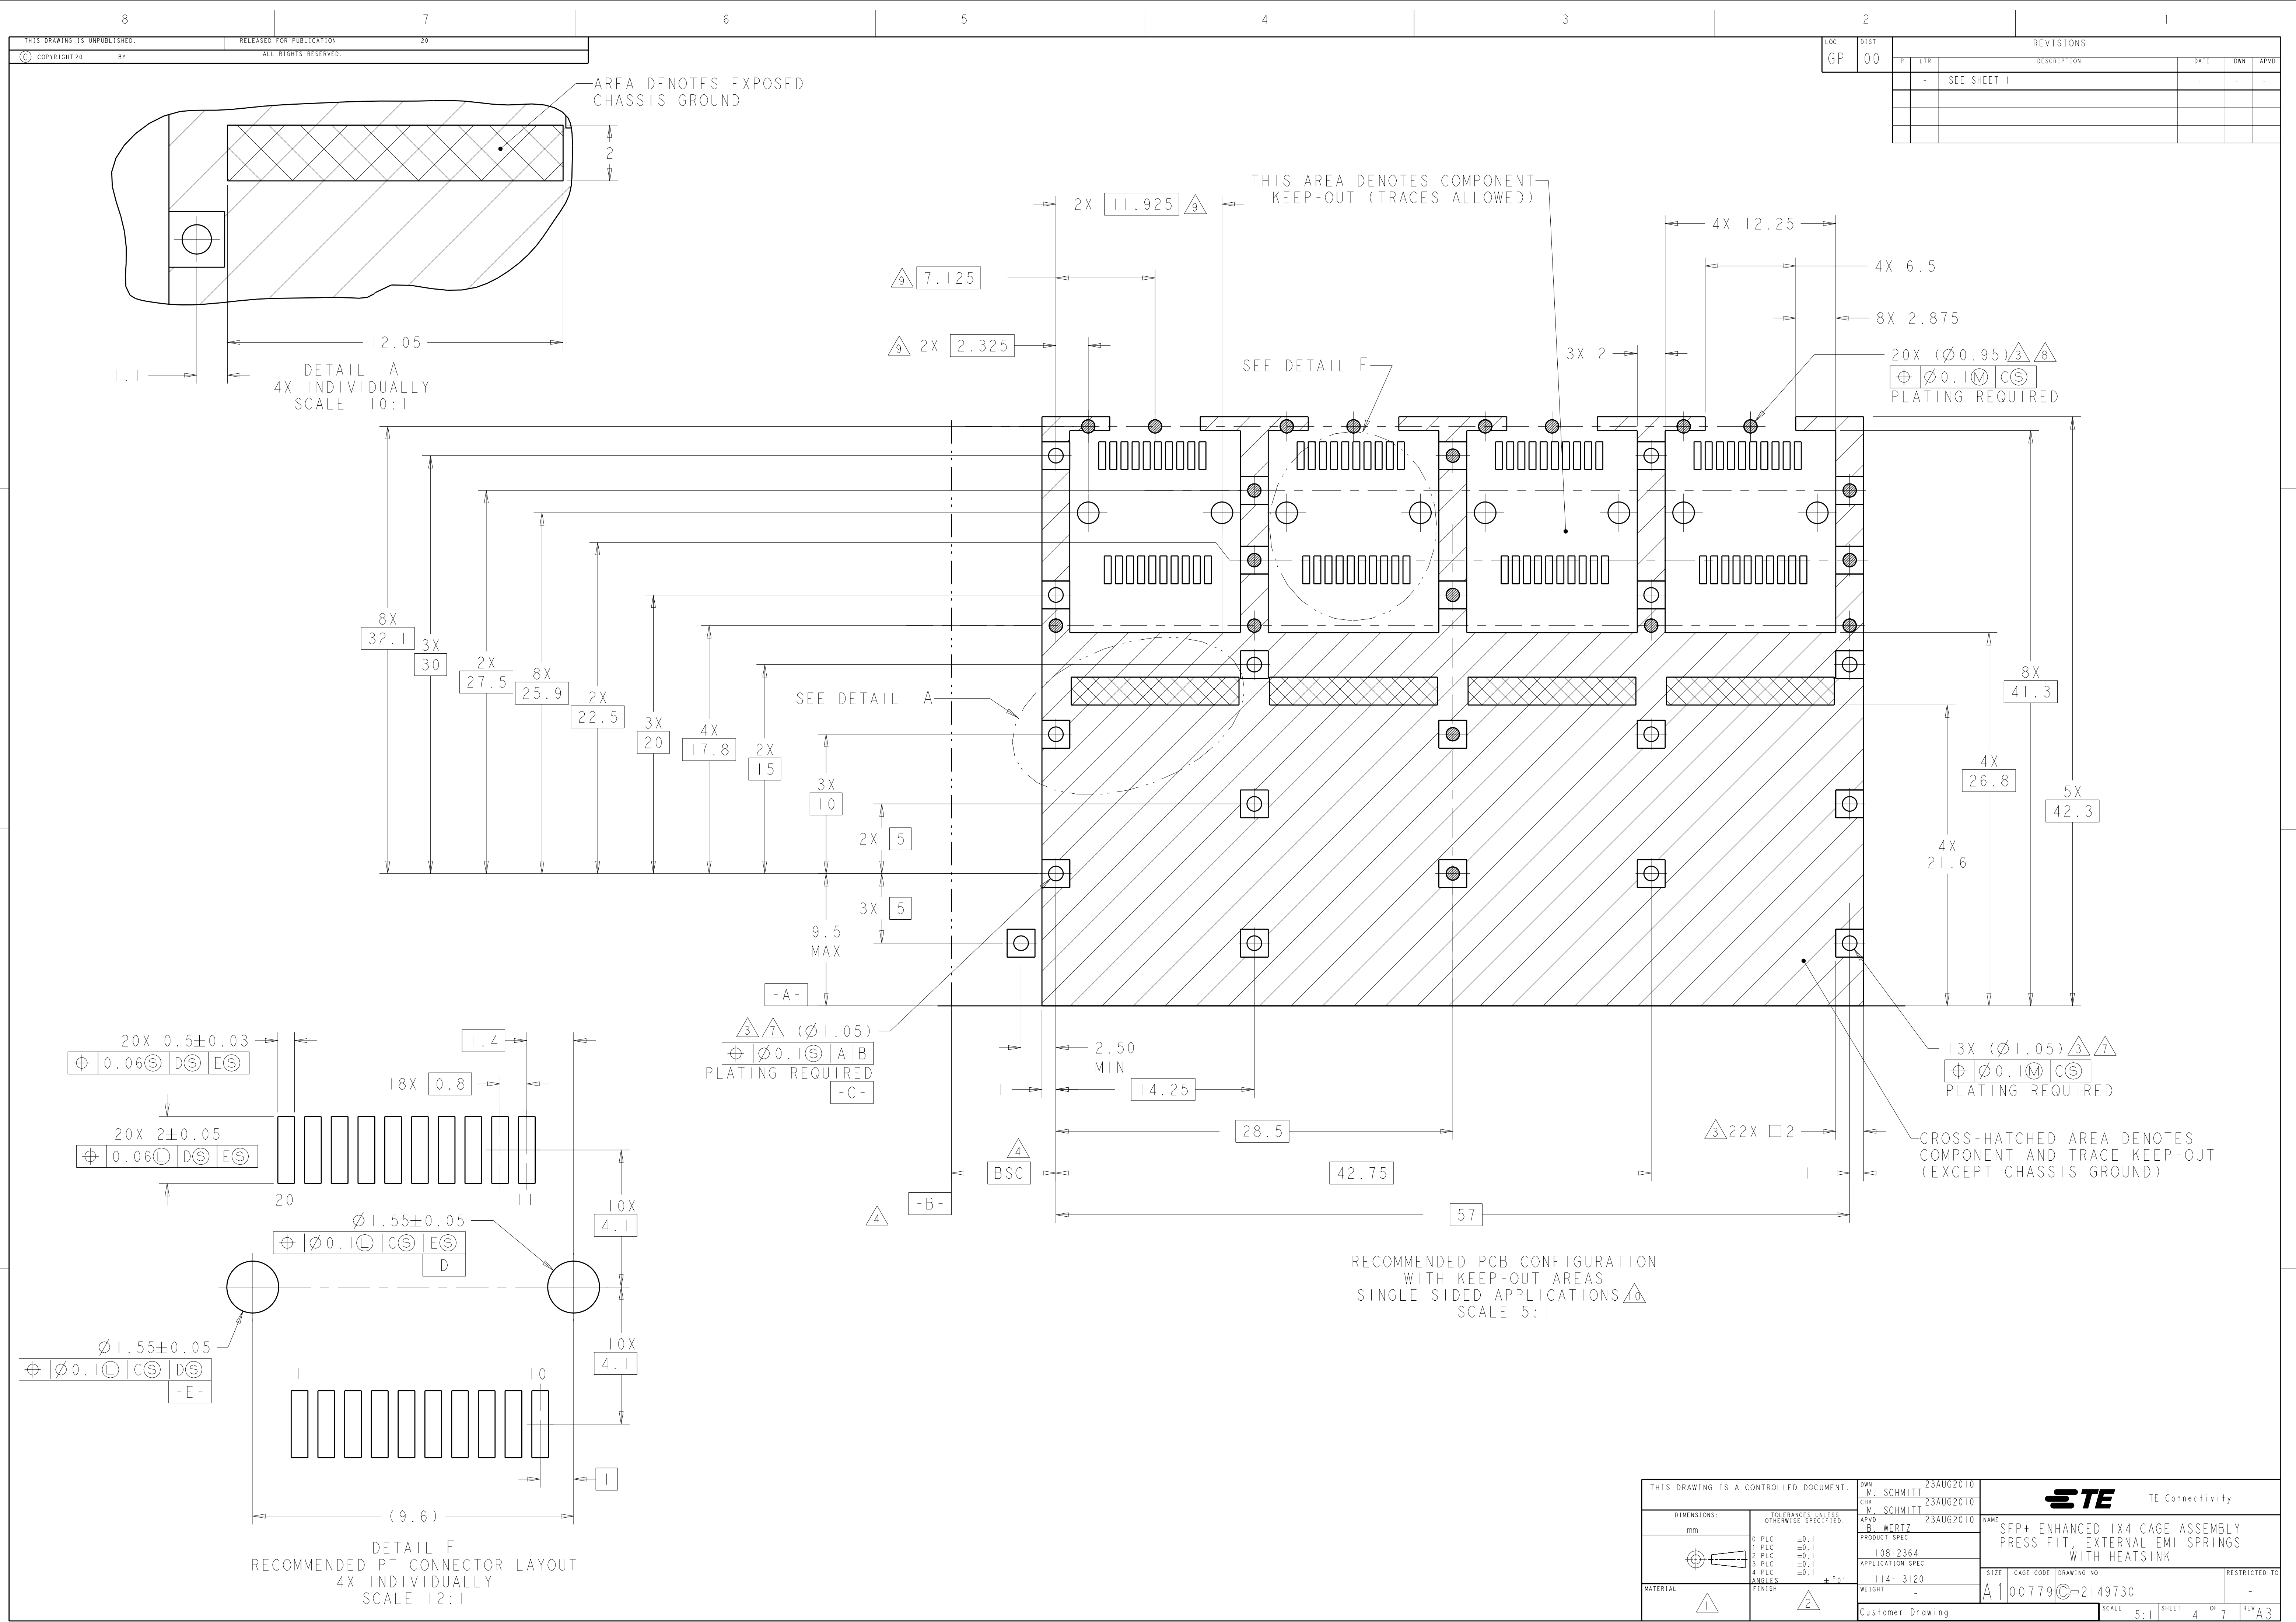


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

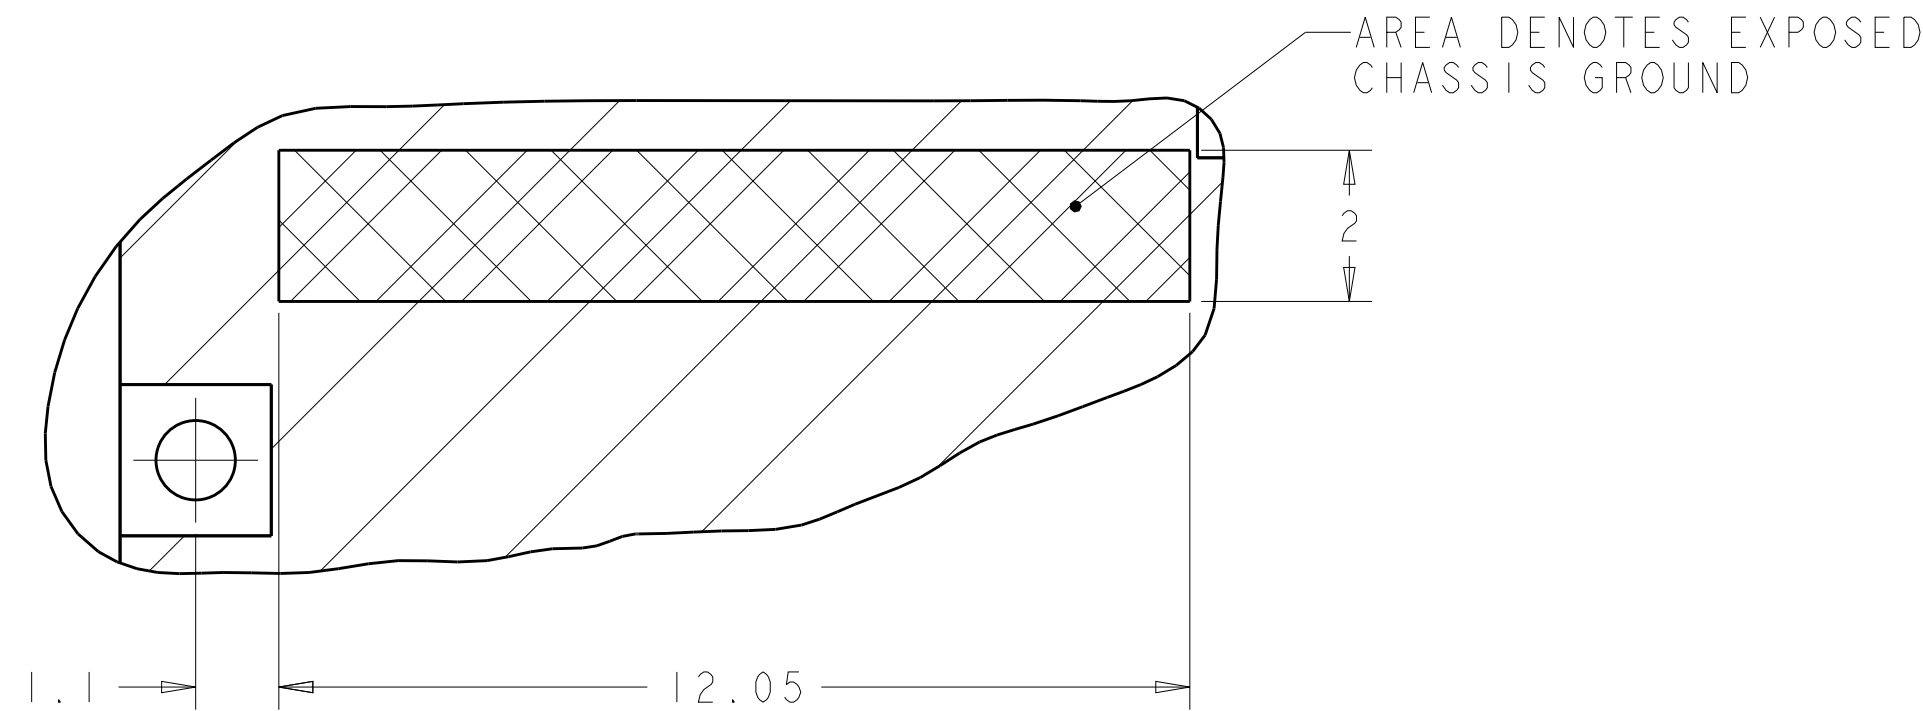

DETAIL B
4X INDIVIDUALLY
SCALE 10:1

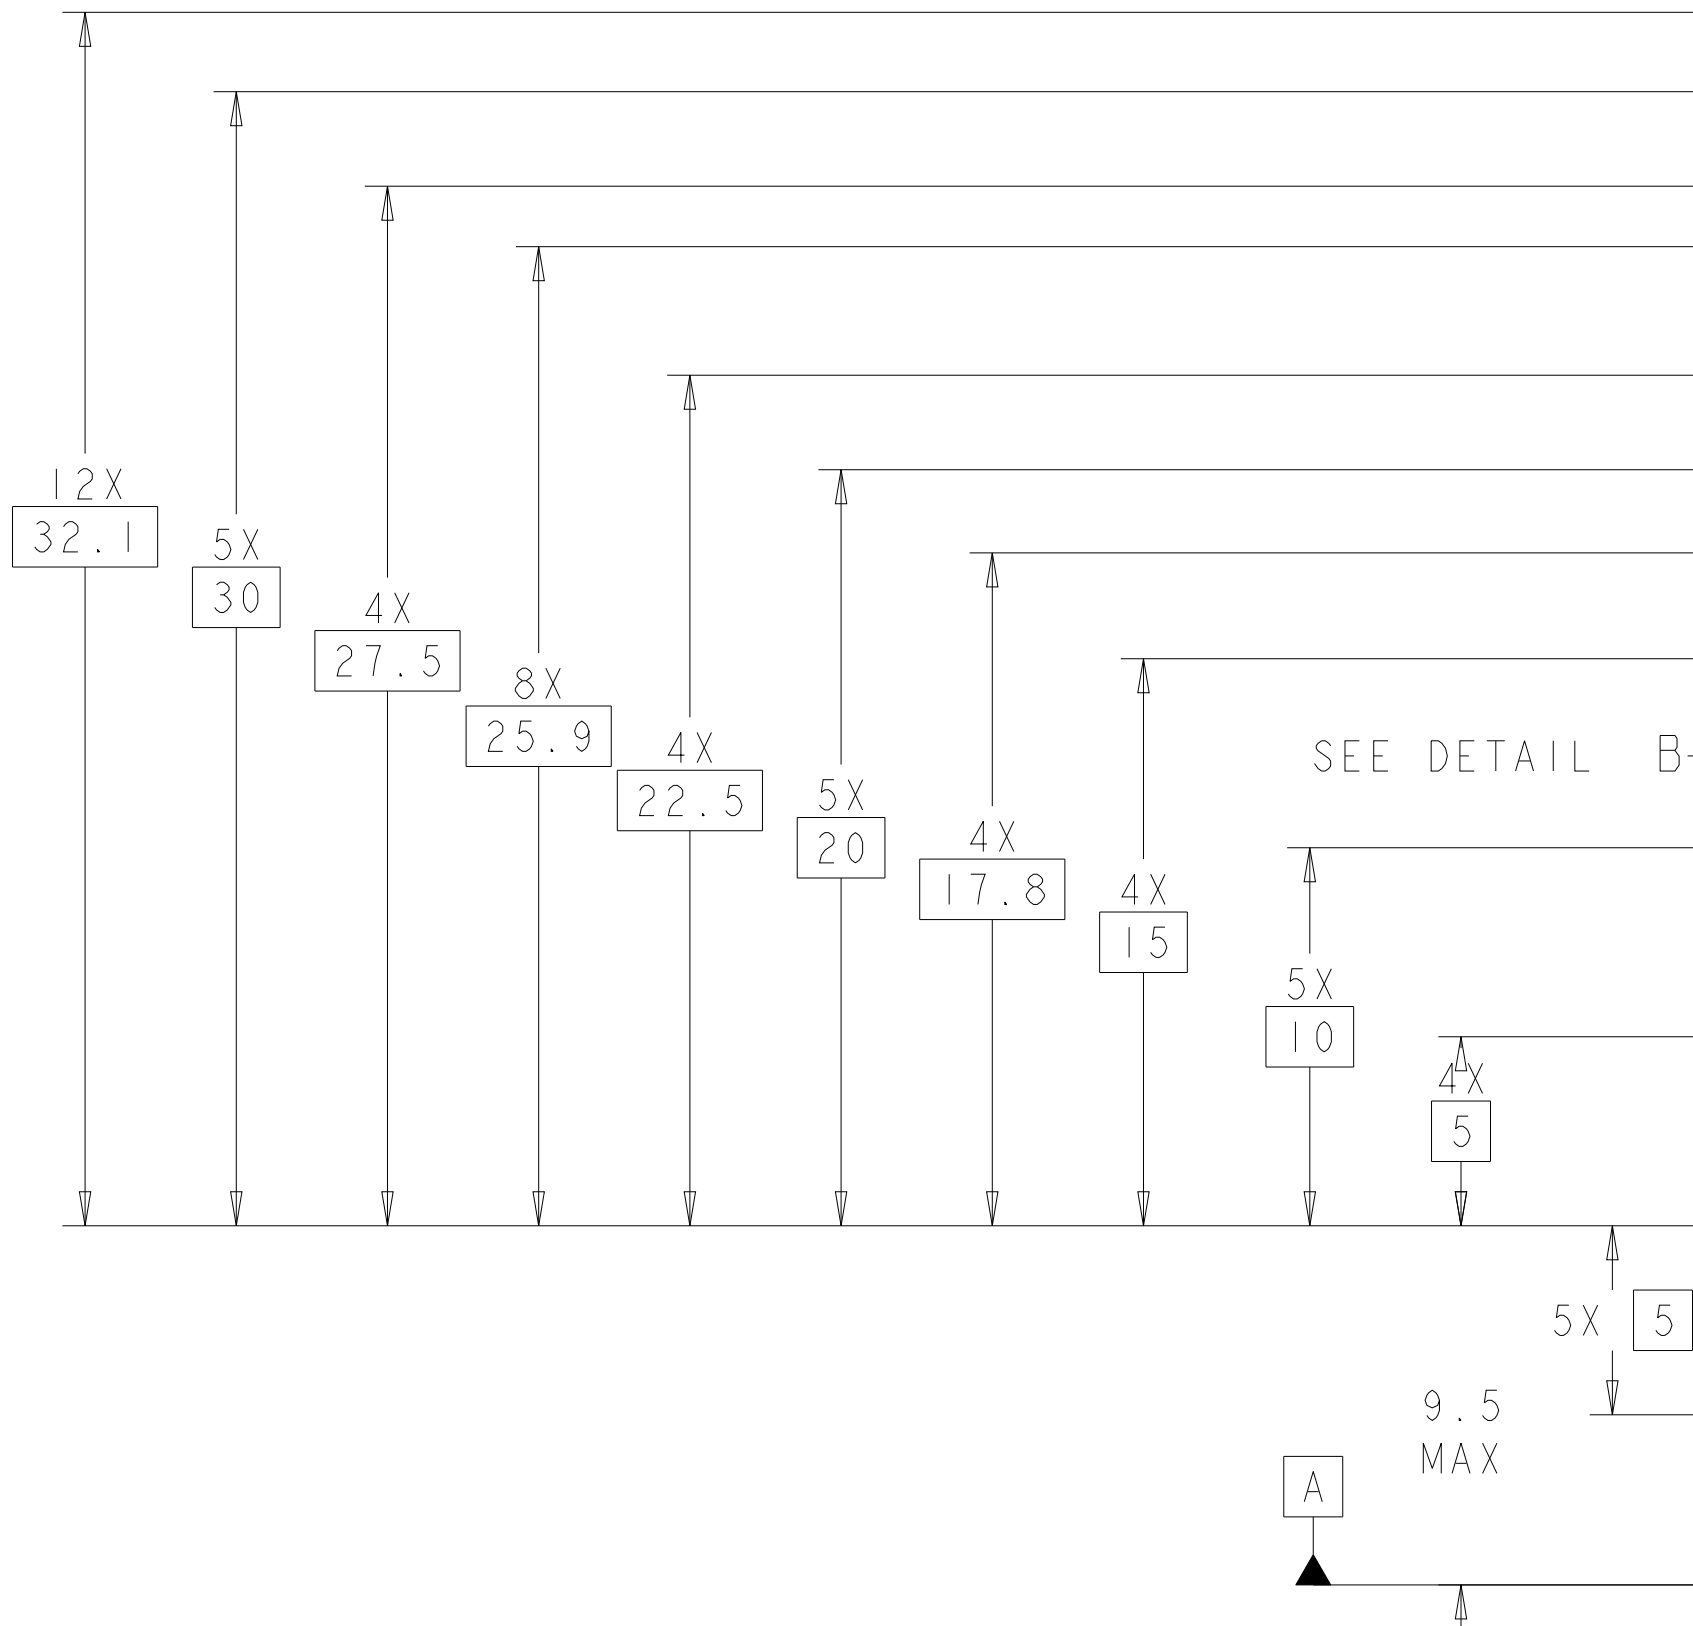


3 7 (Ø 1.05)
Ø 0.1 CS AB
PLATING REQUIRED
-C-

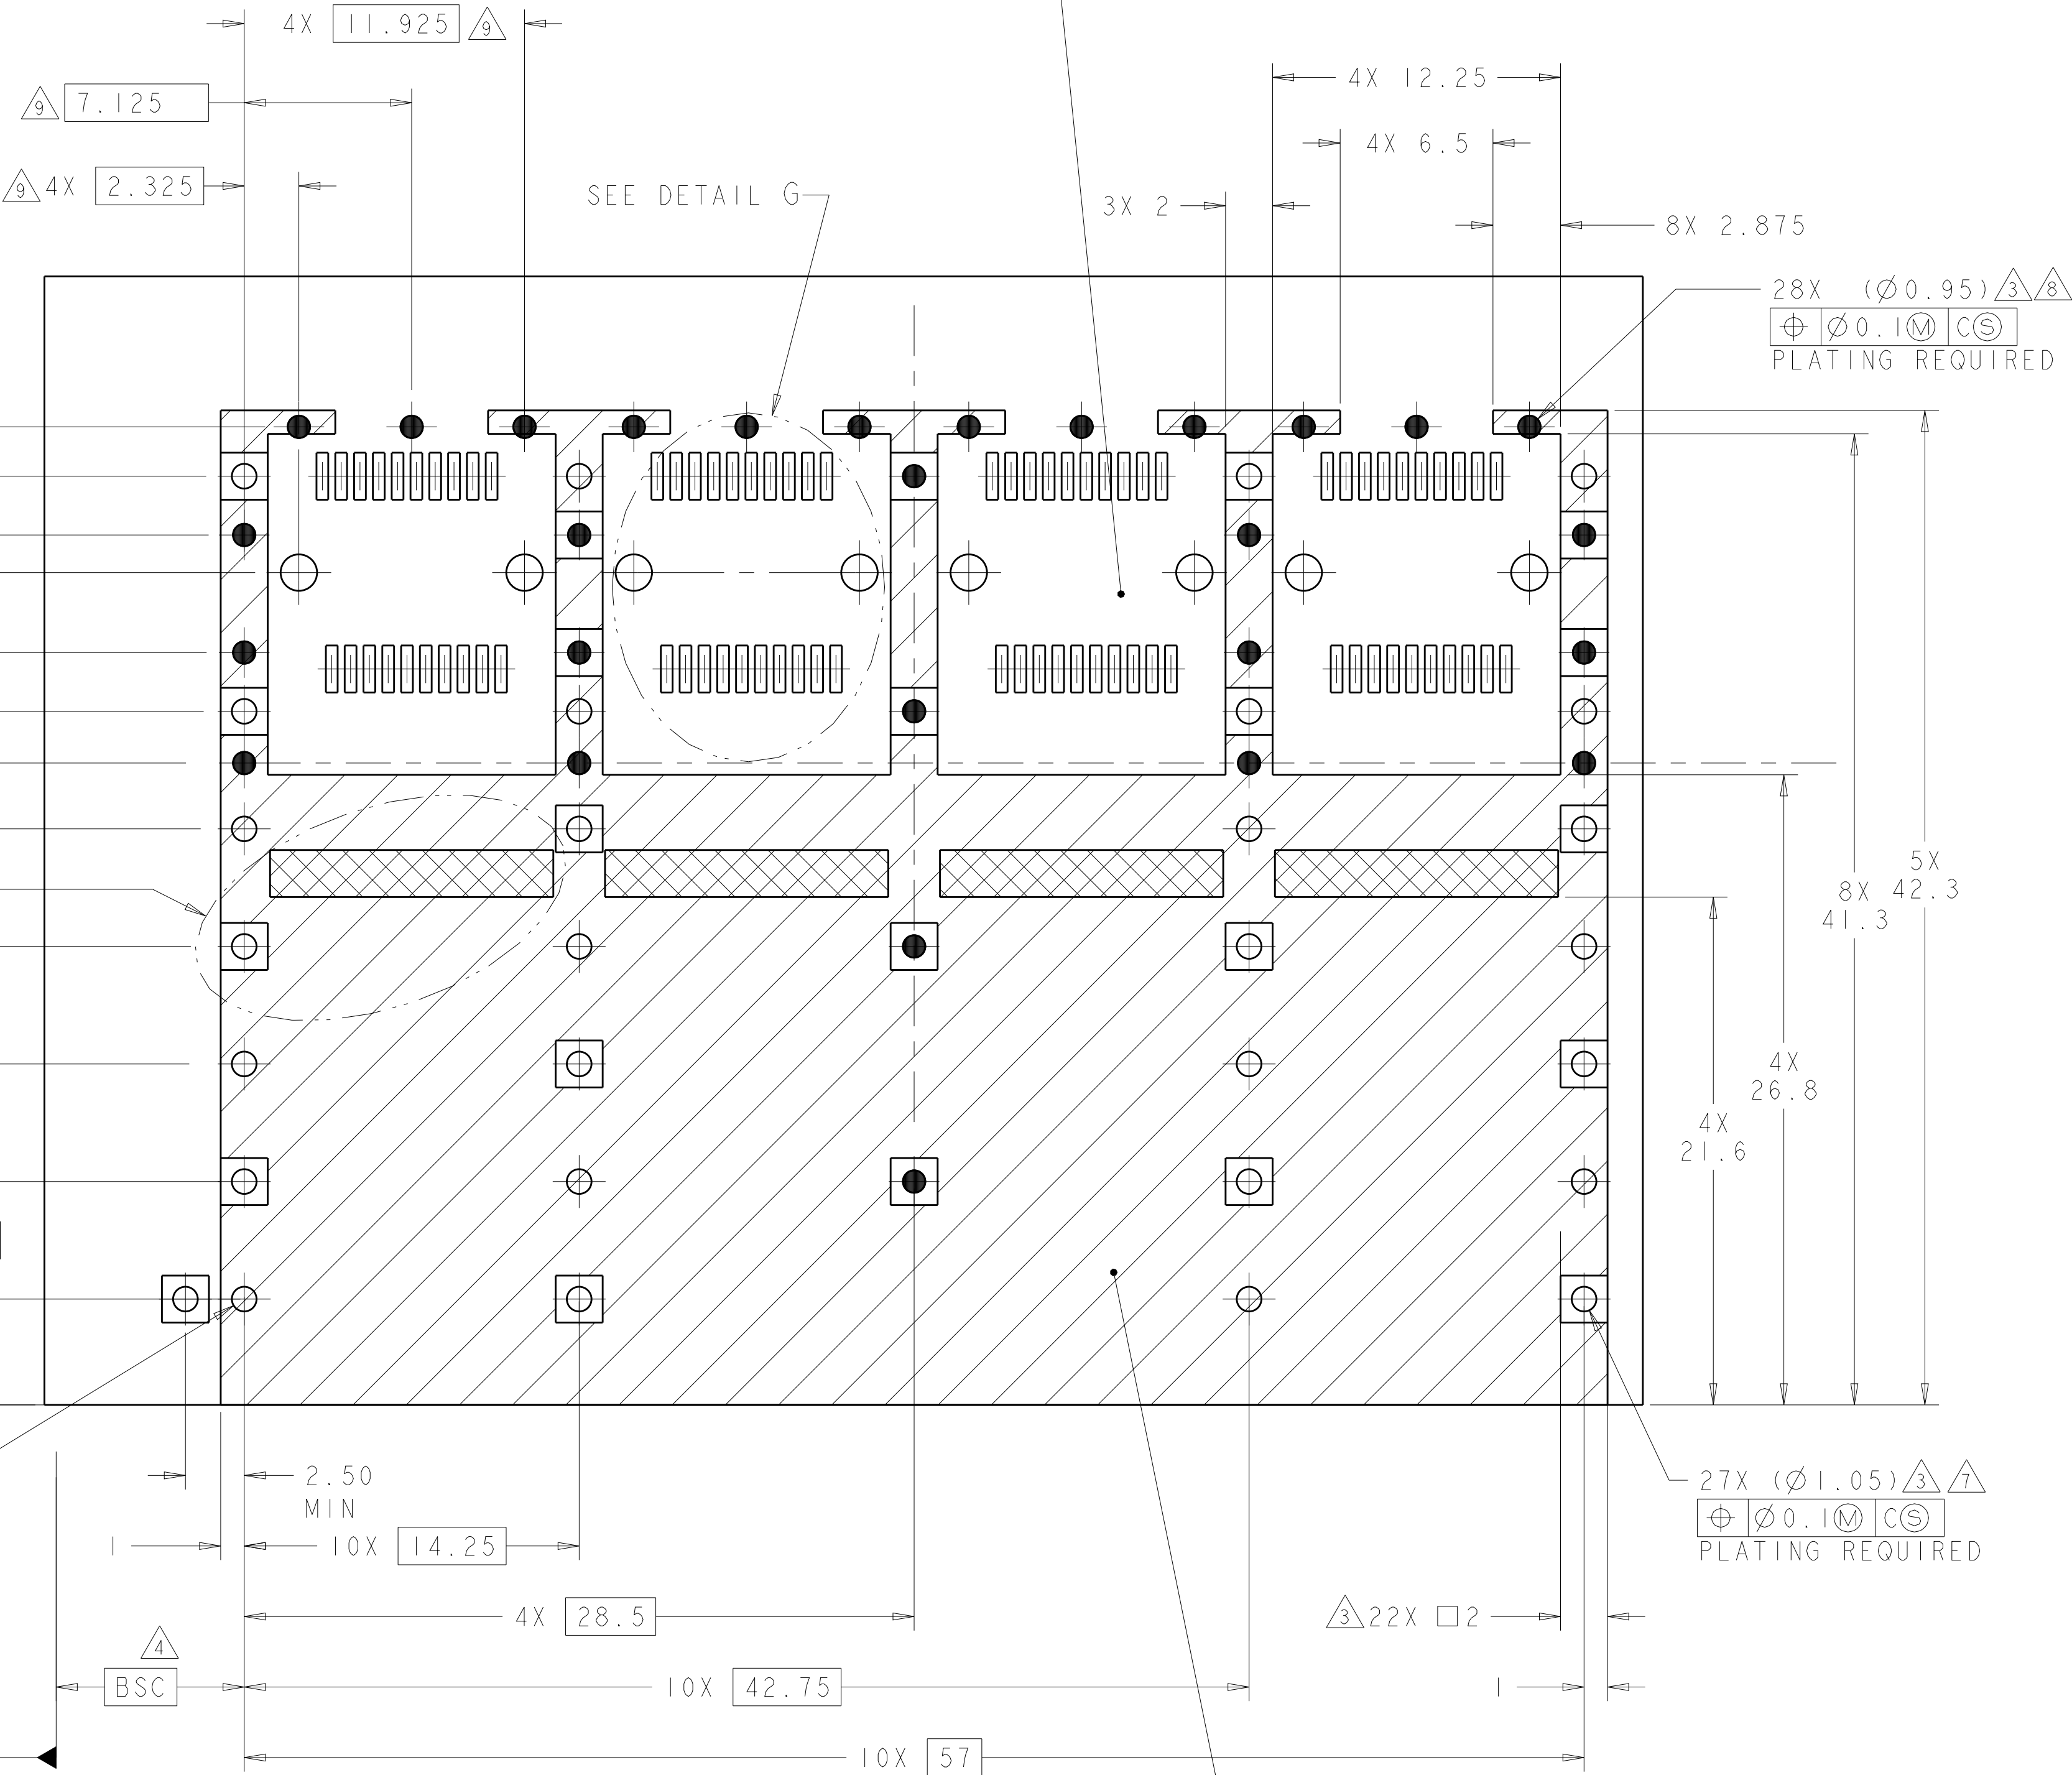


CROSS-HATCHED AREA DENOTES
COMPONENT AND TRACE KEEP-OUT
(EXCEPT CHASSIS GROUND)

RECOMMENDED PCB CONFIGURATION
WITH KEEP-OUT AREAS
BELLY TO BELLY APPLICATIONS
SCALE 5:1

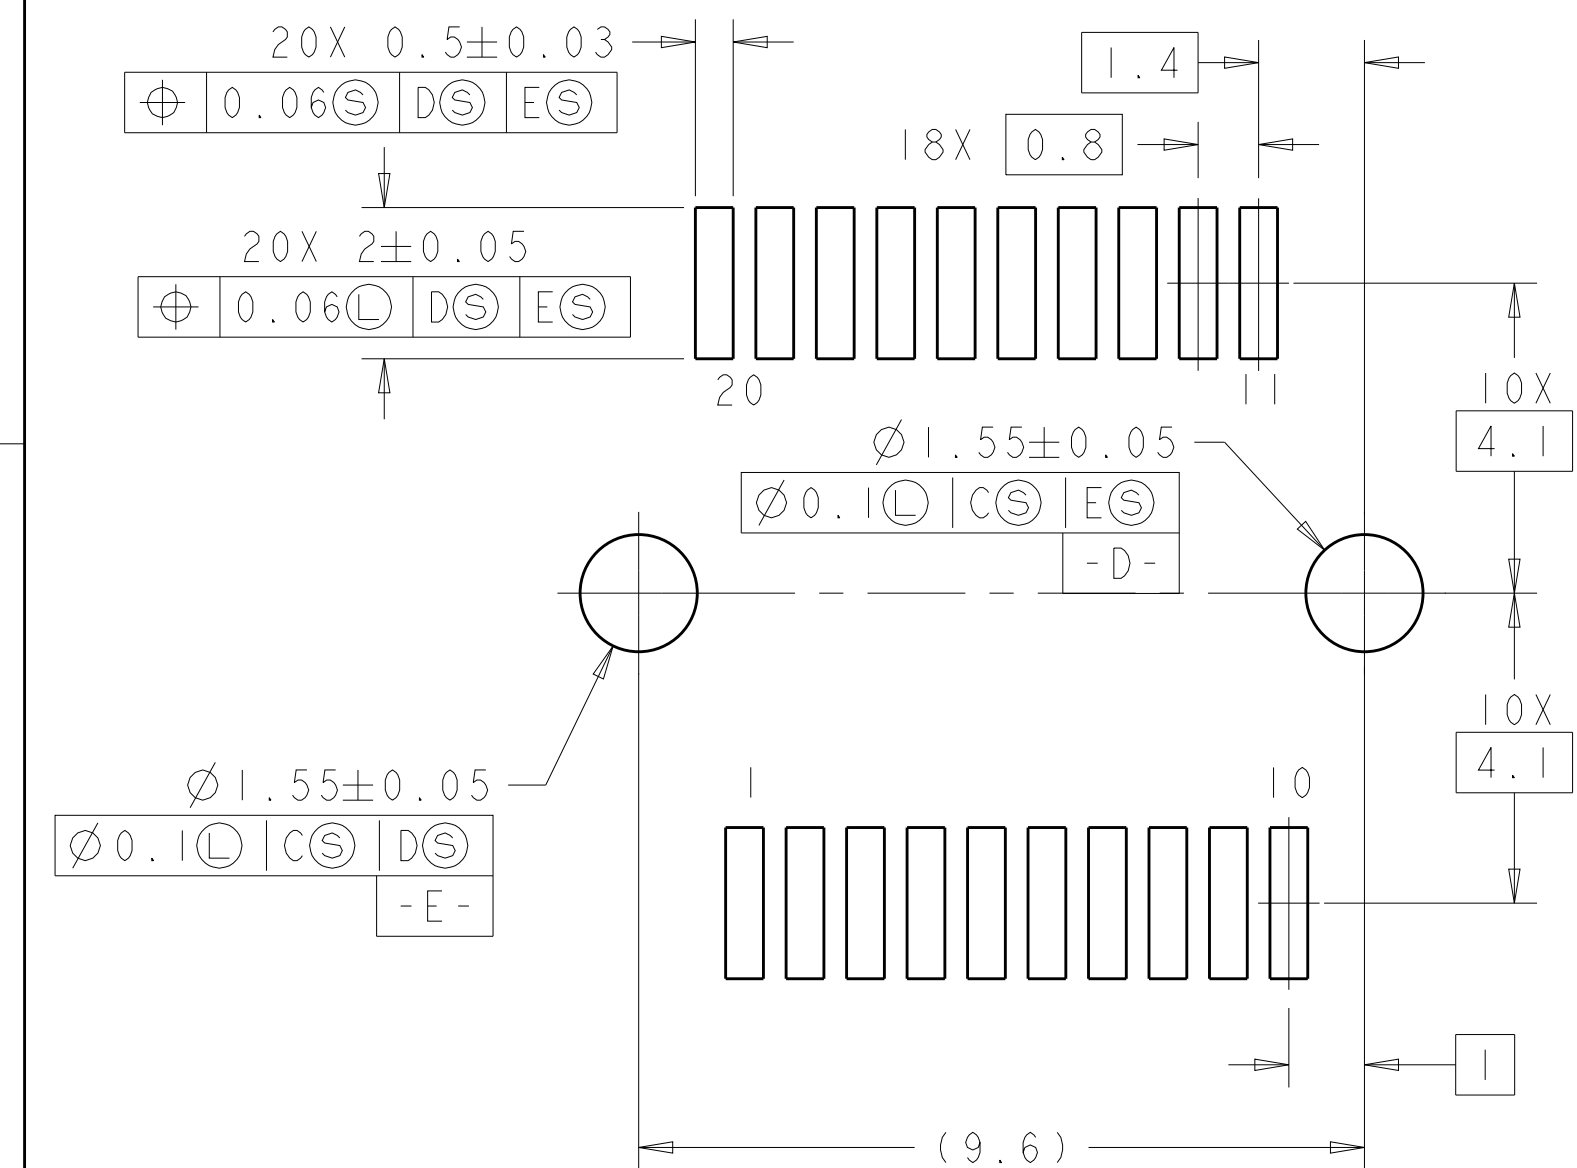


DETAIL G
RECOMMENDED PT CONNECTOR LAYOUT
8X INDIVIDUALLY
SCALE 10:1


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SCHMITT 23AUG2010	 TE Connectivity	
DIMENSIONS: mm		CHK M. SCHMITT 23AUG2010		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. WERTZ 23AUG2010	NAME SFP+ ENHANCED 1X4 CAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK	
		PRODUCT SPEC 108-2364 APPLICATION SPEC 114-13120	SIZE A100779	
MATERIAL		WEIGHT	CAGE CODE C=2149730	
FINISH		Customer Drawing	RESTRICTED TO -	
			SCALE 5:1	
			SHEET 5 OF 7	
			REV A	

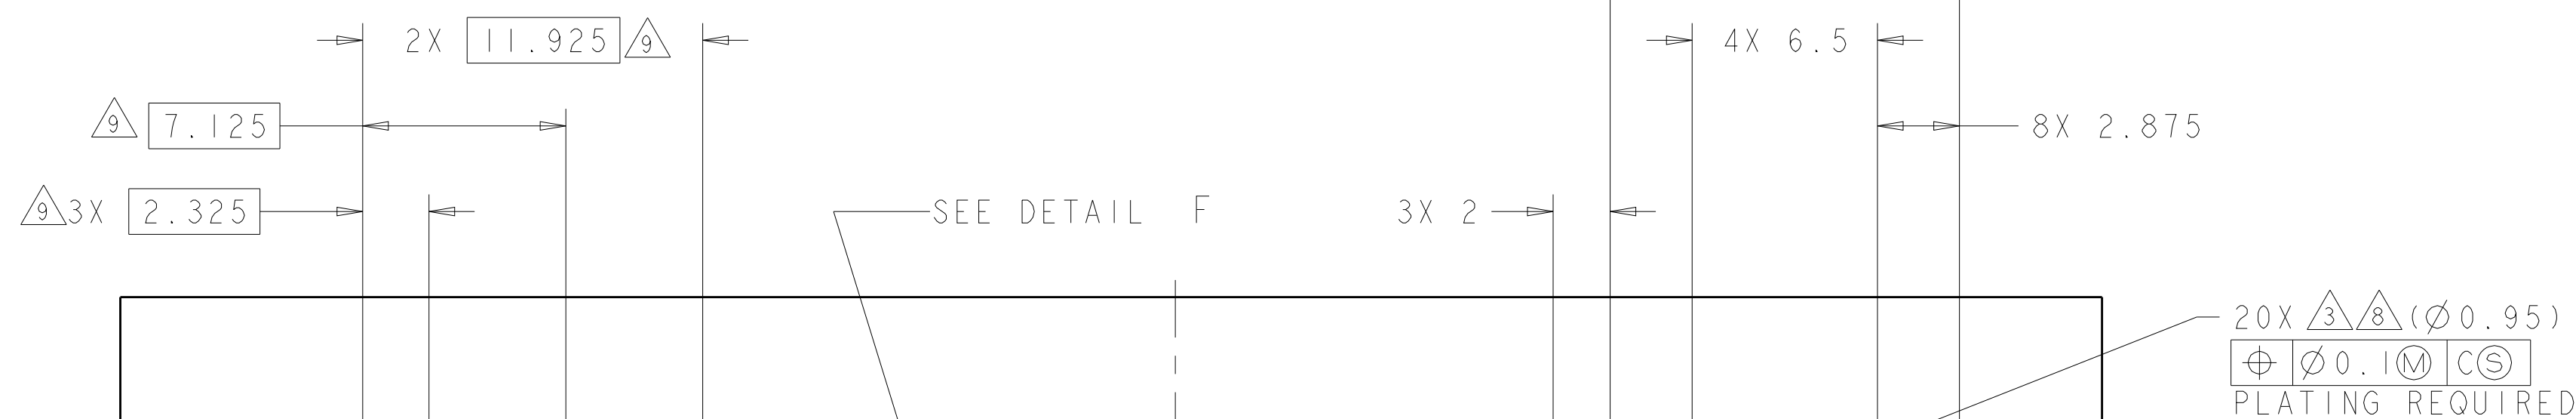


SEE DETAIL A-

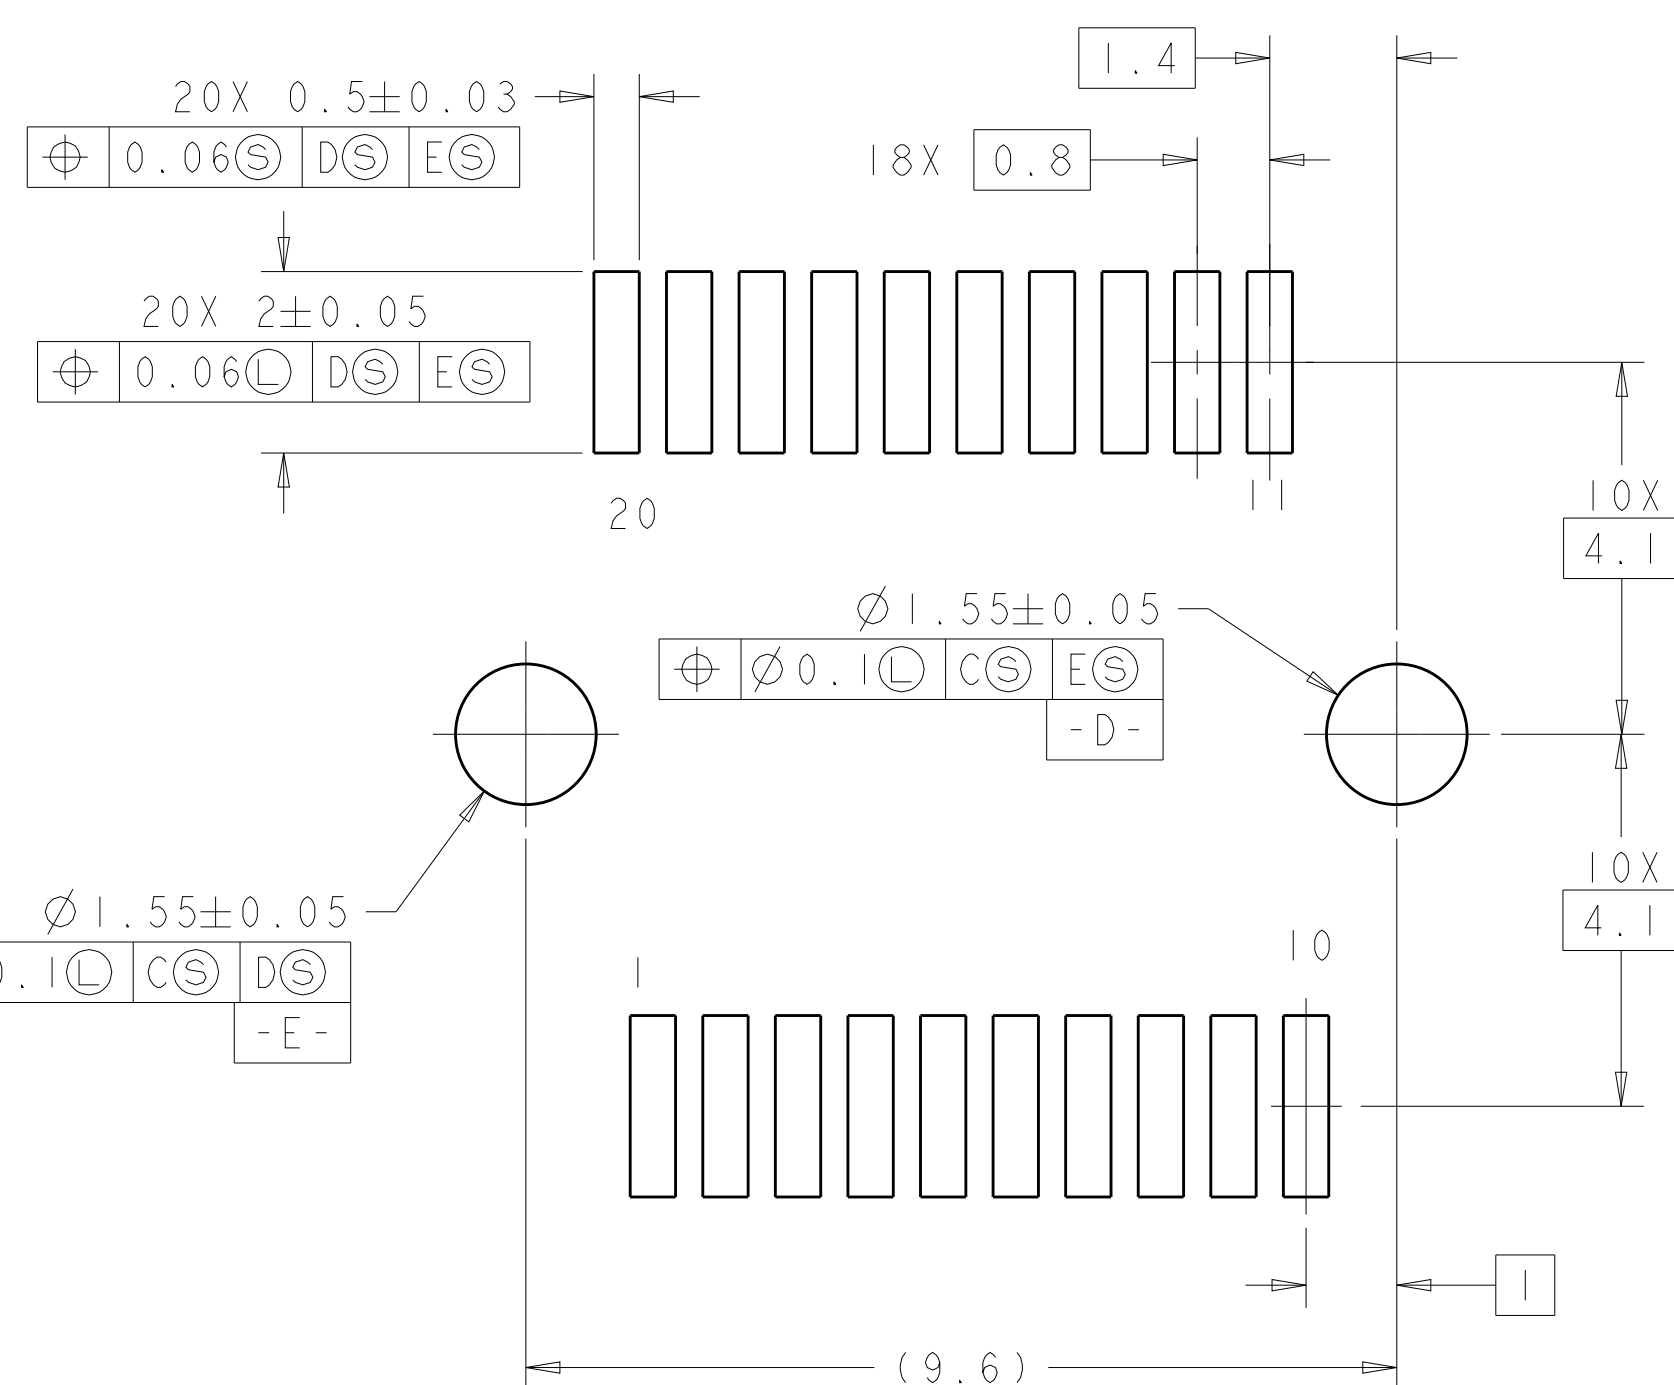

RECOMMENDED PCB CONFIGURATION
WITH KEEP-OUT AREAS
SINGLE SIDED APPLICATIONS
WITH INSULATING TAPE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. M. SCHWITT 23AUG2010 CRK M. SCHWITT 23AUG2010 APPV B. WERTZ 23AUG2010	 TE Connectivity	
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0.1^\circ$	NAME SFP+ ENHANCED IX4 GAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK	SIZE A100779	
MATERIAL FINISH WEIGHT -	ANGLES $\pm 0.1^\circ$	PRODUCT SPEC 108-2364 APPLICATION SPEC 114-13120	DRAWING NO C=2149730	RESTRICTED TO -
Customer Drawing		SCALE	5.1	SHEET 6 OF 7 REV A3

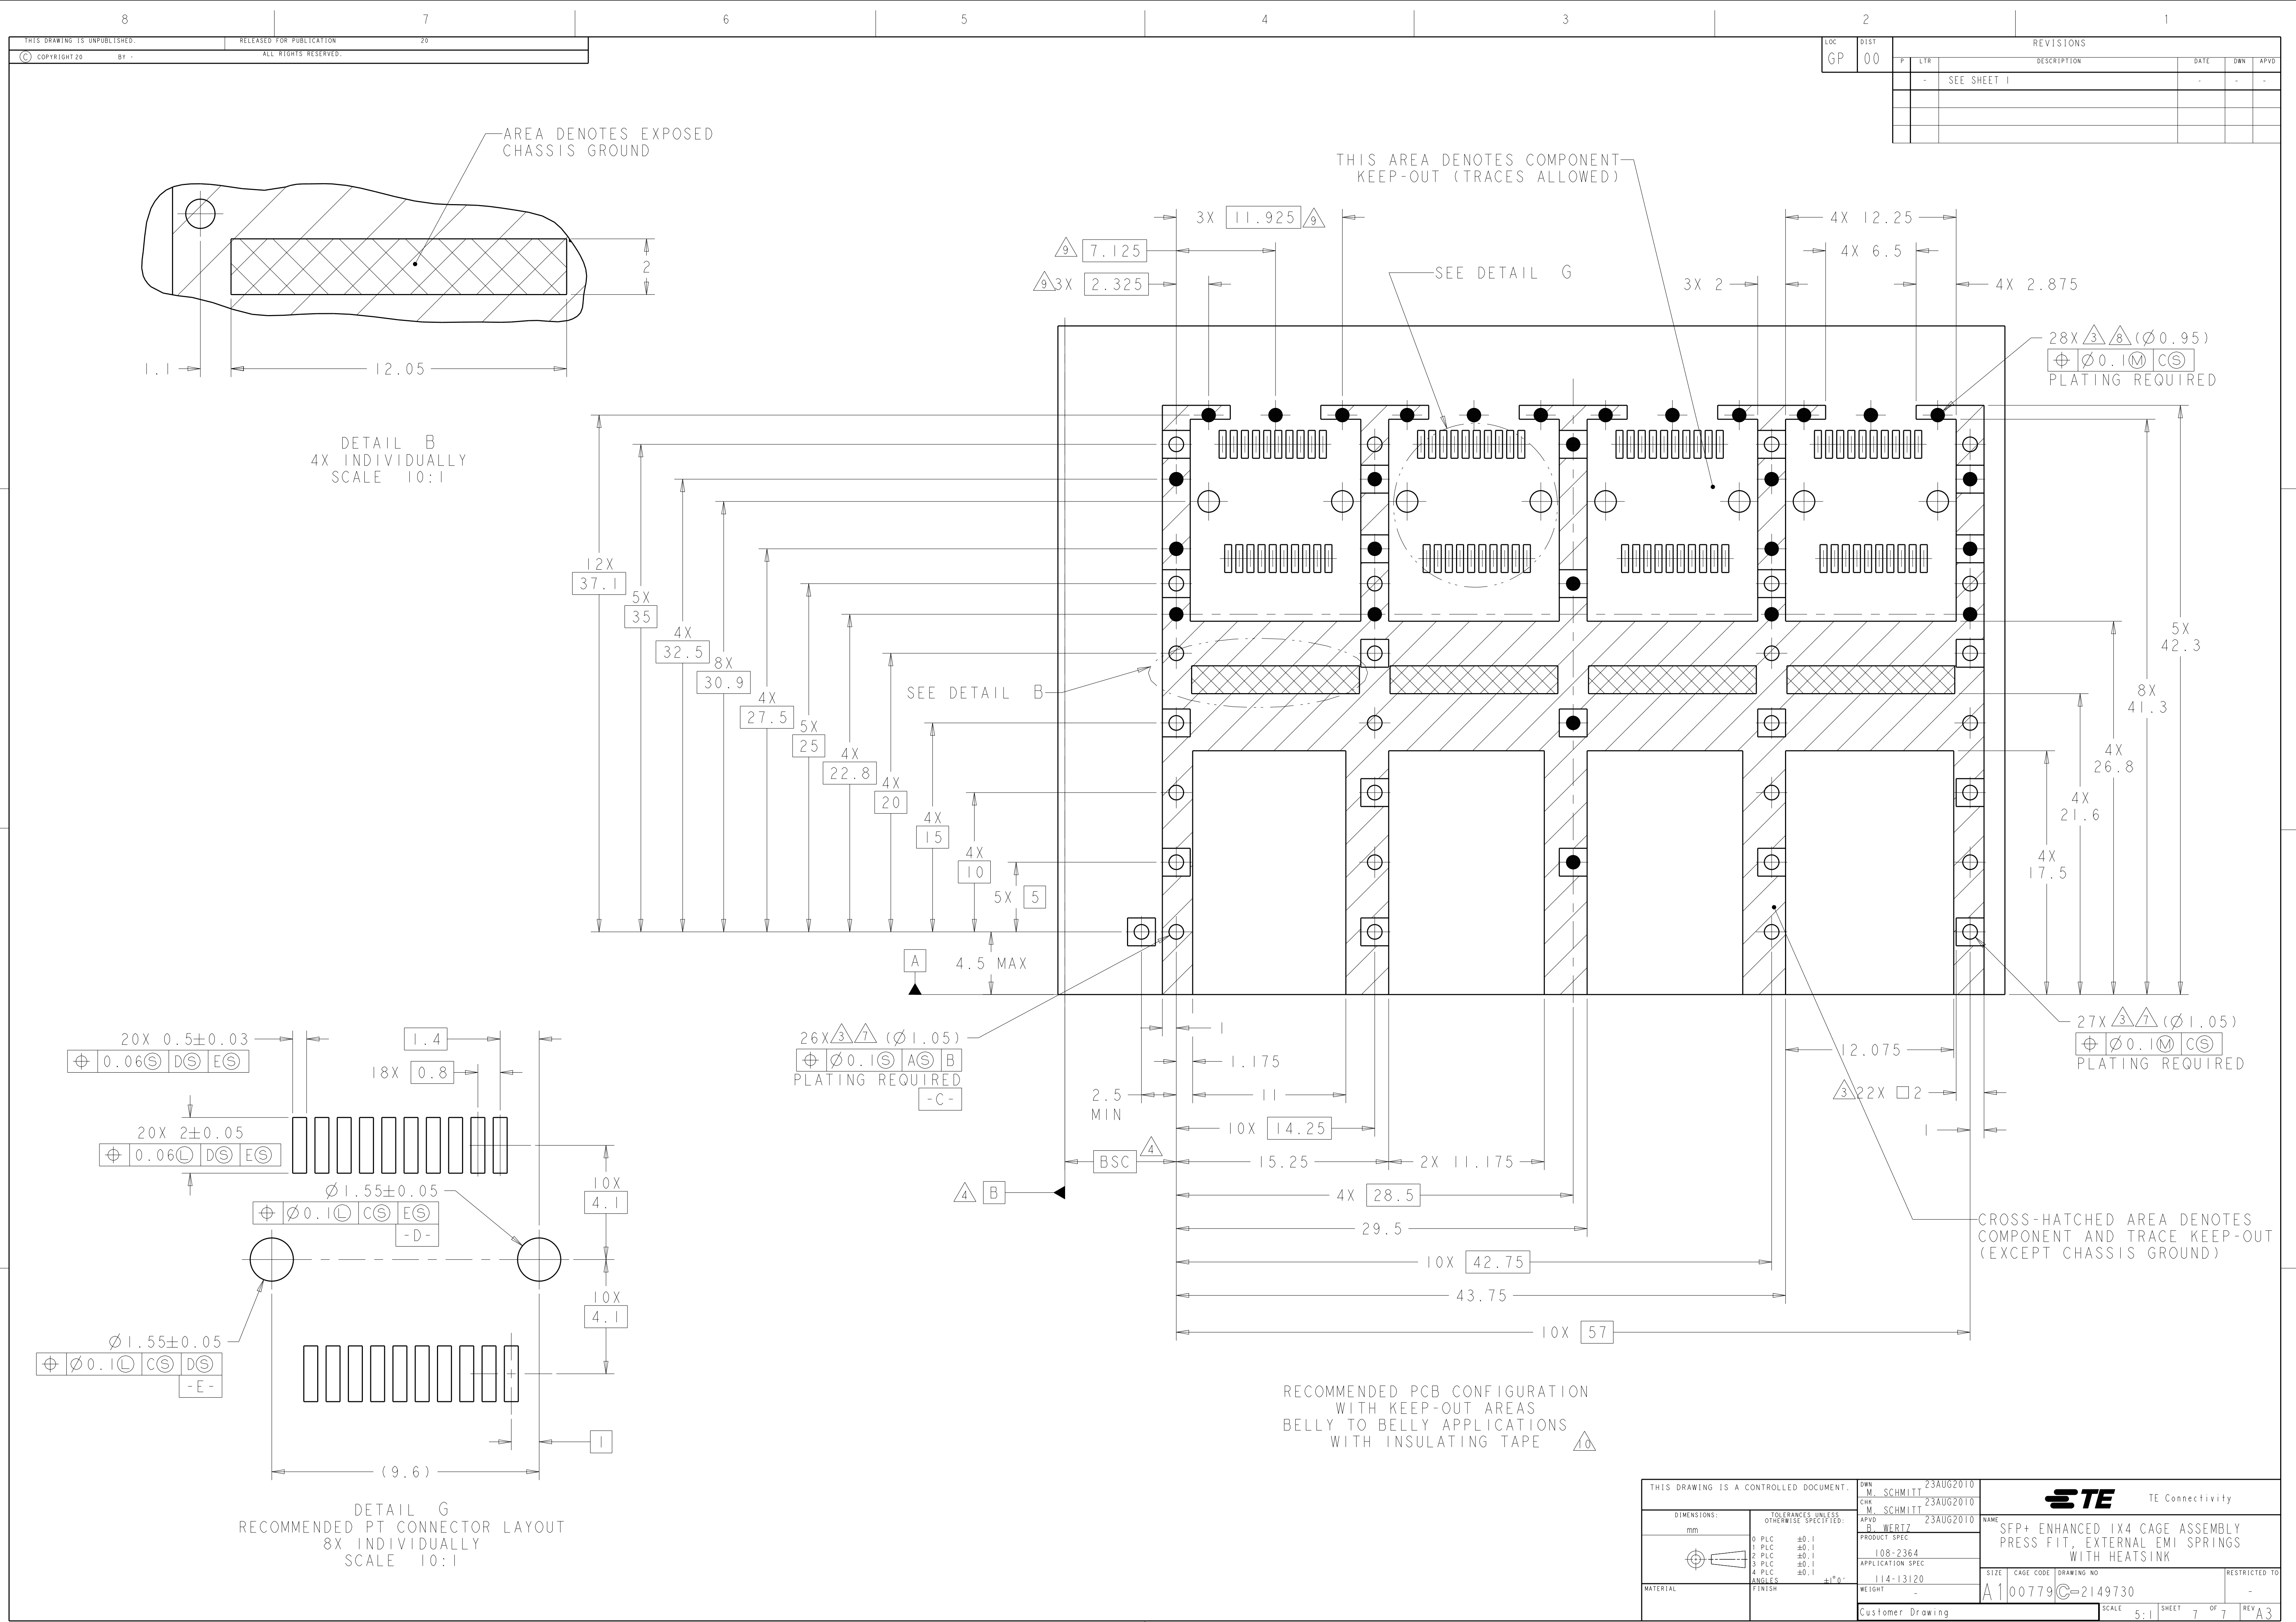

LOC		DIST		REVISONS			
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SCHMITT 23AUG2010	 TE Connectivity											
DIMENSIONS:		CHK M. SCHMITT 23AUG2010												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. WERTZ 23AUG2010	NAME SFP+ ENHANCED 1X4 CAGE ASSEMBLY PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK											
mm		PRODUCT SPEC												
		108-2364												
		APPLICATION SPEC												
		114-13120												
		WEIGHT												
MATERIAL		FINISH					SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
							A1		100779	C-2149730	-			
							Customer Drawing		SCALE	5:1	SHEET	7 OF 7	REV	A3

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А