

**Power Products**

|                                              |              |
|----------------------------------------------|--------------|
| Typical Terminal Styles .....                | S-2          |
| Quick Disconnects .....                      | S-3          |
| Specialty Connectors .....                   | S-4          |
| Terminal Blocks                              |              |
| Beau® Eurostyle .....                        | S-5 to S-8   |
| Barrier Strips .....                         | S-9 to S-12  |
| Beauplug® Plugs and Sockets .....            | S-13 to S-15 |
| Wire Splice Terminal .....                   | S-15         |
| Wire Management Products .....               | S-15         |
| Heavy-Duty Rectangular Industrial Connectors |              |
| HMC™ .....                                   | S-16 to S-21 |
| Mini-HMC™ .....                              | S-22         |

**Sealed Connector Systems**

|               |              |
|---------------|--------------|
| MX150L™ ..... | S-23 to S-24 |
| XRC™ .....    | S-25 to S-27 |

**Automation Connectivity**

|                                                         |              |
|---------------------------------------------------------|--------------|
| Brad® Nano-Change® (M8) .....                           | S-28 to S-30 |
| Brad Micro-Change® (M12) .....                          | S-31 to S-40 |
| Brad Ultra-Lock® (M12) .....                            | S-34 to S-35 |
| BradConnectivity™ mPm® Connectors .....                 | S-41         |
| Brad Mini-Change® .....                                 | S-42 to S-50 |
| BradPower™ .....                                        | S-51 to S-54 |
| BradConnectivity™ M23 Signal and Power Connectors ..... | S-55         |
| Network Protocols                                       |              |
| DeviceNet* .....                                        | S-56 to S-63 |
| PROFIBUS .....                                          | S-64 to S-67 |
| Ethernet .....                                          | S-68 to S-74 |
| Woodhead® Grips .....                                   | S-75 to S-77 |

**I/O Connectors**

|                          |      |
|--------------------------|------|
| Commerical Micro-D ..... | S-78 |
|--------------------------|------|

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# Typical Styles

## Standard Ring Tongue

The ring tongue terminal is the safest and most reliable style because it cannot be disconnected unless the screw is completely removed.

The basic Molex barrel, called Krimptite®, is noninsulated and features a quality, one-piece design. It is also the most economical style and has the greatest variety of uses where special features are not required.

The InsulKrimp® version features a rigid insulation sleeve of PVC affixed to the Krimptite barrel or the brazed-seam VersaKrimp™ barrel. It attaches to the wire with one quick crimp and the insulation sleeve protects against vibration damage by preventing wire flex at the crimp point. The funnel entrance into the barrel eliminates wire strand

“fold back,” increases crimping rates and enhances wire termination reliability.

When the butted-seam Krimptite barrel is bonded with a special brazing alloy, it becomes a VersaKrimp barrel. These brazed-seam barrel terminals will not open under conditions of stress or wire pull. As versatile as it is tough, it can be crimped under most adverse conditions by many types of tooling. The VersaKrimp is ideal for hard-to-crimp solid and stranded wires.

The NylaKrimp® barrel was designed specifically for larger wire applications. The color-coded barrel is formed by affixing a permanent, rigid, color-coded nylon insulating sleeve to the barrel. The insulation has a funnel entrance

into the barrel that eliminates wire strand “fold back,” increases crimping rates and enhances wire termination.

AviKrimp® terminals with color-coded barrels offer you the ultimate in high-performance terminal design and rugged construction. The Tin-plated Brass sleeve strengthens the barrel and secures the wire to protect against stress and high vibration. The color-coded nylon insulating sleeve extends beyond the metal support sleeve. A funnel ferrule wire entrance into the barrel prevents wire strand “fold back” for increased crimping rates and added wire termination reliability in the standard barrel length.

### Features

- Material: Copper
- Available in wire ranges from 24 to 26 AWG to 4/0
- All parts available loose piece; some are also available on mylar tape carrier



AviKrimp



InsulKrimp



NylaKrimp



Krimptite



VersaKrimp

## Splices

Molex offers standard and special splices for nearly every type of wiring needed.

### Butt Splice

Stripped wires are inserted from each end and “butt” in the center, then a crimp at each end secures the connection.



### Step Down Butt Splice

The perfect solution when two wires need to be inserted in one end of a splice and a single wire in the other end.



### Parallel Splice

Stripped wires lie side-by-side in the splice and are secured by a single crimp in the middle.



### AviKrimp Butt Splice

With the extra metal sleeve and nylon insulation, these splices should be used when heavy vibration is anticipated and a strong strain relief is needed.



### Funnel Entry Butt Splice

With the funnel entry butt splice, the end that will be crimped by the crimping press is funneled to allow quick and easy wire insertion.



### Window Butt Splice

The unique feature of this splice is the “window” that is stamped into the copper splice and covered by nylon. The inspection window guarantees proper wire insertion and crimp tool alignment. QPL'd to Mil-T-7928/5



### Multi-Lock

This is an insulation displacement connector that allows tap-and-run connections. Using only ordinary channel lock pliers, these color-coded connectors make quick, reliable, preinsulated splices without having to strip, twist or solder.



### Nylon Closed End Connector

The nylon closed end connectors are used in a wide variety of situations to “pigtail” or tie together two or more wires.



### Wire Tap


The Wire Tap splices onto a wire using an insulation displacement barb. No special tools are required, simply squeeze together with pliers.



Note: The connectors shown here are only a representation of our product line. For a complete listing of all solderless terminals and connectors, please contact Molex Industrial Division at 1-800-800-0449, or at [www.molex.com](http://www.molex.com).

# Quick Disconnects

## Quick Disconnect Terminals For PC Board



Molex offers a large selection of Standard Printed Circuit Board Mountable quick disconnect terminals. Some products offer a tab support mounting feature providing increased mounting reliability and terminal strength. Products are available as strip applied and loose piece. All products can be easily inserted into printed circuit boards using widely available, industry standard bench-type and fully-automated XY insertion tooling.

Molex PC board Quick Disconnect terminals are available in tab sizes ranging from 2.79 by 0.51 mm (.110 by .020") to 6.35 by 0.81 mm (.250 by .032"). Products are available in both vertical and right angle mounting configurations. All products are manufactured to NEMA specifications and are UL and CSA recognized.


### Features

Material: Brass

Tab conforms to NEMA specifications

Plating: Tin 3.81  $\mu$ m (150  $\mu$ " ) min. thickness

## Fully-Insulated Quick Disconnects

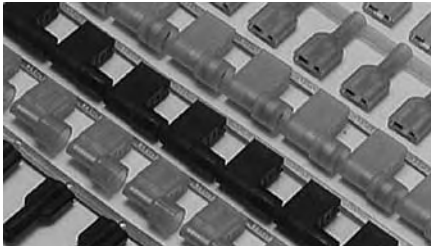


### Features

- Meets UL 310 standards (listed under UL File No. E79133)
- Color coded translucent insulator allows easy identification of terminal size and wire gauge
- Funnel entrance designed for increased crimping rates by speeding wire delivery into crimp section and eliminating wire strand fold back
- Wire stop stamped into the crimp barrel prevents insertion of over-stripped wire

- Avikrimp version has extra advantage of the secure metal support sleeve, and fulfills double crimp (support) requirements of VDE and DIN specifications
- The right angle flag terminal provides space saving design
- All parts available as loose piece; most are also available on either mylar tape, metal strip, and/or continuous molded carrier
- Some parts meet the UL 94V-0 flammability rating

## Fully-Insulated Piggyback Quick Disconnects




### Features

- Same functions as a standard piggyback terminal with the added feature of being fully insulated with a rigid nylon housing
- Also available in expanded flare versions
- Available in InsulKrimp (single crimp) or Avikrimp (double crimp) style
- Also available in barrel insulated InsulKrimp and Avikrimp versions



## Tape-fed And Loose-piece Quick Disconnects

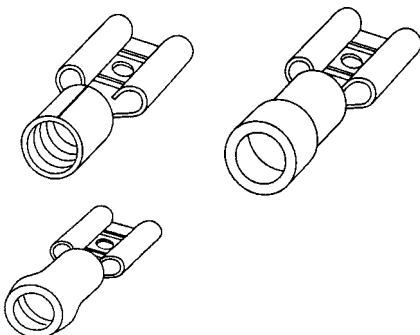

These non-insulated and partially insulated quick disconnects are available either loose piece or tape-mounted. Loose piece versions are individually fed into the dies of manual and powered hand crimping tools. Tape-fed versions are the same terminals mounted on mylar tape for automatic feeding into air- or electric-powered bench crimping presses.




Tape-fed terminals are ideal for applications where there are too many terminals for hand tool crimping and too few for strip press crimping. All loose piece and tape-fed terminals have a fully Tin-plated Brass construction with closed electrical barrels.

Parts are available in the following styles: Krimptite (buted seam), InsulKrimp (PVC insulated), and Avikrimp (nylon insulated with vibration support).

Note: The connectors shown here are only a representation of our product line. For a complete listing of all solderless terminals and connectors, please contact Molex at 1-800-800-0449, or at [www.molex.com](http://www.molex.com).

# Specialty Connectors

## Perma-Seal™ Terminals and Splices

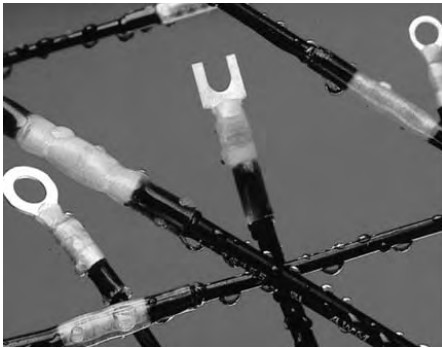


Perma-Seal terminals and splices provide a rugged, environmentally sealed connection for wire sizes 8 to 22 AWG that will insulate, seal and protect joints from physical abuse and abrasion, water, salt and other corrosive compounds.

These terminals give you long-lasting, moisture-proof connections that withstand water, salt, corrosion and heat, all of which cause serious problems for conventional, unsealed splices. The inner wall of the heat-shrinkable insulation sleeve is lined with a special hot-melt adhesive that is inert at room temperature, permitting wires to be inserted easily into the splices and terminals. As the sleeve is heated, the adhesive melts and flows under pressure from the tubing. This action creates a voidless seal that repels moisture incursion even during pressure cycling, and stands up to some of the most rigorous tests that can be applied to high-performance splices, such as the salt fog test MIL-T-7928.

The tough insulation sleeve of Perma-Seal splices and terminals resists abrasion and cutting. This protection helps to maintain the insulation and sealing properties even in the most hostile environments, inside and out.

## Heavy-Duty Copper Lugs and Splices



Our heavy-duty closed end crimpable terminals are designed for electrical and industrial applications such as welding equipment, forklifts, generators, power distribution equipment, motors, etc. They are manufactured of pure electrolytic copper, and are available in 8 AWG through 4/0 AWG wire and cable with a variety of stud sizes.

### Features

- Rated to 35KV applications
- UL listed, CSA certified
- Crimps in industry standard tooling
- Seamless barrel design
- Can be easily soldered or crimped
- Flared barrel entry for easy wire insertion
- AWG wire size identification on barrel
- Made of CDA-110 Copper stock offering 100% conductivity

## Star Ring Terminals



The Star Ring is a serrated ring that is mainly used for grounding. Unlike a ring terminal, when you tighten down on a star ring, the "star blades," or serrated edges, actually pierce through paint or other coatings, and bite into the metal to insure a good connection or ground. The product may also eliminate the need for lock washers.

### Features

Material: Brass or Steel

Non-insulated, PVC insulated, or nylon insulated

Wire ranges from 18 to 22 AWG and 14 to 16 AWG

Note: The connectors shown here are only a representation of our product line. For a complete listing of all solderless terminals and connectors, please contact Molex at 1-800-800-0449, or at [www.molex.com](http://www.molex.com).

# Eurostyle™ PCB Terminal Blocks

## Fixed, One Piece or Pluggable, Two Piece

**Molex manufactures a wide variety of Eurostyle terminal blocks to fit your connector needs.**

Whether you need a fixed, single-piece solution, or a pluggable, two-piece combination, Eurostyle terminal blocks from Molex provide a quality connection every time.

Beau Eurostyle terminal blocks are available from 3.50mm (.138") pitch to 15.00mm (.591") pitch, with current ratings ranging from 8.0 to 30.0A per circuit. The range of styles, configurations, pitches and ratings makes it easy for you to find the right connector for your design.

### Features and Benefits

- Rising cage clamp termination provides a secure connection without strand damage or intermittence
- Various imprinting styles available making wiring and repair faster and easier in the field
- Optional mounting ends ensure plugs maintain connection with PCB headers

- Some PCB headers available as surface mount compatible
- Industry standard interface for compatibility with existing board layouts
- Made from self-extinguishing nylon material, UL 94 V-0 flammability rating

### Reference Information

UL File No.: E48521

## Plugs



| No. of Circuits | Pitch             | Series | Component                  | Orientation | Current | Voltage | Wire Range (AWG) | Lead-free |
|-----------------|-------------------|--------|----------------------------|-------------|---------|---------|------------------|-----------|
| 2-20            | 3.50mm<br>(.138") | 39500  | Plug                       | Horizontal  | 8.0     | 300V    | 16-30            | Yes       |
|                 |                   | 39503  |                            | Vertical    |         |         |                  |           |
|                 |                   | 39504  | Plug with retention screws | Horizontal  |         |         |                  |           |
|                 |                   | 39507  |                            | Vertical    |         |         |                  |           |
| 2-20            | 3.81mm<br>(.150") | 39510  | Plug                       | Horizontal  | 8.0     | 300V    | 16-30            |           |
|                 |                   | 39513  |                            | Vertical    |         |         |                  |           |
|                 |                   | 39514  | Plug with retention screws | Horizontal  |         |         |                  |           |
|                 |                   | 39517  |                            | Vertical    |         |         |                  |           |
| 2-24            | 5.00mm<br>(.197") | 39520  | Plug                       | Horizontal  | 18.0    | 300V    | 12-30            |           |
|                 |                   | 39523  |                            | Vertical    |         |         |                  |           |
|                 |                   | 39524  | Plug with retention screws | Horizontal  |         |         |                  |           |
|                 |                   | 39527  |                            | Vertical    |         |         |                  |           |
| 2-24            | 5.08mm<br>(.200") | 39530  | Plug                       | Horizontal  | 18.0    | 300V    | 12-30            |           |
|                 |                   | 39533  |                            | Vertical    |         |         |                  |           |
|                 |                   | 39534  | Plug with retention screws | Horizontal  |         |         |                  |           |
|                 |                   | 39537  |                            | Vertical    |         |         |                  |           |
| 2-12            | 7.50mm<br>(.295") | 39371  | Plug                       | Horizontal  | 15.0    | 300V    | 12-30            |           |
|                 |                   | 39374  |                            | Vertical    |         |         |                  |           |

## Headers



### Reference Information

UL File No.: E48521

### PCB Headers

| No. of Circuits | Pitch             | Series | Component                         | Orientation             | Current | Voltage | Wire Range (AWG) | Lead-free |
|-----------------|-------------------|--------|-----------------------------------|-------------------------|---------|---------|------------------|-----------|
| 2-20            | 3.50mm<br>(.138") | 39502  | PCB Header                        | Horizontal              | 8.0     | 300V    | N/A              | Yes       |
|                 |                   | 39501  |                                   | Vertical                |         |         |                  |           |
|                 |                   | 39506  | PCB Header with retention inserts | Horizontal              |         |         |                  |           |
|                 |                   | 39505  |                                   | Vertical                |         |         |                  |           |
| 2-20            | 3.81mm<br>(.150") | 39512  | PCB Header                        | Horizontal              | 8.0     | 300V    | N/A              |           |
|                 |                   | 39511  |                                   | Vertical                |         |         |                  |           |
|                 |                   | 39516  | PCB Header with retention inserts | Horizontal              |         |         |                  |           |
|                 |                   | 39515  |                                   | Vertical                |         |         |                  |           |
| 2-24            | 5.00mm<br>(.197") | 39522  | PCB Header                        | Horizontal              | 18.0    | 300V    | N/A              |           |
|                 |                   | 39521  |                                   | Vertical                |         |         |                  |           |
|                 |                   | 39526  | PCB Header with retention inserts | Horizontal              |         |         |                  |           |
|                 |                   | 39525  |                                   | Vertical                |         |         |                  |           |
| 4-48            |                   | 39528  | PCB Header, dual level            | Horizontal and Vertical |         |         |                  |           |
| 2-24            | 5.08mm<br>(.200") | 39532  | PCB Header                        | Horizontal              | 18.0    | 300V    | N/A              |           |
|                 |                   | 39531  |                                   | Vertical                |         |         |                  |           |
|                 |                   | 39536  | PCB Header with retention inserts | Horizontal              |         |         |                  |           |
|                 |                   | 39535  |                                   | Vertical                |         |         |                  |           |
| 4-48            |                   | 39538  | PCB Header, dual level            | Horizontal and Vertical |         |         |                  |           |
| 2-12            | 7.50mm<br>(.295") | 39373  | PCB Header                        | Horizontal              | 15.0    | 300V    | N/A              |           |
|                 |                   | 39372  |                                   | Vertical                |         |         |                  |           |

# Beau® Eurostyle™ PCB Terminal Blocks

## Fixed Terminal Blocks



**Reference Information**  
UL File No.: E48521

| No. of Circuits | Pitch          | Series | Orientation                     | Current | Voltage | Wire Range (AWG) | Lead-free |    |
|-----------------|----------------|--------|---------------------------------|---------|---------|------------------|-----------|----|
| 2-25            | 3.50mm (.138") | 39357  | Vertical                        | 12.0    | 300V    | 16-18            | Yes       |    |
| 2-24            | 5.00mm (.197") | 39543  | Vertical, Horizontal, 45° angle | 10.0    |         | 14-22            |           |    |
|                 |                | 39890  | Vertical, 35° angle             | 13.5    |         | 16-30            |           |    |
|                 | 5.08mm (.200") | 39544  | Vertical, Horizontal, 45° angle | 15.0    |         | 12-30            |           |    |
|                 |                | 39880  | Vertical, 35° angle             | 13.5    |         | 16-30            |           |    |
|                 |                | 2-3*   | 6.35mm (.250")                  | 39380   |         | Vertical         |           | 30 |
| 9.53mm (.375")  | 39390          |        |                                 |         |         |                  |           |    |

\*Note: 39380 and 39390 are modular. Two and three circuit parts can be used to assemble larger circuit sizes.

# Eurostyle™ PCB Terminal Blocks Multi-level (Fixed) Blocks



### Features and Benefits

- Modular design allows larger circuit sizes to be created by stacking smaller circuit parts together, which reduces inventory
- Rising cage clamp wire termination provides secure, reliable contact
- Two and three level parts have staggered rows to make wiring easier

**Reference Information**  
UL File No.: E48521

Industrial Products

S

### Multi-Level

| Circuits | Pitch       | Series | Profile | Levels | Current | Voltage | Wire Range (AWG) | Lead-free |
|----------|-------------|--------|---------|--------|---------|---------|------------------|-----------|
| 4-48     | 5.00 (.197) | 39890  | Low     | 2      | 13.5A   | 300V    | 16-30            | Yes       |
|          |             |        | Medium  |        | 17.5A   |         | 12-30            |           |
|          | 5.08 (.200) | 39880  | Low     |        | 13.5A   |         | 16-30            |           |
|          |             |        | Medium  |        | 17.5A   |         | 12-30            |           |
|          |             |        | High    |        | 24.0A   |         | 12-30            |           |
| 6-72     | 5.00 (.197) | 39890  | Low     | 3      | 13.5A   | 300V    | 16-30            | Yes       |
|          |             |        | Medium  |        | 17.5A   |         | 12-30            |           |
|          | 5.08 (.200) | 39880  | Low     |        | 13.5A   |         | 16-30            |           |
|          |             |        | Medium  |        | 17.5A   |         | 12-30            |           |
|          |             |        | High    |        | 24.0A   |         | 12-30            |           |

# Beau® Eurostyle™ PCB Terminal Blocks High-Power Terminal Blocks



## Features and Benefits

- Rising cage clamp wire termination provides secure, reliable contact
- Multiple PCB terminals distribute power more evenly, reducing "hot spots"
- Combination slotted/posi drive screw heads improve transmission of torque for superior wire retention
- Extended wire funnel entry surrounds the wire insulator, eliminating exposed wire strands and possible shorting

## Reference Information

UL File No.: E48521

### Fixed High-Power

| Circuits | Pitch        | Series | Orientation | Current     | Voltage | Wire Range (AWG) | Lead-free |
|----------|--------------|--------|-------------|-------------|---------|------------------|-----------|
| 2-14     | 10.16 (.400) | 39910  | Vertical    | 60.0/40.0A  | 600V    | 6-18             | Yes       |
| 2-12     | 15.00 (.591) | 39920  |             | 85.0/115.0A |         | 3-14/1-8         |           |
| 3-16     | 8.00 (.315)  | 39950  |             | 20.0A       |         | 12-22            |           |
| 3-12     | 8.00 (.315)  | 39960  |             | 30.0A       |         | 10-22            |           |
| 2-12     | 10.16 (.400) | 39970  |             | 60.0/40.0A  | 300V    | 6-18             |           |

### Pluggable High-Power

#### Plug

| Circuits | Pitch        | Series | Component                  | Orientation | Current | Voltage | Wire Range (AWG) | Lead-free |
|----------|--------------|--------|----------------------------|-------------|---------|---------|------------------|-----------|
| 2-10     | 12.00 (.472) | 39421  | Plug                       | Horizontal  | 85.0A   | 600V    | 3-14             | Yes       |
| 2-8      |              | 39422  | Plug with retention screws |             |         |         |                  |           |

#### Header

| Circuits | Pitch        | Series | Component                         | Orientation | Current | Voltage | Lead-free |
|----------|--------------|--------|-----------------------------------|-------------|---------|---------|-----------|
| 2-10     | 12.00 (.472) | 39425  | PCB Header                        | Horizontal  | 85.0A   | 600V    | Yes       |
| 2-8      |              | 39426  | PCB Header with retention inserts |             |         |         |           |

[www.molex.com/product/highpower\\_tb.html](http://www.molex.com/product/highpower_tb.html)

# Pluggable Beau® Euromate™



## Features and Benefits

- Wiring terminals are staggered and offset vertically to facilitate easier wiring access
- Rear barrier prevents over-insertion of wire into device
- Accepts 6.35mm (.250") ring and spade wiring terminals

## Reference Information

UL File No.: E48521

| Circuits | Pitch       | Series | Orientation | Current | Voltage | Wire Range (AWG) | Lead-free |
|----------|-------------|--------|-------------|---------|---------|------------------|-----------|
| 3-21     | 3.81 (.138) | 39930  | Vertical    | 12.0A   | 300V    | 14-22            | Yes       |
| 3-24     | 5.08 (.200) | 39940  |             | 15.0A   |         | 12-22            |           |

\* Mates with most 3.81 and 5.08mm (.138 and .200") pitch headers.

## Positive Locking Plugs and Headers



### Features and Benefits

- Polarization feature eliminates the potential for mismatching
- Low-profile Eurostyle plug
- Positive latching system resists vibration and wire loads
- Surface Mount Compatible headers can withstand reflow soldering temperatures, eliminating the need for a secondary wave soldering operation

### Reference Information

UL File No.: E48521

### Plugs


| Circuits | Pitch       | Series | Orientation | Current | Voltage | Wire Range (AWG) | Lead-free |
|----------|-------------|--------|-------------|---------|---------|------------------|-----------|
| 2-24     | 5.08 (.200) | 39980  | Vertical    | 10.0A   | 300V    | 12-24            | Yes       |
| 2-18     | 5.00 (.197) | 39990  |             |         |         | 12-26            |           |

### Headers

| Circuits | Pitch       | Series | Orientation | Current | Voltage | Lead-free |
|----------|-------------|--------|-------------|---------|---------|-----------|
| 2-24     | 5.08 (.200) | 39980  | Vertical    | 10.0A   | 300V    | Yes       |
| 2-18     | 5.00 (.197) | 39990  |             |         |         |           |

[www.molex.com/product/poslatch\\_tb.html](http://www.molex.com/product/poslatch_tb.html)

## Eurostyle™ Terminal Blocks Eurostyle Two-Screw Terminal Strips



### Features and Benefits

- Modular design allows larger blocks to be easily cut into smaller circuit sizes
- Contacts and screws are recessed in the housing to help prevent short circuits and provide added finger safety
- Wire protectors prevent stranded wire damage during connection

| Circuits | Pitch        | Series     | Current | Voltage | Wire Range (AWG) | Description                      | Lead-free |
|----------|--------------|------------|---------|---------|------------------|----------------------------------|-----------|
| 2-12     | 8.00 (.315)  | 39100-08XX | 20.0A   | 600V    | 12-22            | Standard profile, with standoffs | Yes       |
|          | 10.00 (.394) | 39100-10XX | 30.0A   |         | 10-18            |                                  |           |
|          | 12.00 (.472) | 39100-12XX | 40.0A   |         | 8-20             |                                  |           |
|          | 15.00 (.591) | 39100-15XX | 63.0A   |         | 6-14             |                                  |           |

Low profile (300V) versions of 8.00, 10.00 and 12.00mm (.315, .394 and .472") terminal blocks available  
Jumpers available in 2 or 3 circuit lengths

# Beau® Barrier Strips

**Beau terminal blocks provide a robust connection between wires and the PCB.**

Beau terminal blocks are a great connector for their durability and versatility. Barrier strips can handle currents of up to 45.0A per circuit and all are rated for 300 or 600V. With the variety of terminal styles, screws and other options available on barrier strips, these parts can be customized in many ways.


Special additions to barrier strips such as topside hardware, marker strips and hinged covers ensure that you get the best possible connector designed specifically for your application.

## Features

- Optional topside hardware allows for further customization to fit your design requirements
- Robust and durable screw terminals are ultrasonically welded into the thermoplastic insulator, reducing the risk for terminal twisting and solder joint failure
- Tri-barrier construction of some barrier strips provides a back wall to prevent over insertion and shorting
- No special tools required to terminate wires, only a No. 2 screwdriver required
- Broad range of screw and terminal options improves interconnect performance
- Various imprinting styles aid in labeling circuits for wiring, testing and repair in the field
- RoHS and ELV compliant

## 8.26mm (.325") Pitch Barrier Terminal Strips

### 38700 PC Terminal

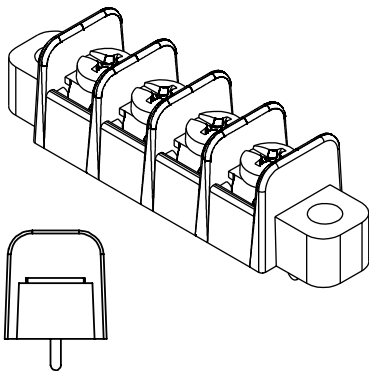

## Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Inches

## Electrical

Voltage: 300V  
Current: 15.0A  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

## Mechanical

Recommended Tightening Torque: 1.36Nm (12 in.-lb)

## Physical


Housing: PBT, black  
Terminal: Brass  
Screw: Steel, #6-32, Phillips/Slot combo head  
Plating: Terminal Area—Tin  
Screw—Zinc with clear chromate  
Wire Range: 14 to 22 AWG

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 2        | <a href="#">38700-6102</a> | <a href="#">38700-6302</a> | Yes       |
| 3        | <a href="#">38700-6103</a> | <a href="#">38700-6303</a> |           |
| 4        | <a href="#">38700-6104</a> | <a href="#">38700-6304</a> |           |
| 5        | <a href="#">38700-6105</a> | <a href="#">38700-6305</a> |           |
| 6        | <a href="#">38700-6106</a> | <a href="#">38700-6306</a> |           |
| 7        | <a href="#">38700-6107</a> | <a href="#">38700-6307</a> |           |
| 8        | <a href="#">38700-6108</a> | <a href="#">38700-6308</a> |           |
| 9        | <a href="#">38700-6109</a> | <a href="#">38700-6309</a> |           |
| 10       | <a href="#">38700-6110</a> | <a href="#">38700-6310</a> |           |
| 11       | <a href="#">38700-6111</a> | <a href="#">38700-6311</a> |           |
| 12       | <a href="#">38700-6112</a> | <a href="#">38700-6312</a> |           |
| 13       | <a href="#">38700-6113</a> | <a href="#">38700-6313</a> |           |
| 14       | <a href="#">38700-6114</a> | <a href="#">38700-6314</a> |           |

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 15       | <a href="#">38700-6115</a> | <a href="#">38700-6315</a> | Yes       |
| 16       | <a href="#">38700-6116</a> | <a href="#">38700-6316</a> |           |
| 17       | <a href="#">38700-6117</a> | <a href="#">38700-6317</a> |           |
| 18       | <a href="#">38700-6118</a> | <a href="#">38700-6318</a> |           |
| 19       | <a href="#">38700-6119</a> | <a href="#">38700-6319</a> |           |
| 20       | <a href="#">38700-6120</a> | <a href="#">38700-6320</a> |           |
| 21       | <a href="#">38700-6121</a> | <a href="#">38700-6321</a> |           |
| 22       | <a href="#">38700-6122</a> | <a href="#">38700-6322</a> |           |
| 23       | <a href="#">38700-6123</a> | <a href="#">38700-6323</a> |           |
| 24       | <a href="#">38700-6124</a> | <a href="#">38700-6324</a> |           |
| 25       | <a href="#">38700-6125</a> | <a href="#">38700-6325</a> |           |
| 26       | <a href="#">38700-6126</a> | <a href="#">38700-6326</a> |           |

# 8.26mm (.325") Pitch Single Row Tri-Barrier Terminal Strips

**38704**  
PC Terminal

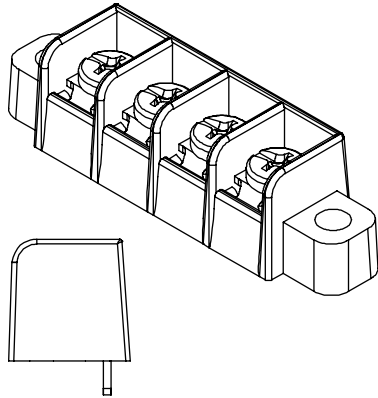

## Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Inches

## Electrical

Voltage: 300V  
Current: 15.0A  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

## Mechanical

Recommended Tightening Torque: 1.36Nm (12 in.-lb)

## Physical


Housing: PBT, black  
Terminal: Brass  
Screw: Steel, #6-32, Phillips/Slot combo head  
Plating: Terminal Area—Tin  
Screw—Zinc with clear chromate  
Wire Range: 14 to 22 AWG

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 2        | <a href="#">38704-4002</a> | <a href="#">38704-4102</a> | Yes       |
| 3        | <a href="#">38704-4003</a> | <a href="#">38704-4102</a> |           |
| 4        | <a href="#">38704-4004</a> | <a href="#">38704-4102</a> |           |
| 5        | <a href="#">38704-4005</a> | <a href="#">38704-4102</a> |           |
| 6        | <a href="#">38704-4006</a> | <a href="#">38704-4102</a> |           |
| 7        | <a href="#">38704-4007</a> | <a href="#">38704-4102</a> |           |

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 8        | <a href="#">38704-4008</a> | <a href="#">38704-4108</a> | Yes       |
| 9        | <a href="#">38704-4009</a> | <a href="#">38704-4109</a> |           |
| 10       | <a href="#">38704-4010</a> | <a href="#">38704-4110</a> |           |
| 11       | <a href="#">38704-4011</a> | <a href="#">38704-4111</a> |           |
| 12       | <a href="#">38704-4012</a> | <a href="#">38704-4112</a> |           |

# 8.26mm (.325") Pitch Dual Level Barrier Terminal Strips

**38706**  
Dual Level, PC Terminal

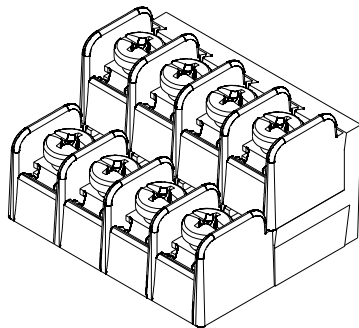

## Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0

## Electrical

Voltage: 300V  
Current: 15.0A  
Insulation Resistance: 5000 Megohms min.  
Dielectric Withstanding Voltage: 1600V AC

## Mechanical

Recommended Tightening Torque: 1.36Nm (12 in.-lb.)  
Wire Range: 14 to 22 AWG

## Physical


Housing: Polysulfone, black  
Terminal: Brass  
Screw: Steel, #6-32, Phillips/Slot combo head  
Plating: Terminal—Tin  
Screw—Zinc with clear chromate

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
| 4        | <a href="#">38706-0004</a> | Yes       |
| 6        | <a href="#">38706-0006</a> |           |
| 8        | <a href="#">38706-0008</a> |           |
| 10       | <a href="#">38706-0010</a> |           |
| 12       | <a href="#">38706-0012</a> |           |
| 14       | <a href="#">38706-0014</a> |           |

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
| 16       | <a href="#">38706-0016</a> | Yes       |
| 18       | <a href="#">38706-0018</a> |           |
| 20       | <a href="#">38706-0020</a> |           |
| 22       | <a href="#">38706-0022</a> |           |
| 24       | <a href="#">38706-0024</a> |           |

## 9.53mm (.375") Pitch Single Row Barrier Terminal Strips

### 38720 Panel Mount

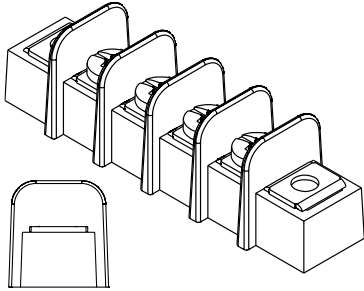

#### Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Inches

#### Electrical

Voltage: 300V  
Current: 15.0A  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 5000 Megohms min.

#### Mechanical

Recommended Tightening Torque: 1.36Nm (12 in.-lb)

#### Physical


Housing: PBT, black  
Terminal: Brass  
Screw: Steel, #6-32, Phillips/Slot combo head  
Plating: Terminal Area—Tin  
Screw—Zinc with clear chromate  
Wire Range: 14 to 22 AWG

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 2        | <a href="#">38720-0202</a> | <a href="#">38720-0302</a> | Yes       |
| 3        | <a href="#">38720-0203</a> | <a href="#">38720-0303</a> |           |
| 4        | <a href="#">38720-0204</a> | <a href="#">38720-0304</a> |           |
| 5        | <a href="#">38720-0205</a> | <a href="#">38720-0305</a> |           |
| 6        | <a href="#">38720-0206</a> | <a href="#">38720-0306</a> |           |
| 7        | <a href="#">38720-0207</a> | <a href="#">38720-0307</a> |           |
| 8        | <a href="#">38720-0208</a> | <a href="#">38720-0308</a> |           |
| 9        | <a href="#">38720-0209</a> | <a href="#">38720-0309</a> |           |
| 10       | <a href="#">38720-0210</a> | <a href="#">38720-0310</a> |           |
| 11       | <a href="#">38720-0211</a> | <a href="#">38720-0311</a> |           |
| 12       | <a href="#">38720-0212</a> | <a href="#">38720-0312</a> |           |
| 13       | <a href="#">38720-0213</a> | <a href="#">38720-0313</a> |           |
| 14       | <a href="#">38720-0214</a> | <a href="#">38720-0314</a> |           |

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 15       | <a href="#">38720-0215</a> | <a href="#">38720-0315</a> | Yes       |
| 16       | <a href="#">38720-0216</a> | <a href="#">38720-0316</a> |           |
| 17       | <a href="#">38720-0217</a> | <a href="#">38720-0317</a> |           |
| 18       | <a href="#">38720-0218</a> | <a href="#">38720-0318</a> |           |
| 19       | <a href="#">38720-0219</a> | <a href="#">38720-0319</a> |           |
| 20       | <a href="#">38720-0220</a> | <a href="#">38720-0320</a> |           |
| 21       | <a href="#">38720-0221</a> | <a href="#">38720-0321</a> |           |
| 22       | <a href="#">38720-0222</a> | <a href="#">38720-0322</a> |           |
| 23       | <a href="#">38720-0223</a> | <a href="#">38720-0323</a> |           |
| 24       | <a href="#">38720-0224</a> | <a href="#">38720-0324</a> |           |
| 25       | <a href="#">38720-0225</a> | <a href="#">38720-0325</a> |           |
| 26       | <a href="#">38720-0226</a> | <a href="#">38720-0326</a> |           |

## 9.53mm (.375") Pitch Single Row Barrier Terminal Strips

### 38720 PC Terminal



#### Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Inches

#### Electrical

Voltage: 300V  
Current: 15.0A  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

#### Mechanical

Recommended Tightening Torque: 1.36Nm (12 in.-lb)

#### Physical


Housing: PBT, black  
Terminal: Brass  
Screw: Steel, #6-32, Philips/Slot combo head  
Plating: Terminal Area—Tin  
Screw—Zinc with clear chromate  
Wire Range: 14 to 22 AWG

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 2        | <a href="#">38720-6202</a> | <a href="#">38720-6302</a> | Yes       |
| 3        | <a href="#">38720-6203</a> | <a href="#">38720-6303</a> |           |
| 4        | <a href="#">38720-6204</a> | <a href="#">38720-6304</a> |           |
| 5        | <a href="#">38720-6205</a> | <a href="#">38720-6305</a> |           |
| 6        | <a href="#">38720-6206</a> | <a href="#">38720-6306</a> |           |
| 7        | <a href="#">38720-6207</a> | <a href="#">38720-6307</a> |           |
| 8        | <a href="#">38720-6208</a> | <a href="#">38720-6308</a> |           |
| 9        | <a href="#">38720-6209</a> | <a href="#">38720-6309</a> |           |
| 10       | <a href="#">38720-6210</a> | <a href="#">38720-6310</a> |           |
| 11       | <a href="#">38720-6211</a> | <a href="#">38720-6311</a> |           |
| 12       | <a href="#">38720-6212</a> | <a href="#">38720-6312</a> |           |
| 13       | <a href="#">38720-6213</a> | <a href="#">38720-6313</a> |           |
| 14       | <a href="#">38720-6214</a> | <a href="#">38720-6314</a> |           |

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | With Mounting Ends         | Without Mounting Ends      |           |
| 15       | <a href="#">38720-6215</a> | <a href="#">38720-6315</a> | Yes       |
| 16       | <a href="#">38720-6216</a> | <a href="#">38720-6316</a> |           |
| 17       | <a href="#">38720-6217</a> | <a href="#">38720-6317</a> |           |
| 18       | <a href="#">38720-6218</a> | <a href="#">38720-6318</a> |           |
| 19       | <a href="#">38720-6219</a> | <a href="#">38720-6319</a> |           |
| 20       | <a href="#">38720-6220</a> | <a href="#">38720-6320</a> |           |
| 21       | <a href="#">38720-6221</a> | <a href="#">38720-6321</a> |           |
| 22       | <a href="#">38720-6222</a> | <a href="#">38720-6322</a> |           |
| 23       | <a href="#">38720-6223</a> | <a href="#">38720-6323</a> |           |
| 24       | <a href="#">38720-6224</a> | <a href="#">38720-6324</a> |           |
| 25       | <a href="#">38720-6225</a> | <a href="#">38720-6325</a> |           |
| 26       | <a href="#">38720-6226</a> | <a href="#">38720-6326</a> |           |

# 9.53mm (.375") Pitch Double Row Barrier Terminal Strips

**38760/38770**  
**Panel Mount**

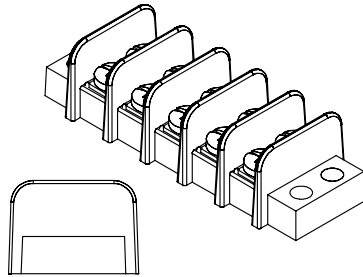

## Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Inches

## Electrical

Voltage: 300V  
Current: 15.0A  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

## Mechanical

Recommended Tightening Torque: 1.26Nm (12 in.-lb)

## Physical


Housing: PBT, black  
Terminal: Brass  
Screw: Steel, #6-32, Phillips/Slot combo head  
Plating: Terminal Area—Tin  
Screw—Zinc with clear chromate  
Wire Range: 14 to 22 AWG

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | Low Profile                | Standard                   |           |
| 2        | <a href="#">38770-0102</a> | <a href="#">38760-0102</a> | Yes       |
| 3        | <a href="#">38770-0103</a> | <a href="#">38760-0103</a> |           |
| 4        | <a href="#">38770-0104</a> | <a href="#">38760-0104</a> |           |
| 5        | <a href="#">38770-0105</a> | <a href="#">38760-0105</a> |           |
| 6        | <a href="#">38770-0106</a> | <a href="#">38760-0106</a> |           |
| 7        | <a href="#">38770-0107</a> | <a href="#">38760-0107</a> |           |
| 8        | <a href="#">38770-0108</a> | <a href="#">38760-0108</a> |           |
| 9        | <a href="#">38770-0109</a> | <a href="#">38760-0109</a> |           |
| 10       | <a href="#">38770-0110</a> | <a href="#">38760-0110</a> |           |
| 11       | <a href="#">38770-0111</a> | <a href="#">38760-0111</a> |           |
| 12       | <a href="#">38770-0112</a> | <a href="#">38760-0112</a> |           |
| 13       | <a href="#">38770-0113</a> | <a href="#">38760-0113</a> |           |
| 14       | <a href="#">38770-0114</a> | <a href="#">38760-0114</a> |           |
| 15       | <a href="#">38770-0115</a> | <a href="#">38760-0115</a> |           |

| Circuits | Order No.                  |                            | Lead-free |
|----------|----------------------------|----------------------------|-----------|
|          | Low Profile                | Standard                   |           |
| 16       | <a href="#">38770-0116</a> | <a href="#">38760-0116</a> | Yes       |
| 17       | <a href="#">38770-0117</a> | <a href="#">38760-0117</a> |           |
| 18       | <a href="#">38770-0118</a> | <a href="#">38760-0118</a> |           |
| 19       | <a href="#">38770-0119</a> | <a href="#">38760-0119</a> |           |
| 20       | <a href="#">38770-0120</a> | <a href="#">38760-0120</a> |           |
| 21       | <a href="#">38770-0121</a> | <a href="#">38760-0121</a> |           |
| 22       | <a href="#">38770-0122</a> | <a href="#">38760-0122</a> |           |
| 23       | <a href="#">38770-0123</a> | <a href="#">38760-0123</a> |           |
| 24       | <a href="#">38770-0124</a> | <a href="#">38760-0124</a> |           |
| 25       | <a href="#">38770-0125</a> | <a href="#">38760-0125</a> |           |
| 26       | <a href="#">38770-0126</a> | <a href="#">38760-0126</a> |           |
| 27       | <a href="#">38770-0127</a> | <a href="#">38760-0127</a> |           |
| 28       | <a href="#">38770-0128</a> | <a href="#">38760-0128</a> |           |
| 29       | <a href="#">38770-0129</a> | <a href="#">38760-0129</a> |           |
| 30       | <a href="#">38770-0130</a> | <a href="#">38760-0130</a> |           |

# 11.11mm (.438") Pitch Double Row Barrier Terminal Strips

**38780**  
**Panel Mount**



## Reference Information

Packaging: Tray  
UL File No.: E48521  
Flammability: UL 94V-0  
Designed In: Inches

## Electrical

Voltage: 300V  
Current: 15.0A  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

## Mechanical

Recommended Tightening Torque: 1.36Nm (12 in.-lb)

## Physical

Housing: PBT, black  
Terminal: Brass  
Screw: Steel, #6-32, Phillips/Slot combo head  
Plating: Terminal Area—Nickel  
Screw—Zinc with clear chromate  
Wire Range: 14 to 22 AWG

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
| 2        | <a href="#">38780-0102</a> | Yes       |
| 3        | <a href="#">38780-0103</a> |           |
| 4        | <a href="#">38780-0104</a> |           |
| 5        | <a href="#">38780-0105</a> |           |
| 6        | <a href="#">38780-0106</a> |           |
| 7        | <a href="#">38780-0107</a> |           |
| 8        | <a href="#">38780-0108</a> |           |
| 9        | <a href="#">38780-0109</a> |           |
| 10       | <a href="#">38780-0110</a> |           |
| 11       | <a href="#">38780-0111</a> |           |

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
| 12       | <a href="#">38780-0112</a> | Yes       |
| 13       | <a href="#">38780-0113</a> |           |
| 14       | <a href="#">38780-0114</a> |           |
| 15       | <a href="#">38780-0115</a> |           |
| 16       | <a href="#">38780-0116</a> |           |
| 17       | <a href="#">38780-0117</a> |           |
| 18       | <a href="#">38780-0118</a> |           |
| 19       | <a href="#">38780-0119</a> |           |
| 20       | <a href="#">38780-0120</a> |           |
| 21       | <a href="#">38780-0121</a> |           |

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
| 22       | <a href="#">38780-0122</a> | Yes       |
| 23       | <a href="#">38780-0123</a> |           |
| 24       | <a href="#">38780-0124</a> |           |
| 25       | <a href="#">38780-0125</a> |           |
| 26       | <a href="#">38780-0126</a> |           |
| 27       | <a href="#">38780-0127</a> |           |
| 28       | <a href="#">38780-0128</a> |           |
| 29       | <a href="#">38780-0129</a> |           |
| 30       | <a href="#">38780-0130</a> |           |

# Beau™ Power Connectors Panel Mount Plugs and Sockets

**38330**

**Angle Bracket,  
Angle Bracket Tapped,  
Without Angle Bracket**



Angle Bracket shown

## Plugs

| Circuits | Order No.                  |                            |                            | Lead-free |
|----------|----------------------------|----------------------------|----------------------------|-----------|
|          | Angle Bracket              | Angle Bracket Tapped       | Without Angle Bracket      |           |
| 2        | <a href="#">38330-0102</a> | <a href="#">38330-1502</a> | <a href="#">38330-2202</a> | Yes       |
| 3        | <a href="#">38330-0103</a> | <a href="#">38330-1503</a> | <a href="#">38330-2203</a> |           |
| 4        | <a href="#">38330-0104</a> | <a href="#">38330-1504</a> | <a href="#">38330-2204</a> |           |
| 6        | <a href="#">38330-0106</a> | <a href="#">38330-1506</a> | <a href="#">38330-2206</a> |           |
| 8        | <a href="#">38330-0108</a> | <a href="#">38330-1508</a> | <a href="#">38330-2208</a> |           |
| 10       | <a href="#">38330-0110</a> | <a href="#">38330-1510</a> | <a href="#">38330-2210</a> |           |
| 12       | <a href="#">38330-0112</a> | <a href="#">38330-1512</a> | <a href="#">38330-2212</a> |           |
| 15       | <a href="#">38330-0115</a> | <a href="#">38330-1515</a> | <a href="#">38330-2215</a> |           |
| 18       | <a href="#">38330-0118</a> | <a href="#">38330-1518</a> | <a href="#">38330-2218</a> |           |
| 21       | <a href="#">38330-0121</a> | <a href="#">38330-1521</a> | <a href="#">38330-2221</a> |           |
| 24       | <a href="#">38330-0124</a> | <a href="#">38330-1524</a> | <a href="#">38330-2224</a> |           |
| 27       | <a href="#">38330-0127</a> | <a href="#">38330-1527</a> | <a href="#">38330-2227</a> |           |
| 30       | <a href="#">38330-0130</a> | <a href="#">38330-1530</a> | <a href="#">38330-2230</a> |           |
| 33       | <a href="#">38330-0133</a> | <a href="#">38330-1533</a> | <a href="#">38330-2233</a> |           |

Note: Solder Eye is the standard contact tail for plugs and sockets. Contact Molex for additional contact options and order numbers.

## Features and Benefits

- Robust blade contacts resist damage from improper mating
- Large surface area of dual wipe female contact produces maximum current capacity
- All circuits are rated for full current load

## Reference Information

Packaging: Tray  
UL File No.: E34763  
CSA File No.: 22156  
Designed In: Inches

## Electrical

Voltage: 250V  
Current: 10.0A

## Mechanical

Durability: 500 cycles

## Physical

Housing: Phenolic  
Plug Contact: Brass  
Socket Contact: Phosphor Bronze  
Plating: Plug Contact—Tin  
Socket Contact—Tin

## Sockets

| Circuits | Order No.                  |                            |                            | Lead-free |
|----------|----------------------------|----------------------------|----------------------------|-----------|
|          | Angle Bracket              | Angle Bracket Tapped       | Without Angle Bracket      |           |
| 2        | <a href="#">38330-0502</a> | <a href="#">38330-1902</a> | <a href="#">38330-2602</a> | Yes       |
| 3        | <a href="#">38330-0503</a> | <a href="#">38330-1903</a> | <a href="#">38330-2603</a> |           |
| 4        | <a href="#">38330-0504</a> | <a href="#">38330-1904</a> | <a href="#">38330-2604</a> |           |
| 6        | <a href="#">38330-0506</a> | <a href="#">38330-1906</a> | <a href="#">38330-2606</a> |           |
| 8        | <a href="#">38330-0508</a> | <a href="#">38330-1908</a> | <a href="#">38330-2608</a> |           |
| 10       | <a href="#">38330-0510</a> | <a href="#">38330-1910</a> | <a href="#">38330-2610</a> |           |
| 12       | <a href="#">38330-0512</a> | <a href="#">38330-1912</a> | <a href="#">38330-2612</a> |           |
| 15       | <a href="#">38330-0515</a> | <a href="#">38330-1915</a> | <a href="#">38330-2615</a> |           |
| 18       | <a href="#">38330-0518</a> | <a href="#">38330-1918</a> | <a href="#">38330-2618</a> |           |
| 21       | <a href="#">38330-0521</a> | <a href="#">38330-1921</a> | <a href="#">38330-2621</a> |           |
| 24       | <a href="#">38330-0524</a> | <a href="#">38330-1924</a> | <a href="#">38330-2624</a> |           |
| 27       | <a href="#">38330-0527</a> | <a href="#">38330-1927</a> | <a href="#">38330-2627</a> |           |
| 30       | <a href="#">38330-0530</a> | <a href="#">38330-1930</a> | <a href="#">38330-2630</a> |           |
| 33       | <a href="#">38330-0533</a> | <a href="#">38330-1933</a> | <a href="#">38330-2633</a> |           |

# Beau™ Power Connectors Cable Mount Plugs and Sockets

**38331**

**Cable Clamp Top**



Cable Clamp Top shown

## Plugs

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
|          | Cable Clamp Top            |           |
| 2        | <a href="#">38331-5602</a> | Yes       |
| 3        | <a href="#">38331-5603</a> |           |
| 4        | <a href="#">38331-5604</a> |           |
| 6        | <a href="#">38331-5606</a> |           |
| 8        | <a href="#">38331-5608</a> |           |
| 10       | <a href="#">38331-5610</a> |           |
| 12       | <a href="#">38331-5612</a> |           |

Note: Solder Eye is the standard contact tail for plugs and sockets.  
Contact Molex for additional contact options and order numbers.

## Features and Benefits

- Latch and keeper hardware ensure that plug and socket remain mated even in high vibration applications
- Robust blade contacts resist damage from improper mating
- Large surface area of dual wipe female contact produces maximum current capacity
- All circuits are rated for full current load

## Reference Information

Packaging: Tray  
UL File No.: E34763  
CSA File No.: 22156  
Designed In: Inches

## Electrical

Voltage: 250V  
Current: 10.0A

## Mechanical

Durability: 500 cycles

## Physical

Housing: Phenolic  
Plug Contact: Brass  
Socket Contact: Phosphor Bronze  
Plating: Plug Contact—Tin  
Socket Contact—Tin

## Sockets

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
|          | Cable Clamp Top            |           |
| 2        | <a href="#">38331-8002</a> | Yes       |
| 3        | <a href="#">38331-8003</a> |           |
| 4        | <a href="#">38331-8004</a> |           |
| 6        | <a href="#">38331-8006</a> |           |
| 8        | <a href="#">38331-8008</a> |           |
| 10       | <a href="#">38331-8010</a> |           |
| 12       | <a href="#">38331-8012</a> |           |

# Beau™ Power Connectors Panel Mount Plugs and Sockets

## 38540 Angle Bracket



Angle Bracket shown

### Plugs

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
|          | Angle Bracket              |           |
| 4        | <a href="#">38540-0104</a> | Yes       |
| 5        | <a href="#">38540-0105</a> |           |
| 6        | <a href="#">38540-0106</a> |           |
| 7        | <a href="#">38540-0107</a> |           |
| 8        | <a href="#">38540-0108</a> |           |
| 9        | <a href="#">38540-0109</a> |           |
| 10       | <a href="#">38540-0110</a> |           |
| 11       | <a href="#">38540-0111</a> |           |
| 12       | <a href="#">38540-0112</a> |           |
| 13       | <a href="#">38540-0113</a> |           |
| 14       | <a href="#">38540-0114</a> |           |
| 15       | <a href="#">38540-0115</a> |           |
| 16       | <a href="#">38540-0116</a> |           |

Note: Solder Hook is the standard contact tail for plugs. Contact Molex for additional contact options and order numbers.

### Sockets

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
|          | Angle Bracket              |           |
| 4        | <a href="#">38540-0604</a> | Yes       |
| 5        | <a href="#">38540-0605</a> |           |
| 6        | <a href="#">38540-0606</a> |           |
| 7        | <a href="#">38540-0607</a> |           |
| 8        | <a href="#">38540-0608</a> |           |
| 9        | <a href="#">38540-0609</a> |           |
| 10       | <a href="#">38540-0610</a> |           |
| 11       | <a href="#">38540-0611</a> |           |
| 12       | <a href="#">38540-0612</a> |           |
| 13       | <a href="#">38540-0613</a> |           |
| 14       | <a href="#">38540-0614</a> |           |
| 15       | <a href="#">38540-0615</a> |           |
| 16       | <a href="#">38540-0616</a> |           |

Note: Solder Eye is the standard contact tail for sockets. Contact Molex for additional contact options and order numbers.

# Beau™ Power Connectors Cable Mount Plugs and Sockets

## 38541 Cable Clamp Top



Cable Clamp Top shown

### Plugs

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
|          | Cable Clamp Top            |           |
| 4        | <a href="#">38541-5404</a> | Yes       |
| 5        | <a href="#">38541-5405</a> |           |
| 6        | <a href="#">38541-5406</a> |           |
| 7        | <a href="#">38541-5407</a> |           |
| 8        | <a href="#">38541-5408</a> |           |
| 9        | <a href="#">38541-5409</a> |           |
| 10       | <a href="#">38541-5410</a> |           |
| 11       | <a href="#">38541-5411</a> |           |
| 12       | <a href="#">38541-5412</a> |           |
| 13       | <a href="#">38541-5413</a> |           |
| 14       | <a href="#">38541-5414</a> |           |
| 15       | <a href="#">38541-5415</a> |           |
| 16       | <a href="#">38541-5416</a> |           |

Note: Solder Hook is the standard contact tail for plugs. Contact Molex for additional contact options and order numbers.

### Sockets

| Circuits | Order No.                  | Lead-free |
|----------|----------------------------|-----------|
|          | Cable Clamp Top            |           |
| 4        | <a href="#">38541-8404</a> | Yes       |
| 5        | <a href="#">38541-8405</a> |           |
| 6        | <a href="#">38541-8406</a> |           |
| 7        | <a href="#">38541-8407</a> |           |
| 8        | <a href="#">38541-8408</a> |           |
| 9        | <a href="#">38541-8409</a> |           |
| 10       | <a href="#">38541-8410</a> |           |
| 11       | <a href="#">38541-8411</a> |           |
| 12       | <a href="#">38541-8412</a> |           |
| 13       | <a href="#">38541-8413</a> |           |
| 14       | <a href="#">38541-8414</a> |           |
| 15       | <a href="#">38541-8415</a> |           |
| 16       | <a href="#">38541-8416</a> |           |

Note: Solder Eye is the standard contact tail for sockets. Contact Molex for additional contact options and order numbers.

### Features and Benefits

- Robust blade contacts resist damage from improper mating
- Large surface area of dual wipe female contact produces maximum current capacity
- All circuits are rated for full current load

### Reference Information

Packaging: Tray  
UL File No.: E34763  
CSA File No.: 22156  
Designed In: Inches

### Electrical

Voltage: 250V  
Current: 15.0A

### Mechanical

Durability: 500 cycles

### Physical

Housing: Phenolic  
Plug Contact: Brass  
Socket Contact: Phosphor Bronze  
Plating: Plug Contact—Tin  
Socket Contact—Tin

### Features and Benefits

- Strain relief cable clamps can be used with round or flat cable
- Robust blade contacts resist damage from improper mating
- Large surface area of dual wipe female contact produces maximum current capacity
- All circuits are rated for full current load

### Reference Information

Packaging: Tray  
UL File No.: E34763  
CSA File No.: 22156  
Designed In: Inches

### Electrical

Voltage: 250V  
Current: 15.0A

### Mechanical


Durability: 500 cycles

### Physical

Housing: Phenolic  
Plug Contact: Brass  
Socket Contact: Phosphor Bronze  
Plating: Plug Contact—Tin  
Socket Contact—Tin

# Wire Splice Terminal

35760

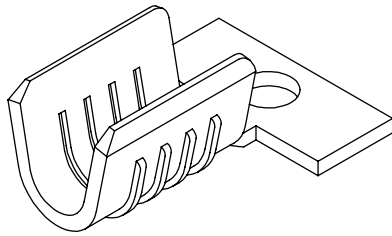

## Features and Benefits

- Uninsulated splices shaped like an open “U” accommodate stranded wire
- Non-insulation support

## Reference Information

Product Specification: PS-35760-003  
Packaging: Reel  
Designed In: Millimeters

## Electrical

Current: 25.0A  
Contact Resistance: 3 milliohms max.

## Physical

Contact: Brass  
Plating: Tin

| Order No.                  | Material         | Wire Range | Lead-free |
|----------------------------|------------------|------------|-----------|
| <a href="#">35760-7100</a> | Brass            | 24-22      | Yes       |
| <a href="#">35760-7110</a> | Tin-plated Brass |            |           |
| <a href="#">35760-7200</a> | Brass            | 22-18      |           |
| <a href="#">35760-7205</a> | Tin-plated Brass |            |           |
| <a href="#">35760-7210</a> | Tin-plated Brass |            |           |
| <a href="#">35760-7300</a> | Brass            | 16-14      |           |
| <a href="#">35760-7310</a> | Tin-plated Brass |            |           |
| <a href="#">35760-7400</a> | Brass            | 14-10      |           |
| <a href="#">35760-7410</a> | Tin-plated Brass |            |           |

[www.molex.com/customer.html?seriesNumber=35760](http://www.molex.com/customer.html?seriesNumber=35760)

## Wire Management Products



### Heat Shrink Tubing

Molex offers a wide variety of heat shrink tubing including thin-wall, adhesive-lined dual-wall and heavy-wall polyolefin tubing as well as heat shrinkable PVC.

Thin (single) wall is high quality tubing with a wide variety of uses. It is made from flame retardant polyolefin, giving it excellent physical, chemical and electrical properties that meet industrial and military requirements for highly reliable, general-purpose tubing.

Dual-wall tubing is adhesive lined, and manufactured using fully flame retardant polyolefin tubing which offers superior strain relief as well as environmental sealing capabilities.

Heavy-wall tubing is UL rated for direct burial applications. This tubing is chemically cross linked during manufacturing which ensures that it will not split or rupture during installation, even if overheated.

### Closed-End Connectors

Molex nylon closed-end connectors feature two-piece construction. A translucent nylon insulator is adhered to the pure electrolytic, copper insert. Closed-end connectors are used in a wide variety of situations to “pigtail” two or more wires together, and can be used as a dead end splice or one power line and multiple lead offs.

### Multi-Lock Connectors

The Multi-Lock is an insulation displacement connector that allows quick tap-and-run connections. Using ordinary channel lock pliers, these color-coded connectors make quick, reliable, pre-insulated splices without having to strip, twist or solder.

The Multi-Lock connector consists of a polypropylene insulation with a tin-plated brass barb. Once the appropriate wires have been inserted, the barb is squeezed such that it “displaces” the insulation and makes contact with the wire, creating an electrical connection. The cover is then snapped into position, completely insulating the barb and wire.

### Wire Connectors

Molex Wire Connectors offer a cost effective way to produce safe and secure wire connections. The tough, thermoplastic shell provides UL-94V2 flame retardant protection while the fixed square-wire spring construction offers a secure connection that will not relax over time.

Standard Twist Locks feature a threaded funnel entry to easily guide wires into the connector.

Wing Locks offer deep gripping ribs and swept-back wings that permit a higher torque.

High Temp Wire Connectors are used in applications that require continued exposure to heat.

### Cable Ties

Molex offers a full line of standard cable ties as well as selected mounting and identification ties. Our cable ties are constructed from durable nylon 6/6 and offer a compact, one piece design. These industry standard products are designed to meet or exceed the MIL-S-23190E tensile strength requirements.

# Heavy-Duty Rectangular Industrial Connectors



## INTRODUCTION

Molex's line of HMC heavy-duty rectangular industrial connectors are designed for rugged applications such as robotics, machinery equipment, transportation, power generation and industrial controls. HMC provides an innovative new approach to traditional heavy-duty connections.

The HMC series includes some unique design features such as: rugged metal cable-side hood with easy-to-actuate "one-touch" lock; removable modular housing inserts that can be custom configured; and various circuit and amperage types to meet different power and signal needs.

## Features

### HMC™ Series

- Unique rounded-shape metal hood with single-action lock for space savings and easy handling
- Easy field removal of modules
- Cable-clamp solution that integrates sealed ring and holder into one-piece cover
- Single-module type enables housing inserts to be loaded into either side
- Multi-module type enables flexible module configurations for hybrid application needs

## HMC Series—Module Type



12 circuits, 35.0/10.0A, IP65



40 circuits, 10.0A, IP65



52 circuits, 10.0A, IP65




36 circuits, 12.0A, IP65




48/72 circuits, 20.0/12.0A, IP65


**HMC™**  
**12 circuits—35A/  
 10 circuits - IP65  
 10A/2 circuits  
 Connection System**

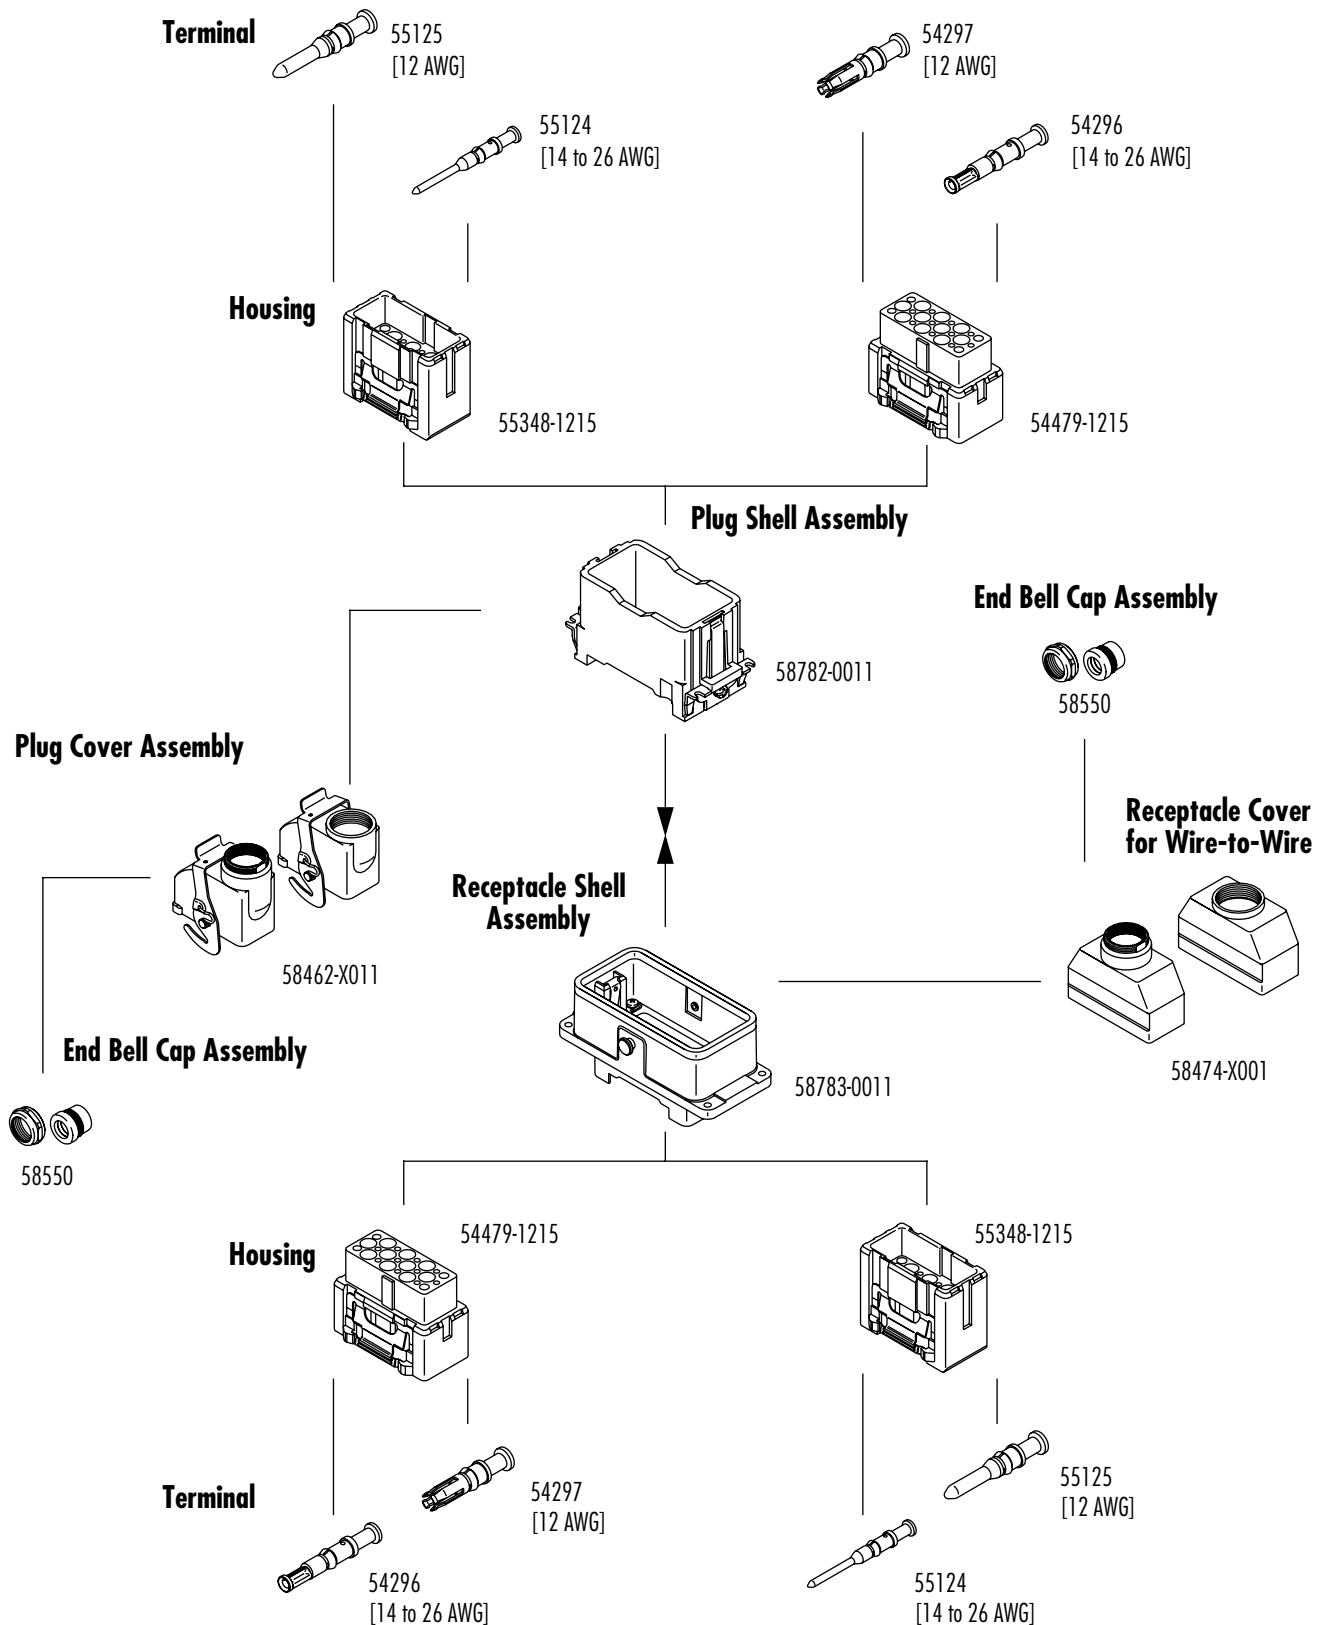


# HMC™ 10A/40 circuits—IP65 Connection System

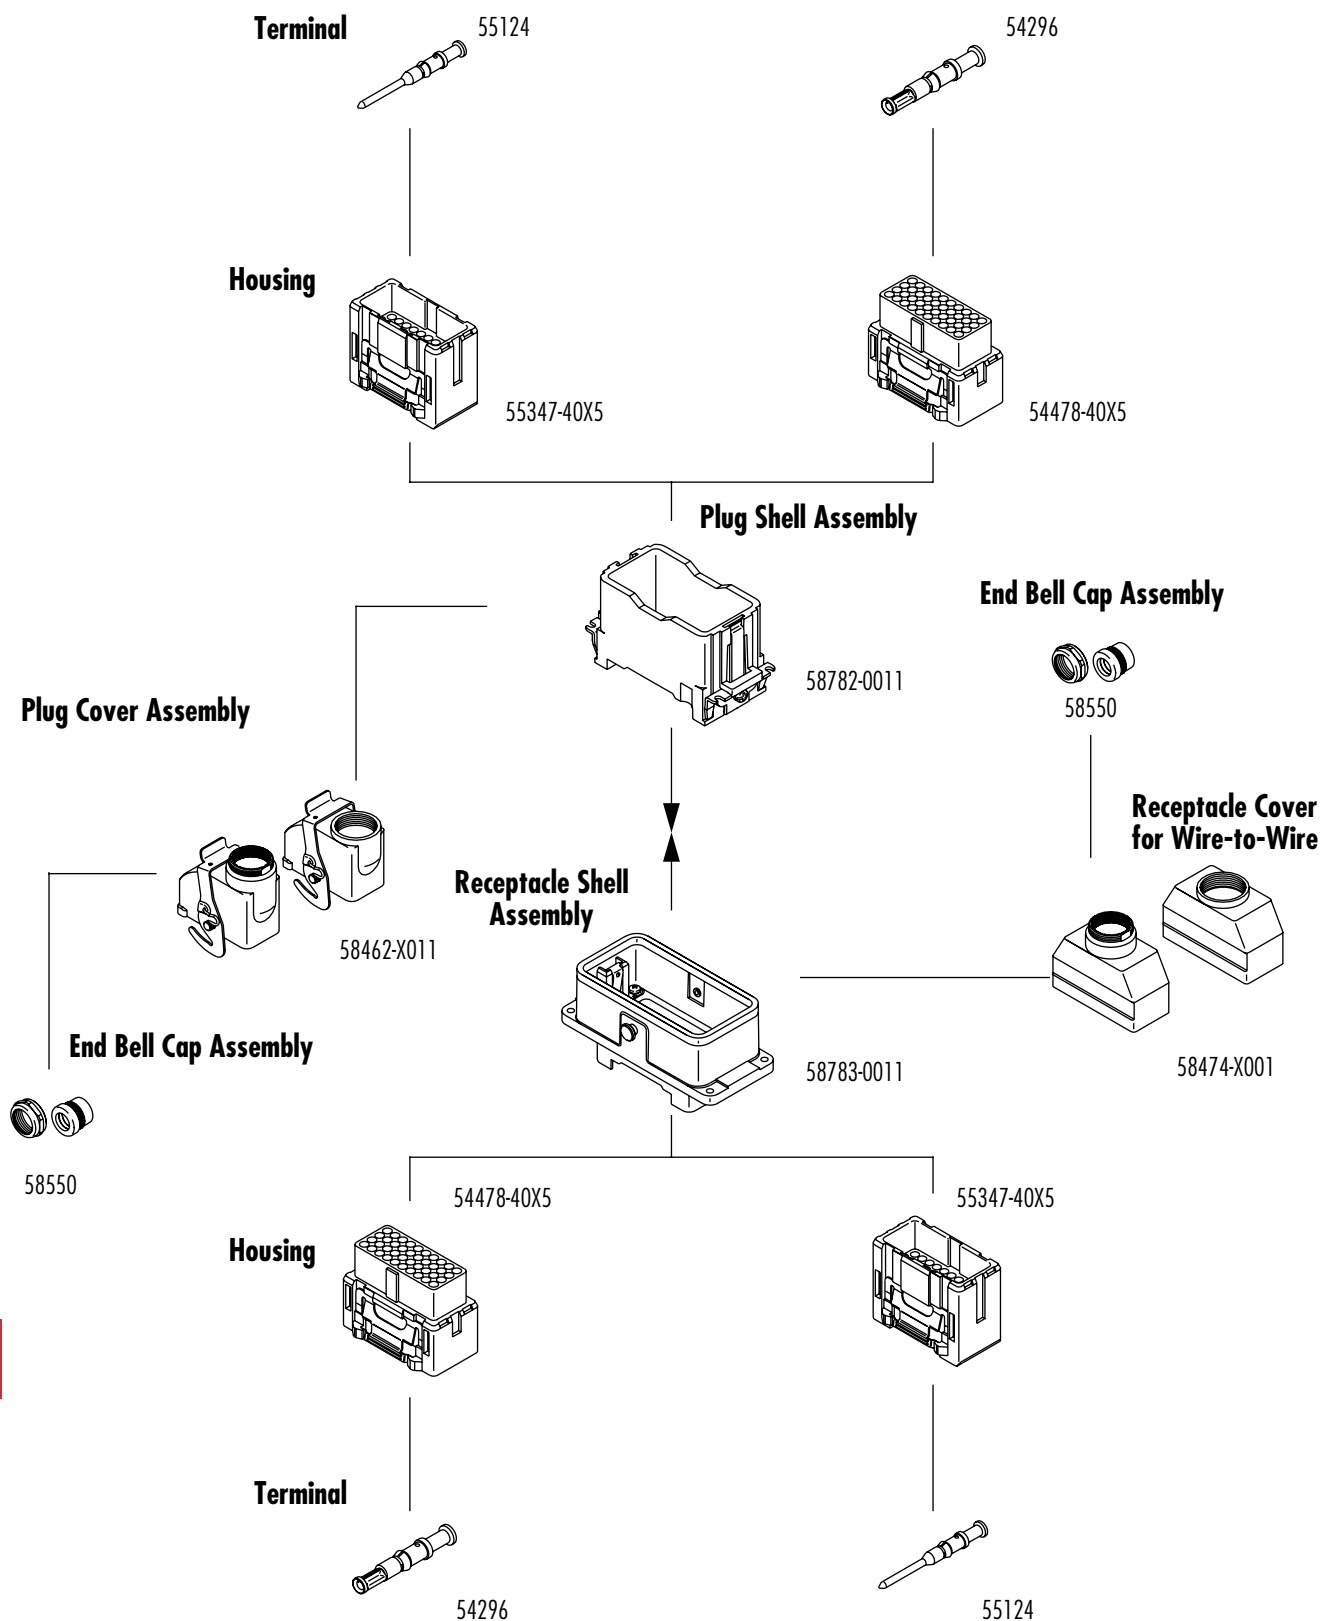

**HMC™**  
**10A/52 circuits—IP65**  
**Connection System**

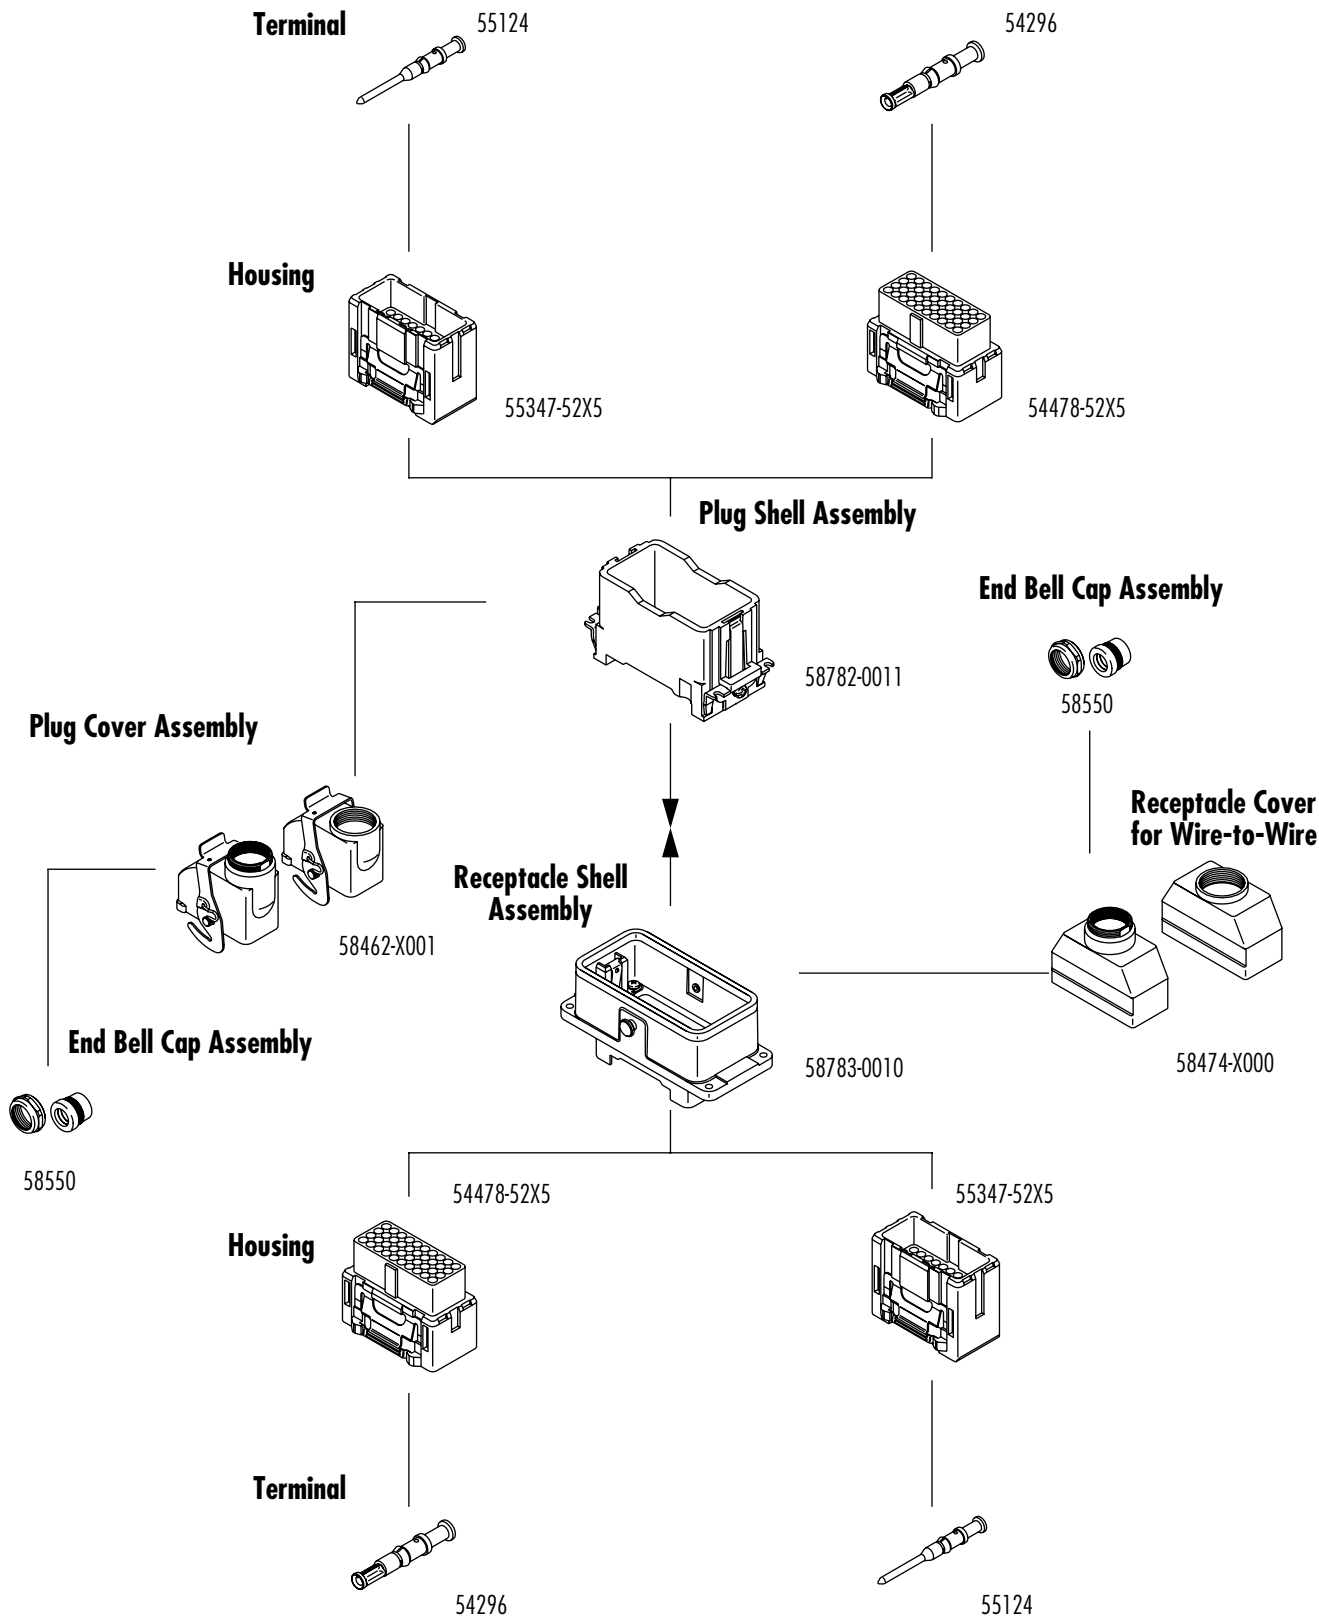


**HMC™**  
**12A/36 circuits—IP65**  
**Connection System**

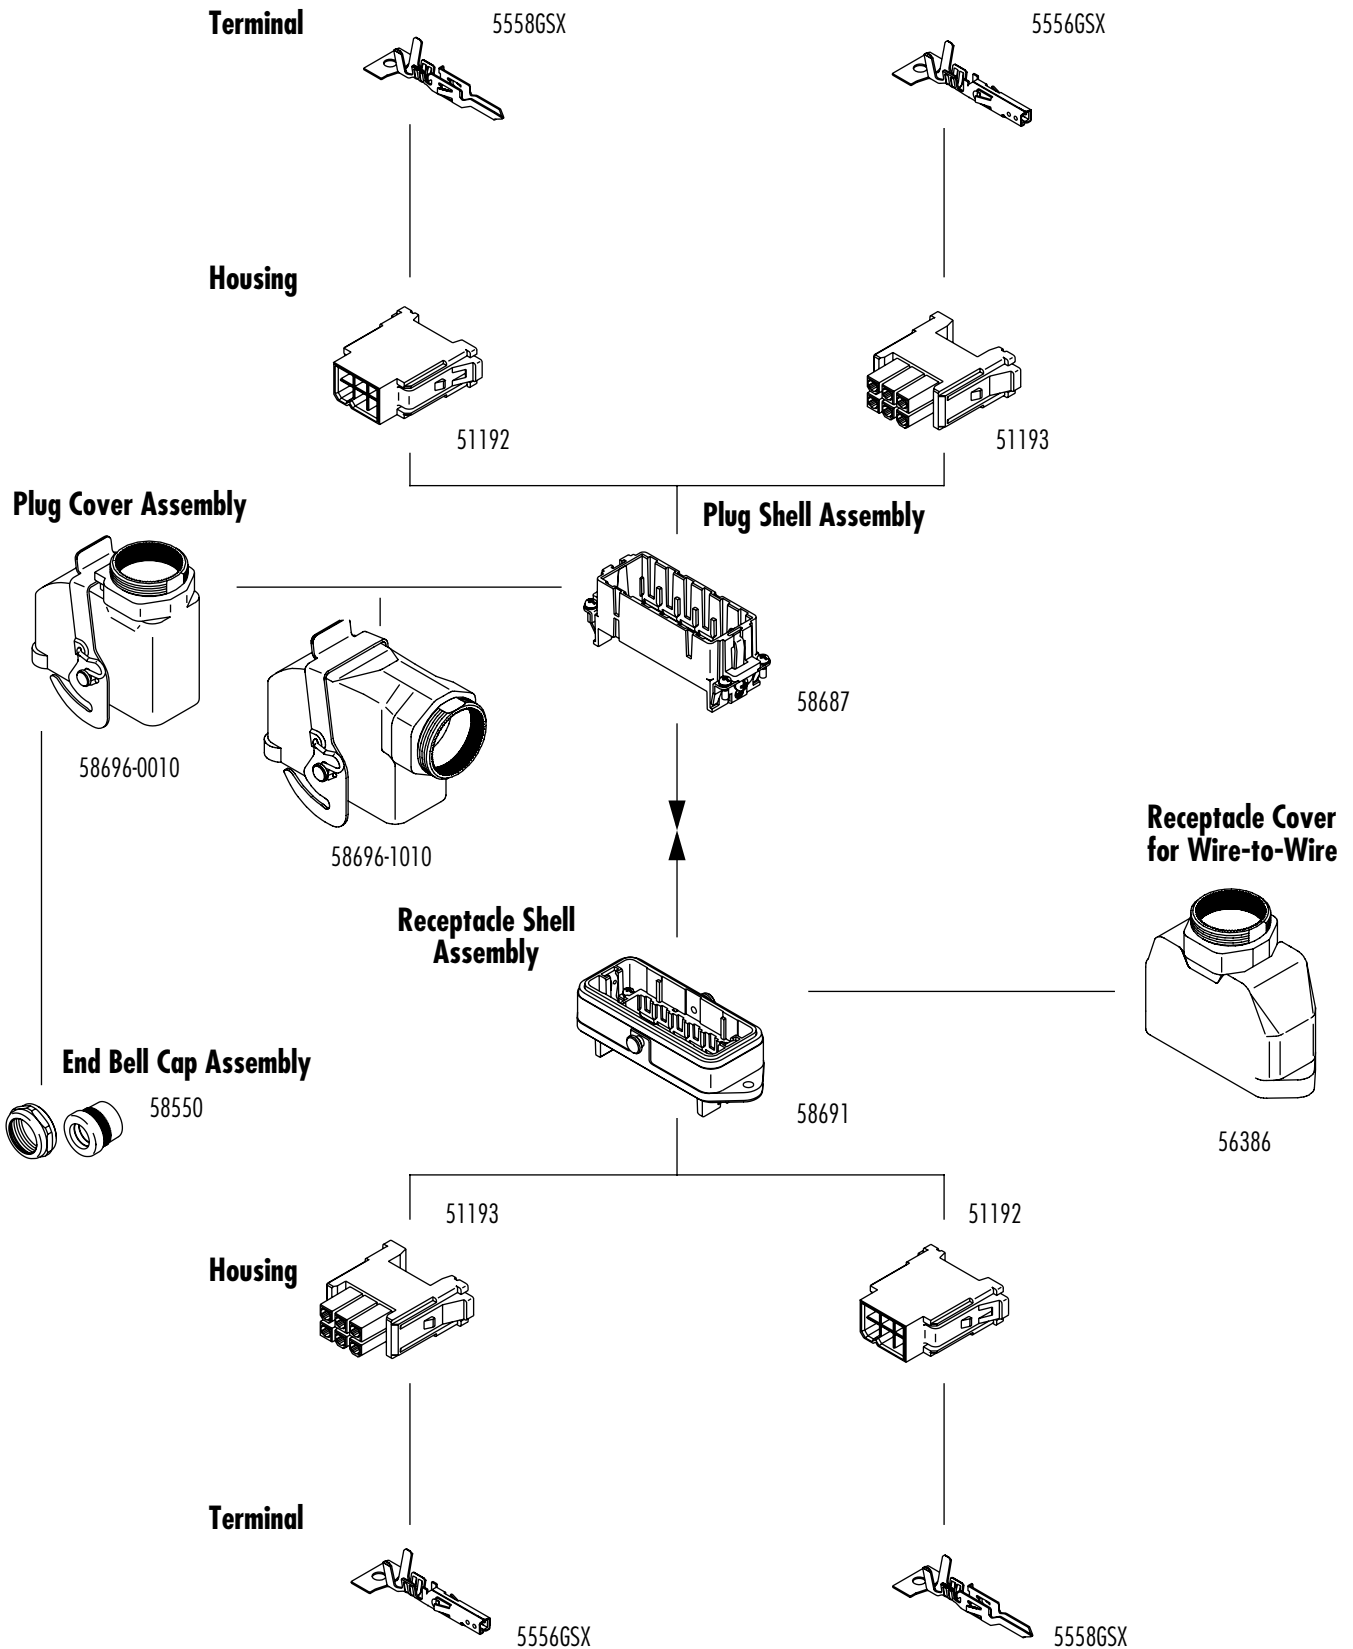

Industrial Products

S

**HMC™**  
**(20A/48 circuits)—IP65**  
**(12A/72 circuits)**  
**Connection System**

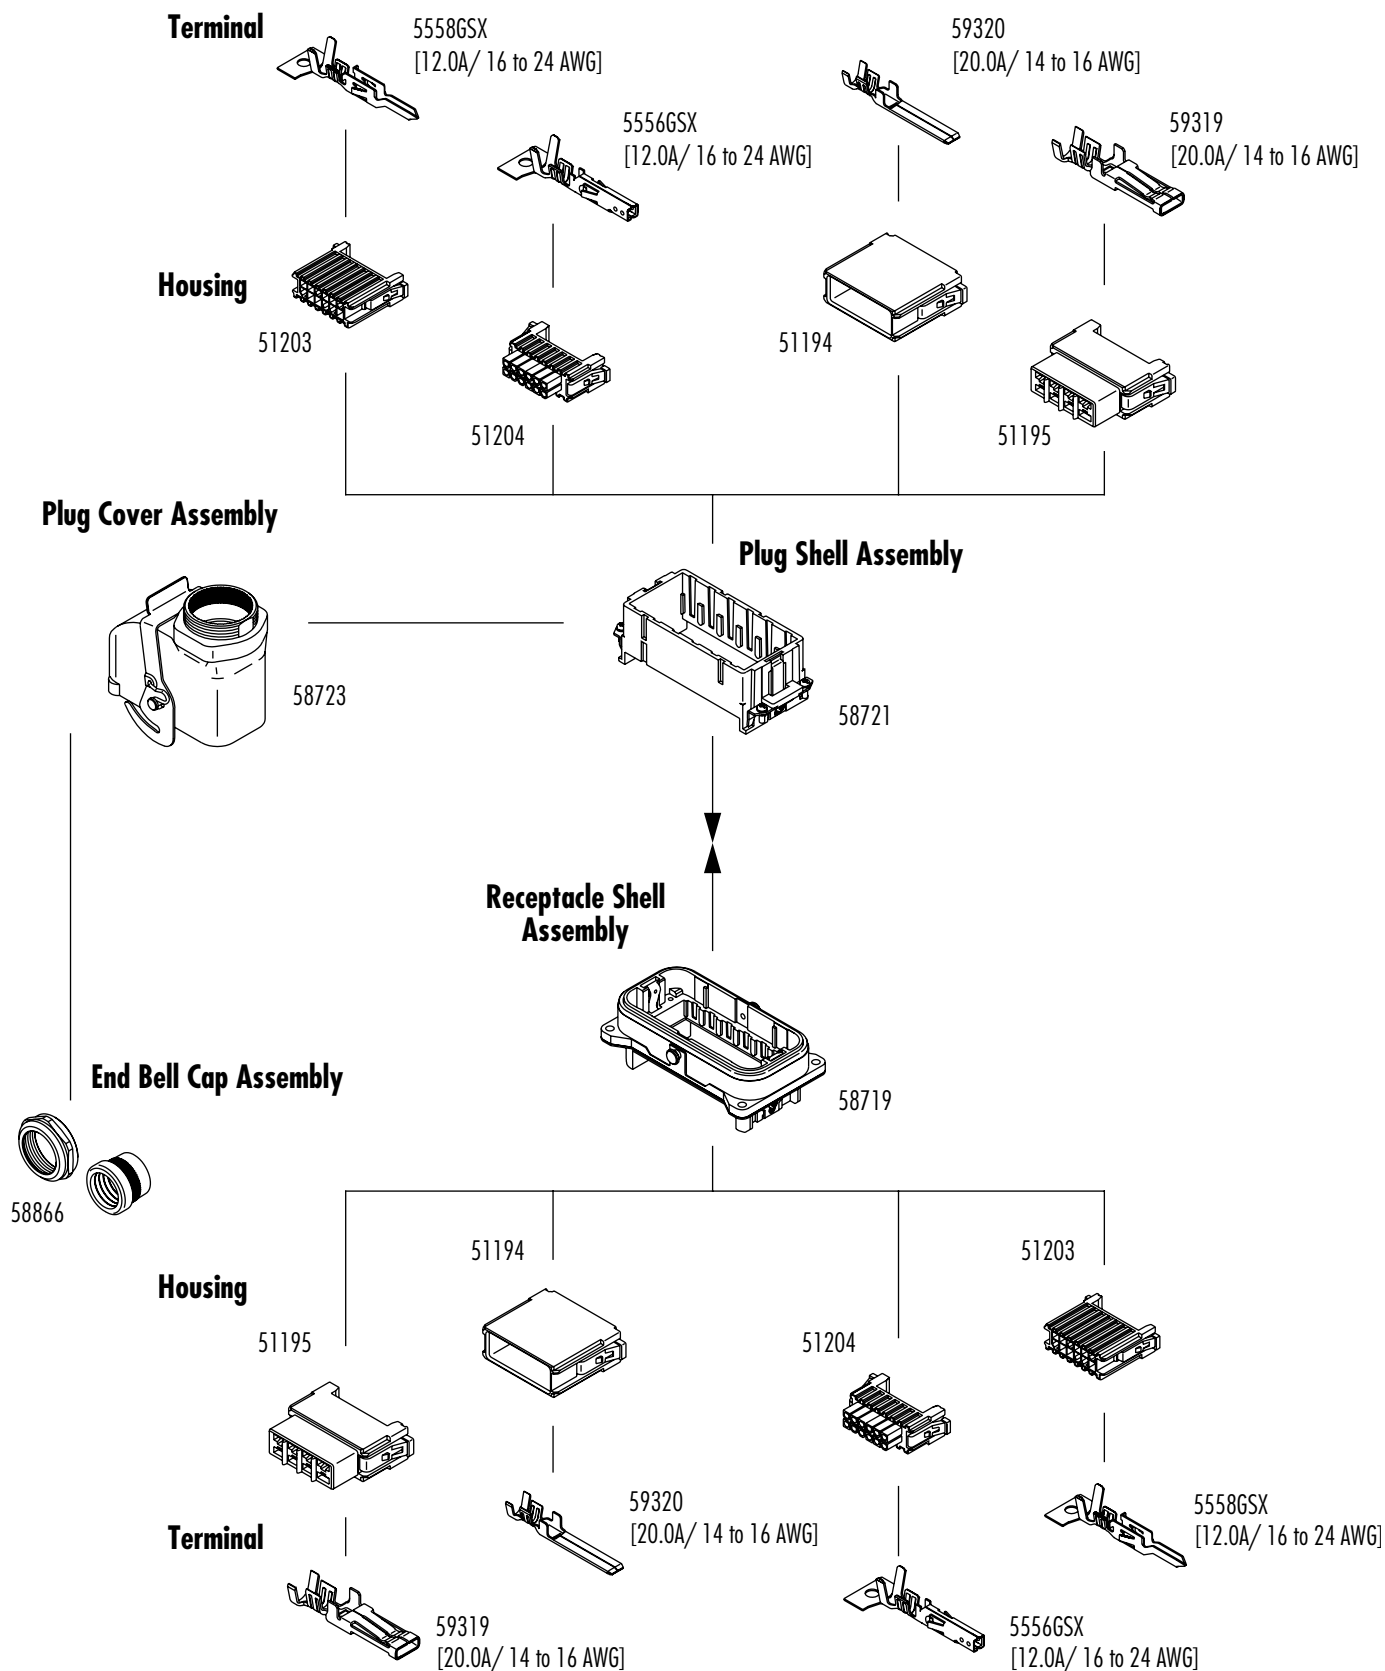

# Mini-HMC™ Rectangular Industrial Connector System

## Introduction






Molex's Mini-HMC system was developed to meet the needs of smaller industrial robotic applications. Mini-HMC provides the ruggedness of traditional Heavy Duty connectors but in a smaller form factor.





Mini-HMC offers many of the same unique features of our standard HMC™ (Heavy Duty Modular) connectors such as "one-touch" lock and removable housings. The system also utilizes the same crimp terminals as our CRC™ (Compact Robotic) industrial connectors.

## Specifications

- Current: 7.0A
- Voltage: 250V
- Circuit Size Range: 40 (fully loaded)
- Contact Resistance: 10 milliohms max.
- Insulation Resistance: 1000 Megohms min.
- Dielectric Strength: AC 1500V/1 minute
- Contact Retention Force: 24.5N
- Durability: 50 cycles

## SELECTION MATRIX

|                                                                                     | Description           | Order No.                                                          | Circuits | Rows | Material                                                                                    | Plating | Packaging |
|-------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------|----------|------|---------------------------------------------------------------------------------------------|---------|-----------|
|    | Plug                  | <a href="#">500812-1000</a>                                        | 10       | 2    | Nylon 66, Glass-Filled<br>UL 94V-0                                                          |         | Bag       |
|    | Receptacle            | <a href="#">500813-1000</a>                                        | 10       | 2    | Nylon 66, Glass-Filled<br>UL 94V-0                                                          |         | Bag       |
|    | Plug Shell            | <a href="#">500810-0000</a> (A)<br><a href="#">500810-0010</a> (B) | 40       | 8    | Plug Shell: Aluminum Alloy<br>Plug Grounded Terminal: Brass<br>Head Screws: Steel           | Nickel  | Bag       |
|   | Receptacle Shell      | <a href="#">500809-0000</a> (A)<br><a href="#">500809-0010</a> (B) | 40       | 8    | Receptacle Shell: Aluminum Alloy<br>Receptacle Ground Terminal: Brass<br>Head Screws: Steel | Nickel  | Bag       |
|  | Cover                 | <a href="#">500811-0010</a>                                        | 40       |      | Plug Cover: Aluminum Alloy<br>Cover Lock Pin/Level Spring: Stainless Steel                  | Nickel  | Bag       |
|  | End Bell Cap Assembly | <a href="#">58550-000*</a>                                         |          |      | Cable Cap: Brass<br>Bush: PVC                                                               | Nickel  | Bag       |

|                                                                                     | Description | Order No.                  | Material        | Plating (Contact/Crimp) | Packaging                 |
|-------------------------------------------------------------------------------------|-------------|----------------------------|-----------------|-------------------------|---------------------------|
|  | AWG# 24-28  | <a href="#">56118-8*28</a> | Phosphor Bronze | Gold/Tin                | -8228: Reel<br>-8328: Bag |
|  | AWG# 18-22  | <a href="#">56119-8*28</a> | Phosphor Bronze | Gold/Tin                | -8228: Reel<br>-8328: Bag |
|  | AWG# 24-28  | <a href="#">56120-8*28</a> | Phosphor Bronze | Gold/Tin                | -8428: Reel<br>-8528: Bag |
|  | AWG# 18-22  | <a href="#">56121-8*28</a> | Phosphor Bronze | Gold/Tin                | -8428: Reel<br>-8528: Bag |

# MX150L™ Sealed Connector System

The pre-assembled, submersible MX150L is a high performance connector system suitable for challenging, rugged and harsh applications.

The MX150L sealed connector system is designed to meet the need for a rugged, environmentally sealed connector system supporting both low-level signal applications as well as power applications up to 40.0A, from on-engine automotive and marine applications to off-road construction equipment applications. The system is comprised of wire-to-wire, wire-to-panel and wire-to-board configurations.


These innovative mat-sealed connectors are based upon the 1.50 and 2.50mm (.059 and .098") blade-type terminals. This design eliminates the need to purchase, handle and crimp individual wire seals to lower applied cost. The mat-seal design is a single silicone-based seal with individual wire openings and a seal cap to protect, securely retain and provide strain relief to the seal. The cost-effective connector design features all-in-one plug and receptacle housings with pre-assembled mat-wire and interfacial connector seals. Integral Terminal Position Assurance (TPA) and optional Connector Position Assurance (CPA) components eliminate time-consuming and costly assembly operations. Completing the application is as simple as crimping the appropriate terminal, inserting the crimped terminal lead and seating the TPA to its final locked position. No additional components are required.

Tooling solutions include FineAdjust™ crimp press applicators for high-volume production, as well as hand tools for low-volume production and field repairs.

## Features and Benefits

- Pre-assembled connector housings, seals, TPA components and mat-seal cap shipped in 1 piece to provide applied labor and cost savings
- Integral TPA assures that crimped terminal leads are properly locked into connector (TPA will not seat into final lock position and connector system will not latch if terminal is not locked properly into position)
- Conforms to UL 1977, which allows for a UL recognized sealed connector system for use in data, signal, control and power applications
- Superior electrical and mechanical performance capabilities surpass performance of most mature competitive products in market
- Audible and tactile clicks on insertion, extraction and mating feedback facilitates reliable mating and terminal loading and removal
- Unused circuits can be blocked using plastic seal plugs, which facilitates flexibility of sealing unused circuits without adding complexity to part numbers and customer inventory
- Integral locking latch with secondary, pre-loaded CPA option assures that connector system is properly latched. CPA will not move to final locked position if connector is not latched. Confirms positive mating of connector
- Sealed panel mount plugs are equipped with a blind hole loss feature that reduces extra hardware while improving the sealing process during assembly by eliminating a leak path
- Integral, 2-way mat and interface seals designed and tested to IEC IP 67 exceeds "waterproof" demands as a true sealed connector system tested under submersed conditions in various fluids
- Easy terminal insertion and extraction provides quick, low-cost field repairs using common screwdriver, needle nose pliers and terminal extraction tool
- Protective mat-seal cap protects, securely retains and provides strain relief to wire seal interface
- Simple crimp, poke and plug application eliminates need to crimp individual wire seals


## MX150L Sealed Connector Systems - Exploded View

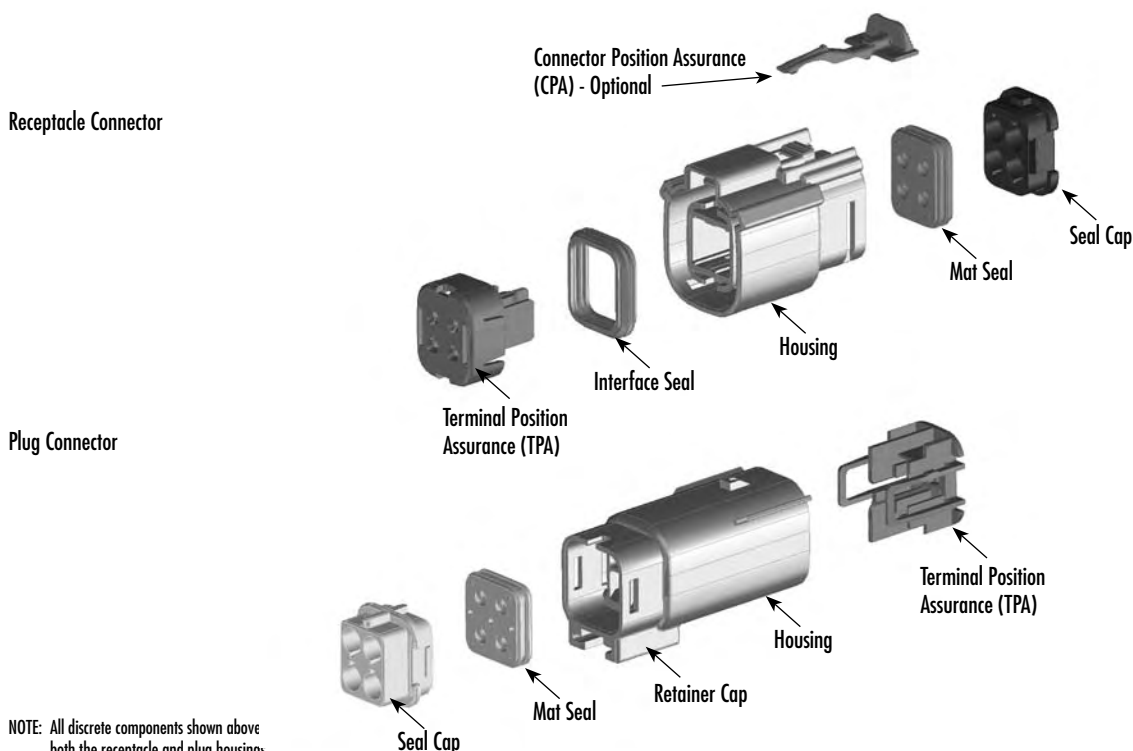


NOTE: All discrete components shown above both the receptacle and plug housings are pre-assembled. Terminals are simply crimped and poked into the housings. No additional wire seals, wedge locks or CPA locks are required.

# MX150L™ Product Overview

14 TO 22 AWG Wire-to-Wire, Wire-to-Board and Panel Mount

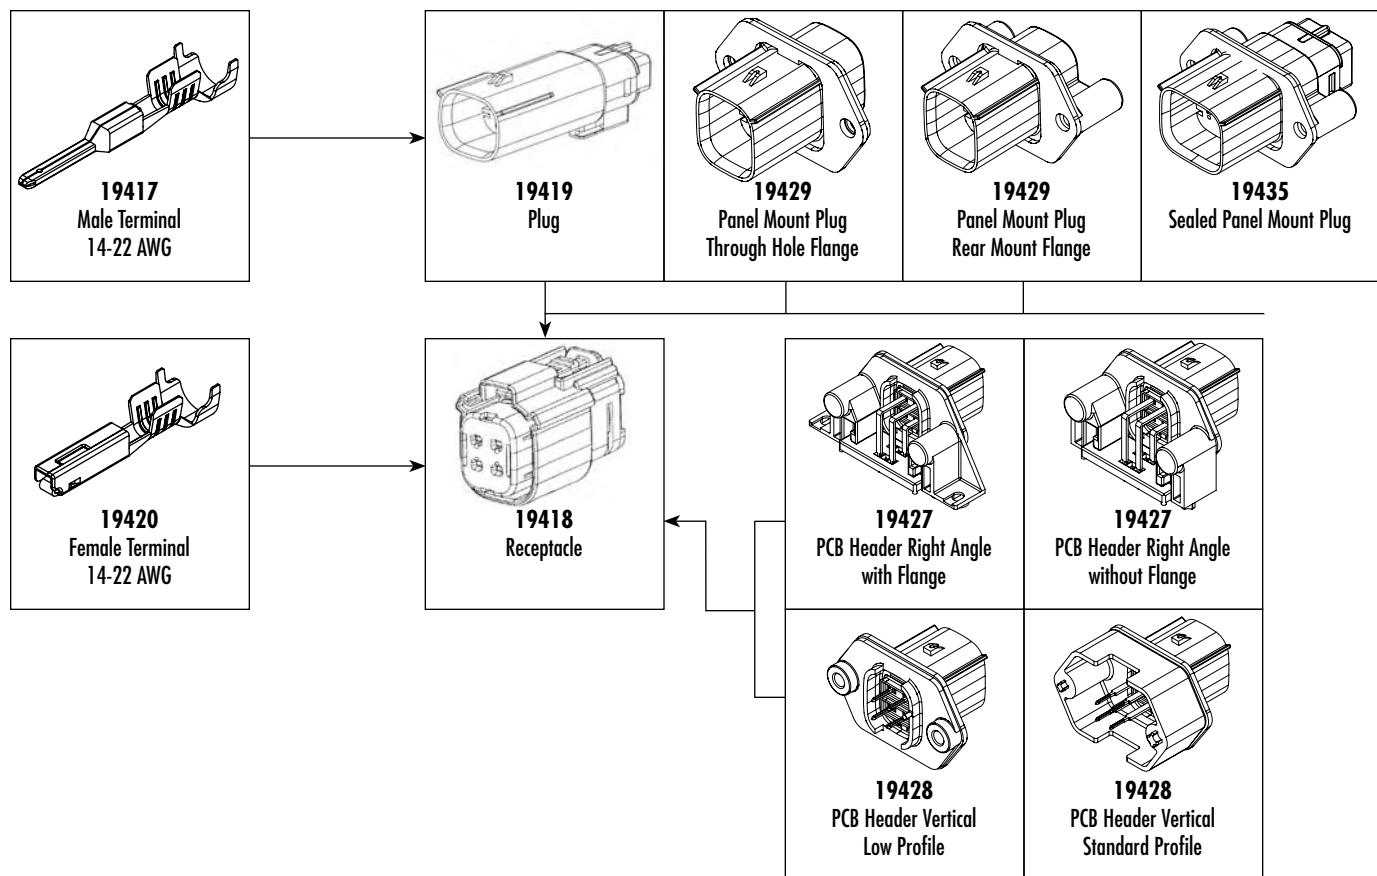

8, 10 and 12 AWG Wire-to-Wire and Panel Mount

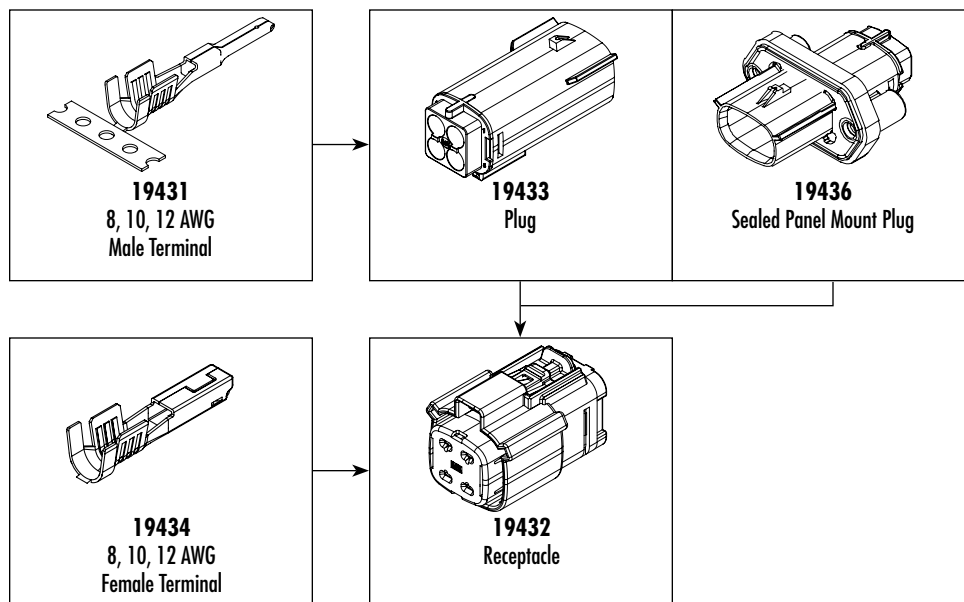


Industrial Products

S

# XRC™ Extra Rugged Circular Sealed Connectors Crimp Terminal

84590

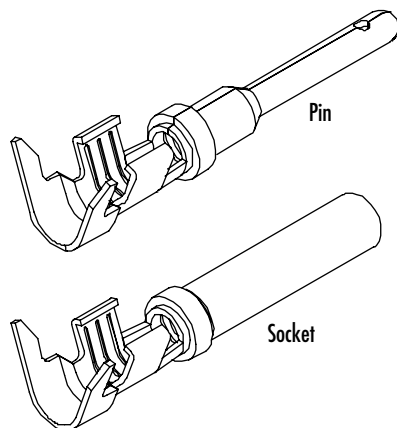

## Reference Information

Packaging: Reel  
Use With: 84501 and 84507 plug housings  
84502 and 84508 receptacle housings  
Designed In: Inches

## Electrical

Current: 18 AWG—10.0A max.  
16 and 14 AWG—13.0A max.  
Contact Resistance: 30 milliohms max.

## Mechanical

Contact Retention to Housing: 53.4N (12 lb)  
Durability: 100 cycles


## Physical

Contact: Copper Alloy  
Plating: Contact Area—Nickel Overall  
Underplating—Copper

| Order No.                  | Wire Range (AWG) | Gender | Terminal Size | Insulation Outside Diameter    | Lead-free |  |
|----------------------------|------------------|--------|---------------|--------------------------------|-----------|--|
| <a href="#">84590-0021</a> | 14 to 18         | Pin    | 16            | 2.41 to 3.81mm (.095 to .150") | Yes       |  |
| <a href="#">84590-0022</a> |                  |        |               | 1.91 to 3.91mm (.075 to .150") |           |  |
| <a href="#">84590-0020</a> | 16 to 18         |        |               | 1.40 to 2.16mm (.055 to .085") |           |  |
| <a href="#">84590-0024</a> | 14 to 18         | Socket |               | 2.41 to 3.81mm (.095 to .150") |           |  |
| <a href="#">84590-0023</a> |                  |        |               | 1.91 to 3.91mm (.075 to .150") |           |  |
| <a href="#">84590-0025</a> | 16 to 18         |        |               | 1.40 to 2.16mm (.055 to .085") |           |  |

# XRC™ Extra Rugged Circular Sealed Connectors Plug Housing

84501



## Features and Benefits

- Environmentally sealed to IP67 standard and protects against the ingress of dust, water and other contaminants to maintain the integrity of the mated pair
- Seal retainer lip is compatible with backshell and overmolding applications
- Bayonet style latch provides quick and easy connections for reduced installation and service time as well as ensures proper depth when mated
- Simple crimp-and-poke technology does not require terminal alignment when installing crimped wires
- Tactile and audible mating feedback facilitates reliable mating

## Reference Information

Packaging: Tray  
Mates With: 84508 receptacle  
Use With: 84590 crimp terminals and  
84509-0002 circuit plug  
Designed In: Inches

## Electrical

Current: 18 AWG—10.0A max.  
16 and 14 AWG—13.0A max.  
Contact Resistance: 30 milliohms max.  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

## Mechanical

Contact Retention to Housing: 53.4N (12 lb)  
Mating Force: 133.5N (30 lb) max.  
Unmating Force: 26.7N (6 lb) min.  
Durability: 100 cycles


## Physical

Housing: Glass-filled PBT  
Seals: Silicone rubber  
Contact: Copper Alloy  
Insulation Outside Diameter: Thin wall

| Circuits | Shell Size | Order No.                  | Terminal Insert Configuration | Wire Range | Lead-free |
|----------|------------|----------------------------|-------------------------------|------------|-----------|
| 14       | 18         | <a href="#">84501-0001</a> | Pin insert                    | 14 to 18   | Yes       |

## XRC™ Extra Rugged Circular Sealed Connectors Plug Housing

84507



### Features and Benefits

- Environmentally sealed to IP67 standard and protects against the ingress of dust, water and other contaminants to maintain the integrity of the mated pair
- Seal retainer lip is compatible with backshell and overmolding applications
- Bayonet style latch provides quick and easy connections for reduced installation and service time as well as ensures proper depth when mated
- Simple crimp-and-poke technology does not require terminal alignment when installing crimped wires
- Tactile and audible mating feedback facilitates reliable mating

### Reference Information

Packaging: Tray  
Mates With: 84502 receptacle  
Use With: 84590 crimp terminals and 84509-0002 circuit plug  
Designed In: Inches

### Electrical

Current: 18 AWG—10.0A max.  
16 and 14 AWG—13.0A max.  
Contact Resistance: 30 milliohms max.  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

### Mechanical

Contact Retention to Housing: 53.4N (12 lb)  
Mating Force: 133.5N (30 lb) max.  
Unmating Force: 26.7N (6 lb) min.  
Durability: 100 cycles


### Physical

Housing: Glass-filled PBT  
Seals: Silicone rubber  
Contact: Copper Alloy  
Insulation Outside Diameter: Thin wall

| Circuits | Shell Size | Order No.                  | Terminal Insert Configuration | Wire Range | Lead-free |
|----------|------------|----------------------------|-------------------------------|------------|-----------|
| 14       | 18         | <a href="#">84507-0012</a> | Socket insert                 | 14 to 18   | Yes       |

## XRC™ Extra Rugged Circular Sealed Connectors Receptacle Housing

84502



### Features and Benefits

- Environmentally sealed to IP67 standard and protects against the ingress of dust, water and other contaminants to maintain the integrity of the mated pair
- Seal retainer lip is compatible with backshell and overmolding applications
- Bayonet style latch provides quick and easy connections for reduced installation and service time as well as ensures proper depth when mated
- Simple crimp-and-poke technology does not require terminal alignment when installing crimped wires
- Tactile and audible mating feedback facilitates reliable mating

### Reference Information

Packaging: Tray  
Mates With: 84507 plug  
Use With: 84590 crimp terminals, 84502-0004 panel mount hex nut (optional) and 84509-0002 circuit plug  
Designed In: Inches

### Electrical

Current: 18 AWG—10.0A max.  
16 and 14 AWG—13.0A max.  
Contact Resistance: 30 milliohms max.  
Dielectric Withstanding Voltage: 1600V AC  
Insulation Resistance: 1000 Megohms min.

### Mechanical

Contact Retention to Housing: 53.4N (12 lb)  
Mating Force: 133.5N (30 lb) max.  
Unmating Force: 26.7N (6 lb) min.  
Durability: 100 cycles


### Physical

Housing: Glass-filled PBT  
Seals: Silicone rubber  
Contact: Copper Alloy  
Insulation Outside Diameter: Thin wall

| Circuits | Shell Size | Order No.                  | Terminal Insert Configuration | Wire Range | Lead-free |
|----------|------------|----------------------------|-------------------------------|------------|-----------|
| 14       | 18         | <a href="#">84502-0008</a> | Pin insert                    | 14 to 18   | Yes       |

## XRC™ Extra Rugged Circular Sealed Connectors Receptacle Housing

84508



### Features and Benefits

- Environmentally sealed to IP67 standard and protects against the ingress of dust, water and other contaminants to maintain the integrity of the mated pair
- Seal retainer lip is compatible with backshell and overmolding applications
- Bayonet style latch provides quick and easy connections for reduced installation and service time as well as ensures proper depth when mated
- Simple crimp-and-poke technology does not require terminal alignment when installing crimped wires
- Tactile and audible mating feedback facilitates reliable mating

### Reference Information

Packaging: Tray  
 Mates With: 84501 plug  
 Use With: 84590 crimp terminals,  
 84502-0004 panel mount hex nut (optional) and  
 84509-0002 circuit plug  
 Designed In: Inches

### Electrical

Current: 18 AWG—10.0A max.  
 16 and 14 AWG—13.0A max.  
 Contact Resistance: 30 milliohms max.  
 Dielectric Withstanding Voltage: 1600V AC  
 Insulation Resistance: 1000 Megohms min.

### Mechanical

Contact Retention to Housing: 53.4N (12 lb)  
 Mating Force: 133.5N (30 lb) max.  
 Unmating Force: 26.7N (6 lb) min.  
 Durability: 100 cycles


### Physical

Housing: Glass-filled PBT  
 Seals: Silicone rubber  
 Contact: Copper Alloy  
 Insulation Outside Diameter: Thin wall

| Circuits | Shell Size | Order No.                  | Terminal Insert Configuration | Wire Range | Lead-free |
|----------|------------|----------------------------|-------------------------------|------------|-----------|
| 14       | 18         | <a href="#">84508-0001</a> | Socket insert                 | 14 to 18   | Yes       |

## XRC™ Extra Rugged Circular Sealed Connectors Circuit Plug

84509



### Features and Benefits

- Optional circuit plug supports the ability to implement sealed blank cavities in both plug and receptacle housings
- Provides the ability to plan for possible future circuit additions while maintaining the sealing integrity of the mated pair

### Reference Information

Packaging: Box  
 Use With: 84501 and 84507 plug housings  
 84502 and 84508 receptacle housings  
 Designed In: Inches


### Physical

Material: PBT, UL 94V-0

| Order No.                  | Contact Size | Color         | Lead-free |
|----------------------------|--------------|---------------|-----------|
| <a href="#">84509-0002</a> | 12 and 16    | Natural/White | Yes       |

## XRC™ Extra Rugged Circular Sealed Connectors Panel Mount Hex Nut

84502



### Reference Information

Packaging: Box  
 Use with: Molex shell size 18 receptacle housings  
 Designed In: Inches


### Physical

Material: PBT, UL 94V-0

| Order No.                  | Color                 | Lead-free |
|----------------------------|-----------------------|-----------|
| <a href="#">84502-0004</a> | <a href="#">Black</a> | Yes       |

# Brad® Nano-Change® (M8) Cordset

**120027/120028/120086/120087**  
**Single and Double-Ended**



## Features and Benefits

- M8 connector per IEC 61072-2-104
- #24 AWG yellow PVC cable
- Threaded coupling to withstand harsh industrial environments

## Reference Information

UL File No.: E152210

## Electrical

Voltage: 60V AC/75V DC

Current: 3P—4.0A

4P—4.0A

5P—3.0A

## Mechanical

Connector Face: PBT

Molded Body: TPE

O-Ring: Viton

Coupling Nut: Nickel-plated Brass

Cable: Yellow, PVC Cable Jacket, #24 AWG over 19 by #36

Copper stranding, UL style 2661

Outside Diameter:

3P—0.17" (4.3mm)

4P—0.18" (4.6mm)

5P—0.20" (5.1mm)

## Environmental

Protection: IP67

## Single-Ended

| Poles | Cable Length (m) | PVC Cable     |                             |               |                             | PUR* Cable    |                             |               |                             |
|-------|------------------|---------------|-----------------------------|---------------|-----------------------------|---------------|-----------------------------|---------------|-----------------------------|
|       |                  | Male          |                             | Female        |                             | Male          |                             | Female        |                             |
|       |                  | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   |
| 3     | 2.0              | 403006A10M020 | <a href="#">120086-0132</a> | 403000A10M020 | <a href="#">120086-0102</a> | 403006P03M020 | <a href="#">120027-0911</a> | 403000P03M020 | <a href="#">120027-0003</a> |
|       | 4.0              | 403006A10M040 | <a href="#">120086-0133</a> | 403000A10M040 | <a href="#">120086-0106</a> | 403006P03M040 | <a href="#">120027-0453</a> | 403000P03M040 | <a href="#">120027-1130</a> |
|       | 5.0              | 403006A10M050 | <a href="#">120086-0134</a> | 403000A10M050 | <a href="#">120086-0107</a> | 403006P03M050 | <a href="#">120086-0474</a> | 403000P03M050 | <a href="#">120086-0466</a> |
|       | 6.0              | 403006A10M060 | <a href="#">120086-0575</a> | 403000A10M060 | <a href="#">120086-0108</a> | 403006P03M060 | <a href="#">120086-0583</a> | 403000P03M060 | <a href="#">120086-0589</a> |
|       | 10.0             | 403006A10M100 | <a href="#">120086-0135</a> | 403000A10M100 | <a href="#">120086-0111</a> | 403006P03M100 | <a href="#">120027-0933</a> | 403000P03M100 | <a href="#">120027-0005</a> |
| 4     | 2.0              | 404006A10M020 | <a href="#">120086-0183</a> | 404000A10M020 | <a href="#">120086-0144</a> | 404006P03M020 | <a href="#">120027-0960</a> | 404000P03M020 | <a href="#">120027-0014</a> |
|       | 4.0              | 404006A10M040 | <a href="#">120086-0184</a> | 404000A10M040 | <a href="#">120086-0146</a> | 404006P03M040 | <a href="#">120086-0584</a> | 404000P03M040 | <a href="#">120086-0590</a> |
|       | 5.0              | 404006A10M050 | <a href="#">120086-0185</a> | 404000A10M050 | <a href="#">120086-0147</a> | 404006P03M050 | <a href="#">120027-1017</a> | 404000P03M050 | <a href="#">120027-0015</a> |
|       | 6.0              | 404006A10M060 | <a href="#">120086-0576</a> | 404000A10M060 | <a href="#">120086-0148</a> | 404006P03M060 | <a href="#">120086-0585</a> | 404000P03M060 | <a href="#">120086-0591</a> |
|       | 10.0             | 404006A10M100 | <a href="#">120086-0577</a> | 404000A10M100 | <a href="#">120086-0155</a> | 404006P03M100 | <a href="#">120027-1137</a> | 404000P03M100 | <a href="#">120027-0016</a> |
| 5     | 2.0              | 405006A10M020 | <a href="#">120086-0206</a> | 405000A10M020 | <a href="#">120086-0191</a> | 405006P02M020 | <a href="#">120027-0752</a> | 405000P02M020 | <a href="#">120027-0709</a> |
|       | 4.0              | 405006A10M040 | <a href="#">120086-0207</a> | 405000A10M040 | <a href="#">120086-0192</a> | 405006P02M040 | <a href="#">120086-0586</a> | 405000P02M040 | <a href="#">120086-0592</a> |
|       | 5.0              | 405006A10M050 | <a href="#">120086-0208</a> | 405000A10M050 | <a href="#">120086-0193</a> | 405006P02M050 | <a href="#">120027-0657</a> | 405000P02M050 | <a href="#">120086-0475</a> |
|       | 6.0              | 405006A10M060 | <a href="#">120086-0541</a> | 405000A10M060 | <a href="#">120086-0578</a> | 405006P02M060 | <a href="#">120086-0587</a> | 405000P02M060 | <a href="#">120086-0593</a> |
|       | 10.0             | 405006A10M100 | <a href="#">120086-0579</a> | 405000A10M100 | <a href="#">120086-0194</a> | 405006P02M100 | <a href="#">120086-0588</a> | 405000P02M100 | <a href="#">120086-0594</a> |

\* Preferred Version in Europe


## Double-Ended

| Poles | Cable Length (m) | PVC Cable                               |                             | PUR* Cable    |                             |
|-------|------------------|-----------------------------------------|-----------------------------|---------------|-----------------------------|
|       |                  | Male Straight/Female Straight Extension |                             |               |                             |
|       |                  | Old Part No.                            | Order No.                   | Old Part No.  | Order No.                   |
| 3     | 0.6              | 443030A10M006                           | <a href="#">120087-0071</a> | 443030P03M006 | <a href="#">120028-0681</a> |
|       | 1.0              | 443030A10M010                           | <a href="#">120087-0074</a> | 443030P03M010 | <a href="#">120087-0515</a> |
|       | 2.0              | 443030A10M020                           | <a href="#">120087-0078</a> | 443030P03M020 | <a href="#">120028-0682</a> |
|       | 3.0              | 443030A10M030                           | <a href="#">120087-0079</a> | 443030P03M030 | <a href="#">120028-0947</a> |
|       | 4.0              | 443030A10M040                           | <a href="#">120087-0080</a> | 443030P03M040 | <a href="#">120028-1269</a> |
|       | 5.0              | 443030A10M050                           | <a href="#">120087-0081</a> | 443030P03M050 | <a href="#">120028-0870</a> |
| 4     | 0.6              | 444030A10M006                           | <a href="#">120087-0092</a> | 444030P03M006 | <a href="#">120028-0473</a> |
|       | 1.0              | 444030A10M010                           | <a href="#">120087-0093</a> | 444030P03M010 | <a href="#">120028-0365</a> |
|       | 2.0              | 444030A10M020                           | <a href="#">120087-0095</a> | 444030P03M020 | <a href="#">120028-0696</a> |
|       | 3.0              | 444030A10M030                           | <a href="#">120087-0096</a> | 444030P03M030 | <a href="#">120028-0697</a> |
|       | 4.0              | 444030A10M040                           | <a href="#">120087-0097</a> | 444030P03M040 | <a href="#">120087-0686</a> |
|       | 5.0              | 444030A10M050                           | <a href="#">120087-0098</a> | 444030P03M050 | <a href="#">120028-0970</a> |
| 5     | 0.6              | 445030A10M006                           | <a href="#">120087-0677</a> | 445030P02M006 | <a href="#">120087-0687</a> |
|       | 1.0              | 445030A10M010                           | <a href="#">120087-0112</a> | 445030P02M010 | <a href="#">120028-1309</a> |
|       | 2.0              | 445030A10M020                           | <a href="#">120087-0113</a> | 445030P02M020 | <a href="#">120087-8035</a> |
|       | 3.0              | 445030A10M030                           | <a href="#">120087-0678</a> | 445030P02M030 | <a href="#">120087-0688</a> |
|       | 4.0              | 445030A10M040                           | <a href="#">120087-0114</a> | 445030P02M040 | <a href="#">120087-8036</a> |
|       | 5.0              | 445030A10M050                           | <a href="#">120087-0041</a> | 445030P02M050 | <a href="#">120028-1310</a> |

\* Preferred Version in Europe

# Brad® Nano-Change® (M8) Receptacle

120090

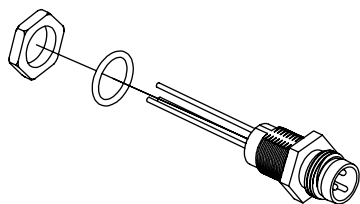

## Features and Benefits

- M8 connector per IEC 61072-2-104
- Nickel-plated Brass body
- IP67 rating on threaded connection

## Reference Information

UL File No.: E152210

## Electrical

Voltage: 60V AC/75V DC

Current: 3P—4.0A

4P—4.0A

5P—3.0A

## Mechanical

Connector Face: PBT

Shell: Nickel-plated Brass

O-Ring: Viton

Wire: PVC; #24 AWG (19 by #36)

## Environmental


Protection: Coupler—NEMA IP67

Snap—NEMA 4, IP65

| Poles | Old Part No.  | Order No.                   | Gender |
|-------|---------------|-----------------------------|--------|
| 3     | 4R3P00A27C300 | <a href="#">120090-0016</a> | Female |
|       | 4R3P06A27C300 | <a href="#">120090-0020</a> | Male   |
| 4     | 4R4P00A27C300 | <a href="#">120090-0029</a> | Female |
|       | 4R4P06A27C300 | <a href="#">120090-0032</a> | Male   |
| 5     | 4R5P00A27C300 | <a href="#">120090-0037</a> | Female |
|       | 4R5P06A27C300 | <a href="#">120090-0038</a> | Male   |

# Brad® Nano-Change® (M8) Attachable Connector

120091



## Features and Benefits

- M8 connector per IEC 61076-2-104
- Allows easy field conversion to threaded connection quick-disconnect
- Solder connections for reliability in vibration applications
- Male and female in both straight and 90° versions

## Electrical

Voltage: 60V AC/75V DC

Current: 4.0A

## Mechanical

Connector Face: PA

Body: PA

Coupling Nut: Nickel-plated Brass

Termination: Solder lugs; accepts conductor to #20 AWG


## Environmental

Protection: IP67

| Poles | Old Part No. | Order No.                   | Orientation | Gender |
|-------|--------------|-----------------------------|-------------|--------|
| 3     | N03FA03124   | <a href="#">120091-0001</a> | Straight    | Female |
|       | N03FA04124   | <a href="#">120091-0003</a> | 90°         | Female |
|       | N03MA03124   | <a href="#">120091-0004</a> | Straight    | Male   |
|       | N03MA04124   | <a href="#">120091-0006</a> | 90°         | Male   |
| 4     | N04FA03124   | <a href="#">120091-0007</a> | Straight    | Female |
|       | N04FA04124   | <a href="#">120091-0009</a> | 90°         | Female |
|       | N04MA03124   | <a href="#">120091-0010</a> | Straight    | Male   |
|       | N04MA04124   | <a href="#">120091-0012</a> | 90°         | Male   |

# Brad® Nano-Change® (M8) Distribution Box

120113

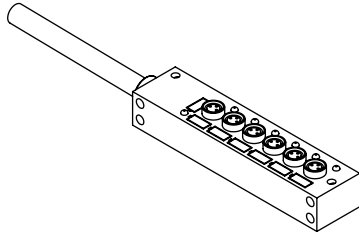

## Features and Benefits

- M8 connector per IEC 61072-2-104
- Connectorized Home Run cable connector version for maximum flexibility
- Flexibility with 4, 8, and 10 ports
- PNP and NPN versions for use with a variety of DC sensor

## Mechanical

Insert: Thermoplastic polyester

Housing: PBT

Receptacle Housing: Nickel-plated Brass

ID Label: ABS

O-Ring: Viton

Home Run Connector Cabling: M16 14 pole connector, metal shell

Cable Jacket: Black PUR/PVC composite, black PUR

Diameter: PUR—0.28" (7mm)

|                | 4 Port                  | 6 Port                  | 8 Port                  | 10 Port                 |
|----------------|-------------------------|-------------------------|-------------------------|-------------------------|
| V(+) and V(-): | 2 x 0.75mm <sup>2</sup> | 2 x 0.75mm <sup>2</sup> | 2 x 0.75mm <sup>2</sup> | 2 x 0.75mm <sup>2</sup> |
| Control:       | 4 x 0.34mm <sup>2</sup> | 6 x 0.34mm <sup>2</sup> | 8 x 0.34mm <sup>2</sup> | Outer                   |
| Stranding      |                         |                         |                         |                         |
| V(+) and V(-): | 95 x 0.1mm              | 85 x 0.1mm              | 95 x 0.1mm              | 95 x 0.1mm              |
| Control        | 42 x 0.1mm              | 42 x 0.1mm              | 42 x 0.1mm              | 42 x 0.1mm              |

## Electrical

Voltage: 10 to 30V DC

Current: 2.0A max. per port; 6A total per MPIS unit

Indicating Lights: Green LED—power; Yellow LED—function

Average LED Life: 100,000 hours

## Environmental


Protection: IP67

| Ports | Old Part No.   | Order No.                   | Description                                           |
|-------|----------------|-----------------------------|-------------------------------------------------------|
| 4     | BNY401P-FBC    | <a href="#">120113-0023</a> | Top Mount, Connector with Integral Home Run Connector |
| 8     | BNY801P-FBC    | <a href="#">120113-0029</a> |                                                       |
| 10    | BNYA01P-FBC    | <a href="#">120113-0020</a> |                                                       |
| 4     | BNY401P-FBP-05 | <a href="#">120113-0025</a> | Top Mount with Top Cable Entry, Molded Home Run Cable |
| 8     | BNY801P-FBP-05 | <a href="#">120113-0032</a> |                                                       |
| 10    | BNYA01P-FBP-05 | <a href="#">120113-0022</a> |                                                       |
| 4     | BEY401P-FBP-05 | <a href="#">120113-0006</a> |                                                       |
| 6     | BEY601P-FBP-05 | <a href="#">120113-0011</a> |                                                       |
| 8     | BEY801P-FBP-05 | <a href="#">120113-0014</a> |                                                       |
| 10    | BEYA01P-FBP-05 | <a href="#">120113-0002</a> |                                                       |
| 4     | BEY401P-FBP-10 | <a href="#">120113-0007</a> |                                                       |

# Brad® Micro-Change® (M12) Cordset

120006/120065

Single Keyway  
Single-Ended



## Features and Benefits

- Single key M12 connector per IEC 61076-2-101
- 22 AWG yellow PVC, PUR thermoplastic elastomer (TPE) cables
- DC color code
- Highly reliable low-resistance contact design with Gold/Palladium Nickel plating

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 250V AC/DC

Current: 4.0A

## Mechanical

Connector Face: PUR

Molded Body: PUR

O-Ring: Nitrile rubber

Coupling Nut: Nickel plated brass

Cable:

PVC—Yellow 22 AWG PVC jacket and PVC conductor insulation over 26 x 36 Copper strand, 300V, UL Style AWM 2661, CSA AWM I/IT A/B

TPE—Yellow 22 AWG TPE jacket and PVC conductor insulation over 19 x 34 copper stranding, 300V, High Flex Cable(>10 millionbind cycles), UL ITC/PLTC 105°C, CSA AWM I/IT AB 90°C 300V FT4

Cable Outside Diameter: 4P—0.20" (5.10mm)

5P—0.23" (5.80mm)

## Environmental


Protection: IP67

| Cable Type | Poles | Length (m)    | Straight                    |                             |                             |                             | Right Angle                 |                             |                             |                             |
|------------|-------|---------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
|            |       |               | Male                        |                             | Female                      |                             | Male                        |                             | Female                      |                             |
|            |       |               | Old Part No.                | Order No.                   | Old Part No.                | Order No.                   | Old Part No.                | Order No.                   | Old Part No.                | Order No.                   |
| TPE        | 4     | 2.0           | 804006K05M020               | <a href="#">120065-1129</a> | 804000K05M020               | <a href="#">120065-1121</a> | 804007K05M020               | <a href="#">120065-1691</a> | 804001K05M020               | <a href="#">120065-1639</a> |
|            |       | 4.0           | 804006K05M040               | <a href="#">120065-1130</a> | 804000K05M040               | <a href="#">120065-1123</a> | 804007K05M040               | <a href="#">120065-1692</a> | 804001K05M040               | <a href="#">120065-1641</a> |
|            |       | 5.0           | 804006K05M050               | <a href="#">120065-1131</a> | 804000K05M050               | <a href="#">120065-1124</a> | 804007K05M050               | <a href="#">120065-1693</a> | 804001K05M050               | <a href="#">120065-1642</a> |
|            |       | 6.0           | 804006K05M060               | <a href="#">120065-1132</a> | 804000K05M060               | <a href="#">120065-1125</a> | 804007K05M060               | <a href="#">120065-1694</a> | 804001K05M060               | <a href="#">120065-1643</a> |
|            |       | 10.0          | 804006K05M100               | <a href="#">120065-1133</a> | 804000K05M100               | <a href="#">120065-1126</a> | 804007K05M100               | <a href="#">120065-1695</a> | 804001K05M100               | <a href="#">120065-1644</a> |
| PVC        |       | 2.0           | 804006A09M020               | <a href="#">120065-0414</a> | 804000A09M020               | <a href="#">120065-0255</a> | 804007A09M020               | <a href="#">120065-1662</a> | 804001A09M020               | <a href="#">120065-1551</a> |
|            |       | 4.0           | 804006A09M040               | <a href="#">120065-0418</a> | 804000A09M040               | <a href="#">120065-0261</a> | 804007A09M040               | <a href="#">120065-1665</a> | 804001A09M040               | <a href="#">120065-1555</a> |
|            |       | 5.0           | 804006A09M050               | <a href="#">120065-0419</a> | 804000A09M050               | <a href="#">120065-0265</a> | 804007A09M050               | <a href="#">120065-1666</a> | 804001A09M050               | <a href="#">120065-1558</a> |
|            |       | 6.0           | 804006A09M060               | <a href="#">120065-0421</a> | 804000A09M060               | <a href="#">120065-0268</a> | 804007A09M060               | <a href="#">120065-1668</a> | 804001A09M060               | <a href="#">120065-1562</a> |
|            |       | 10.0          | 804006A09M100               | <a href="#">120065-0425</a> | 804000A09M100               | <a href="#">120065-0277</a> | 804007A09M100               | <a href="#">120065-1669</a> | 804001A09M100               | <a href="#">120065-1567</a> |
| PUR*       |       | 2.0           | 804006P03M020               | <a href="#">120006-0570</a> | 804000P03M020               | <a href="#">120006-0018</a> | 804007P03M020               | <a href="#">120006-0592</a> | 804001P03M020               | <a href="#">120006-0024</a> |
|            |       | 4.0           | 804006P03M040               | <a href="#">120065-2141</a> | 804000P03M040               | <a href="#">120065-2143</a> | 804007P03M040               | <a href="#">120065-2145</a> | 804001P03M040               | <a href="#">120065-2147</a> |
|            |       | 5.0           | 804006P03M050               | <a href="#">120006-0047</a> | 804000P03M050               | <a href="#">120006-0019</a> | 804007P03M050               | <a href="#">120006-0594</a> | 804001P03M050               | <a href="#">120006-0025</a> |
|            |       | 6.0           | 804006P03M060               | <a href="#">120065-2142</a> | 804000P03M060               | <a href="#">120065-2144</a> | 804007P03M060               | <a href="#">120065-2146</a> | 804001P03M060               | <a href="#">120065-8206</a> |
|            |       | 10.0          | 804006P03M100               | <a href="#">120006-0572</a> | 804000P03M100               | <a href="#">120065-1782</a> | 804007P03M100               | <a href="#">120006-0595</a> | 804001P03M100               | <a href="#">120065-1787</a> |
| TPE        | 2.0   | 805006K03M020 | <a href="#">120065-1374</a> | 805000K03M020               | <a href="#">120065-1367</a> | 805007K03M020               | <a href="#">120065-2159</a> | 805001K03M020               | <a href="#">120065-1720</a> |                             |
|            | 4.0   | 805006K03M040 | <a href="#">120065-2150</a> | 805000K03M040               | <a href="#">120065-1369</a> | 805007K03M040               | <a href="#">120065-2160</a> | 805001K03M040               | <a href="#">120065-1721</a> |                             |
|            | 5.0   | 805006K03M050 | <a href="#">120065-2151</a> | 805000K03M050               | <a href="#">120065-1370</a> | 805007K03M050               | <a href="#">120065-2161</a> | 805001K03M050               | <a href="#">120065-1722</a> |                             |
|            | 6.0   | 805006K03M060 | <a href="#">120065-2152</a> | 805000K03M060               | <a href="#">120065-1371</a> | 805007K03M060               | <a href="#">120065-2162</a> | 805001K03M060               | <a href="#">120065-1723</a> |                             |
|            | 10.0  | 805006K03M100 | <a href="#">120065-2153</a> | 805000K03M100               | <a href="#">120065-1373</a> | 805007K03M100               | <a href="#">120065-2163</a> | 805001K03M100               | <a href="#">120065-2155</a> |                             |
| PVC        | 2.0   | 805006A09M020 | <a href="#">120065-0523</a> | 805000A09M020               | <a href="#">120065-0471</a> | 805007A09M020               | <a href="#">120065-1724</a> | 805001A09M020               | <a href="#">120065-1697</a> |                             |
|            | 4.0   | 805006A09M040 | <a href="#">120065-0526</a> | 805000A09M040               | <a href="#">120065-0476</a> | 805007A09M040               | <a href="#">120065-1726</a> | 805001A09M040               | <a href="#">120065-1700</a> |                             |
|            | 5.0   | 805006A09M050 | <a href="#">120065-0528</a> | 805000A09M050               | <a href="#">120065-0479</a> | 805007A09M050               | <a href="#">120065-1727</a> | 805001A09M050               | <a href="#">120065-1701</a> |                             |
|            | 6.0   | 805006A09M060 | <a href="#">120065-0531</a> | 805000A09M060               | <a href="#">120065-0483</a> | 805007A09M060               | <a href="#">120065-1728</a> | 805001A09M060               | <a href="#">120065-1703</a> |                             |
|            | 10.0  | 805006A09M100 | <a href="#">120065-0533</a> | 805000A09M100               | <a href="#">120065-0487</a> | 805007A09M100               | <a href="#">120065-2123</a> | 805001A09M100               | <a href="#">120065-1706</a> |                             |
| PUR*       | 2.0   | 805006P03M020 | <a href="#">120006-0680</a> | 805000P03M020               | <a href="#">120006-0647</a> | 805007P03M020               | <a href="#">120006-0697</a> | 805001P03M020               | <a href="#">120006-0663</a> |                             |
|            | 4.0   | 805006P03M040 | <a href="#">120065-2157</a> | 805000P03M040               | <a href="#">120065-8020</a> | 805007P03M040               | <a href="#">120006-0699</a> | 805001P03M040               | <a href="#">120065-8184</a> |                             |
|            | 5.0   | 805006P03M050 | <a href="#">120006-0682</a> | 805000P03M050               | <a href="#">120065-1792</a> | 805007P03M050               | <a href="#">120065-8186</a> | 805001P03M050               | <a href="#">120065-1793</a> |                             |
|            | 6.0   | 805006P03M060 | <a href="#">120006-2082</a> | 805000P03M060               | <a href="#">120065-2154</a> | 805007P03M060               | <a href="#">120065-2149</a> | 805001P03M060               | <a href="#">120065-2156</a> |                             |
|            | 10.0  | 805006P03M100 | <a href="#">120065-2158</a> | 805000P03M100               | <a href="#">120006-0649</a> | 805007P03M100               | <a href="#">120065-5006</a> | 805001P03M100               | <a href="#">120006-0664</a> |                             |

\*Preferred Version in Europe

# Brad® Micro-Change® (M12) Cordset

**120066**  
**Double-Ended**  
**Single Keyway**



## Features and Benefits

- Single key M12 connector per IEC 61076-2-101
- 22 AWG yellow PVC and thermoplastic elastomer (TPE) cables
- DC color code
- Highly reliable low-resistance contact design with Gold/Palladium Nickel plating

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 250V AC/DC

Current: 4.0A

## Mechanical

Connector Face: PUR

Molded Body: PUR

O-Ring: Nitrile rubber

Coupling Nut: Nickel plated brass

Cable:

PVC—Yellow 22 AWG PVC jacket and PVC conductor insulation over 26 x 36 Copper strand, 300V, UL Style AWM 2661, CSA AWM I/IT A/B

TPE—Yellow 22 AWG TPE jacket and PVC conductor insulation over 19 x 34 copper stranding, 300V, High Flex Cable(>10 millionbind cycles), UL ITC/PLTC 105°C, CSA AWM I/IT AB 90°C 300V FT4

Cable Outside Diameter: 4P—0.20" (5.10mm)

5P—0.23" (5.80mm)

## Environmental


Protection: IP67

| Cable Type | Poles | Length (m) | Female/Male Extension |                             |
|------------|-------|------------|-----------------------|-----------------------------|
|            |       |            | Old Part No.          | Order No.                   |
| PVC        | 4     | 0.6        | 884030A09M006         | <a href="#">120066-0262</a> |
|            |       | 1.0        | 884030A09M010         | <a href="#">120066-0266</a> |
|            |       | 2.0        | 884030A09M020         | <a href="#">120066-0271</a> |
|            |       | 4.0        | 884030A09M040         | <a href="#">120066-0279</a> |
|            |       | 5.0        | 884030A09M050         | <a href="#">120066-0284</a> |
| TPE        | 4     | 0.6        | 884030K05M006         | <a href="#">120066-0686</a> |
|            |       | 1.0        | 884030K05M010         | <a href="#">120066-0687</a> |
|            |       | 2.0        | 884030K05M020         | <a href="#">120066-0689</a> |
|            |       | 3.0        | 884030K05M030         | <a href="#">120066-0690</a> |
|            |       | 4.0        | 884030K05M040         | <a href="#">120066-0691</a> |
|            | 5     | 5.0        | 884030K05M050         | <a href="#">120066-0692</a> |
|            |       | 0.6        | 885030K03M006         | <a href="#">120066-1033</a> |
|            |       | 1.0        | 885030K03M010         | <a href="#">120066-1034</a> |
|            |       | 2.0        | 885030K03M020         | <a href="#">120066-1035</a> |
|            |       | 4.0        | 885030K03M040         | <a href="#">120066-1037</a> |
| PUR*       | 4     | 5.0        | 885030K03M050         | <a href="#">120066-1038</a> |
|            |       | 0.6        | 884030F03M006         | <a href="#">120007-0487</a> |
|            |       | 1.0        | 884030F03M010         | <a href="#">120007-0488</a> |
|            |       | 2.0        | 884030F03M020         | <a href="#">120007-0489</a> |
|            |       | 4.0        | 884030F03M040         | <a href="#">120007-2803</a> |
|            |       | 5.0        | 884030F03M050         | <a href="#">120007-0490</a> |

\*Preferred Version in Europe

# Brad® Micro-Change® (M12) Receptacle

**120070**  
Single Keyway



## Features and Benefits

- Single key M12 connector per IEC 61076-2-101
- 22 AWG PVC 12 inch leads—DC color code, epoxy potted
- Black anodized aluminum shell
- Used in control panels, junction boxes and sensors

## Reference Information

UL File No.: 3P and 4P E152210, 5P UL recognized  
CSA File No.: LR6837

## Electrical

Voltage: 250V AC/DC  
Current: 4.0A

## Mechanical

Shell: Black anodized aluminum  
Insert: Nylon 6/6  
Conductors: 22 AWG with PVC insulation over 26 by #36  
Copper stranding, 300V, UL Style 1061, CSA AWM SR  
O-Ring: Nitrile Rubber

## Environmental


Protection: IP67

| Poles | Male          |                             | Mounting Thread | Female        |                             | Mounting Thread |
|-------|---------------|-----------------------------|-----------------|---------------|-----------------------------|-----------------|
|       | Old Part No.  | Order No.                   |                 | Old Part No.  | Order No.                   |                 |
| 4     | 8R4006A18A120 | <a href="#">120070-0184</a> | 1/2" - 14NPT    | 8R4A00A18A120 | <a href="#">120070-0114</a> | 1/4" - 18NPT    |
| 5     | 8R5006A18A120 | <a href="#">120070-0252</a> |                 | 8R5A00A18A120 | <a href="#">120070-0201</a> |                 |

\*Note: Other mounting threads available, contact Molex.

# Brad® Micro-Change® (M12) Field Attachables

**120071**  
Single Keyway



## Features and Benefits

- Single key M12 connector per IEC 61076-2-101
- Screw terminal connection accepts up to 18 AWG conductors
- Easy field installation of quick-disconnect design
- For use with all standard single keyway M12 receptacles and cordsets

## Reference Information

CSA File No.: LR6837

## Electrical

Voltage: 4P—250V AC, 300V DC  
5P—30V AC, 36V DC  
Current: 4.0A

## Mechanical

Connector Face: Polyamide  
Molded Body: Polyamide  
Contact: Silver plated Brass  
Coupling Nut: Nickel plated Brass  
Grommet: Nitrile rubber  
Maximum Conductor Size: 18 AWG


## Environmental

Protection: IP67

| Poles | Male         |                             | Female       |                             | Orientation | Description                                                         |
|-------|--------------|-----------------------------|--------------|-----------------------------|-------------|---------------------------------------------------------------------|
|       | Old Part No. | Order No.                   | Old Part No. | Order No.                   |             |                                                                     |
| 4     | 8A4006-31    | <a href="#">120071-0038</a> | 8A4000-31    | <a href="#">120071-0035</a> | Straight    | With PG 7 Cable Fitting<br>(0.13 - 0.26" O.D.<br>[3.3-6.6mm] cable) |
|       | 8A4007-31    | <a href="#">120071-0040</a> | 8A4001-31    | <a href="#">120071-0037</a> | 90 degree   |                                                                     |
| 5     | 8A5006-31    | <a href="#">120071-0045</a> | 8A5000-31    | <a href="#">120071-0041</a> | Straight    |                                                                     |
|       | 8A5007-31    | <a href="#">120071-0049</a> | 8A5001-31    | <a href="#">120071-0044</a> | 90 degree   |                                                                     |
| 4     | 8A4006-32    | <a href="#">120071-0039</a> | 8A4000-32    | <a href="#">120071-0036</a> | Straight    |                                                                     |
| 5     | 8A5006-32    | <a href="#">120071-0047</a> | 8A5000-32    | <a href="#">120071-0043</a> |             |                                                                     |

# Brad® Ultra-Lock® (M12) Cordset

**120079**  
**Single-Ended**



## Features and Benefits

- Simply push down to connect and pull up to disconnect
- Surpasses the performance and reliability of traditional threaded connectors to deliver increased productivity and cost savings
- Ultra-lock connectors incorporate a unique radial seal and mechanical locking design that deliver unsurpassed performance

## Electrical

Voltage: 3P and 4P—250V

5P—60V

Insulation Resistance: >10<sup>9</sup> ohms

Rated Current T Amb. 40C: 4.0A

Contact Resistance: <5 milliohms

## Mechanical

Connector Face: PUR

Connector Body: PUR

Locking Mechanism: Nickel-plated Brass

Contact: Male—Brass

Female—Phosphor Bronze

Contact Plating: Gold over Nickel

O-Ring: Viton

## Environmental

Pollution Degree (IEC 60 664-1): 3


Protection: IP67/69K

| Poles | Cable Type | Length (m) | Male Straight |                             | Female Straight |                             | Female Right Angle |                             |
|-------|------------|------------|---------------|-----------------------------|-----------------|-----------------------------|--------------------|-----------------------------|
|       |            |            | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.       | Order No.                   |
| 4     | PVC        | 2.0        |               |                             |                 |                             | W04001A09M020      | <a href="#">120079-0232</a> |
|       |            | 4.0        |               |                             |                 |                             | W04001A09M040      | <a href="#">120079-0233</a> |
|       |            | 5.0        |               |                             |                 |                             | W04001A09M050      | <a href="#">120079-0234</a> |
|       |            | 6.0        |               |                             |                 |                             | W04001A09M060      | <a href="#">120079-0235</a> |
|       |            | 10.0       |               |                             |                 |                             | W04001A09M100      | <a href="#">120079-0195</a> |
|       | TPE        | 2.0        | W04006K05M020 | <a href="#">120079-0156</a> | W04000K05M020   | <a href="#">120079-0149</a> | W04001K05M020      | <a href="#">120079-0221</a> |
|       |            | 4.0        | W04006K05M040 | <a href="#">120079-0143</a> | W04000K05M040   | <a href="#">120079-0148</a> | W04001K05M040      | <a href="#">120079-0183</a> |
|       |            | 5.0        | W04006K05M050 | <a href="#">120079-0142</a> | W04000K05M050   | <a href="#">120079-0147</a> | W04001K05M050      | <a href="#">120079-0184</a> |
|       |            | 6.0        | W04006K05M060 | <a href="#">120079-0141</a> | W04000K05M060   | <a href="#">120079-0134</a> | W04001K05M060      | <a href="#">120079-0185</a> |
|       |            | 10.0       | W04006K05M100 | <a href="#">120079-0140</a> | W04000K05M100   | <a href="#">120079-0145</a> | W04001K05M100      | <a href="#">120079-0186</a> |
|       | PUR*       | 2.0        | W04006P03M020 | <a href="#">120079-8006</a> | W04000P03M020   | <a href="#">120079-8012</a> | W04001P03M020      | <a href="#">120079-8013</a> |
|       |            | 4.0        | W04006P03M040 | <a href="#">120079-5064</a> | W04000P03M040   | <a href="#">120079-5068</a> | W04001P03M040      | <a href="#">120079-5071</a> |
|       |            | 5.0        | W04006P03M050 | <a href="#">120079-5065</a> | W04000P03M050   | <a href="#">120079-5069</a> | W04001P03M050      | <a href="#">120079-8007</a> |
|       |            | 6.0        | W04006P03M060 | <a href="#">120079-5066</a> | W04000P03M060   | <a href="#">120079-5070</a> | W04001P03M060      | <a href="#">120079-5073</a> |
|       |            | 10.0       | W04006P03M100 | <a href="#">120079-8011</a> | W04000P03M100   | <a href="#">120079-8010</a> | W04001P03M100      | <a href="#">120079-5072</a> |
| 5     | PVC        | 2.0        | W05006A09M020 | <a href="#">120079-0092</a> | W05000A09M020   | <a href="#">120079-0109</a> | W05001A09M020      | <a href="#">120079-0223</a> |
|       |            | 4.0        | W05006A09M040 | <a href="#">120079-0091</a> | W05000A09M040   | <a href="#">120079-0096</a> | W05001A09M040      | <a href="#">120079-0202</a> |
|       |            | 5.0        | W05006A09M050 | <a href="#">120079-0090</a> | W05000A09M050   | <a href="#">120079-0095</a> | W05001A09M050      | <a href="#">120079-0203</a> |
|       |            | 6.0        | W05006A09M060 | <a href="#">120079-0089</a> | W05000A09M060   | <a href="#">120079-0094</a> | W05001A09M060      | <a href="#">120079-0204</a> |
|       |            | 10.0       | W05006A09M100 | <a href="#">120079-0088</a> | W05000A09M100   | <a href="#">120079-0093</a> | W05001A09M100      | <a href="#">120079-0205</a> |
|       | PUR*       | 2.0        | W05006P03M020 | <a href="#">120079-5055</a> |                 |                             | W05001P03M020      | <a href="#">120079-5088</a> |
|       |            | 4.0        | W05006P03M040 | <a href="#">120079-5079</a> |                 |                             | W05001P03M040      | <a href="#">120079-5089</a> |
|       |            | 5.0        | W05006P03M050 | <a href="#">120079-5080</a> |                 |                             | W05001P03M050      | <a href="#">120079-5090</a> |
|       |            | 6.0        | W05006P03M060 | <a href="#">120079-5081</a> |                 |                             | W05001P03M060      | <a href="#">120079-5091</a> |
|       |            | 10.0       | W05006P03M100 | <a href="#">120079-5082</a> |                 |                             | W05001P03M100      | <a href="#">120079-5092</a> |

\*Preferred Version in Europe

# Brad® Ultra-Lock® (M12) Cordset

**120080**  
**Doubled-Ended**



## Features and Benefits

- Simply push down to connect and pull up to disconnect
- Surpasses the performance and reliability of traditional threaded connectors to deliver increased productivity and cost savings
- Ultra-lock connectors incorporate a unique radial seal and mechanical locking design that deliver unsurpassed performance

## Electrical

Voltage: 4P—250V  
5P—60V  
Insulation Resistance: >10<sup>9</sup> ohms  
Rated Current T Amb.: 4.0A  
Contact Resistance: <5 milliohms

## Mechanical

Connector Face: PUR  
Contact Carrier: PUR  
Locking Mechanism: Nickel-plated Brass  
Contact: Male—Brass  
Female—Phosphor Bronze  
Contact Plating: Gold over Nickel  
O-Ring: Viton  
Durability: 30,000 mate/demate

## Environmental


Pollution Degree (IEC 60 664-1): 3  
Protection: IP67/69K

| Poles | Cable Type | Length (m) | Ultra-Lock Male/Threaded Female Extension |                             | Ultra-Lock Male/ Ultra-Lock Female Extension |                             |
|-------|------------|------------|-------------------------------------------|-----------------------------|----------------------------------------------|-----------------------------|
|       |            |            | Old Material No.                          | Order No.                   | Old Material No.                             | Order No.                   |
| 4     | PVC        | 0.6        | 8W4030A09M006                             | <a href="#">120080-0042</a> | WW4030A09M006                                | <a href="#">120080-0009</a> |
|       |            | 1.0        | 8W4030A09M010                             | <a href="#">120080-0043</a> | WW4030A09M010                                | <a href="#">120080-0403</a> |
|       |            | 2.0        | 8W4030A09M020                             | <a href="#">120080-0044</a> | WW4030A09M020                                | <a href="#">120080-0331</a> |
|       |            | 3.0        | 8W4030A09M030                             | <a href="#">120080-0449</a> | WW4030A09M030                                | <a href="#">120080-0450</a> |
|       |            | 4.0        | 8W4030A09M040                             | <a href="#">120080-0045</a> | WW4030A09M040                                | <a href="#">120080-0332</a> |
|       | TPE        | 0.6        | 8W4030A09M050                             | <a href="#">120080-0046</a> | WW4030A09M050                                | <a href="#">120080-0333</a> |
|       |            | 1.0        | 8W4030K05M010                             | <a href="#">120080-0455</a> | WW4030K05M010                                | <a href="#">120080-0504</a> |
|       |            | 2.0        | 8W4030K05M020                             | <a href="#">120080-0073</a> | WW4030K05M020                                | <a href="#">120080-0417</a> |
|       |            | 3.0        | 8W4030K05M030                             | <a href="#">120080-0074</a> | WW4030K05M030                                | <a href="#">120080-0406</a> |
|       |            | 4.0        | 8W4030K05M040                             | <a href="#">120080-0442</a> | WW4030K05M040                                | <a href="#">120080-0505</a> |
|       | PUR*       | 0.6        | 8W4030K05M050                             | <a href="#">120080-0075</a> | WW4030K05M050                                | <a href="#">120080-0405</a> |
|       |            | 1.0        | 8W4030P03M006                             | <a href="#">120080-0076</a> | WW4030P03M006                                | <a href="#">120080-0404</a> |
|       |            | 2.0        | 8W4030P03M010                             | <a href="#">120080-5028</a> | WW4030P03M010                                | <a href="#">120080-5044</a> |
|       |            | 3.0        | 8W4030P03M020                             | <a href="#">120080-5029</a> | WW4030P03M020                                | <a href="#">120080-5045</a> |
|       |            | 4.0        | 8W4030P03M030                             | <a href="#">120080-5030</a> | WW4030P03M030                                | <a href="#">120080-5018</a> |
| 5     | PVC        | 0.6        | 8W4030P03M040                             | <a href="#">120080-8004</a> | WW4030P03M040                                | <a href="#">120080-5046</a> |
|       |            | 1.0        | 8W4030P03M050                             | <a href="#">120080-5031</a> | WW4030P03M050                                | <a href="#">120080-5047</a> |
|       |            | 2.0        | 8W5030A09M006                             | <a href="#">120080-8005</a> | WW4030P03M050                                | <a href="#">120080-5048</a> |
|       |            | 3.0        | 8W5030A09M010                             | <a href="#">120080-0451</a> | WW5030A09M006                                | <a href="#">120080-5048</a> |
|       |            | 4.0        | 8W5030A09M020                             | <a href="#">120080-0059</a> | WW5030A09M010                                | <a href="#">120080-0453</a> |
|       | TPE        | 0.6        | 8W5030A09M030                             | <a href="#">120080-0060</a> | WW5030A09M020                                | <a href="#">120080-0313</a> |
|       |            | 1.0        | 8W5030A09M040                             | <a href="#">120080-0452</a> | WW5030A09M030                                | <a href="#">120080-0454</a> |
|       |            | 2.0        | 8W5030A09M050                             | <a href="#">120080-0061</a> | WW5030A09M040                                | <a href="#">120080-0312</a> |
|       |            | 3.0        | 8W5030A09M050                             | <a href="#">120080-0062</a> | WW5030A09M050                                | <a href="#">120080-0311</a> |
|       |            | 4.0        | 8W5030P03M006                             | <a href="#">120080-5032</a> | WW5030A09M050                                | <a href="#">120080-0311</a> |
|       | PUR*       | 0.6        | 8W5030P03M010                             | <a href="#">120080-5033</a> | WW5030P03M006                                | <a href="#">120080-5049</a> |
|       |            | 1.0        | 8W5030P03M020                             | <a href="#">120080-5034</a> | WW5030P03M010                                | <a href="#">120080-5050</a> |
|       |            | 2.0        | 8W5030P03M030                             | <a href="#">120080-5035</a> | WW5030P03M020                                | <a href="#">120080-5051</a> |
|       |            | 3.0        | 8W5030P03M040                             | <a href="#">120080-5036</a> | WW5030P03M030                                | <a href="#">120080-5052</a> |
|       |            | 4.0        | 8W5030P03M050                             | <a href="#">120080-5037</a> | WW5030P03M040                                | <a href="#">120080-5053</a> |

\*Preferred Version in Europe

# Brad® Ultra-Lock® (M12) Receptacle

**120025/120084**  
**Single Keyway**



## Features and Benefits

- Mating receptacles for Ultra-Lock® cordsets
- 0.34mm<sup>2</sup> (22 AWG) PVC 30cm wire leads, DC color code
- Fully potted to maintain water tight rating of enclosure
- Used in control panels, junction boxes and sensors
- Offered with wire leads or PCB pins for easy incorporation into devices

## Electrical

Voltage: 4P—250V AC/DC  
5P—60V AC/DC  
Current: 4.0A

## Mechanical

Shell: Nickel-plated Brass  
Insert: PUR  
Conductors: 0.34mm<sup>2</sup> (22 AWG) PVC insulation  
O-Ring: Viton


## Environmental

Protection: IP67/IP69K

| Poles | Mounting Thread | Front Panel Mount |                             |               |                             | Rear Panel Mount |                             |              |                             |
|-------|-----------------|-------------------|-----------------------------|---------------|-----------------------------|------------------|-----------------------------|--------------|-----------------------------|
|       |                 | Male              |                             | Female        |                             | Male             |                             | Female       |                             |
|       |                 | Old Part No.      | Order No.                   | Old Part No.  | Order No.                   | Old Part No.     | Order No.                   | Old Part No. | Order No.                   |
| 4     | M16 x 1         | WR4U26E03C300     | <a href="#">120025-0005</a> | WR4U20E03C300 | <a href="#">120025-0006</a> | WR4U46000        | <a href="#">120084-0028</a> | WR4U40000    | <a href="#">120084-0029</a> |
| 5     |                 | WR5U26E03C300     | <a href="#">120025-0007</a> | WR5U20E03C300 | <a href="#">120025-0008</a> | WR5U46000        | <a href="#">120084-0031</a> | WR5U40000    | <a href="#">120084-0030</a> |

# Brad® Micro-Change® (½"-20 UNC) Cordset

**120072**  
Single-Ended  
Dual Keyway



## Features and Benefits

- Dual key connector with ½"-20 UNF coupler
- 22 AWG yellow PVC cable with metallic braid—auto color code
- Low-resistance contact design with Gold/Palladium Nickel plating

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 250V AC/DC  
Current: 4.0A

## Mechanical

Connector Face: Nylon 6/6  
Molded Body: PVC  
O-Ring: Nitrile rubber  
Coupling Nut: Zinc diecast with black epoxy coat  
Cable: Yellow 22 AWG PVC jacket 70% metallic braid and PVC conductor insulation over 26 by #36 Copper stranding, 300V, UL Style 2661, CSA AWM I/II A/B  
Outside Diameter (22 AWG with 70% Braid):  
3P—0.23" (5.80mm)  
4P—0.25" (6.40mm)  
5P—0.26" (6.60mm)


## Environmental

Protection: IP67

| Poles | Length | Male Straight |                             | Female Straight |                             |
|-------|--------|---------------|-----------------------------|-----------------|-----------------------------|
|       |        | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   |
| 3     | 6.0'   | 703006D02F060 | <a href="#">120072-0302</a> | 703000D02F060   | <a href="#">120072-0171</a> |
|       | 12.0'  | 703006D02F120 | <a href="#">120072-0305</a> | 703000D02F120   | <a href="#">120072-0178</a> |
|       | 20.0'  | 703006D02F200 | <a href="#">120072-0308</a> | 703000D02F200   | <a href="#">120072-0185</a> |
| 4     | 6.0'   | 704006D02F060 | <a href="#">120072-0445</a> | 704000D02F060   | <a href="#">120072-0356</a> |
|       | 12.0'  | 704006D02F120 | <a href="#">120072-0447</a> | 704000D02F120   | <a href="#">120072-0359</a> |
|       | 20.0'  | 704006D02F200 | <a href="#">120072-0450</a> | 704000D02F200   | <a href="#">120072-0364</a> |
| 5     | 6.0'   | 705006D02F060 | <a href="#">120072-0551</a> | 705000D02F060   | <a href="#">120072-0471</a> |
|       | 12.0'  | 705006D02F120 | <a href="#">120072-0553</a> | 705000D02F120   | <a href="#">120072-0474</a> |
|       | 20.0'  | 705006D02F200 | <a href="#">120072-0555</a> | 705000D02F200   | <a href="#">120072-0477</a> |

# Brad® Micro-Change® (½"-20 UNC) Receptacle

**120074**  
Dual Keyway



## Features and Benefits

- Dual keyway connector with ½"-20 UNC coupler
- 22 AWG PVC 12 inch leads—auto color code, epoxy potted
- Gray anodized aluminum shell
- Used in control panels, junction boxes and sensors

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 250V AC/DC  
Current: 4.0A

## Mechanical

Shell: Gray anodized aluminum  
Insert: Nylon 6/6  
O-Ring: Nitrile Rubber  
Conductors: 22 AWG with PVC insulation over 26 by #36 Copper stranding, 300V, UL Style 1061, CSA AWM SR

## Environmental


Protection: IP67

| Poles | Male          |                             | Female        |                             | Mounting Thread |
|-------|---------------|-----------------------------|---------------|-----------------------------|-----------------|
|       | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   |                 |
| 3     | 7R3A06A19A120 | <a href="#">120074-0079</a> | 7R3A00A19A120 | <a href="#">120074-0058</a> | 1/4" - NPT      |
| 4     | 7R4A06A19A120 | <a href="#">120074-0140</a> | 7R4A00A19A120 | <a href="#">120074-0122</a> |                 |
| 5     | 7R5A06A19A120 | <a href="#">120074-0190</a> | 7R5A00A19A120 | <a href="#">120074-0178</a> |                 |

\*Note: Other mounting threads available, contact Molex.

# Brad® Micro-Change® (½"-20 UNF) Field Attachables

**120075**  
**Dual Keyway**



## Features and Benefits

- Dual keyway connector with ½"-20 UNC coupler
- Screw terminal connection accepts up to 18 AWG conductors
- Easy field installation of quick-disconnect design
- For use with all standard dual keyway ½"-20 UNF receptacles and cordsets

## Electrical

Voltage: 250V AC/DC  
Current: 3P—4.0A

## Mechanical

Connector Face: Nylon 6/6  
Molded Body: Nylon 6/6  
Contact: Gold plated Copper alloy  
Coupling Nut: Nickel plated Brass  
Grommet: Nitrile rubber  
Maximum Conductor Size: 18 AWG


## Environmental

Protection: IP67

| Poles | Male         |                             | Female       |                             | Orientation | Description                                                      |
|-------|--------------|-----------------------------|--------------|-----------------------------|-------------|------------------------------------------------------------------|
|       | Old Part No. | Order No.                   | Old Part No. | Order No.                   |             |                                                                  |
| 3     | 7A3006-31    | <a href="#">120075-0017</a> | 7A3000-31    | <a href="#">120075-0014</a> | Straight    | With PG 7 Cable Fitting<br>(0.13 - 0.26" O.D. [3.3-6.6mm] cable) |
|       | 7A3007-31    | <a href="#">120075-0019</a> | 7A3001-31    | <a href="#">120075-0016</a> | 90 degree   |                                                                  |
|       | 7A3006-32    | <a href="#">120075-0018</a> | 7A3000-32    | <a href="#">120075-0015</a> | Straight    | With PG 9 Cable Fitting<br>(0.16 - 0.32" O.D. [4.1-8.1mm] cable) |

# Brad® Micro-Change® (M12) Ultra-Lock® Sealed Distribution Box

**120119/130007/130008**



## Features and Benefits

- Available in a variety of formats for backward compatibility with different connector styles
- Accepts Ultra-Lock and threaded M12 cordsets

## Electrical

Voltage (IEC 60 664-1): 10-30V DC  
Insulation Resistance (IEC 60 512-2): >10<sup>9</sup> ohms  
Rated Current T Amb. 40C (IEC 60 512-3): 2 A per I/O  
Current: 12.0A  
Contact Resistance (IEC 60 512-2): <5 milliohms

## Mechanical

Body: PBT  
Contact Carrier: PBT  
Shell Material: Nickel over Brass  
Contact: Phosphor Bronze  
Contact Plating: Gold over Nickel  
Cable Jacket: PUR  
O-Ring: Viton

## Environmental

Pollution Degree (IEC 60 664-1): 3  
Protection: IP67/69K

| Single I/O Per Port with/Integral Mini-Change Connector |                             |                                            |
|---------------------------------------------------------|-----------------------------|--------------------------------------------|
| Old Part No.                                            | Order No.                   | Description                                |
| BKY401P-FBB                                             | <a href="#">120119-0002</a> | 4-Port, 5-Pole/ 4 wire-single I/O per port |
| BKY601P-FBB                                             | <a href="#">120119-0010</a> | 6-Port, 5-Pole/ 4 wire-single I/O per port |
| BKY801P-FBB                                             | <a href="#">120119-0017</a> | 8-Port, 5-Pole/ 4 wire-single I/O per port |

| Double I/O Per Port with/Integral Mini-Change Connector |                             |                                          |
|---------------------------------------------------------|-----------------------------|------------------------------------------|
| Old Part No.                                            | Order No.                   | Description                              |
| BKY403P-FBB                                             | <a href="#">120119-0005</a> | 4-Port, 5-Pole/ 5 wire-dual I/O per port |
| BKY603P-FBB                                             | <a href="#">120119-0013</a> | 6-Port, 5-Pole/ 5 wire-dual I/O per port |
| BKY803P-FBB                                             | <a href="#">120119-0020</a> | 8-Port, 5-Pole/ 5 wire-dual I/O per port |

## Suggested home-run cable assembly for above junction boxes

| Mini-Change® 90° Female Single-Ended Home Run Cable |                             |                  |            |
|-----------------------------------------------------|-----------------------------|------------------|------------|
| Old Part No.                                        | Order No.                   | Description      | Length (m) |
| 302101A04M050                                       | <a href="#">130008-0279</a> | 18/3 22/8 PVC MI | 5.0        |
| 302101A04M100                                       | <a href="#">130008-0282</a> | 18/3 22/8        | 10.0       |


## Suggested home-run cable assembly for above junction boxes

| Mini-Change Female |                             |                               |            |
|--------------------|-----------------------------|-------------------------------|------------|
| Old Part No.       | Order No.                   | Description                   | Length (m) |
| 208000A04M050      | <a href="#">130007-0176</a> | MC 8P FP 5M 8 PVC MICRO MPIS  | 5.0        |
| 208000A04M100      | <a href="#">130007-0177</a> | MC 8P FP 10M 8 PVC MICRO MPIS | 10.0       |
| 301000A04M050      | <a href="#">130008-0073</a> | MC 10P FP 5M PVC HOME RUN     | 5.0        |
| 301000A04M100      | <a href="#">130008-0075</a> | MC 10P FP 10M PVC HOME RUN    | 10.0       |
| 301001A04M050      | <a href="#">130008-0489</a> | MC 10P FP 90D 5M PVC HOME RUN | 5.0        |
| 301001A04M100      | <a href="#">130008-0112</a> | MC 10P FP 90D 10M 22/10 PVC   | 10.0       |

## Brad® Micro-Change® (M12) Sealed Distribution Box

120114

Top Mount, Single Keyway with  
Molded Home Run Cable



### Features and Benefits

- Simplifies wiring installation, molded PVC home run cable
- Flexibility with 4 and 8 port configurations
- PNP and NPN versions for use in a variety of DC sensors

### Reference Information

UL File No.: E46237  
CSA File No.: LR6837

### Electrical

Voltage: 10-30V DC  
Current: 4.0A per port, 12.0A max. per unit  
Indicating Lights: Green LED—power, yellow LED—function  
Average LED Expectancy: 100,000 hours

### Mechanical

Insert: PA  
Housing: Glass-filled PBT  
Receptacle Housing: Nickel-plated Brass  
ID Label: ABS  
Home Run Connector: Black, PUR cable jacket, (3) 16 AWG over either (4) or (8) 22 AWG and PVC conductor insulation over either 41 by #34 (16 AWG) or 26 by #36 (22 AWG) Copper stranding over 65 by #34 Copper stranding, 600 V  
Outside Diameter: 0.29" (7.4mm)

### Environmental


Protection: IP67

| Port | Old Part No.   | Order No.                   | Functional Wiring | Home Run Cable |
|------|----------------|-----------------------------|-------------------|----------------|
| 4    | BTY401P-FBE-05 | <a href="#">120114-0021</a> | PNP               | 5M PVC         |
|      | BTY401P-FBE-10 | <a href="#">120114-0022</a> |                   | 10M PVC        |
|      | BTY401P-FBP-05 | <a href="#">120114-0024</a> |                   | 5M PUR         |
|      | BTY405P-FBP-05 | <a href="#">120114-0039</a> | Dual-in PNP       | 5M PU          |
| 8    | BTY801N-FBE-05 | <a href="#">120114-0061</a> | NPN               | 5M PVC         |
|      | BTY801P-FBE-05 | <a href="#">120114-0068</a> | PNP               | 5M PVC         |
|      | BTY801P-FBE-10 | <a href="#">120114-0069</a> |                   | 10M PVC        |
|      | BTY801P-FBP-05 | <a href="#">120114-0072</a> |                   | 5M PUR         |
|      | BTY805P-FBP-05 | <a href="#">120114-0089</a> | Dual-in PNP       | 5M PUR         |

## Brad® Micro-Change® (M12) Sealed Distribution Box

120114

Top Mount, Single Keyway with  
Mini-Change® Home Run Connector



### Features and Benefits

- Connectorized home run cable connector version for maximum flexibility
- Flexibility with 4 and 8 port configurations
- PNP and NPN versions for use with a variety of DC sensors

### Reference Information

UL File No.: E46237  
CSA File No.: LR6837

### Electrical

Voltage: 10-30V DC  
Current: 4.0A per port, 12.0A total per MPIS unit  
Indicating Lights: Green LED—power, yellow LED—function  
Average LED Expectancy: 100,000 hours

### Mechanical

Insert: PA  
Housing: Glass-filled PBT  
Receptacle Housing: Nickel-plated Brass  
ID Label: ABS

### Environmental

Protection: IP67

| Port | Old Part No. | Order No.                   | Functional Wiring |
|------|--------------|-----------------------------|-------------------|
| 4    | BTY401N-FBB  | <a href="#">120114-0014</a> | PNP               |
|      | BTY401P-FBB  | <a href="#">120114-0019</a> |                   |
| 8    | BTY801N-FBB  | <a href="#">120114-0059</a> | NPN               |
|      | BTY801P-FBB  | <a href="#">120114-0065</a> |                   |


### Home Run Cables

| Cable Type | Length | Old Part No.  | Order No.                   |
|------------|--------|---------------|-----------------------------|
| PVC        | 5m     | 302000A01M050 | <a href="#">130008-0187</a> |
|            | 10m    | 302000A01M100 | <a href="#">130008-0188</a> |
|            | 3 feet | 302001A01F030 | <a href="#">130008-0211</a> |
|            | 6 feet | 302001A01F060 | <a href="#">130008-0212</a> |

## Brad® Micro-Change® (M12) Sealed Distribution Box

**120114**

**Top Mount, Single Keyway  
Twin Wired with Field Attachable  
Home Run Cable**



| Port | Old Part No. | Order No.                   |
|------|--------------|-----------------------------|
| 4    | BTY403P-FBA  | <a href="#">120114-0029</a> |

### Features and Benefits

- Field-attachable home run cable provides flexibility in installation
- Allows for specialty user-supplied control cable options
- User can decide home run cable lengths at last minute
- Cable can exit at either top or end of MPIS

### Electrical

Voltage: 10-30V DC  
Current: 2.0A max. per port, 12A max. per unit  
Indicating Lights: Green LED—power, yellow LED—function  
Average LED Expectancy: 100,000 hours

### Mechanical

Insert: PBT  
Housing: PBT  
Receptacle Housing: Nickel-plated Brass  
ID Label: PA  
Home Run Connector: Screw termination; maximum wire gauge 18 AWG, control cable diameter to fit PG16 grommet 0.31-0.51" (8-14mm)


### Environmental

Protection: IP67

## Brad® Micro-Change® (M12) Sealed Distribution Box

**120115**

**Side Mount, Single Keyway with  
12" Mini-Change® Molded Home  
Run Connector**



| Port | Old Part No. | Order No.                   | Functional Wiring |
|------|--------------|-----------------------------|-------------------|
| 4    | 803P402      | <a href="#">120115-0047</a> | PNP               |
| 6    | 803P602      | <a href="#">120115-0050</a> |                   |
| 8    | 803P802      | <a href="#">120115-0055</a> |                   |

### Features and Benefits

- Molded home run connector provides flexibility
- Flexibility with 4, 6 and 8 port configurations
- PNP for use with a variety of DC sensors

### Reference Information

UL File No.: E46237  
CSA File No.: LR6837

### Electrical

Voltage: 10-30V DC  
Current: 4.0A per port, 12.0A total per MPIS unit  
Indicating Lights: Green LED—power, yellow LED—function  
Average LED Expectancy: 100,000 hours

### Mechanical

Insert: Nylon 6/6  
Housing: Nylon 6/6  
Receptacle Housing: Black E-coat  
ID Label: ABS  
Home Run Connector Cabling: Yellow, PVC cable jacket, (1) 18 AWG and either (5) or (7) 22 AWG control cabling and PVC conductor insulation over 41 by #34 (18 AWG) and 26 by #36 (22 AWG), UL listed style 2661, CSA certified 105° C, 300 V  
Outside Diameter: 0.29" (7.4mm)


### Environmental

Protection: IP67

## Brad® Micro-Change® Sealed Distribution Box

**120115**

### Side Mount, Single Keyway with Home Run Connector



#### Features and Benefits

- Simplifies wiring installation, integrated PVC home run cable
- Flexibility with 4, 6 and 8 port configurations
- PNP for use with a variety of DC sensors

#### Reference Information

UL File No.: E46237  
CSA File No.: LR6837

#### Electrical

Voltage: 10-30V DC  
Current: 4.0A max. per port, 12.0A total per MPIS unit  
Indicating Lights: Green LED—power, yellow LED—function  
Average LED Expectancy: 100,000 hours

#### Mechanical

Insert: Nylon 6/6  
Housing: Nylon 6/6  
Receptacle Housing: Black E-coat  
ID Label: ABS  
Home Run Connector Cabling: Yellow, PVC cable jacket, (1) 18 AWG and either (5) or (7) 22 AWG control cables and PVC conductor insulation over 41 by #34 (18 AWG) and 26 by #36 (22 AWG) Copper stranding, UL listed style 2661, CSA certified 105° C, 300 V  
Outside Diameter: 0.29" (7.4mm)

#### Environmental


Protection: IP67

| Port | Old Part No. | Order No.                   | Functional Wiring | Home Run Cable     |
|------|--------------|-----------------------------|-------------------|--------------------|
| 4    | 803P401      | <a href="#">120115-0046</a> | PNP               | 5.0m - PVC #18 AWG |
| 6    | 803P601      | <a href="#">120115-0048</a> |                   |                    |
| 8    | 803P801      | <a href="#">120115-0054</a> |                   |                    |

## Brad® Micro-Change® (½" NPT-20) Sealed Distribution Box

**120115**

### Side Mount, Dual Keyway Parallel Wiring with Home Run Connector



#### Features and Benefits

- Connectorized home run cable connection for maximum flexibility
- Flexibility with 4 and 8 port configurations
- For use with a variety of AC sensors

#### Reference Information

UL File No.: E46237  
CSA File No.: LR6837

#### Electrical

Voltage: 120V AC  
Current: 4.0A per port, 12.0A total per MPIS unit

#### Mechanical

Insert: Nylon 6/6  
Housing: PBT  
Receptacle Housing: Zinc die cast with black epoxy coat  
ID Label: ABS  
Home Run Connector: Yellow, ST00W PVC cable jacket, 16 AWG/6,8 and 10 conductor and PVC conductor insulation over 65 by #34 Copper stranding, UL listed ST00W 105° C, CSA certified ST 105° C, 600 V  
Outside Diameter: 4 Port—0.54" (13.7mm)  
8 Port—0.66" (16.8mm)

#### Environmental

Protection: IP67

| Port | Old Part No. | Order No.                   | Home Run Connector Style |
|------|--------------|-----------------------------|--------------------------|
| 4    | 702P401      | <a href="#">120115-0017</a> | 6P MR STD                |
| 8    | 702P801      | <a href="#">120115-0022</a> | 10P MR STD               |

## BradConnectivity™ mPm® Connectors

Our BradConnectivity mPm product line offers a wide range of connectors including DIN connectors, DIN splitters, molded cable connectors, suppressor adaptors, Junior Timer connectors and proximity switches for magnetic cylinders.

The mPm range of connectors is available with standard options including filament, neon or LED illuminating devices, VDR, diodes or transil diodes (with or without illuminating devices) to offer protection against overvoltage or peaks caused when switching off.

The mPm connectors are used extensively to provide electrical connections in a wide range of applications. The most common applications are in conjunction with hydraulic, pneumatic or electro magnetic devices, including solenoid valves. Other applications include pressure transducers, proximity switches, flow monitors, level sensors, limit switches, thermostats, industrial thermometers and low energy motors.

The mPm connectors are also available with approval cURus on request.

All mPm connectors offer protection from dust and water according to EN60529 (IP65 and IP67 on request) and conform to VDE 01101/89 operating voltage up to 250V group C with respect to the insulation class. The terminal block in mPm connectors is securely assembled and retained in the connector casing by way of a spring loaded lug. With this feature the terminal block remains secure in the casing reducing the danger of accidental contact or exposure to live parts even when the fixing screw is removed.

The mPm DIN connectors are designed to reduce the number of components, making them easier to assemble and with fewer parts to stock. They are supplied in single set or bulk components, eliminating the costly effort of disassembly and providing further cost savings. The new generation of mPm DIN connectors provide repeatable, unsurpassed IP67 sealing performance (even in humidity) using an external nut over the cable. The external nut accepts a wider range of cables from 4mm to 9mm, reducing the current number of different nuts from 3 (P607, P608, P611) to 1 (external nut).

Choose from the largest selection of DIN field-attachables, molded DIN and DIN accessories.

The mPm connectors with moulded cables offer a fast and efficient method of connection resulting in greatly reduced installation time and cost. They can be supplied with or without integral LED indicators and suppression circuits. A diagram is printed on each connector with circuit to allow easy user identification.

BradConnectivity mPm overmolded Junior Timer connectors are available in straight and 90 degree versions. These pre-wired overmolded connectors offer an economical alternative to hard wiring and mate with industry standard Junior Timer interfaces or solenoids and other mobile hydraulic devices and other harsh environment applications. The integrated surge suppression circuitry (VDR) protects the system and extends overall lifetime. LED indication is built into the connector head for easy identification of system status. With an IP65 environmental rating the Junior Timer provides protection in harsh and demanding environments. Plus the cable locking clip protects the connection in high vibration applications.

Also mPm offers a wide range of proximity switches. They are available with attached flying leads or a plug connector, the latter facilitating maintenance operations with all voltage disconnected. The plug connector is also available with an M12 ring nut fastener, giving enhanced security in the presence of high vibrations. The switches are impregnated with epoxy resin to give protection in accordance with IP67, excellent resistance to impact and operational temperature range of -20° to +85°C.



DIN Field Attachable



DIN Connectors




DIN Overmolded Valve Connectors



DIN Splitter

# Brad® Mini-Change® A-Size Single-Ended Cordset STOOW Cable

**130006**  
**Internal Thread**



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and weld slag resistant
- Cable is oil, water and UV resistant

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC  
Current: 2P—13.0A  
3P—13.0A  
4P—10.0A  
5P—8.0A  
6P—8.0A

## Mechanical

Connector Face: PVC UL 94-V0  
Molded Body: PVC UL 94-V0  
Coupling Nut: Zinc diecast with black epoxy coat. Optional Stainless Steel type 303, type 316 or gray Nylon 6/6  
Cable: Yellow, #16 AWG, UL STOOW, CSA ST, PVC jacket and insulation, 65 x #34 stranding  
Cable Diameter: 2P—0.37" (9.4mm)  
3P—0.41" (10.4mm)  
4P—0.42" (10.7mm)  
5P—0.50" (12.7mm)  
6P—0.54" (13.7mm)

## Environmental

Protection: IP67


| Poles | Length | Male Straight  |                              | Female Straight |                             | Female Right Angle |                              |
|-------|--------|----------------|------------------------------|-----------------|-----------------------------|--------------------|------------------------------|
|       |        | Old Part No.   | Order No.                    | Old Part No.    | Order No.                   | Old Part No.       | Order No.                    |
| 2     | 3.0'   | 102002A01F030  | <a href="#">130006-0156</a>  | 102000A01F030   | <a href="#">130006-0088</a> | 102001A01F030      | <a href="#">130006-0134</a>  |
|       | 6.0'   | 102002A01F060  | <a href="#">130006-0159</a>  | 102000A01F060   | <a href="#">130006-0091</a> | 102001A01F060      | <a href="#">130006-0137</a>  |
|       | 12.0'  | 102002A01F120  | <a href="#">130006-0162</a>  | 102000A01F120   | <a href="#">130006-0096</a> | 102001A01F120      | <a href="#">130006-0141</a>  |
|       | 20.0'  | 102002A01F200  | <a href="#">130006-0168</a>  | 102000A01F200   | <a href="#">130006-0102</a> | 102001A01F200      | <a href="#">130006-0146</a>  |
| 3     | 3.0'   | 103002A01F030  | <a href="#">130006-0529</a>  | 103000A01F030   | <a href="#">130006-0217</a> | 103001A01F030      | <a href="#">130006-0422</a>  |
|       | 6.0'   | 103002A01F060  | <a href="#">130006-0534</a>  | 103000A01F060   | <a href="#">130006-0221</a> | 103001A01F060      | <a href="#">130006-0426</a>  |
|       | 12.0'  | 103002A01F120  | <a href="#">130006-0542</a>  | 103000A01F120   | <a href="#">130006-0232</a> | 103001A01F120      | <a href="#">130006-0430</a>  |
|       | 20.0'  | 103002A01F200  | <a href="#">130006-0549</a>  | 103000A01F200   | <a href="#">130006-0241</a> | 103001A01F200      | <a href="#">130006-0436</a>  |
| 4     | 3.0'   | 104002A01F030  | <a href="#">130006-0991</a>  | 104000A01F030   | <a href="#">130006-0725</a> | 104001A01F030      | <a href="#">130006-0898</a>  |
|       | 6.0'   | 104002A01F060  | <a href="#">130006-0995</a>  | 104000A01F060   | <a href="#">130006-0728</a> | 104001A01F060      | <a href="#">130006-0902</a>  |
|       | 12.0'  | 104002A01F120  | <a href="#">130006-1002</a>  | 104000A01F120   | <a href="#">130006-0737</a> | 104001A01F120      | <a href="#">130006-0905</a>  |
|       | 20.0'  | 104002A01F200  | <a href="#">130006-1009</a>  | 104000A01F200   | <a href="#">130006-0744</a> | 104001A01F200      | <a href="#">130006-0912</a>  |
| 5     | 3.0'   | 105002A01F030  | <a href="#">130006-1435</a>  | 105000A01F030   | <a href="#">130006-1160</a> | 105001A01F030      | <a href="#">130006-1346</a>  |
|       | 6.0'   | 105002A01F060  | <a href="#">130006-1438</a>  | 105000A01F060   | <a href="#">130006-1163</a> | 105001A01F060      | <a href="#">130006-1349</a>  |
|       | 12.0'  | 105002A01F120  | <a href="#">130006-1447</a>  | 105000A01F120   | <a href="#">130006-1171</a> | 105001A01F120      | <a href="#">130006-1353</a>  |
|       | 20.0'  | 105002A01F200  | <a href="#">130006-1453</a>  | 105000A01F200   | <a href="#">130006-1179</a> | 105001A01F200      | <a href="#">130006-1360</a>  |
| 6     | 3.0'   | 106002A01F030* | <a href="#">130006-1672*</a> | 106000A01F030   | <a href="#">130006-1579</a> | 106001A01F030*     | <a href="#">130006-1651*</a> |
|       | 6.0'   | 106002A01F060* | <a href="#">130006-1675*</a> | 106000A01F060   | <a href="#">130006-1583</a> | 106001A01F060*     | <a href="#">130006-1653*</a> |
|       | 12.0'  | 106002A01F120* | <a href="#">130006-1679*</a> | 106000A01F120   | <a href="#">130006-1590</a> | 106001A01F120*     | <a href="#">130006-1656*</a> |
|       | 20.0'  | 106002A01F200* | <a href="#">130006-1686*</a> | 106000A01F200   | <a href="#">130006-1600</a> | 106001A01F200*     | <a href="#">130006-1661*</a> |

\*Note: This is the A-Size 6-pole Mini-Change, please refer to series 130007 for the B-Size.

# Brad® Mini-Change® A-Size Double-Ended Cordset STOOW Cable

**130011**

**Extension Cable  
Internal Thread Both Ends**

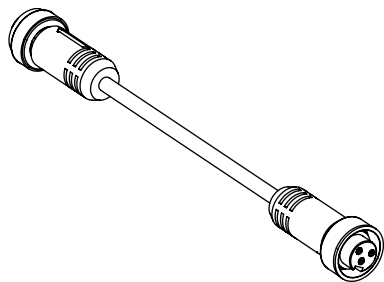

## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and weld slag resistant
- Cable is oil, water and UV resistant

## Reference Information

UL File No.: E1 52210

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC

Current: 2P—13.0A

3P—13.0A

4P—10.0A

5P—8.0A

6P—8.0A

## Mechanical

Connector Face: PVC UL 94-V0

Molded Body: PVC UL 94-V0

Coupling Nut: Zinc diecast with black epoxy coat. Optional Stainless Steel type 303, type 316 or gray Nylon 6/6

Cable: Yellow, #16 AWG, UL STOOW, CSA ST, PVC jacket and insulation, 65 x #34 stranding

Cable Diameter: 2P—0.37" (9.4mm)

3P—0.41" (10.4mm)

4P—0.42" (10.7mm)

5P—0.50" (12.7mm)

6P—0.54" (13.7mm)

## Environmental

Protection: IP67


| Poles | Length | Female/Male   |                             |
|-------|--------|---------------|-----------------------------|
|       |        | Old Part No.  | Order No.                   |
| 2     | 6.0'   | 112020A01F060 | <a href="#">130010-0147</a> |
|       | 12.0'  | 112020A01F120 | <a href="#">130010-0152</a> |
|       | 20.0'  | 112020A01F200 | <a href="#">130010-0159</a> |
| 3     | 3.0'   | 113020A01F030 | <a href="#">130010-0214</a> |
|       | 6.0'   | 113020A01F060 | <a href="#">130010-0221</a> |
|       | 12.0'  | 113020A01F120 | <a href="#">130010-0228</a> |
|       | 15.0'  | 113020A01F150 | <a href="#">130010-0233</a> |
| 4     | 20.0'  | 113020A01F200 | <a href="#">130010-0238</a> |
|       | 3.0'   | 114020A01F030 | <a href="#">130010-0519</a> |
|       | 6.0'   | 114020A01F060 | <a href="#">130010-0525</a> |
|       | 12.0'  | 114020A01F120 | <a href="#">130010-0533</a> |
| 5     | 20.0'  | 114020A01F200 | <a href="#">130010-0541</a> |
|       | 3.0'   | 115020A01F030 | <a href="#">130010-0999</a> |
|       | 6.0'   | 115020A01F060 | <a href="#">130010-1005</a> |
|       | 12.0'  | 115020A01F120 | <a href="#">130010-1013</a> |
| 6*    | 15.0'  | 115020A01F150 | <a href="#">130010-1016</a> |
|       | 20.0'  | 115020A01F200 | <a href="#">130010-1020</a> |
|       | 3.0'   | 116020A01F030 | <a href="#">130010-1312</a> |
|       | 6.0'   | 116020A01F060 | <a href="#">130010-1316</a> |
|       | 12.0'  | 116020A01F120 | <a href="#">130010-1327</a> |
|       | 20.0'  | 116020A01F200 | <a href="#">130010-1338</a> |

\*Note: This is the A-Size 6-pole Mini-Change, please refer to series 130011 for the B-Size.

# Brad® Mini-Change® A-Size Double-Ended Cordset TPE Cable

**130010**

**Extension Cord  
Male External Thread  
Female Internal Thread**

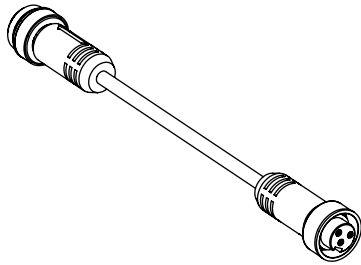

## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and held slag resistant
- TPE cable is weld slag and coolant resistant. It is exposed-run, tray routed and continuous flex rated.

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC

Current: 3P—13.0A

4P—10.0A

5P—8.0A

## Mechanical

Connector Face: PVC UL 94-V0

Molded Body: PVC UL 94-V0

Coupling Nut: Zinc diecast with black epoxy coat. Optional Stainless Steel type 303 or type 316

Cable: Yellow, #16 AWG, UL type TC-ER, CSA TC, TPE jacketed, PVC/Nylon insulation, 65 x #34 stranding

Outside Diameter: 3P—0.41" (10.4mm)

4P—0.42" (10.7mm) .43" (10.9mm)

5P—0.50" (12.7mm) .46" (11.7mm)


## Environmental

Protection: IP67

| Poles | Length | Female/Male   |                             |
|-------|--------|---------------|-----------------------------|
|       |        | Old Part No.  | Order No.                   |
| 3     | 1.0m   | 113030K13M010 | <a href="#">130010-0487</a> |
|       | 2.0m   | 113030K13M020 | <a href="#">130010-0488</a> |
|       | 3.0m   | 113030K13M030 | <a href="#">130010-0489</a> |
|       | 4.0m   | 113030K13M040 | <a href="#">130010-0490</a> |
|       | 5.0m   | 113030K13M050 | <a href="#">130010-0491</a> |
|       | 6.0m   | 113030K13M060 | <a href="#">130010-0492</a> |
| 4     | 1.0m   | 114030K12M010 | <a href="#">130010-0864</a> |
|       | 2.0m   | 114030K12M020 | <a href="#">130010-0865</a> |
|       | 3.0m   | 114030K12M030 | <a href="#">130010-0866</a> |
|       | 4.0m   | 114030K12M040 | <a href="#">130010-0867</a> |
|       | 5.0m   | 114030K12M050 | <a href="#">130010-0868</a> |
|       | 6.0m   | 114030K12M060 | <a href="#">130010-0869</a> |
| 5     | 1.0m   | 115030K13M010 | <a href="#">130010-0102</a> |
|       | 2.0m   | 115030K13M020 | <a href="#">130010-0103</a> |
|       | 3.0m   | 115030K13M030 | <a href="#">130010-0104</a> |
|       | 4.0m   | 115030K13M040 | <a href="#">130010-1750</a> |
|       | 5.0m   | 115030K13M050 | <a href="#">130010-0105</a> |
|       | 6.0m   | 115030K13M060 | <a href="#">130010-1758</a> |

# Brad® Mini-Change® A-Size Receptacle 16 AWG

**130013/130099**  
**External Thread with Leads**



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Black epoxy coated Zinc diecast shell design
- #16 AWG, PVC insulated leads, U.S. color code

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC  
Amperage: 2P—13.0A  
3P—13.0A  
4P—10.0A  
5P—8.0A  
6P—8.0A

## Mechanical

Shell: Zinc diecast with black epoxy coat, optional stainless steel type 303, type 316 or gray Nylon 6/6  
90°—Zinc diecast with black epoxy coat (only)  
Flange Mount—Gray anodized aluminum, optional stainless steel type 303  
Insert: PVC UL 94-V0  
Conductors: #16 AWG, PVC insulation over 26 x #30 Copper stranding, 600V, UL Style 1015, CSA TEW

## Environmental

Protection: IP67

## Accessories


| Old Part No. | Order No.   | Description                             |
|--------------|-------------|-----------------------------------------|
| 5601         | 130099-0143 | Locknut 1/2" - 14NPT, Zinc plated Steel |
| 5611         | 130099-0149 | 1/2" Gasket, black neoprene             |

| Poles | Length | Male          |                             | Female         |                              | Orientation |
|-------|--------|---------------|-----------------------------|----------------|------------------------------|-------------|
|       |        | Old Part No.  | Order No.                   | Old Part No.   | Order No.                    |             |
| 2     | 12"    | 1R2006A20A120 | <a href="#">130013-0076</a> | 1R2004A20A120  | <a href="#">130013-0060</a>  | Straight    |
|       | 6'     | 1R2006A20F060 | <a href="#">130013-0084</a> | 1R2004A20F060  | <a href="#">130013-0067</a>  |             |
|       | 12"    | 1R2007A20A120 | <a href="#">130013-0090</a> | 1R2005A20A120  | <a href="#">130013-0074</a>  |             |
| 3     | 12"    | 1R3006A20A120 | <a href="#">130013-0202</a> | 1R3004A20A120  | <a href="#">130013-0135</a>  | Straight    |
|       | 6'     | 1R3006A20F060 | <a href="#">130013-0215</a> | 1R3004A20F060  | <a href="#">130013-0148</a>  |             |
|       | 12"    | 1R3007A20A120 | <a href="#">130013-0247</a> | 1R3005A20A120  | <a href="#">130013-0184</a>  |             |
| 4     | 12"    | 1R4006A20A120 | <a href="#">130013-0353</a> | 1R4004A20A120  | <a href="#">130013-0314</a>  | Straight    |
|       | 6'     | 1R4006A20F060 | <a href="#">130013-0361</a> | 1R4004A20F060  | <a href="#">130013-0325</a>  |             |
|       | 12"    | 1R4007A20A120 | <a href="#">130013-0386</a> | 1R4005A20A120  | <a href="#">130013-0337</a>  |             |
| 5     | 12"    | 1R5006A20A120 | <a href="#">130013-0493</a> | 1R5004A20A120  | <a href="#">130013-0442</a>  | Straight    |
|       | 6'     | 1R5006A20F060 | <a href="#">130013-0503</a> | 1R5004A20F060  | <a href="#">130013-0452</a>  |             |
|       | 12"    | 1R5007A20A120 | <a href="#">130013-0534</a> | 1R5005A20A120  | <a href="#">130013-0482</a>  |             |
| 6     | 12"    | 1R6006A20A120 | <a href="#">130013-0593</a> | 1R6004A20A120* | <a href="#">130013-0567*</a> | Straight    |
|       | 6'     | 1R6006A20F060 | <a href="#">130013-0605</a> | 1R6004A20F060* | <a href="#">130013-0576*</a> |             |
|       | 12"    | 1R6007A20A120 | <a href="#">130013-0612</a> | 1R6005A20A120* | <a href="#">130013-0589*</a> |             |

\*Note: This is the A-Size 6-pole Mini-Change, please refer to series 130014 for the B-Size.

# Brad® Mini-Change® A-Size Receptacle

**130013**  
**With Leads**



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Black epoxy coated Zinc diecast shell design
- #16 AWG, PVC insulated leads, U.S. color code

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 300V AC/DC  
Current: 3P—10.0A  
4P—7.0A  
5P—5.6A

## Mechanical

Shell: Zinc diecast with black epoxy coat, optional stainless steel type 303  
Insert: PVC UL 94-V0  
Conductors: #18 AWG, PVC insulation over 16 x #30 Copper stranding, 300V, UL Style 1061, CSA AWM SR

## Environmental

Protection: IP 68, NEMA 6P

| AWG | Mounting Thread | Poles | Length | Male          |                             | Color Rotation |
|-----|-----------------|-------|--------|---------------|-----------------------------|----------------|
|     |                 |       |        | Old Part No.  | Order No.                   |                |
| 18  | 1/2" -1 NPT     | 3     | 12"    | 1R3006A17A120 | <a href="#">130013-0193</a> | #18 Auto       |
|     |                 | 4     |        | 1R4006A16A120 | <a href="#">130013-0341</a> | #18 IEC        |
|     |                 | 5     |        | 1R5006A17A120 | <a href="#">130013-0489</a> | #18 Auto       |
| 16  | 1/2" -NPT       | 4     |        | 1R4006A39M020 | <a href="#">1300130378</a>  | #16 IEC        |
|     |                 | 3     |        | 1R3006A25A120 | <a href="#">130013-0268</a> | #18 IEC        |
|     |                 | 4     |        | 1R4006A16A120 | <a href="#">130013-0396</a> |                |
| 18  | PG 13.5         | 5     |        | 1R5006A25A120 | <a href="#">130013-0548</a> |                |

## Solder Cup Contacts


| Mounting Thread | Poles | Order No.                  |                            |
|-----------------|-------|----------------------------|----------------------------|
|                 |       | Male                       | Female                     |
| 1/2"-14 NPT     | 4     |                            | <a href="#">84854-9102</a> |
|                 | 5     | <a href="#">84854-9101</a> | <a href="#">84854-9100</a> |

## Internal Thread

| Poles | Length | Female        |                             | Color Rotation |
|-------|--------|---------------|-----------------------------|----------------|
|       |        | Old Part No.  | Order No.                   |                |
| 3     | 2M     | 1R3000A20M020 | <a href="#">130013-0112</a> | #16 US         |
| 4     |        | 1R4000A39M020 | <a href="#">130013-0301</a> |                |
| 5     |        | 1R5000A20M020 | <a href="#">130013-0426</a> |                |

# Brad® Mini-Change® B-Size Single-Ended Cordset STOOW Cable

**130007**  
Internal Thread

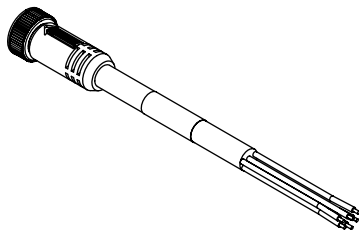

## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and held slag resistant
- Cable is oil, water and UV resistant

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC

Current: 6P—8.0A

7P—8.0A

8P—7.0A

## Mechanical

Connector Face: PVC UL 94-V0

Molded Body: PVC UL 94-V0

Coupling Nut: Zinc diecast with black epoxy coat, optional Stainless Steel type 303

Cable: Yellow, #16 AWG, UL STOOW, CSA ST, PVC jacket and insulation, 65 x #34 stranding

Outside Diameter: 6P—0.54" (13.7mm)

7P—0.54" (13.7mm)

8P—0.61" (15.5mm)

## Environmental


Protection: IP67

| Poles | Length | Male Straight  |                              | Female Straight |                             |
|-------|--------|----------------|------------------------------|-----------------|-----------------------------|
|       |        | Old Part No.   | Order No.                    | Old Part No.    | Order No.                   |
| 6     | 3'     | 206002A01F030* | <a href="#">130007-0049*</a> | 206000A01F030   | <a href="#">130007-0022</a> |
|       | 6'     | 206002A01F060* | <a href="#">130007-0051*</a> | 206000A01F060   | <a href="#">130007-0024</a> |
|       | 12'    | 206002A01F120* | <a href="#">130007-0054*</a> | 206000A01F120   | <a href="#">130007-0026</a> |
|       | 20'    | 206002A01F200* | <a href="#">130007-0057*</a> | 206000A01F200   | <a href="#">130007-0028</a> |
| 7     | 3'     | 207002A01F030  | <a href="#">130007-0113</a>  | 207000A01F030   | <a href="#">130007-0071</a> |
|       | 6'     | 207002A01F060  | <a href="#">130007-0115</a>  | 207000A01F060   | <a href="#">130007-0073</a> |
|       | 12'    | 207002A01F120  | <a href="#">130007-0117</a>  | 207000A01F120   | <a href="#">130007-0076</a> |
|       | 20'    |                |                              | 207000A01F200   | <a href="#">130007-0080</a> |
| 8     | 3'     | 208002A01F030  | <a href="#">130007-0197</a>  | 208000A01F030   | <a href="#">130007-0139</a> |
|       | 6'     | 208002A01F060  | <a href="#">130007-0199</a>  | 208000A01F060   | <a href="#">130007-0142</a> |
|       | 12'    | 208002A01F120  | <a href="#">130007-0202</a>  | 208000A01F120   | <a href="#">130007-0145</a> |
|       | 20'    | 208002A01F200  | <a href="#">130007-0204</a>  | 208000A01F200   | <a href="#">130007-0149</a> |

\*Note: This is the B-Size 6-pole Mini-Change, please refer to series 130006 for the A-Size.

# Brad® Mini-Change® B-Size Double-Ended Cordset STOOW Cable

**130011**  
Extension Cable  
Internal Thread Both Ends



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and held slag resistant
- Cable is oil, water and UV resistant

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC

Current: 6P—8.0A

7P—8.0A

8P—7.0A

## Mechanical

Connector Face: PVC UL 94-V0

Molded Body: PVC UL 94-V0

Coupling Nut: Zinc diecast with black epoxy coat, optional Stainless Steel type 303

Cable: Yellow, #16 AWG, UL STOOW, CSA ST, PVC jacket and insulation, 65 x #34 stranding

Outside Diameter: 6P—0.54" (13.7mm)

7P—0.54" (13.7mm)

8P—0.61" (15.5mm)

## Environmental


Protection: IP67

| Poles | Length | Female Straight/Male Straight |                              |
|-------|--------|-------------------------------|------------------------------|
|       |        | Old Part No.                  | Order No.                    |
| 6     | 6'     | 226020A01F060*                | <a href="#">130011-0010*</a> |
|       | 12'    | 226020A01F120*                | <a href="#">130011-0016*</a> |
|       | 20'    | 226020A01F200*                | <a href="#">130011-0019*</a> |
| 7     | 6'     | 227020A01F060                 | <a href="#">130011-0051</a>  |
|       | 12'    | 227020A01F120                 | <a href="#">130011-0055</a>  |
|       | 20'    | 227020A01F200                 | <a href="#">130011-0057</a>  |
| 8     | 6'     | 228020A01F060                 | <a href="#">130011-0119</a>  |
|       | 12'    | 228020A01F120                 | <a href="#">130011-0124</a>  |
|       | 20'    | 228020A01F200                 | <a href="#">130011-0130</a>  |

\*Note: This is the B-Size 6-pole Mini-Change, please refer to series 130006 for the A-Size.

# Brad® Mini-Change® B-Size Receptacle 16 AWG

**130014**  
External Thread



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Black epoxy coated Zinc diecast shell design
- #16 AWG, PVC insulated leads, U.S. color code

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC  
Current: 6P—8.0A  
7P—8.0A  
8P—7.0A

## Mechanical

Shell: Zinc diecast with black epoxy coat, optional Stainless Steel type 303  
Insert: PVC UL 94-V0  
Conductors: #16 AWG, PVC insulation over 26 x #30 Copper stranding, 600V, UL Style 1015, CSA TEW

## Environmental


Protection: IP67

| Poles | Lead Length | Male           |                              | Female        |                             |
|-------|-------------|----------------|------------------------------|---------------|-----------------------------|
|       |             | Old Part No.   | Order No.                    | Old Part No.  | Order No.                   |
| 6     | 12"         | 2R6006A20A120* | <a href="#">130014-0025*</a> | 2R6004A20A120 | <a href="#">130014-0015</a> |
|       | 6'          | 2R6006A20F060* | <a href="#">130014-0032*</a> | 2R6004A20F060 | <a href="#">130014-0019</a> |
| 7     | 12"         | 2R7006A20A120  | <a href="#">130014-0050</a>  | 2R7004A20A120 | <a href="#">130014-0037</a> |
|       | 6'          | 2R7006A20F060  | <a href="#">130014-0055</a>  | 2R7004A20F060 | <a href="#">130014-0042</a> |
| 8     | 12"         | 2R8006A20A120  | <a href="#">130014-0078</a>  | 2R8004A20A120 | <a href="#">130014-0061</a> |
|       | 6'          | 2R8006A20F060  | <a href="#">130014-0084</a>  | 2R8004A20F060 | <a href="#">130014-0067</a> |

\*Note: This is the B-Size 6-pole Mini-Change, please refer to series 130006 for the A-Size.

# Brad® Mini-Change® C-Size Single-Ended Cordset STOOW Cable

**130008**  
Internal Thread



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and weld slag resistant
- Cable is oil, water and UV resistant

## Reference Information

UL File No.: E152210  
CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC  
Current: 9P—7.0A  
10P—7.0A  
12P—5.0A

## Mechanical

Connector Face: PVC UL 94-V0  
Molded Body: PVC UL 94-V0  
Coupling Nut: Zinc diecast with black epoxy coat. Optional Stainless Steel type 303 or gray Nylon 6/6  
Cable: Yellow, #16 AWG, UL STOOW, CSA ST, PVC jacket and insulation, 65 x #34 stranding  
Outside Diameter: 9P—0.64" (16.3mm)  
10P—0.66" (16.8mm)  
12P—0.71" (18.0mm)

## Environmental


Protection: IP67

| Poles | Length | Male Straight |                             | Female Straight |                             | Female Right Angle |             |
|-------|--------|---------------|-----------------------------|-----------------|-----------------------------|--------------------|-------------|
|       |        | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.       | Order No.   |
| 9     | 3'     | 309002A01F030 | <a href="#">130008-0364</a> | 309000A01F030   | <a href="#">130008-0323</a> |                    |             |
|       | 6'     | 309002A01F060 | <a href="#">130008-0366</a> | 309000A01F060   | <a href="#">130008-0325</a> | 309001A01F060      | 130008-0351 |
|       | 12'    | 309002A01F120 | <a href="#">130008-0368</a> | 309000A01F120   | <a href="#">130008-0329</a> | 309001A01F120      | 130008-0353 |
|       | 20'    | 309002A01F200 | <a href="#">130008-0370</a> | 309000A01F200   | <a href="#">130008-0332</a> | 309001A01F200      | 130008-0355 |
| 10    | 3'     | 301002A01F030 | <a href="#">130008-0115</a> | 301000A01F030   | <a href="#">130008-0023</a> |                    |             |
|       | 6'     | 301002A01F060 | <a href="#">130008-0117</a> | 301000A01F060   | <a href="#">130008-0025</a> | 301001A01F060      | 130008-0098 |
|       | 12'    | 301002A01F120 | <a href="#">130008-0120</a> | 301000A01F120   | <a href="#">130008-0028</a> | 301001A01F120      | 130008-0100 |
|       | 20'    | 301002A01F200 | <a href="#">130008-0124</a> | 301000A01F200   | <a href="#">130008-0033</a> | 301001A01F200      | 130008-0104 |
| 12    | 3'     | 302002A01F030 | <a href="#">130008-0229</a> | 302000A01F030   | <a href="#">130008-0154</a> |                    |             |
|       | 6'     | 302002A01F060 | <a href="#">130008-0231</a> | 302000A01F060   | <a href="#">130008-0157</a> | 302001A01F060      | 130008-0212 |
|       | 12'    | 302002A01F120 | <a href="#">130008-0234</a> | 302000A01F120   | <a href="#">130008-0161</a> | 302001A01F120      | 130008-0215 |
|       | 20'    | 302002A01F200 | <a href="#">130008-0238</a> | 302000A01F200   | <a href="#">130008-0165</a> | 302001A01F200      | 130008-0218 |

# Brad® Mini-Change® C-Size Double-Ended Cordset PVC Cable

**130012**

**Extension Cord  
Internal Thread Both Ends**



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Epoxy coated coupling nut is corrosion and weld slag resistant
- Cable is oil, water and UV resistant

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC

Current: 9P—7.0A

10P—7.0A

12P—5.0A

## Mechanical

Connector Face: PVC UL 94-V0

Molded Body: PVC UL 94-V0

Coupling Nut: Zinc diecast with black epoxy coat, optional Stainless Steel type 303

Cable: Yellow, #16 AWG, UL STOOW, CSA ST, PVC jacket and insulation, 65 x #34 stranding

Outside Diameter: 9P—0.64" (16.3mm)

10P—0.66" (16.8mm)

12P—0.71" (18.0mm)

## Environmental


Protection: IP67

| Poles | Length | Male Straight |                             |
|-------|--------|---------------|-----------------------------|
|       |        | Old Part No.  | Order No.                   |
| 9     | 6'     | 339020A01F060 | <a href="#">130012-0385</a> |
|       | 12'    | 339020A01F120 | <a href="#">130012-0391</a> |
|       | 20'    | 339020A01F200 | <a href="#">130012-0396</a> |
| 10    | 6'     | 331020A01F060 | <a href="#">130012-0009</a> |
|       | 12'    | 331020A01F120 | <a href="#">130012-0016</a> |
|       | 20'    | 331020A01F200 | <a href="#">130012-0019</a> |
| 12    | 6'     | 332020A01F060 | <a href="#">130012-0113</a> |
|       | 12'    | 332020A01F120 | <a href="#">130012-0119</a> |
|       | 20'    | 332020A01F200 | <a href="#">130012-0127</a> |

# Brad® Mini-Change® C-Size Receptacle

**130015**

**External Thread**



## Features and Benefits

- Patented Quad Beam contact with gold/nickel plating provides high reliability and low resistance
- Black epoxy coated Zinc diecast shell design
- #16 AWG, PVC insulated leads, U.S. color code

## Reference Information

UL File No.: E152210

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC

Current: 9P—7.0A

10P—7.0A

12P—5.0A

## Mechanical

Shell: Zinc diecast with black epoxy coat, optional Stainless Steel type 303

Insert: PVC UL 94-V0

Conductors: #16 AWG, PVC insulation over 36 x #30 Copper stranding, 600V, UL Style 1015, CSA TEW


## Environmental

Protection: IP67

| Mounting Thread | Poles | Length | Male Straight |                             | Female Straight |                             |
|-----------------|-------|--------|---------------|-----------------------------|-----------------|-----------------------------|
|                 |       |        | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   |
| ½"-14 NPT       | 9     | 12"    | 3R9006A20A120 | <a href="#">130015-0137</a> | 3R9004A20A120   | <a href="#">130015-0117</a> |
|                 |       | 6'     | 3R9006A20F060 | <a href="#">130015-0143</a> | 3R9004A20F060   | <a href="#">130015-0124</a> |
|                 | 10    | 12"    | 3R1006A20A120 | <a href="#">130015-0044</a> | 3R1004A20A120   | <a href="#">130015-0024</a> |
|                 |       | 6'     | 3R1006A20F060 | <a href="#">130015-0049</a> | 3R1004A20F060   | <a href="#">130015-0033</a> |
|                 | 12    | 12"    | 3R2006A20A120 | <a href="#">130015-0076</a> | 3R2004A20A120   | <a href="#">130015-0054</a> |
|                 |       | 6'     | 3R2006A20F060 | <a href="#">130015-0082</a> | 3R2004A20F060   | <a href="#">130015-0062</a> |

# Brad® Mini-Change® C-Size Single and Double-Ended Cordset and Receptacle

130008/130012/130015  
19-Pole



## Features and Benefits

- #18 AWG power and #22 AWG control conductors
- Oil- and abrasion-resistant black polyurethane (PUR) jacket
- Mating receptacles available in male and female designs

## Electrical

Voltage: 300V AC/DC  
Current: 3.0A—18AWG  
2.0A—22AWG

## Mechanical

Connector Face: PVC UL 94-V0  
Molded Body: PVC UL 94-V0  
Coupling Nut: Zinc diecast with black epoxy coat  
Contact: Gold plated Brass  
Cable: Black #18 AWG (.75mm<sup>2</sup>) and #22 AWG (.34mm<sup>2</sup>),  
PUR jacket and PVC conductor insulation over 42 x .15mm  
(#18) and 42 x .10mm (#22) Copper stranding  
Outside Diameter: 19P—.45" (11.4mm)  
Receptacle Shell: Gray anodized Aluminum  
Receptacle Insert: PVC UL 94-V0  
Receptacle Conductors: #22 AWG with PVC insulation  
#18 AWG with PVC insulation

## Environmental

Protection: IP67

## Single-Ended Cordset

| Poles | Length | Female Straight |                             | Female Right Angle |                             |
|-------|--------|-----------------|-----------------------------|--------------------|-----------------------------|
|       |        | Old Part No.    | Order No.                   | Old Part No.       | Order No.                   |
| 19    | 5M     | 30300P80M050    | <a href="#">130008-0303</a> | 303001P80M050      | <a href="#">130008-0315</a> |
|       | 10M    | 30300P80M100    | <a href="#">130008-0306</a> | 303001P80M100      | <a href="#">130008-0316</a> |
|       | 5M     | 30300B20M050    | <a href="#">130008-0294</a> | 303001B20M050      | <a href="#">130008-0312</a> |
|       | 10M    | 30300B20M100    | <a href="#">130008-0295</a> | 303001B20M100      | <a href="#">130008-0313</a> |

## Double-Ended Cordset


| Poles | Length | Male Straight/Female Straight |                             |
|-------|--------|-------------------------------|-----------------------------|
|       |        | Old Part No.                  | Order No.                   |
| 19    | 5M     | 333030P80M050                 | <a href="#">130012-0339</a> |
|       | 10M    | 333030P80M100                 | <a href="#">130012-0341</a> |
|       | 5M     | 333030B20M050                 | <a href="#">130012-0561</a> |
|       | 10M    | 333030B20M100                 | <a href="#">130012-0562</a> |

## Receptacle

| Poles | Length | Male          |                             | Female        |                             |
|-------|--------|---------------|-----------------------------|---------------|-----------------------------|
|       |        | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   |
| 19    | 0.3M   | 3R3N36E80C300 | <a href="#">130015-0109</a> | 3R3N30E80C300 | <a href="#">130015-0098</a> |
|       | 2M     | 3R3N36E80M020 | <a href="#">130015-0112</a> | 3R3N30E80M020 | <a href="#">130015-0102</a> |

# Brad® Mini-Change® Field Attachable Connector

130017



## Features and Benefits

- Allows easy field conversion to quick disconnect
- Male with internal or external threads—female with internal threads
- Secure screw terminals #15 AWG to #24 AWG—compatible with existing Mini-Change®

## Reference Information

CSA File No.: LR6837

## Electrical

Voltage: 600V AC/DC  
Current: 3P—13.0A  
4P—10.0A  
5P—8.0A

## Mechanical

Connector Face: Polyurethane  
Body: Polyamide PA6  
Contact: Gold-plated Brass  
Coupling Nut: Nickel-plated Brass or type 36 stainless steel  
Grommet: Neoprene  
Cable Range O.D.: .20" to .48" (5.0 to 12.0mm)  
Acceptable Wire Gauge Range:  
#24 AWG (.25mm<sup>2</sup>) to #15 AWG (2.0mm<sup>2</sup>)


## Environmental

Protection: IP67

| Poles | Male         |                             | Female       |                             | Description                                    |
|-------|--------------|-----------------------------|--------------|-----------------------------|------------------------------------------------|
|       | Old Part No. | Order No.                   | Old Part No. | Order No.                   |                                                |
| 3     | 1A3002-34    | <a href="#">130017-0008</a> | 1A3000-34    | <a href="#">130017-0004</a> | Straight with internal threads                 |
|       | 1A3002-348   | <a href="#">130017-0009</a> | 1A3000-348   | <a href="#">130017-0005</a> | Stainless Steel straight with internal threads |
|       | 1A3006-34    | <a href="#">130017-0011</a> |              |                             | Straight with external threads                 |
|       | 1A3006-348   | <a href="#">130017-0012</a> |              |                             | Stainless Steel straight with external threads |
| 4     | 1A4002-34    | <a href="#">130017-0018</a> | 1A4000-34    | <a href="#">130017-0015</a> | Straight with internal threads                 |
|       | 1A4002-348   | <a href="#">130017-0019</a> | 1A4000-348   | <a href="#">130017-0016</a> | Stainless Steel straight with internal threads |
|       | 1A4006-34    | <a href="#">130017-0020</a> |              |                             | Straight with external threads                 |
|       | 1A4006-348   | <a href="#">130017-0021</a> |              |                             | Stainless Steel straight with external threads |
| 5     | 1A5002-34    | <a href="#">130017-0026</a> | 1A5000-34    | <a href="#">130017-0023</a> | Straight with internal threads                 |
|       | 1A5002-348   | <a href="#">130017-0027</a> | 1A5000-348   | <a href="#">130017-0024</a> | Stainless Steel straight with internal threads |
|       | 1A5006-34    | <a href="#">130017-0029</a> |              |                             | Straight with external threads                 |
|       | 1A5006-348   | <a href="#">130017-0030</a> |              |                             | Stainless Steel straight with external threads |

# Brad® Mini-Change® Accessories

130006/130013/  
130018/130201

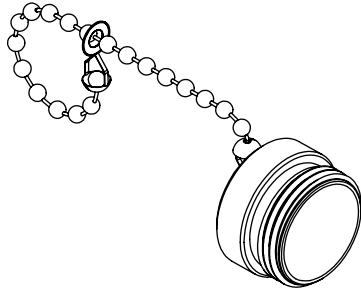

## Features and Benefits

- Closure caps for receptacles, connectors and Multi-ports
- Threaded unions for mating (2) cordsets
- Female and male plugs for liquid tight conduit terminations
- 90° adapters with (1) male and (1) female plug

## Reference Information

UL File No.: E152210\*

CSA File No.: LR6837†

## Electrical

Liquid-tight plugs and 90° adapters

Voltage: 600V

Current: 2P—13.0A

3P—10.0A

4P—8.0A

5P—8.0A

## Mechanical

Closure Caps: Anodized aluminum, stainless steel or gray nylon (A-size only)

Threaded Union: Gray anodized Aluminum

Liquid-tight Plugs Connector Body: Zinc plated Steel

Coupling Nut: Gray anodized Aluminum

Clamp Nut: Zinc plated Steel

Insert: PVC UL 94-V0

90° Adapter Connector Body: Yellow PVC

Coupling Nuts: Zinc diecast with black epoxy

Insert: PVC UL 94-V0

## Environmental

Protection: IP67

## Dust Cap

| Size | Poles        | Plug         |                             |                   | Receptacle   |                             |                   |
|------|--------------|--------------|-----------------------------|-------------------|--------------|-----------------------------|-------------------|
|      |              | Old Part No. | Order No.                   | Description       | Old Part No. | Order No.                   | Description       |
| A    | 2-6          | 65-0085      | <a href="#">130201-1109</a> | Black Epoxy Coat  | 65-0086      | <a href="#">130201-1111</a> | Anodized Aluminum |
|      |              | 65-0085SS    | <a href="#">130201-1110</a> | Stainless Steel   | 65-0086N     | <a href="#">130201-1112</a> | Nylon             |
|      |              |              |                             |                   | 65-0086SS    | <a href="#">130201-1113</a> | Stainless Steel   |
| B    | 6, 7 and 8   | 65-0102      | <a href="#">130201-1115</a> | Anodized Aluminum | 65-0103      | <a href="#">130201-1116</a> | Anodized Aluminum |
| C    | 9, 10 and 12 |              |                             |                   | 65-0103SS    | <a href="#">130201-1117</a> | Stainless Steel   |
|      |              | 65-0104      | <a href="#">130201-1118</a> | Anodized Aluminum | 65-0105      | <a href="#">130201-1120</a> | Anodized Aluminum |
|      |              | 65-0104SS    | <a href="#">130201-1119</a> | Stainless Steel   | 65-0105SS    | <a href="#">130201-1121</a> | Stainless Steel   |

## Threaded Unions

| Old Part No. | Order No.                   | Description          |
|--------------|-----------------------------|----------------------|
| 55-0426      | <a href="#">130201-1224</a> | A-Size, 2P-6P        |
| 55-0466      | <a href="#">130201-1226</a> | B-Size, 6P, 7P, 8P   |
| 55-0496      | <a href="#">130201-1228</a> | C-Size, 9P, 10P, 12P |

## Bulk Head Pass-Through Adapters

| Old Part No. | Order No.                      |
|--------------|--------------------------------|
| 1R3030       | <a href="#">130013-0255</a> *† |
| 1R4030       | <a href="#">130013-0388</a> †  |
| 1R5030       | <a href="#">130013-0541</a> †  |

\* UL File No.: E152210

† CSA File No.: LR6837

## Plugs

| Poles | Male         |                             | Female       |                             |
|-------|--------------|-----------------------------|--------------|-----------------------------|
|       | Old Part No. | Order No.                   | Old Part No. | Order No.                   |
| 2     | 40780        | <a href="#">130006-2098</a> | 40718        | <a href="#">130006-2098</a> |
| 3     | 41037        | <a href="#">130006-2102</a> | 40925        | <a href="#">130006-2099</a> |
| 4     | 51149        | <a href="#">130006-0184</a> | 41132        | <a href="#">130006-2103</a> |
| 5     | 41593        | <a href="#">130006-2109</a> | 41344        | <a href="#">130006-2107</a> |

## 90° Adapters

| Poles | Old Part No. | Order No.                   |
|-------|--------------|-----------------------------|
| 2     | 40761        | <a href="#">130018-0204</a> |
| 3     | 41048        | <a href="#">130018-0206</a> |
| 4     | 41212        | <a href="#">130018-0207</a> |
| 5     | 41481        | <a href="#">130018-0210</a> |

## The Brad® Brand of Automation Products— Designed for Performance and Reliability

Molex empowers the industrial infrastructure through its Brad automation products. Brad products are ruggedly designed, engineered and constructed to provide easy installation and long-term, reliable performance in harsh environments. Whether they're for connecting power, industrial networks or automation equipment such as sensors, I/O devices, computer systems, robots, or conveyor systems, Brad products are the ideal choice for connecting the plant floor.

Brad products include:

**BradConnectivity™** connectors, cordsets and distribution boxes for sensor and actuator applications. Designed to meet our customers' requirements and built industrial-tough to ensure flexibility, interoperability and rock-solid performance. The BradConnectivity solutions include:

### Mini-Change® Connectivity

The industry's first quick-disconnect alternative to hardwiring, commonly used with 18 and 30mm proximity switches, photoelectric sensors and limit switches as well as for network I/O-power connection.

### Micro-Change® (M12) Connectivity

When space and time are in short supply, Micro-Change (M12) connectivity provides compact migration towards soft-wiring solutions. These industry standard connectors are available in single and dual keyways for a myriad of network and I/O applications.

### Nano-Change® (M8) Connectivity

The industry's broadest selection of space saving cordsets, receptacles, inserts, splitters and molded junction boxes. They provide rugged performance in tight spaces while minimizing downtime, maintenance and wiring time.

**BradCommunications™** network interface cards, gateways, diagnostic tools and Industrial Ethernet switches. Designed to enhance communication of industrial networks and devices. The BradCommunications solutions include:

### Network interface cards

PC network interfaces connect "Soft" PLC, HMI/OI or SCADA applications installed on a PC based computer to an industrial network

PLC communication modules connect a PLC to an industrial network

Embedded interfaces quickly integrate an industrial network into an OEM device

Gateways connect networks to other networks or devices, exchange information across many protocols as well as creating a communications link between the plant floor and the office.

Diagnostic tools provide a clear understanding of the "health" of the network to increase production uptime as well as obtaining an early warning through its predictive technologies.

Industrial Ethernet switches intelligently route Ethernet messages, eliminate collisions and provide deterministic performance of your Ethernet network.

**BradControl™** networked I/O for on-machine applications. Designed to provide reliable connections in harsh environments between industrial controllers communicating on an industrial network and I/O devices. The BradControl solution includes:

Classic 60mm I/O modules

Compact 30mm I/O modules

**BradPower™** products bring power reliably to motors, lights, heaters and other electrical devices. The BradPower solution includes:

Cordsets, connectors, receptacles, tees and reducers that create a modular, flexible wiring system for machine power distribution and motor control

# BradPower™ Modular Power Solutions Overmolded Cordsets and Connectors



## Features and Benefits

- Available in 3 or 4 pole
- UL Listed for use in US and Canada
- IP67, IP68 and IP69K rated
- NFPA-79-2002 standard compliance
- Total installed cost can be reduced from 20 to 50% vs. conventional hard-wiring

- Modular components mean faster, easier installation and maintenance
- Eliminates the potential for mis-wiring
- Requires no tools, no pipe bending, no wire pulling, no conduit or raceways
- Complete range of modular components available for food and beverage processors

## Modular, Easy to install

BradPower solutions replace machine hard wiring with modular, quick-connect systems comprised of crush-resistant, pre-wired cordsets and factory-molded connectors. The result is a robust, scalable and easy-to-install power distribution system that does not require the specialized tools and labor typically associated with traditional conduit or raceway installations.

## Performance

BradPower wiring systems' modular components make installation faster, easier and more reliable. Where multiple machines are involved, assembling the systems is consistent and repeatable.

## Bottom-Line Benefits

Compared to traditional conduit-based hard wiring, BradPower modular solutions provide:

- Reduced labor costs
- Simplified connections
- Increased plant flexibility
- Reduced commission time

BradPower modular solutions deliver rapid return on capital equipment investments

## Markets and Applications

Robotic machinery  
Material handling equipment  
Packaging systems  
Food and beverage processing  
Factory automation  
Motor control  
Power distribution

# BradPower™ Modular Power Solutions

## Trunk/Feeder Cordsets

### Features

- 600V AC; 30.0A (3 pole) and 25.0A (4 pole)
- Dual rated 10 AWG cable
- Multiple key options available



## Drop/Branch Cordsets

### Features

- 600V AC
- 15.0A (3 pole, 14 AWG); 13.0A (3 pole, 16 AWG)
- 15.0A (4 pole, 14 AWG); 10.0A (4 pole, 16 AWG)
- Features Mini-Change® to allow for quick connection of field devices



## Tees

### Features

- 600V AC
- 30.0A (3 pole) and 25.0A (4 pole)
- Multiple key options available
- Multiple key options available
- Serve as the termination point at motors and devices



## Receptacles

### Features

- 600V AC
- 30.0A (3 pole) and 25.0A (4 pole)
- Multiple key options available
- Tees with drop connector available for access points to branch circuits to field devices
- Tees with trunk connector available to split main feeder circuit into sub-segments



## Reducers

### Features

- 600V AC
- Trunk reducer to female drop
- Reducers are essential in achieving the most versatile, scalable wiring system possible
- Multiple key options available (trunk/feeder lines)



# BradPower™ Modular Power Solutions

## Field Attachables

### Features

- 600V AC
- Trunk/Feeder—30.0A (3 pole); 25.0A (4 pole)
- Drop/Branch—15.0A
- Cut cable to length on-site for maximum flexibility and convenience



## Disconnect Switch

### Features

- 600V AC
- 15.0A
- Easily installed without special tools or highly skilled labor



## Accessories

### Features

- Closure caps maintain sealing integrity and provide convenient "stop points" for expandable power systems
- Locking clips snap over the outside of trunk/feeder or drop/branch connection points to limit access to the flexible wiring system



# BradConnectivity™ M23 Signal and Power Connectors

BradConnectivity M23 connectors and receptacles for signal and power applications were designed to meet our customers' stringent requirements for reliability and performance in the harshest of industrial environments.

## M23 Signal Connectors

Includes field attachable male and female cable connectors and receptacles from 6-pole to 19-pole in straight and right-angled versions. Cable connectors for a broad range of cable outer diameters and receptacles for front mounting or back mounting guarantee the highest flexibility.

### Features

- Cable assembly and shielding in one assembly step
- Clipped-on strain-relief insert prevents cable rotation
- Flexible EMC-O-Ring guarantees reliable EMC-protection
- Radial-encompassing spring contacts assure low plug-in resistance and high mating cycles
- Integrated locking clip secures the contact in the insert and allows easy assembly and disassembly



## M23 Power Connectors

For power applications up to 28 amps. Brad® offers field-attachable cable connectors and receptacles in 5+PE and 4+3+PE versions. Applying the same modular design as the signal connectors, both pole counts can be used in straight and right-angled versions.

Crimp contacts are available with different crimp ranges. Female contacts with integrated springs assure exceptional electrical performance with ultimate contact reliability in both signal and power product ranges.

*Additional tools and accessories are available, contact Molex*


### Features

- Modularity—same insert for all housings
- The integrated locking clip allows quick assembly
- Complete assembly and disassembly without special tools
- Lowest contact resistance as a result of a Gold-plated contact area
- Integrated strain-relief fitting



# DeviceNet\* IP67 I/O Module

112092



## Features and Benefits

- IP67 digital IO modules—reliable world-class product for harsh environment
- Supports ADR and Quick-Connect
- Standard mounting hole pattern allows for interchangeable with popular I/O modules
- Visible diagnostic through status LEDs for network, module, external power, inputs and outputs

## Reference Information

Approvals: ODVA, UL, CUL, CUE

## Compact

### Physical

I/O Configurations:

- 8 inputs
- 4 inputs/4 outputs

I/O Connectors:

- 4 Port—Micro-Change® 5-pole M12 female BradConnectivity™ Ultra-Lock™, internally threaded
- 8 Port—Nano-Change® 3-pole threaded M8 female

Bus Connectors:

- Network In—Micro-Change 5-pole M12 male
- Network Out—Micro-Change 5-pole M12 female

Auxiliary Power Connector:

- Power In—Micro-Change 5-pole M12 male

Address Settings: 0 to 63 using rotary switches or software

Input Type: Compatible with dry contact and PNP or NPN 3-wire switches; electronic short circuit protection.

Housing Dimensions:

- 30 x 175 x 20mm (1.18 x 6.89 x 0.78")

Mounting Dimensions:

- 23mm (0.91") horizontal on centers
- 168mm (6.61") vertical on centers
- Center hole

Storage Temperature: -25 to 85° C (-13 to 185° F)

RH Operating: 5 to 95% non-condensing

EMC: IEC 61000-6-2

Protection: IP67 according to IEC 60529

Vibration: IEC 60068-2-6 conformance

Shock: 10G, 11ms, 3 axis

### Electrical

External Power Requirements:

- Module and Input Power—24V DC (input devices plus module)

- Output Power—24V DC (13 to 28V), 4.0A max. per module

Baud Rate Settings: Auto baud—125, 250, 500 Kbaud

Input Delay: 3 ms

Input Device Supply: 140 mA per port at 25° C

Output Load Current:

- 1.0A max. per channel; electronic short circuit protection

Maximum Switching Frequency: 200 Hz

## Classic

### Physical

I/O Configurations:

- 16 inputs
- 8 inputs/8 outputs

I/O Connectors:

- Micro-Change® 5-pole M12 female BradConnectivity™ Ultra-Lock™, internally threaded

Bus Connectors:

- Network In—Mini-Change® 5-pole male
- Network Out—5-pole female

Auxiliary Power Connector:

- Power In—Mini-Change 4-pole male
- Power Out—4-pole female

Address Settings: 0 to 63 using rotary switches or software

Input Type:

- Compatible with dry contact and PNP or NPN 3-wire switches; electronic short circuit protection

Housing Dimensions:

- 60 x 220 x 20mm (2.36 x 8.66 x 0.78")

Mounting Dimensions:

- 37.5mm (1.48") horizontal on centers
- 210mm (8.27") vertical on centers Center hole

Storage Temperature: -20 to 85° C (-4 to 185° F)

RH Operating: 5 to 95% non-condensing

EMC: IEC 61000-6-2

Protection: IP67 according to IEC 60529

Vibration: IEC 60068-2-6 conformance

Shock: 10G, 11ms, 3 axis

### Electrical

External Power Requirements:

- Module and Input Power—24V DC (input devices plus module)

- Output Power—24V DC (13 to 28V), 8.0A max. per module

Baud Rate Settings: Auto baud—125, 250, 500 Kbaud

Input Device Supply: 140 mA per port at 25° C

Output Load Current: 1.0A max. per channel; electronic short circuit protection


Maximum Switching Frequency: 200 Hz

|                | Old Part No.   | Order No.                   | Option            | Description                                                                  |
|----------------|----------------|-----------------------------|-------------------|------------------------------------------------------------------------------|
| Compact (30mm) | TBDDN-480N-80U | <a href="#">112092-0018</a> | 8 input           | DeviceNet Slave, Compact Digital, 4-port, M12 Ultra-Lock, 8 input            |
|                | TBDDN-480P-80U | <a href="#">112092-0007</a> | 8 input           | DeviceNet Slave, Compact Digital, 4-port, M12 Ultra-Lock, 8 input            |
|                | TBDDN-444N-88U | <a href="#">112092-5004</a> | 4 input, 4 output | DeviceNet Slave, Compact Digital, 4-port, M12 Ultra-Lock, 4 input, 4 output  |
|                | TBDDN-444P-88U | <a href="#">112092-0006</a> | 4 input, 4 output | DeviceNet Slave, Compact Digital, 4-port, M12 Ultra-Lock, 4 input, 4 output  |
|                | TBDDN-880N-804 | <a href="#">112092-0022</a> | 8 input           | DeviceNet Slave, Compact Digital, 8-port, M8, 8 input                        |
|                | TBDDN-880P-804 | <a href="#">112092-0008</a> | 8 input           | DeviceNet Slave, Compact Digital, 8-port, M8, 8 input                        |
| Classic (60mm) | TCDDN-8DOP-10U | <a href="#">112092-0010</a> | 16 input          | DeviceNet Slave, Classic Digital, 8-port, M12 Ultra-Lock, 16 input           |
|                | TCDDN-8DON-10U | <a href="#">112092-0019</a> | 16 input          | DeviceNet Slave, Classic Digital, 8-port, M12 Ultra-Lock, 16 input           |
|                | TCDDN-888P-11U | <a href="#">112092-0009</a> | 8 input 8 output  | DeviceNet Slave, Classic Digital, 8-port, M12 Ultra-Lock, 8 input / 8 output |
|                | TCDDN-888N-11U | <a href="#">112092-0020</a> | 8 input 8 output  | DeviceNet Slave, Classic Digital, 8-port, M12 Ultra-Lock, 8 input / 8 output |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet\* Micro-Change® (M12) Drop Cordset

## 130027/130028 Single and Double-Ended

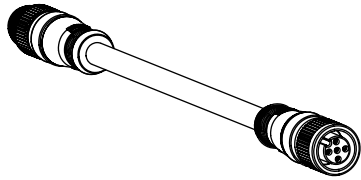

### Features and Benefits

- Rugged, IP68 rated connectors for continued connection integrity in industrial environments
- Variety of cable types, cable exit, form factor, coupling nut and length options for maximum flexibility
- Connect tees or ports on drop distribution boxes to active devices
- Micro-Change (M12) to Micro-Change (M12) cordsets or Micro-Change (M12) to Nano-Change® (M8) cordsets
- Single and double-ended
- Straight and 90°
- Standard and application-specific lengths

### Thin Standard Specifications

#### Overall

Rating: 300V 80°C

Outer Jacket: PVC

Inner Insulation: Power—Semirigid PVC  
Data—PE foam

Construction: Two shielded pairs, #22 Tin-Copper drain wire between pairs

Cable Jacket Color: Gray

#### Power Pair

Wire: Two #22 individually Tinned stranded Copper

Shielding: Aluminum foil shield, 25% overlap

DC Resistance: 16.5 ohms/1000 ft max. at 20°C max.

Current: 4.0A

Color Code: Red/black

#### Data Pair

Wire: Two #22 individually Tinned stranded Copper

Shielding: Aluminum foil shield, 25% overlap

DC Resistance: 16.5 ohms/1000 ft max. at 20°C

Velocity of Propagation: 75%

Capacitance: 11 pF/ft

Color Code: White/blue

#### Reference Information

UL: CL2, AWM 2464

CSA: FT4 Rated

### Thin High Flex Specifications

#### Overall

Rating: 300V 80°C

Outer Jacket: PVC

Inner Insulation: Power—Semirigid PVC  
Data—PE foam

Flexure: Rolling Flex > 1 million cycles at 10x bend radius  
Construction: Two foil shielded pairs, #26 Tin-Copper drains between pairs

Cable Jacket Color: Gray

#### Power Pair

Wire: Two #22 individually Tinned stranded Copper

Shielding: Aluminum outside/polyester tape, 25% overlap

DC Resistance: 17.5 ohms/1000 ft max. at 20°C

Current: 4.0A max.

Color Code: Red/black

#### Data Pair

Wire: Two #24 individually Tinned stranded Copper

Shielding: Aluminum outside/polyester tape, 25% overlap

DC Resistance: 28 ohms/1000 ft max. at 20°C

Velocity of Propagation: 75%

Capacitance: 12 pF/ft

Color Code: White/blue

#### Reference Information

UL: CL3 AWM 20626, Flame UL 1581

CSA: AWM: I/II A/B, 80°C, 300V ft

### Thin Standard Cable

| Cable Length (m) | Single-Ended  |                             |              |                             |              |                             | Double-Ended                  |                             |                          |                             |                     |                             |
|------------------|---------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|-------------------------------|-----------------------------|--------------------------|-----------------------------|---------------------|-----------------------------|
|                  | Male Straight |                             | Male 90°     |                             | Female 90°   |                             | Female Straight/Male Straight |                             | Female 90°/Male Straight |                             | Female 90°/Male 90° |                             |
|                  | Old Part No.  | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No.                   | Old Part No.                  | Order No.                   | Old Part No.             | Order No.                   | Old Part No.        | Order No.                   |
| 1.0              | DND02A-M010   | <a href="#">130027-0012</a> | DND03A-M010  | <a href="#">130027-0037</a> | DND30A-M010  | <a href="#">130027-0075</a> | DND22A-M010                   | <a href="#">130028-0028</a> | DND32A-M010              | <a href="#">130028-0085</a> | DND33A-M010         | <a href="#">130028-0104</a> |
| 3.0              | DND02A-M030   | <a href="#">130027-0015</a> | DND03A-M030  | <a href="#">130027-0040</a> | DND30A-M030  | <a href="#">130027-0077</a> | DND22A-M030                   | <a href="#">130028-0037</a> | DND32A-M030              | <a href="#">130028-0089</a> | DND33A-M030         | <a href="#">130028-0110</a> |
| 5.0              | DND02A-M050   | <a href="#">130027-0017</a> | DND03A-M050  | <a href="#">130027-0041</a> | DND30A-M050  | <a href="#">130027-0079</a> | DND22A-M050                   | <a href="#">130028-0042</a> | DND32A-M050              | <a href="#">130028-0091</a> | DND33A-M050         | <a href="#">130028-0113</a> |

### Thin High Flex


| Cable Length (m) | Single-Ended  |                             |              |                             |              |                             | Double-Ended                  |                             |                          |                             |                     |                             |
|------------------|---------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|-------------------------------|-----------------------------|--------------------------|-----------------------------|---------------------|-----------------------------|
|                  | Male Straight |                             | Male 90°     |                             | Female 90°   |                             | Female Straight/Male Straight |                             | Female 90°/Male Straight |                             | Female 90°/Male 90° |                             |
|                  | Old Part No.  | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No.                   | Old Part No.                  | Order No.                   | Old Part No.             | Order No.                   | Old Part No.        | Order No.                   |
| 1.0              | DNDF02A-M010  | <a href="#">130027-0103</a> | DNDF03A-M010 | <a href="#">130027-0115</a> | DNDF30A-M010 | <a href="#">130027-0161</a> | DNDF22A-M010                  | <a href="#">130028-0132</a> | DNDF32A-M010             | <a href="#">130028-0172</a> | DNDF33A-M010        | <a href="#">130028-0183</a> |
| 3.0              | DNDF02A-M030  | <a href="#">130027-0159</a> | DNDF03A-M030 | <a href="#">130027-0117</a> | DNDF30A-M030 | <a href="#">130027-0162</a> | DNDF22A-M030                  | <a href="#">130028-0140</a> | DNDF32A-M030             | <a href="#">130028-0244</a> | DNDF33A-M030        | <a href="#">130028-0249</a> |
| 5.0              | DNDF02A-M050  | <a href="#">130027-0106</a> | DNDF03A-M050 | <a href="#">130027-0160</a> | DNDF30A-M050 | <a href="#">130027-0130</a> | DNDF22A-M050                  | <a href="#">130028-0143</a> | DNDF32A-M050             | <a href="#">130028-0178</a> | DNDF33A-M050        | <a href="#">130028-0185</a> |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet<sup>®</sup> Mini-Change<sup>®</sup> Trunk Cordset

## 130024/130025

### Single and Double-Ended



#### Features and Benefits

- Plug-and-play connection between DeviceNet nodes
- Mini-Change<sup>®</sup> cordsets
- Single and double-ended
- Straight and 90°
- Standard and application-specific lengths
- Rugged, IP-68 rated connectors for continual connection integrity in industrial environments
- Phosphor-bronze contacts for greater reliability
- Variety of cable types, cable exit, coupling nut and length options for maximum flexibility

#### Reference Information

UL File No.: E152210  
CSA File No.: LR6837

#### Thick Standard

##### Overall

Rating: 300V, 80°C  
Outer Jacket: Gray PVC  
Outside Diameter: 0.48" (12.10mm)  
Inner Insulation:

Power—PVC with Nylon skin

Data—PE foam

Construction: Two shielded pairs with #18 AWG (19 by #30)  
drain wire between pairs

#### Thick Standard Cable

| Cable Length (m) | Single-Ended  |                             |              |                             |                 |                             |              |                             | Double-Ended (Female/Male) |                             |              |                             |              |                             |              |           |
|------------------|---------------|-----------------------------|--------------|-----------------------------|-----------------|-----------------------------|--------------|-----------------------------|----------------------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|--------------|-----------|
|                  | Male Straight |                             | Male 90°     |                             | Female Straight |                             | Female 90°   |                             | Straight/Straight          |                             | 90°/Straight |                             | 90°/90°      |                             |              |           |
|                  | Old Part No.  | Order No.                   | Old Part No. | Order No.                   | Old Part No.    | Order No.                   | Old Part No. | Order No.                   | Old Part No.               | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No. |
| 1.0              | DN01A-M010    | <a href="#">130024-0028</a> | DN09A-M010   | <a href="#">130024-0059</a> | DN10A-M010      | <a href="#">130024-0073</a> | DN90A-M010   | <a href="#">130024-0133</a> | DN11A-M010                 | <a href="#">130025-0054</a> | DN91A-M010   | <a href="#">130025-0173</a> | DN99A-M010   | <a href="#">130025-0197</a> |              |           |
| 3.0              | DN01A-M030    | <a href="#">130024-0032</a> | DN09A-M030   | <a href="#">130024-0061</a> | DN10A-M030      | <a href="#">130024-0078</a> | DN90A-M030   | <a href="#">130024-0136</a> | DN11A-M030                 | <a href="#">130025-0067</a> | DN91A-M030   | <a href="#">130025-0177</a> | DN99A-M030   | <a href="#">130025-0200</a> |              |           |
| 5.0              | DN01A-M050    | <a href="#">130024-0034</a> | DN09A-M050   | <a href="#">130024-0064</a> | DN10A-M050      | <a href="#">130024-0080</a> | DN90A-M050   | <a href="#">130024-0137</a> | DN11A-M050                 | <a href="#">130025-0073</a> | DN91A-M050   | <a href="#">130025-0179</a> | DN99A-M050   | <a href="#">130025-0202</a> |              |           |

#### Thick Flex-Rated Cable

| Cable Length (m) | Single-Ended  |                             |              |                             |                 |                             |              |                             | Double-Ended (Female/Male) |                             |              |                             |              |                             |              |           |
|------------------|---------------|-----------------------------|--------------|-----------------------------|-----------------|-----------------------------|--------------|-----------------------------|----------------------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|--------------|-----------|
|                  | Male Straight |                             | Male 90°     |                             | Female Straight |                             | Female 90°   |                             | Straight/Straight          |                             | 90°/Straight |                             | 90°/90°      |                             |              |           |
|                  | Old Part No.  | Order No.                   | Old Part No. | Order No.                   | Old Part No.    | Order No.                   | Old Part No. | Order No.                   | Old Part No.               | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No. |
| 1.0              | DNF01A-M010   | <a href="#">130024-0265</a> | DNF09A-M010  | <a href="#">130025-0538</a> | DNF10A-M010     | <a href="#">130024-0337</a> | DNF90A-M010  | <a href="#">130024-0341</a> | DNF11A-M010                | <a href="#">130025-0408</a> | DNF91A-M010  | <a href="#">130025-0468</a> | DNF99A-M010  | <a href="#">130025-0482</a> |              |           |
| 3.0              | DNF01A-M030   | <a href="#">130024-0267</a> | DNF09A-M030  | <a href="#">130025-0539</a> | DNF10A-M030     | <a href="#">130024-0338</a> | DNF90A-M030  | <a href="#">130024-0342</a> | DNF11A-M030                | <a href="#">130025-0412</a> | DNF91A-M030  | <a href="#">130025-0471</a> | DNF99A-M030  | <a href="#">130025-0542</a> |              |           |
| 5.0              | DNF01A-M050   | <a href="#">130024-0269</a> | DNF09A-M050  | <a href="#">130025-0540</a> | DNF10A-M050     | <a href="#">130024-0287</a> | DNF90A-M050  | <a href="#">130024-0343</a> | DNF11A-M050                | <a href="#">130025-0415</a> | DNF91A-M050  | <a href="#">130025-0472</a> | DNF99A-M050  | <a href="#">130025-0486</a> |              |           |

#### Mid Cable

| Cable Length (m) | Single-Ended  |                             |              |                             |                 |                             |              |                             | Double-Ended (Female/Male) |                             |              |                             |              |                             |              |           |
|------------------|---------------|-----------------------------|--------------|-----------------------------|-----------------|-----------------------------|--------------|-----------------------------|----------------------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|--------------|-----------|
|                  | Male Straight |                             | Male 90°     |                             | Female Straight |                             | Female 90°   |                             | Straight/Straight          |                             | 90°/Straight |                             | 90°/90°      |                             |              |           |
|                  | Old Part No.  | Order No.                   | Old Part No. | Order No.                   | Old Part No.    | Order No.                   | Old Part No. | Order No.                   | Old Part No.               | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No. |
| 1.0              | DNB01A-M010   | <a href="#">130024-0146</a> | DNB09A-M010  | <a href="#">130024-0163</a> | DNB10A-M010     | <a href="#">130024-0169</a> | DNB90A-M010  | <a href="#">130024-0178</a> | DNB11A-M010                | <a href="#">130025-0233</a> | DNB91A-M010  | <a href="#">130025-0259</a> | DNB99A-M010  | <a href="#">130025-0267</a> |              |           |
| 3.0              | DNB01A-M030   | <a href="#">130025-0292</a> | DNB09A-M030  | <a href="#">130025-0324</a> | DNB10A-M030     | <a href="#">130024-0336</a> | DNB90A-M030  | <a href="#">130024-0344</a> | DNB11A-M030                | <a href="#">130025-0235</a> | DNB91A-M030  | <a href="#">130025-0254</a> | DNB99A-M030  | <a href="#">130025-0270</a> |              |           |
| 5.0              | DNB01A-M050   | <a href="#">130024-0151</a> | DNB09A-M050  | <a href="#">130024-0165</a> | DNB10A-M050     | <a href="#">130024-0340</a> | DNB90A-M050  | <a href="#">130024-0180</a> | DNB11A-M050                | <a href="#">130025-0237</a> | DNB91A-M050  | <a href="#">130025-0261</a> | DNB99A-M050  | <a href="#">130025-0271</a> |              |           |

#### Thin Standard Cable

| Cable Length (m) | Double-Ended                  |                             |                          |                             |                     |                             |
|------------------|-------------------------------|-----------------------------|--------------------------|-----------------------------|---------------------|-----------------------------|
|                  | Female Straight/Male Straight |                             | Female 90°/Male Straight |                             | Female 90°/Male 90° |                             |
|                  | Old Part No.                  | Order No.                   | Old Part No.             | Order No.                   | Old Part No.        | Order No.                   |
| 1.0              | DND11A-M010                   | <a href="#">130025-0287</a> | DND91A-M010              | <a href="#">130025-0322</a> | DND99A-M010         | <a href="#">130025-0543</a> |
| 3.0              | DND11A-M030                   | <a href="#">130025-0292</a> | DND91A-M030              | <a href="#">130025-0324</a> | DND99A-M030         | <a href="#">130025-0544</a> |
| 5.0              | DND11A-M050                   | <a href="#">130025-0295</a> | DND91A-M050              | <a href="#">130025-0326</a> | DND99A-M050         | <a href="#">130025-0545</a> |


#### Thin High Flex Cable

| Cable Length (m) | Double-Ended                  |                             |                          |                             |                     |                             |
|------------------|-------------------------------|-----------------------------|--------------------------|-----------------------------|---------------------|-----------------------------|
|                  | Female Straight/Male Straight |                             | Female 90°/Male Straight |                             | Female 90°/Male 90° |                             |
|                  | Old Part No.                  | Order No.                   | Old Part No.             | Order No.                   | Old Part No.        | Order No.                   |
| 1.0              | DND11A-M010                   | <a href="#">130025-0502</a> | DND91A-M010              | <a href="#">130025-0546</a> | DND99A-M010         | <a href="#">130025-0513</a> |
| 3.0              | DND11A-M030                   | <a href="#">130025-0504</a> | DND91A-M030              | <a href="#">130025-0547</a> | DND99A-M030         | <a href="#">130025-0533</a> |
| 5.0              | DND11A-M050                   | <a href="#">130025-0508</a> | DND91A-M050              | <a href="#">130025-0548</a> | DND99A-M050         | <a href="#">130025-0515</a> |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet\* Receptacle

120070/130031/  
130039/130188



## Features and Benefits

- Connects the external trunk line with an enclosure
- Mini-Change® receptacles with DeviceNet color rotation
- Male and female
- Front-Panel mount
- Bulkhead feed-through
- PCB-mount or cable lead
- A variety of options allows for maximum flexibility in connecting devices nodes
- Bulkhead version features rugged keyways for positive alignment of connections

## Thick Media

### Electrical

Voltage: 300V AC/DC  
Current: Based on cable used

### Mechanical

Shell (Receptacle): Gray anodized Aluminum  
Shell (Bulkhead) Nickel-Brass  
Gasket Material (Bulkhead): Neoprene  
Thrust Washer (Bulkhead): Nylon  
Locknut Material (Bulkhead): Brass alloy  
Insert: PVC UL 94V  
Outside Diameter: Thick—0.48" (12.10mm)  
Mid—0.34" (8.60mm)  
Thick-Flex—0.48" (12.20mm)

### Environmental

Protection: IP67

## Thin Media

### Reference Information

(Except for Bulkhead)  
UL File No.: E152210  
CSA File No.: LR6837

### Electrical

Voltage Rating: 250V AC/DC  
Current: 4.0A

### Mechanical

Shell: Receptacle—Anodized Aluminum  
Bulkhead—Nickel over Brass  
PCB—Thermoplastic  
Insert: Nylon 6/6  
Coupling Nut: PCB—Delrin  
Gasket Material: Bulkhead—Neoprene  
Lock Washer: Bulkhead—Steel Alloy  
Support Bracket: Steel, Tin, Lead, coated  
MB Panel Thickness: PCB—0.639 to 0.070"

### Environmental

Protection: Receptacles—IP67  
Bulkhead—PCB IP67

## Drop Receptacle Micro-Change (M12)

| PCB Mount     |                             |               |                             |                 |                             |               |                             | 12" Wire Pigtail |                             |                 |                             |
|---------------|-----------------------------|---------------|-----------------------------|-----------------|-----------------------------|---------------|-----------------------------|------------------|-----------------------------|-----------------|-----------------------------|
| Male Straight |                             | Male 90°      |                             | Female Straight |                             | Female 90°    |                             | Male Straight    |                             | Female Straight |                             |
| Old Part No.  | Order No.                   | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.  | Order No.                   | Old Part No.     | Order No.                   | Old Part No.    | Order No.                   |
| 8R5L560005-35 | <a href="#">120070-0243</a> | 8R5L570005-35 | <a href="#">120070-0245</a> | 8R5L500005-35   | <a href="#">120070-0239</a> | 8R5L510005-35 | <a href="#">120070-0241</a> | 81612            | <a href="#">130031-0026</a> | 81611           | <a href="#">130031-0023</a> |

## Trunk Receptacle—Front Panel Mount with Cable

| Mounting Thread | Cable Length (m) | Description          | Male Straight |                             | Female Straight |                             |
|-----------------|------------------|----------------------|---------------|-----------------------------|-----------------|-----------------------------|
|                 |                  |                      | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   |
| 1/2" - 14 NPT   | 0.50             | Thick Standard Cable | DN5100-M005   | <a href="#">130039-0297</a> | DN5000-M005     | <a href="#">130039-0283</a> |
|                 | 1.0              |                      | DN5100-M010   | <a href="#">130039-0299</a> | DN5000-M010     | <a href="#">130039-0284</a> |
|                 | 0.50             | Mid Cable            | DNB5100-M005  | <a href="#">130039-0317</a> | DNB5000-M005    | <a href="#">130039-0311</a> |
|                 | 1.0              |                      | DNB5100-M010  | <a href="#">130039-0318</a> | DNB5000-M010    | <a href="#">130039-0312</a> |

## Trunk Receptacle—Double-Ended Back Panel Mount to Mini-Change Receptacle (Female/Male)


| Mounting Thread | Cable Length (m) | Description          | Receptacle/Straight |                             | Receptacle/90° |                             | Straight/Receptacle |                             |
|-----------------|------------------|----------------------|---------------------|-----------------------------|----------------|-----------------------------|---------------------|-----------------------------|
|                 |                  |                      | Old Part No.        | Order No.                   | Old Part No.   | Order No.                   | Old Part No.        | Order No.                   |
| 1/2" - 14 NPT   | 1.0              | Thick Standard Cable | DN5210A-M010        | <a href="#">130039-0096</a> | DN5290A-M010   | <a href="#">130039-0098</a> | DN5301A-M010        | <a href="#">130039-0101</a> |

| Mounting Thread | PCB Mount     |                             |                 |                             | Bulkhead Feed-Through |                             |
|-----------------|---------------|-----------------------------|-----------------|-----------------------------|-----------------------|-----------------------------|
|                 | Male Straight |                             | Female Straight |                             | Male Straight         | Female Straight             |
|                 | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.          | Order No.                   |
| 1/2" - 14 NPT   | 67-0065       | <a href="#">130188-0033</a> | 67-0075         | <a href="#">130188-0034</a> | 1R5030                | <a href="#">130013-0541</a> |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet\* Sealed Distribution Box

130036/130037/130039



## Features and Benefits

- Allows several trunk cables or drop cables with Mini-Change® style of connectors to be consolidated and can be connected to the trunk
- Eliminate the need to have numerous tees connected near a single point
- Rugged enclosure for reliable connectors in industrial environment

## Thin Media

### Reference Information

cCSAus File No.: LR6837

### Electrical

Voltage: 120V AC/DC

Amperage: 7.0A total per unit

### Mechanical

Insert: PVC

Housing: Zinc diecast with black epoxy coat

ID Label: ABS

### Environmental

Protection: IP67

## Thick Media

### Reference Information

UL File No.: E46237

CSA File No.: LR6837

### Electrical

Voltage: 120V AC/DC

Amperage: 7.0A total per unit

### Mechanical

Insert: PVC

Housing: PET (Polyester)

Receptacle Housing: Zinc diecast with black epoxy coat

ID Label: ABS

### Environmental


Protection: IP67

| Mounting | Ports | Thick Media                        |                             |                                            |                             | Thin Media                         |                             |                                            |                             |
|----------|-------|------------------------------------|-----------------------------|--------------------------------------------|-----------------------------|------------------------------------|-----------------------------|--------------------------------------------|-----------------------------|
|          |       | Mini-Change BUS IN with Mini Ports |                             | Mini-Change BUS IN/BUS OUT with Mini Ports |                             | Mini-Change BUS IN with Mini Ports |                             | Mini-Change BUS IN/BUS OUT with Mini Ports |                             |
|          |       | Old Part No.                       | Order No.                   | Old Part No.                               | Order No.                   | Old Part No.                       | Order No.                   | Old Part No.                               | Order No.                   |
| Side     | 2     |                                    |                             | DN2100                                     | <a href="#">130039-0336</a> |                                    |                             |                                            |                             |
|          | 4     | DN4000                             | <a href="#">130036-0005</a> | DN4100                                     | <a href="#">130036-0006</a> | DND4000                            | <a href="#">130036-0011</a> | DND4100                                    | <a href="#">130036-0012</a> |
|          | 6     | DN6000                             | <a href="#">130036-0008</a> | DN6100                                     | <a href="#">130036-0009</a> | DND6000                            | <a href="#">130036-0014</a> | DND6100                                    | <a href="#">130036-0015</a> |

| Mounting | Ports | Thick Media                         |                             |                                                        |                             |                                                                |                             |
|----------|-------|-------------------------------------|-----------------------------|--------------------------------------------------------|-----------------------------|----------------------------------------------------------------|-----------------------------|
|          |       | Mini-Change BUS IN with Micro Ports |                             | Mini-Change BUS IN with 2 Meter Cable with Micro Ports |                             | Mini-Change BUS IN/BUS OUT with 2 Meter Cable with Micro Ports |                             |
|          |       | Old Part No.                        | Order No.                   | Old Part No.                                           | Order No.                   | Old Part No.                                                   | Order No.                   |
| Top      | 4     | DND4200                             | <a href="#">130037-0004</a> | DND4500-02                                             | <a href="#">130037-0006</a> | DND4300-02                                                     | <a href="#">130037-0005</a> |

# DeviceNet\* Tee and Splitter

130035/130039



## Features and Benefits

- Phosphor bronze contacts for greatest reliability
- Variety of Mini-Change® to Micro-Change® (M12) cordset configurations for installation flexibility
- Tees enable tapping into trunk line to add drop lines or devices
- Splitters allow service to two devices through just one connection
- Power monitor tees show you what the power condition is, when an improper condition occurred and what that condition is.

## Tee

### Electrical

Voltage: 50V  
Current: Mini-Change drop—8.0A  
Micro-Change drop—3.0A  
Contact Material: Phosphor Bronze Alloy  
Contact Plating: Gold over Nickel Alloy

### Mechanical

Connector Face: Mini-Change Drop Tee—TPE  
Micro-Change Drop Tee—PCV  
Molded Body: Mini-Change Drop Tee—TPE  
Micro-Change Drop Tee—PCV  
Coupling Nut: Zinc diecast black E-Coat  
MICT555—Nickel-plated Brass

### Environmental

Protection: Mini-Change—IP67  
Micro-Change—IP67

## Splitter

### Reference Information

UL File No.: E152210  
CSA File No.: LR6337

### Electrical

Voltage: Micro-Change—250V AC/DC  
Mini-Change—600V AC/DC  
Current: Micro-Change—4.0A  
Mini-Change—10A






### Mechanical

Connector Face: Micro-Change—Nylon 6/6  
Mini-Change—PVC  
Molded Body: PVC  
Coupling Nut: Zinc diecast with black epoxy coat, optional stainless Steel type 303 Nickel-plated Brass  
Outside Diameter: Thin—0.27" (6.9mm)  
Thin-Flex—0.30" (12.2mm)


### Environmental

Protection: IP67

## Tee

| Configuration |  |                             |  |                             |  |                             |  |                             |  |                             |
|---------------|------------------------------------------------------------------------------------|-----------------------------|------------------------------------------------------------------------------------|-----------------------------|------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------|-----------------------------|
|               | Standard Bus Drop with Power Diagnostics                                           |                             | Bus Drop Wye                                                                       |                             | Mini-Change Drop                                                                   |                             | Bus Drop Micro                                                                       |                             | Micro-Bus Drop                                                                       |                             |
|               | Old Part No.                                                                       | Order No.                   | Old Part No.                                                                       | Order No.                   | Old Part No.                                                                       | Order No.                   | Old Part No.                                                                         | Order No.                   | Old Part No.                                                                         | Order No.                   |
| Right         | DN3020-PM-1                                                                        | <a href="#">130035-0061</a> | DN3200                                                                             | <a href="#">130035-0071</a> | DN3020                                                                             | <a href="#">130035-0057</a> |                                                                                      |                             | MICT555                                                                              | <a href="#">130035-0090</a> |
| Back          |                                                                                    |                             |                                                                                    |                             |                                                                                    |                             | DND3020                                                                              | <a href="#">130039-0341</a> |                                                                                      |                             |
| Left          | DN3020-PM-3                                                                        | <a href="#">130035-0060</a> |                                                                                    |                             |                                                                                    |                             |                                                                                      |                             |                                                                                      |                             |

## Splitter



| Male-Female/Female |             |
|--------------------|-------------|
| Old Part No.       | Order No.   |
| DNYG001            | 130039-0396 |


## Tee Gender Configuration Chart

| Old Part No. | Order No.                   | Left Trunk Connection | Right Trunk Connection | Drop Connection |
|--------------|-----------------------------|-----------------------|------------------------|-----------------|
| DN3020PM-1   | <a href="#">130035-0060</a> | Male                  | Female                 | Female          |
| DN3020PM-3   | <a href="#">130035-0061</a> | Female                | Male                   |                 |
| DN3200       | <a href="#">130035-0071</a> |                       |                        |                 |
| DND3020      | <a href="#">130035-0057</a> |                       |                        |                 |
| MICT555      | <a href="#">130035-0090</a> |                       |                        |                 |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet\* Trunk Gender Changer

**130035/130039**  
**Mini-Change® Connection**



## Features and Benefits

- Phosphor bronze contacts for greatest reliability
- Change connection interface from male to female or vice-versa
- Female-to-Male, Straight or 90° versions
- Right angle version specially designed for tight spaces

## Electrical

Voltage: 50V  
Current: 8.0A  
Contact Material: Phosphor Bronze alloy  
Contact Plating: Gold over Nickel

## Mechanical

Connector Face: Thermoplastic Elastomer  
Molded Body: Thermoplastic Elastomer  
Coupling Nut: Zinc diecast, black E-Coat—Stainless Steel, Nickel-plated Brass optional

## Environmental


Protection: IP67

| Male Straight/Male |                             | Female Straight/Female |                             | Female/Male 90° |                             |
|--------------------|-----------------------------|------------------------|-----------------------------|-----------------|-----------------------------|
| Old Part No.       | Order No.                   | Old Part No.           | Order No.                   | Old Part No.    | Order No.                   |
| 115060A            | <a href="#">130035-0015</a> | 115010A                | <a href="#">130039-0351</a> | 115032A         | <a href="#">130035-0013</a> |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet\* Termination Resistor

**130039**



## Features and Benefits

- Phosphor bronze contacts for greatest reliability
- Diagnostics versions indicate power connection and correct polarity
- Used to terminate end of data line
- Trunk and drop versions
- LED diagnostic versions

## Electrical

Voltage: 50V  
Current: Mini-Change®—8.0A  
Micro-Change®—4.0A  
Contact Material: Phosphor Bronze Alloy  
Contact Plating: Gold over Copper Alloy  
LED: Green—Proper polarity  
Red—Improper polarity

## Mechanical

Connector Face: Mini-Change: PVC  
Micro-Change: Nylon  
Molded Body: Diagnostic—Clear PVC  
Standard—Gray PVC  
Coupling Nut: Zinc diecast, black E-Coat optional  
302 stainless

## Environmental


Protection: IP67

| Option   | Trunk (Mini-Change Connection) |                             |              |                             | Drop (Micro-Change (M12) Connection) |                             |              |                             |
|----------|--------------------------------|-----------------------------|--------------|-----------------------------|--------------------------------------|-----------------------------|--------------|-----------------------------|
|          | Male                           |                             | Female       |                             | Male                                 |                             | Female       |                             |
|          | Old Part No.                   | Order No.                   | Old Part No. | Order No.                   | Old Part No.                         | Order No.                   | Old Part No. | Order No.                   |
| Standard | DN100                          | <a href="#">130039-0370</a> | DN150        | <a href="#">130039-0376</a> | DND100                               | <a href="#">130039-0382</a> | DND150       | <a href="#">130039-0385</a> |
| with LED | DN100L                         | <a href="#">130039-0371</a> | DN150L       | <a href="#">130039-0072</a> |                                      |                             |              |                             |
| Jumpered |                                |                             |              |                             | DND101                               | <a href="#">130039-0125</a> | DND151       | <a href="#">130039-0386</a> |

| Bus Extender |                             |
|--------------|-----------------------------|
| Old Part No. | Order No.                   |
| DNTEXT-C     | <a href="#">130039-0389</a> |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# DeviceNet\* Mini-Change® and Micro-Change® (M12) Field Attachable Connector 130034

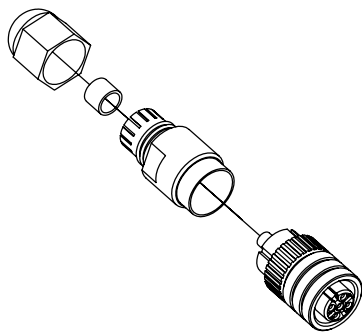

- Features and Benefits**
- Accepts a wide range of DeviceNet cables for maximum installation flexibility
  - Field termination for specific length or repair
  - Internal and external threads
  - Color-coded screw terminators make for error free field installation

**Mini-Change® DeviceNet Field Attachable**

**Reference Information**  
CSA File No.: LR6837

**Electrical**  
Voltage: 600V AC/DC  
Current: 8.0A

**Mechanical**  
Connector Face: Polyurethane  
Connector Body: Polyamide Pag  
Contact: Gold-plated Brass  
Coupling Nut: Nickel-plated Brass  
Grommet: Neoprene  
Cable Range OD: 0.20-0.48" (5.0-12.0mm)  
Acceptable Cable Types: Thick, thin, mid  
Acceptable Wire Gauges: #24 AWG (0.25mm²) to #15 AWG (2.0mm²)  
Color Coding: Per ODVA Standards

**Environmental**  
Protection: IP67

**Micro-Change® (M12) DeviceNet Field Attachable**

**Reference Information**  
CSA File No.: LR6835

**Electrical**  
Voltage Rating: 36V DC  
Current: 4.0A

**Mechanical**  
Connector Face: Polyamide  
Molded Body: Polyamide  
Contact: Silver-plated Brass  
Coupling Nut: Nickle-plated Brass  
Grommet: Nitrite rubber  
Cable Range OD: 0.16 to 32" OD (4.1 to 8.1mm)  
Acceptable Cable Types: Thin, Thin-Flex, Thin-600V  
Color Coding: Per DNET standards


**Environmental**  
Protection: IP67

| Trunk (Mini-Change® Connection) |                             |               |                             | Drop (Micro-Change® (M12) Connection) |                             |               |                             |
|---------------------------------|-----------------------------|---------------|-----------------------------|---------------------------------------|-----------------------------|---------------|-----------------------------|
| Female Straight                 |                             | Male Straight |                             | Female Straight                       |                             | Male Straight |                             |
| Old Part No.                    | Order No.                   | Old Part No.  | Order No.                   | Old Part No.                          | Order No.                   | Old Part No.  | Order No.                   |
| 1A5000-34DN                     | <a href="#">130034-0005</a> | 1A5006-34DN   | <a href="#">130034-0006</a> | 8A5000-32DN                           | <a href="#">130034-0007</a> | 8A5006-32DN   | <a href="#">130034-0008</a> |

\* DeviceNet is a trademark of Open DeviceNet Vendor Association (ODVA)

# PROFIBUS I/O Module

112038



## Features and Benefits

- Accepts both M12 threaded and Ultra-Lock®
- Compact
  - 30mm wide package size
  - 4 ports, M12 Ultra-Lock technology
  - Speed: 9.6 Kbps to 12 Mbps
  - Slave DP-VO
- Classic
  - 60mm wide package size
  - 8 ports, M12 Ultra-Lock technology
  - Speed: 9.6 Kbps to 12 Mbps
  - Slave DP-VO

## Reference

EMC: IEC 61000-6-2  
Protection: IEC IP67 according to IEC 60529  
Vibration: IEC 60068-2-6 conformance  
Approvals: CE, UL, CUL and PNO certification

## Compact

### Physical

I/O Configurations:

- 8 input
- 4 inputs/4 outputs
- 8 outputs
- 6 inputs/2 outputs

I/O Connectors:

- 5-pole female M12 BradConnectivity™ Ultra-Lock or
- 3-pole female threaded M8 connectors

Bus Connectors:

- Bus in: Male reverse keyway M12 5-pole, B-coded
- Bus out: Female reverse keyway M12 5-pole, B-coded
- BradConnectivity Ultra-Lock

Power Connectors:

Power in: Male Micro-Change® M12 5-pole

Address Settings:

- 1-99 by rotary switches;
- 1-126 by set\_slave\_address command

Input Type:

Dry contact, PNP or NPN

Housing Dimensions:

30 x 175 x 20mm (1.18 x 6.89 x 0.78")

Mounting Dimensions:

- 23mm (0.91") horizontal on centers,
- 168mm (6.61") vertical centers

Storage Temperature: -25 to 90° C (-13 to 194° F)

RH Operating: 5 to 95% non-condensing

Shock: 10G, 11ms, 3 axis

## Electrical

External Power Requirements:

Module and input power: 24V DC, device current and module Output power: 24V DC (13 to 28V), 4.0A max. per module

Baud Rate Settings: Auto baud, all Profibus® baud rates up to 12 MBaud

Input Delay: 3ms

Input Device Supply: 140mA per port at 25° C

Output Load Current:

Sourcing, 1.4A per channel max., 4.0A per module max.

Input Signal Voltage: "0": -2 to 7V/ "1": 9 to 30V

Output Voltage: Auxiliary power value: 1V

## Classic

### Physical

I/O Configurations:

- 16 inputs
- 12 inputs/4 outputs
- 14 inputs/2 outputs
- 8 inputs/8 outputs
- 5-pole female M12 BradConnectivity Ultra-Lock allows
- 2 input or 2 output channels per connector

Bus Connectors:

- Bus in: Male reverse-key M12 5-pole, B-coded
- Bus out: Female reverse-key M12 5-pole, B-coded

Power Connectors:

- Power in: Male Mini-Change® 5-pole
- Power out: Female Mini-Change 5-pole

Address Settings:

- 1-99 by rotary switches (0 = factory default of 126);
- 1-126 by set\_slave\_address command

Input Type:

Compatible with dry contact and PNP or NPN 3-wire switches; electronic short circuit protection

Housing Dimensions:

60 x 220 x 20mm (2.36 x 8.66 x 0.78")

Mounting Dimensions:

- 37.5mm (1.48") horizontal on centers,
- 210mm (8.27") vertical on centers

## Mechanical

Maximum Switching Frequency: 200 Hz

## Electrical

External Power Requirements:

Module and input power: 24V DC, device current and module

Output power: 24V DC (13 to 28V), 8.0A max. per module

Baud Rate Settings: Auto baud, all Profibus® baud rates up to 12 MBaud

Input Delay: 3ms

Input Device Supply: 140mA per port at 25° C

Output Load Current:

2.0A per channel max., electronic short circuit protection

Input Signal Voltage: "0": -2 to 5V/ "1": 10 to 28V

Output Voltage: Supply value less 1V

## LED Indicators

### Electrical

Output Power (O):

Green—External supply present

Input/Output:

- Compact—4 port: 1A to 4B
- 8 port: 1 to 8
- Green: input/output on
- Red: input/output fault
- Classic—M12: 1A to 8B
- Green: input/output on
- Red: input/output fault

## Physical

Profibus Network Status (NET):

- Green—Running
- Red—Device not configured

I/O Module Diagnostics:

- Off—No fault
- Red—Fault

Module and Input Power (I):

Green—External supply present

## Compact Threaded and Ultra-Lock (M12) Connection

| Ports | Old Part No.   | Order No.                   | Input Interface | Description      |
|-------|----------------|-----------------------------|-----------------|------------------|
| 4     | TBDPB-480N-B8U | <a href="#">112038-0009</a> | NPN             | 8 input          |
|       | TBDPB-480P-B8U | <a href="#">112038-0011</a> | PNP             |                  |
|       | TBDPB-462N-B8U | <a href="#">112038-0007</a> | NPN             | 6 input/2 output |
|       | TBDPB-462P-B8U | <a href="#">112038-0008</a> | PNP             |                  |
|       | TBDPB-444N-B8U | <a href="#">112038-0005</a> | NPN             | 4 input/4 output |
|       | TBDPB-444P-B8U | <a href="#">112038-0006</a> | PNP             |                  |
|       | TBDPB-408P-B8U | <a href="#">112038-0003</a> | PNP             | 8 output         |

## Compact Threaded and Ultra-Lock (M8) Connection


| Ports | Old Part No.   | Order No.                   | Input Interface | Description      |
|-------|----------------|-----------------------------|-----------------|------------------|
| 8     | TBDPB-880N-B84 | <a href="#">112038-0019</a> | NPN             | 8 input          |
|       | TBDPB-880P-B84 | <a href="#">112038-0021</a> | PNP             |                  |
|       | TBDPB-862N-B84 | <a href="#">112038-0017</a> | NPN             | 6 input/2 output |
|       | TBDPB-862P-B84 | <a href="#">112038-0018</a> | PNP             |                  |
|       | TBDPB-844N-B84 | <a href="#">112038-0015</a> | NPN             | 4 input/4 output |
|       | TBDPB-844P-B84 | <a href="#">112038-0016</a> | PNP             |                  |
|       | TBDPB-808P-B84 | <a href="#">112038-0014</a> | PNP             | 8 output         |

## Classic Threaded and Ultra-Lock (M12) Connection

| Ports | Old Part No.   | Order No.                   | Input Interface | Description       |
|-------|----------------|-----------------------------|-----------------|-------------------|
| 8     | TCDPB-8D0N-B1U | <a href="#">112038-0030</a> | NPN             | 16 input          |
|       | TCDPB-8D0P-B1U | <a href="#">112038-0031</a> | PNP             |                   |
|       | TCDPB-8C2N-B1U | <a href="#">112038-0028</a> | NPN             | 14 input/2 output |
|       | TCDPB-8C2P-B1U | <a href="#">112038-0029</a> | PNP             |                   |
|       | TCDPB-8B4N-B1U | <a href="#">112038-0026</a> | NPN             | 12 input/4 output |
|       | TCDPB-8B4P-B1U | <a href="#">112038-0027</a> | PNP             |                   |
|       | TCDPB-888N-B1U | <a href="#">112038-0024</a> | NPN             | 8 input/8 output  |
|       | TCDPB-888P-B1U | <a href="#">112038-0025</a> | PNP             |                   |

# PROFIBUS Double-Ended and D-Sub Cordset

120098



## Features and Benefits (Double-Ended Cordset)

- Double ended straight and 90°
- Used in a variety of configurations where a complete daisy-chain plug-and-play solution is desired

## Features and Benefits (D-Sub Cordset)

- Shielded D-Sub connector maintains signal integrity in noisy environments
- D-Sub includes termination switch for field installation flexibility
- Plug and play connection between PROFIBUS interface cards and modules
- D-Sub to single or dual ended M12
- Horizontal, vertical, straight or 90° configurations
- Standard and application specific lengths

## Physical

### Micro-Change Connector

Connector Face: Nylon 6/6

Molded Body: PUR

Coupling Nut: Nickel-plated Brass (360° Shielded)

### 9-pin D-Sub Connector

Material: ABS

## Environmental

### Micro-Change Connector

Protection: IP67, NEMA 6

### 9-pin D-Sub Connector

Protection: IP40

## Cable

Outside Diameter:  $8 \pm 0.2\text{mm}$

## Cable Construction

Jacket Material: PUR

Inner Material Insulation: PE insulation

Shield Type: PETP/AV foil, Tinned Copper braid 65%

Conductor: Twisted pair 24 AWG

## Cable Flex Information

Torsion: Survived more than 2 million cycles at 360° over 1m

C-Track: Survived more than 3 million cycles at acceleration of  $10\text{m/s}^2$  and process speed of  $5\text{m/s}$

Bend Radius: 7.5 x cable diameter (static)

## Electrical

Voltage: 250V AC/DC

Current: 4A

## D-Sub (9-pin) to D-Sub (9-pin)

| Configuration                  | Horizontal      |                             | Vertical        |                             | Single-Ended    |                             |
|--------------------------------|-----------------|-----------------------------|-----------------|-----------------------------|-----------------|-----------------------------|
|                                | Old Part Number | Order Number                | Old Part Number | Order Number                | Old Part Number | Order Number                |
| Horizontal                     | MM3S60PP4M010   | <a href="#">120098-0198</a> | MM3S62PP4M010   | <a href="#">120098-0200</a> | M03S06PP4M010   | <a href="#">120098-0202</a> |
|                                | MM3S60PP4M050   | <a href="#">120098-0118</a> | MM3S62PP4M050   | <a href="#">120098-0201</a> | M03S06PP4M050   | <a href="#">120098-0124</a> |
| Vertical                       | MP3S62PP4M010   | <a href="#">120098-0199</a> |                 |                             |                 |                             |
|                                | MP3S62PP4M050   | <a href="#">120098-0153</a> |                 |                             |                 |                             |
| Vertical with Programming Port |                 |                             |                 |                             | P03S07PP4M010   | <a href="#">120098-0203</a> |
|                                |                 |                             |                 |                             | P03S07PP4M050   | <a href="#">120098-0224</a> |

## D-Sub (9-pin) to Dual D-Sub (9-pin)

| Configuration                  | Horizontal      |                             | Vertical        |                             | Horizontal/Vertical |                             |
|--------------------------------|-----------------|-----------------------------|-----------------|-----------------------------|---------------------|-----------------------------|
|                                | Old Part Number | Order Number                | Old Part Number | Order Number                | Old Part Number     | Order Number                |
| Horizontal                     | MM3G60PP4M010   | <a href="#">120098-0204</a> | MM3G61PP4M010   | <a href="#">120098-0207</a> | MM3G70PP4M010       | <a href="#">120098-0211</a> |
|                                | MM3G60PP4M050   | <a href="#">120098-0205</a> | MM3G61PP4M050   | <a href="#">120098-0208</a> | MM3G70PP4M050       | <a href="#">120098-0212</a> |
| Vertical with Programming Port | MP3G62PP4M010   | <a href="#">120098-0206</a> | MP3G63PP4M010   | <a href="#">120098-0209</a> | MP3G72PP4M010       | <a href="#">120098-0213</a> |
|                                | MP3G62PP4M050   | <a href="#">120098-0154</a> | MP3G63PP4M050   | <a href="#">120098-0210</a> | MP3G72PP4M050       | <a href="#">120098-0214</a> |

## D-Sub (9-pin) to Micro-Change® (M12) Cordsets


| Single Reverse Keyway (end of segment) Module Connection |                  |               |                             |               |                             |                 |                             |               |                             |
|----------------------------------------------------------|------------------|---------------|-----------------------------|---------------|-----------------------------|-----------------|-----------------------------|---------------|-----------------------------|
| Configuration                                            | Cable Length (m) | Male Straight |                             | Male 90°      |                             | Female Straight |                             | Female 90°    |                             |
|                                                          |                  | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.  | Order No.                   |
| Horizontal                                               | 1.0              | BM5S60PP4M010 | <a href="#">120098-0062</a> | BM5S61PP4M010 | <a href="#">120098-0223</a> | BM5S30PP4M010   | <a href="#">120098-0155</a> | BM5S31PP4M010 | <a href="#">120098-0184</a> |
|                                                          | 5.0              | BM5S60PP4M050 | <a href="#">120098-0064</a> | BM5S61PP4M050 | <a href="#">120098-0157</a> | BM5S30PP4M050   | <a href="#">120098-0055</a> | BM5S31PP4M050 | <a href="#">120098-0185</a> |
| Vertical with Programming Port                           | 1.0              | BP5S62PP4M010 | <a href="#">120098-0079</a> | BP5S63PP4M010 | <a href="#">120098-0181</a> | BP5S32PP4M010   | <a href="#">120098-0183</a> | BP5S33PP4M010 | <a href="#">120098-0077</a> |
|                                                          | 5.0              | BP5S62PP4M050 | <a href="#">120098-0081</a> | BP5S63PP4M050 | <a href="#">120098-0182</a> | BP5S32PP4M050   | <a href="#">120098-0075</a> | BP5S33PP4M050 | <a href="#">120098-0161</a> |

## D-Sub (9-pin) to Dual Micro-Change® (M12) Cordsets

| Dual Reverse Keyway (Daisy chain) Module Connection |                  |               |                             |               |                             |                 |                             |               |                             |                                           |
|-----------------------------------------------------|------------------|---------------|-----------------------------|---------------|-----------------------------|-----------------|-----------------------------|---------------|-----------------------------|-------------------------------------------|
| Configuration                                       | Cable Length (m) | Male Straight |                             | Male 90°      |                             | Female Straight |                             | Female 90°    |                             | Male Straight/Female Straight             |
|                                                     |                  | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.  | Order No.                   |                                           |
| Horizontal                                          | 1.0              | BM5G60PP4M010 | <a href="#">120098-0150</a> | BM5G61PP4M010 | <a href="#">120098-0151</a> | BM5G30PP4M010   | <a href="#">120098-0190</a> | BM5G31PP4M010 | <a href="#">120098-0194</a> | BM5G70PP4M010 <a href="#">120098-0048</a> |
|                                                     | 5.0              | BM5G60PP4M050 | <a href="#">120098-0045</a> | BM5G61PP4M050 | <a href="#">120098-0187</a> | BM5G30PP4M050   | <a href="#">120098-0191</a> | BM5G31PP4M050 | <a href="#">120098-0195</a> | BM5G70PP4M050 <a href="#">120098-0180</a> |
| Vertical                                            | 1.0              | BM5G62PP4M010 | <a href="#">120098-0186</a> | BM5G63PP4M010 | <a href="#">120098-0188</a> | BM5G32PP4M010   | <a href="#">120098-0192</a> | BM5G33PP4M010 | <a href="#">120098-0196</a> | BM5G72PP4M010 <a href="#">120098-0051</a> |
|                                                     | 5.0              | BM5G62PP4M050 | <a href="#">120098-0047</a> | BM5G63PP4M050 | <a href="#">120098-0189</a> | BM5G32PP4M050   | <a href="#">120098-0193</a> | BM5G33PP4M050 | <a href="#">120098-0197</a> | BM5G72PP4M050 <a href="#">120098-0053</a> |

# PROFIBUS Receptacle

120099



## Features and Benefits

- Used in control panels and junction boxes
- Epoxy potted for rugged industrial environments
- Male and female configurations
- Connects the external bus with an enclosure
- Front panel or back panel mount
- Bulkhead feed-through
- Wire or cable lead

## Electrical

Voltage: 250V AC/DC  
Current: 4.0A

## Mechanical

Shell: Nickel-Plated Brass  
Insert: Nylon 6/6  
Conductors: Receptacles—#22 AWG PVC  
Bulkhead Feed-Through—Solid Phosphor Bronze  
O-Ring: Nitrile rubber

## Environmental

Protection: IP67

## Cable Construction

Jacket Material: PUR  
Inner Material Insulation: PE insulation  
Shield Type: PETP/AV foil, Tinned Copper braid 65%  
Conductor: Twisted pair 24 AWG

## Cable Flex Information

Torsion: Survived more than 2 million cycles  
at 360° over 1m  
C-Track: Survived more than 3 million cycles  
at acceleration of 10m/s<sup>2</sup> and  
process speed up to 5m/s  
Bend Radius: 7.5 x cable diameter (static)

## Cable

Outside Diameter: 8 ± 0.2mm

## Data Line Micro-Change® (M12)


| Mounting Style | Cable Length (m) | Male Straight  |                             | Female Straight |                             |
|----------------|------------------|----------------|-----------------------------|-----------------|-----------------------------|
|                |                  | Old Part No.   | Order No.                   | Old Part No.    | Order No.                   |
| Back Panel     | 1.0              | BR5U76PP4M0103 | <a href="#">120099-0013</a> | BR5U70PP4M0103  | <a href="#">120099-0005</a> |
|                | 5.0              | BR5U76PP4M0503 | <a href="#">120099-0019</a> | BR5U70PP4M0503  | <a href="#">120099-0010</a> |

## Trunk

| Mounting Style | Wire Length | Male Straight |                             | Female Straight |                             | Horizontal/Vertical |                             |
|----------------|-------------|---------------|-----------------------------|-----------------|-----------------------------|---------------------|-----------------------------|
|                |             | Old Part No.  | Order No.                   | Old Part No.    | Order No.                   | Old Part No.        | Order No.                   |
| Front Panel    | 3"          | 81688-030     | <a href="#">120099-0025</a> | 81689-030       | <a href="#">120099-0024</a> | BR5L30              | <a href="#">120099-0001</a> |

# PROFIBUS Terminator and Tee

120101/120102



## Features and Benefits

- Shielded to reduce RFI/EMI and improve signal integrity
- Male reverse key Micro-Change® terminator
- M12 threads
- Provides quick disconnection of bus line
- Allows disconnection of node without shutting down the network
- Used with remote activity I/O modules

## Electrical

Voltage: Data Line Tee—30V AC/36V DC  
Terminators—250V AC/DC  
Current: 4A

## Mechanical

Connector Face: Nylon 6/6  
Molded Body: PVC  
O-Ring: Data Line Tee—Viton  
Terminators—Nitrile number  
Coupling Nuts: Nickel-plated Brass  
Shielding Sleeves: Nickel-plated Brass

## Environmental

Protection: Data Line Tee—IP67 (IEC 605290)  
Terminators—IP67

## General

Coupling nuts, pin 5 and PCB all connected to provide full shielding; Reverse key for Profibus circuitry includes line balancing inductors

## Data Line Micro-Change® (M12) Tee

| Old Part No. | Order No.                   |
|--------------|-----------------------------|
| PDT501       | <a href="#">120101-0002</a> |

## Micro-Change (M12) Terminator

| Old Part No. | Order No.                   |
|--------------|-----------------------------|
| B05S06       | <a href="#">120102-0002</a> |


## Tee Gender Configuration Chart

| Male   | Female  | Male     |
|--------|---------|----------|
| Bus in | Bus Out | Drop Bus |

# PROFIBUS

## Field-Attachable Connector

### 120100/120103



- Features and Benefits**
- Shielded to reduce RFI/EMI and improve signal integrity
  - D-Sub IDC with or without built-in diagnostics
  - Male and female configurations
  - Field termination for specific length or repair
  - Easy field installation of quick-disconnect design
  - D-Sub horizontal or vertical

#### Mirco-Change® (M12)

**Electrical**  
 Voltage: 250V AC/DC  
 Current: 4.0A

**Mechanical**  
 Connector Face: Polyamide  
 Body: Nickel-plated Brass  
 Contact: Silver-plated Brass  
 Coupling Nut: Nickel-plated Brass  
 Grommet: Nitrile rubber  
 Conductor Size: 22 AWG

**Environmental**  
 Protection: IP67

**D-Sub**  
**Electrical**  
 Voltage: 30V AC/DC  
 Current: 4.0A  
**Mechanical**  
 Housing: Diecast Zinc  
 Housing Material: ABS  
 Cable Diameter: 8.0mm  
 Cable Connection: IDC technology  
 Terminating Resistor: Yes, externally switch selectable  
**Environmental**  
 Protection: IP20

#### Micro-Change® (M12)

| Male Straight |                             | Female Straight |                             |
|---------------|-----------------------------|-----------------|-----------------------------|
| Old Part No.  | Order No.                   | Old Part No.    | Order No.                   |
| BA5506-32     | <a href="#">120100-0002</a> | BA5500-32       | <a href="#">120100-0001</a> |


#### D-Sub

|                     | Vertical     |                             | Horizontal   |                             | 45°          |                             |
|---------------------|--------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|
|                     | Old Part No. | Order No.                   | Old Part No. | Order No.                   | Old Part No. | Order No.                   |
| With Diagnostics    | PA9D01-42    | <a href="#">120103-0001</a> | MA9D00-42    | <a href="#">120103-5001</a> | PA9D08-42    | <a href="#">120103-0003</a> |
| Without Diagnostics | PA9S01-42    | <a href="#">120103-0005</a> |              |                             |              |                             |

# Ethernet Cordset RJ45 Threaded

**130050**

**Single and Double-Ended**



## Features and Benefits

- Overmolded threaded connectors for secure, robust IP67 connection between Ethernet nodes
- First IP67 industrial Ethernet connector
- Category 5e compliant
- Achieves IEC IP67 rated seal when mated with a RJ-Lnxx® receptacle

## Unshielded Stranded PVC

### Physical

Cable: Stranded  
Conductors: #24 AWG stranded tinned Copper  
Insulation: Polyolefin 0.037" (0.94mm) nominal diameter  
Pair: 2 insulated conductors twisted together, lay lengths varied between pairs to minimize cross talk  
Core: 4 pairs cabled together  
Binder: Polyester tape, 20% overlay minimum  
Jacket: PVC 0.025" (0.635mm) nominal thickness  
Diameter: 0.220" (5.588mm) nominal  
Wiring Sequence: 568B

### Electrical

Cable: Stranded  
Capacitance: 15 pF/FT  
Velocity of Propagation: 70% nominal  
Conductor DC Resistance: 9.0/100 meter max.  
Impedance: 100 ±15 ohms  
Delay Skew: 10 nS/100 meter typical,  
25 nS/100 meter max.  
TIA/EIA Rating: Category 5E

| Frequency (MHz) | Attenuation (dB/100 M max.) | Next (dB min) |
|-----------------|-----------------------------|---------------|
| 1               | 1.9                         | 76            |
| 4               | 3.9                         | 72            |
| 16              | 7.9                         | 61            |
| 20              | 9.0                         | 60            |
| 31.25           | 11.0                        | 55            |
| 62.5            | 15.9                        | 53            |
| 100             | 20.7                        | 50            |

## Shielded Solid PUR

### Physical

Cable: Solid core  
Conductors: #24 AWG solid bare Copper, 0.020" (0.510mm)  
Insulation: 0.009" (0.229mm) of cellular polyethylene, 0.04" (1.0mm) nominal diameter  
Pair: 2 insulated conductors twisted together, lay lengths varied between pairs to minimize cross talk  
Core: 4 pairs cabled together  
Binder: Polyester tape, 20% overlay minimum  
Shield: Aluminum/polyester tape, 20% overlay minimum  
Drain Wire: #24 AWG stranded (7/32") Tin-plated Copper  
Jacket: Black polyurethane 0.025" (.635mm) nominal thickness  
Diameter: 0.245" (6.223mm) nominal  
Wiring Sequence: 568B

### Electrical

Cable: Solid  
Capacitance: 5.6 nF/100 meter max.  
Velocity of Propagation: 72% nominal  
Conductor DC Resistance: 9.38/100 meter max.  
Impedance: 100 ±15 ohms  
Delay Skew: 45 nS/100 meter max.  
TIA/EIA Rating: Category 5E

| Frequency (MHz) | Attenuation (dB/100 M max.) | Next (dB min) |
|-----------------|-----------------------------|---------------|
| 1               | 2.0                         | 65.3          |
| 4               | 4.1                         | 56.3          |
| 10              | 6.5                         | 50.3          |
| 16              | 8.2                         | 47.3          |
| 20              | 9.3                         | 45.8          |
| 31.25           | 11.7                        | 42.9          |
| 62.5            | 17.0                        | 38.4          |
| 100             | 22.0                        | 35.3          |

## Shielded Stranded PUR

### Physical

Cable: Proplex™ Kevlar wrapped  
Conductors: #26 AWG stranded bare copper  
Insulation: Color coded HFFR, halogen free, 0.035" (0.90mm) nominal diameter  
Pair: Cabled with Kevlar strength member and tape wrapped  
Core: 4 pairs cabled together  
Shield: Inner—Aluminum mylar, 100% coverage  
Outer—Tinned Copper  
Braid—80% coverage  
Jacket: Black urethane 0.059" (1.5mm) nominal thickness  
Diameter: 0.287" (7.3mm) nominal  
Wiring Sequence: 568B

### Electrical

Cable: Proplex Kevlar wrapped  
Capacitance: 4.6 nF/100 meters  
Propagation Delay: 5.2 nS/M maximum  
Conductor DC Resistance: 15/100 meter max.  
Impedance: 100 ±15 ohms  
Delay Skew: 20 nS/100 meter typical,  
25 nS/100 meter max.  
TIA/EIA Rating: Category 5E


| Frequency (MHz) | Attenuation (dB/100 M max.) | Next (dB min) |
|-----------------|-----------------------------|---------------|
| 1               | 3.15                        | 62            |
| 4               | 6.45                        | 53            |
| 16              | 12.3                        | 44            |
| 20              | 13.8                        | 42            |
| 31.25           | 17.7                        | 40            |
| 62.5            | 25.6                        | 35            |
| 100             | 33.0                        | 32            |

| Cable Type                                      | Length (m) | Single-Ended    |                             | Double-Ended                    |                             |                             |                             |
|-------------------------------------------------|------------|-----------------|-----------------------------|---------------------------------|-----------------------------|-----------------------------|-----------------------------|
|                                                 |            | Industrial Male |                             | Industrial Male/Industrial Male |                             | Male Standard/Male Standard |                             |
|                                                 |            | Old Part No.    | Order No.                   | Old Part No.                    | Order No.                   | Old Part No.                | Order No.                   |
| Unshielded Stranded PVC                         | 1.0        | ENQ3105M010     | <a href="#">130050-0506</a> | ENQ3115M010                     | <a href="#">130050-0251</a> | ENQ3335M010                 | <a href="#">130050-0507</a> |
|                                                 | 5.0        | ENQ3105M050     | <a href="#">130050-0250</a> | ENQ3115M050                     | <a href="#">130050-0255</a> | ENQ3335M050                 | <a href="#">130050-0273</a> |
| Shielded Solid PUR                              | 1.0        | ENS3105M010     | <a href="#">130050-0408</a> | ENS3115M010                     | <a href="#">130050-0412</a> | ENS3335M010                 | <a href="#">130050-0503</a> |
|                                                 | 5.0        | ENS3105M050     | <a href="#">130050-0502</a> | ENS3115M050                     | <a href="#">130050-0416</a> | ENS3335M050                 | <a href="#">130050-0437</a> |
| Shielded Stranded PUR (Proplex™) Kevlar Wrapped | 1.0        | ENP3105M010     | <a href="#">130050-0162</a> | ENP3115M010                     | <a href="#">130050-0170</a> | ENP3335M010                 | <a href="#">130050-0457</a> |
|                                                 | 5.0        | ENP3105M050     | <a href="#">130050-0166</a> | ENP3115M050                     | <a href="#">130050-0174</a> | ENP3335M050                 | <a href="#">130050-0193</a> |

# Micro-Change® (M12) Ethernet Cordset

**130048**

**Single and Double-Ended**



## Features and Benefits

- For connecting Micro-Change (M12) Ethernet system components in harsh industrial environments
- Category 5e compliant
- IP67 rated, perfect for harsh industrial environments
- D-coded to ensure proper alignment/mating

## Unshielded PVC

### Mechanical

Cable Conductors: 4/24 AWG stranded tinned wire  
Outside Diameter (Nom): 5.60mm  
Jacket Material: Teal PVC  
Inner Material Insulation: HDPE  
Certification: UL CMR

### Environmental

Protection: IP67

## Shielded PVC

### Electrical

TIA/EIA Rating: CAT5E  
UL: CL2

### Mechanical

Connector Face: PUR  
Molded Body: Black PUR  
Coupling Nut: Nickel-plated Brass  
Cable Conductors: 4/24 AWG stranded tinned wire  
Outside Diameter (Nom): 6.10mm  
Jacket Material: Teal PVC  
Inner Material Insulation: Foamed Polypropylene  
Certification: UL CMR  
Shield Type: Foil shield: 100% coverage, 25% min. overlap

### Environmental

Protection: IP67

## Shielded PUR

### Mechanical

Cable Conductors: 4/22 AWG stranded tinned wire  
Outside Diameter (Nom): 6.50mm  
Jacket Material: Green PUR  
Inner Material Insulation: FRNC  
Certification: UL listed CMX  
Shield Type: Foil—100% coverage  
Braid—85% coverage

### Environmental

Protection: IP67, sun/oil resistant

## Single-Ended

| Cable Type                               | Length (m) | Male Straight |                             | Male 90°      |                             |
|------------------------------------------|------------|---------------|-----------------------------|---------------|-----------------------------|
|                                          |            | Old Part No.  | Order No.                   | Old Part No.  | Order No.                   |
| Unshielded/Stranded Conductor/PVC Jacket | 1.0        | E10A00603M010 | <a href="#">130048-0038</a> | E10A00703M010 | <a href="#">130048-0062</a> |
|                                          | 5.0        | E10A00603M050 | <a href="#">130048-0040</a> | E10A00703M050 | <a href="#">130048-0064</a> |
| Shielded/Stranded Conductor/PVC Jacket   | 1.0        | E10A00610M010 | <a href="#">130048-0046</a> | E10A00710M010 | <a href="#">130048-0070</a> |
|                                          | 5.0        | E10A00610M050 | <a href="#">130048-0048</a> | E10A00710M050 | <a href="#">130048-0072</a> |
| Shielded/Stranded Conductor/PUR Jacket   | 1.0        | E10A00615M010 | <a href="#">130048-0054</a> | E10A00715M010 | <a href="#">130048-0078</a> |
|                                          | 5.0        | E10A00615M050 | <a href="#">130048-0056</a> | E10A00715M050 | <a href="#">130048-0080</a> |


## Double-Ended

| Cable Type                               | Male Straight/Male Straight |               |                             | Male Straight/Male 90° |                             | Male 90°/Male 90° |                             | Female Straight/Male Straight Crossover |                             | Female Straight/Male RJ45 |                             |
|------------------------------------------|-----------------------------|---------------|-----------------------------|------------------------|-----------------------------|-------------------|-----------------------------|-----------------------------------------|-----------------------------|---------------------------|-----------------------------|
|                                          | Length (m)                  | Old Part No.  | Order No.                   | Old Part No.           | Order No.                   | Old Part No.      | Order No.                   | Old Part No.                            | Order No.                   | Old Part No.              | Order No.                   |
| Unshielded/Stranded Conductor/PVC Jacket | 0.2                         |               |                             |                        |                             |                   |                             | E11B03003M002                           | <a href="#">130048-0193</a> |                           |                             |
|                                          | 1.0                         | E11A06003M010 | <a href="#">130048-0088</a> | E11A06203M010          | <a href="#">130048-0137</a> | E11A06303M010     | <a href="#">130048-0161</a> |                                         |                             | E11A06303M010             | <a href="#">130048-0197</a> |
|                                          | 5.0                         | E11A06003M050 | <a href="#">130048-0090</a> | E11A06203M050          | <a href="#">130048-0139</a> | E11A06303M050     | <a href="#">130048-0164</a> |                                         |                             | E11A06303M050             | <a href="#">130048-0200</a> |
| Shielded/Stranded Conductor/PVC Jacket   | 0.2                         |               |                             |                        |                             |                   |                             | E11B03015M002                           | <a href="#">130048-0195</a> |                           |                             |
|                                          | 1.0                         | E11A06015M010 | <a href="#">130048-0122</a> | E11A06215M010          | <a href="#">130048-0153</a> | E11A06315M010     | <a href="#">130048-0179</a> |                                         |                             |                           |                             |
|                                          | 5.0                         | E11A06015M050 | <a href="#">130048-0126</a> | E11A06215M050          | <a href="#">130048-0155</a> | E11A06315M050     | <a href="#">130048-0183</a> |                                         |                             |                           |                             |
| Shielded/Stranded Conductor/PUR Jacket   | 1.0                         | E11A06010M010 | <a href="#">130048-0114</a> | E11A06210M010          | <a href="#">130048-0145</a> | E11A06310M010     | <a href="#">130048-0170</a> |                                         |                             |                           |                             |
|                                          | 5.0                         | E11A06010M050 | <a href="#">130048-0116</a> | E11A06210M050          | <a href="#">130048-0147</a> | E11A06310M050     | <a href="#">130048-0172</a> |                                         |                             |                           |                             |

Note: Other standard lengths available. Please contact Molex.

# Ultra-Lock® (M12) Ethernet Cordset

**120108/130048**  
**Double-Ended**



## Features and Benefits

- All the same benefits as the threaded Ethernet Cordsets, but with the patented Ultra-Lock connection system connectors
- Plug and play solution for quick field installation
- Superior performance, higher reliability and reduce installation time

## Unshielded PVC

### Mechanical

Cable Conductors: 4/24 AWG stranded tinned wire  
Outside Diameter (Nom): 5.60mm  
Jacket Material: Teal PVC  
Inner Material Insulation: HDPE  
Certification: UL CMR

### Environmental

Protection: IP67

## Shielded PVC

### Electrical

TIA/EIA Rating: CAT5E  
UL: CL2

### Mechanical

Connector Face: PUR  
Molded Body: Black PUR  
Coupling Nut: Nickel-plated Brass  
Cable Conductors: 4/24 AWG stranded tinned wire  
Outside Diameter (Nom): 6.10mm  
Jacket Material: Teal PVC  
Inner Material Insulation: Foamed Polypropylene  
Certification: UL CMR  
Shield Type: Foil shield: 100% coverage, 25% min. overlap

### Environmental

Protection: IP67

## Shielded PUR

### Mechanical

Cable Conductors: 4/22 AWG stranded tinned wire  
Outside Diameter (Nom): 6.50mm  
Jacket Material: Green PUR  
Inner Material Insulation: FRNC  
Certification: UL listed CMX  
Shield Type: Foil—100% coverage  
Braid—85% coverage

### Environmental


Protection: IP67, sun/oil resistant

| Cable Type     | Length (m) | Old Part No.  | Order No.                   | Description                                      |
|----------------|------------|---------------|-----------------------------|--------------------------------------------------|
| Unshielded PVC | 1.0        | EWAA06003M010 | <a href="#">120108-0066</a> | Male Straight/Male Straight                      |
|                | 5.0        | EWAA06003M050 | <a href="#">120108-0069</a> |                                                  |
|                | 1.0        | EWAA06203M010 | <a href="#">120108-0074</a> | Male Straight/Male 90°                           |
|                | 5.0        | EWAA06203M050 | <a href="#">120108-0076</a> |                                                  |
|                | 1.0        | EWAA06303M010 | <a href="#">120108-0082</a> | Male 90°/Male 90°                                |
|                | 5.0        | EWAA06303M050 | <a href="#">120108-0084</a> |                                                  |
|                | 0.2        | E1WB03003M002 | <a href="#">130048-0207</a> | Threaded Female Straight/Male Straight Crossover |
| Shielded PVC   | 1.0        | EWAA06015M010 | <a href="#">120108-0042</a> | Male Straight/Male Straight                      |
|                | 5.0        | EWAA06015M050 | <a href="#">120108-0044</a> |                                                  |
|                | 1.0        | EWAA06215M010 | <a href="#">120108-0050</a> | Male Straight/Male 90°                           |
|                | 5.0        | EWAA06215M050 | <a href="#">120108-0052</a> |                                                  |
|                | 1.0        | EWAA06315M010 | <a href="#">120108-0058</a> | Male 90°/Male 90°                                |
|                | 5.0        | EWAA06315M050 | <a href="#">120108-0060</a> |                                                  |
|                | 0.2        | E1WB03015M002 | <a href="#">130048-0209</a> | Threaded Female Straight/Male Straight Crossover |
| Shielded PUR   | 1.0        | EWAA06010M010 | <a href="#">120108-0090</a> | Male Straight/Male Straight                      |
|                | 5.0        | EWAA06010M050 | <a href="#">120108-0092</a> |                                                  |
|                | 1.0        | EWAA06210M010 | <a href="#">120108-0098</a> | Male Straight/Male 90°                           |
|                | 5.0        | EWAA06210M050 | <a href="#">120108-0100</a> |                                                  |
|                | 1.0        | EWAA06310M010 | <a href="#">120108-0106</a> | Male 90°/Male 90°                                |
|                | 5.0        | EWAA06310M050 | <a href="#">120108-0108</a> |                                                  |
|                | 0.2        | E1WB03010M002 | <a href="#">130048-0208</a> | Threaded Female Straight/Male Straight Crossover |

Note: Other standard lengths available. Please contact Molex.

# Ethernet Receptacle RJ45 110 Punchdown

130053



| Old Part No. | Order No.                   |
|--------------|-----------------------------|
| ENDR2FB5     | <a href="#">130053-0002</a> |

## Features and Benefits

- Simple field termination of cable using a standard punchdown tool
- Category 5e compliant
- Can be used with TIA 568A or 568B wiring sequences
- Color-coded block simplifies wiring

## Reference

TIA/EIA Rating: Category 5e compliant

## Electrical

Voltage: 125V DC

Current: 1.5A

## Mechanical

O-Ring Material: Viton

Insert Material: Acrylonitrile-Butadiene-Styrene (ABS)

Overmold Material: Polyurethane

Coupling Nut Material: Acrylonitrile-Butadiene-Styrene (ABS)

Shell Material: Acrylonitrile-Butadiene-Styrene (ABS)

Knockout Hole: 1.063"

Thread Size: UNC 1" - 14

Panel Thickness: With Gasket—0.125" max.

Without Gasket—0.187" max., 0.062" min.

Plating: RJ45 Jack—50μ Gold over 100μ Nickel


Return Loss: 5 dB at 100 MHz

## Environmental

Environmental Rating: IEC IP67

# Ethernet Receptacle Direct PCB Mount

130053



| Old Part No. | Order No.                   |
|--------------|-----------------------------|
| ENPR1FF5     | <a href="#">130053-0004</a> |

## Features and Benefits

- Ideal for OEMs looking to incorporate a sealed, robust connection into their field device
- Category 5e compliant
- Short depths for space constrained applications
- Achieves IP67 rated seal when mated with an RJ-Lnxx cordset- but also compatible with commercial RJ45 patch cords

## Reference

TIA/EIA Rating: Category 5e compliant

## Electrical

Voltage: 125V DC

Current: 1.5A

## Mechanical

O-Ring Material: Viton

Insert Material: Acrylonitrile-Butadiene-Styrene (ABS)

Overmold Material: Polyurethane

Coupling Nut Material: Acrylonitrile-Butadiene-Styrene (ABS)

Shell Material: Acrylonitrile-Butadiene-Styrene (ABS)

Knockout Hole: 1.063"

Thread Size: UNC 1" - 14

Panel Thickness: With Gasket—0.125" max.

Without Gasket—0.187" max., 0.062" min.

Plating: RJ45 Jack—50μ Gold over 100μ Nickel


Return Loss: 5 dB at 100 MHz

## Environmental

Environmental Rating: IEC IP67

# Ethernet Receptacle PC Board to Cable

130055

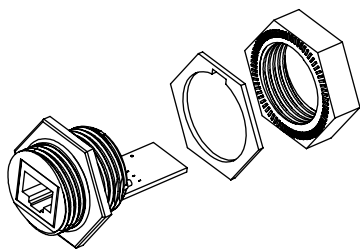

| Old Part No. | Order No.                   |
|--------------|-----------------------------|
| ENSRI FB5    | <a href="#">130055-0016</a> |

## Features and Benefits

- Highly flexible solution for OEMs looking to incorporate a sealed, robust receptacle into their field device or control panel
- Achieves IP67 rated seal when mated with an RJ-Lnxx cordset but also compatible with commercial RJ45 patch cords

## Reference

TIA/EIA Rating: Not rated as additional customer termination is required

## Electrical

Voltage: 125V DC  
Current: 1.5A

## Mechanical


O-Ring Material: Viton  
Insert Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Overmold Material: Polyurethane  
Coupling Nut Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Shell Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Knockout Hole: 1.063"  
Thread Size: UNC 1" - 14  
Panel Thickness: With Gasket—0.125" max.  
Without Gasket—0.187" max., 0.062" min.  
RJ45 Jack Plating: 50μ Gold over 100μ of Nickel  
Return Loss: 5 dB at 100 MHZ

## Environmental

Environmental Rating: IEC IP67

# Ethernet Receptacle Solder PCB and Cable Termination

130055

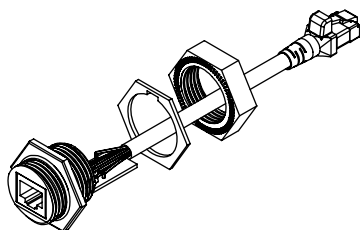

| Old Part No.  | Order No.                   | Description |
|---------------|-----------------------------|-------------|
| ENSRI FB5M010 | <a href="#">130055-0020</a> |             |
| ENSP1 F5M010  | <a href="#">130055-0005</a> | Male RJ45   |

## Features and Benefits

- Highly flexible solution for incorporating a sealed, robust receptacle into a field device or control panel, particularly when the Ethernet transceiver is located some distance from the desired mounting point for the receptacle
- Achieves IEC IP67 rated seal when mated with an RJ-Lnxx cordset- but also compatible with commercial RJ45 patch cords

## Reference

TIA/EIA Rating: Not rated as additional customer termination is required

## Electrical

Voltage: 125V DC  
Current: 1.5A

## Mechanical

O-Ring Material: Viton  
Insert Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Overmold Material: Polyurethane  
Coupling Nut Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Shell Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Knockout Hole: 1.063"  
Thread Size: UNC 1" - 14  
Panel Thickness: With Gasket—0.125" max.  
Without Gasket—0.187" max., 0.062" min.  
RJ45 Jack Plating: 50μ Gold over 100μ of Nickel  
Return Loss: 5 dB at 100 MHZ

## Environmental

Environmental Rating: IEC IP67

# Ultra-Lock® (M12) Ethernet Receptacle

120109  
4-Pole

### Features and Benefits

- Accepts both threaded and Ultra-Lock (M12) Cordsets
- Category 5e compliant
- IP67 rated, perfect for harsh industrial environments
- D-coded to ensure proper alignment/mating
- Board locking feature for more secure mounting

### Electrical


Voltage: 215V  
Current: 4.0A  
TIA/EIA Rating: Category 5E

### Mechanical


Shell: Nickel-Plated Brass  
Insert: PUR  
Conductors: Brass Gold plated/Bronze selective Gold plated  
O-Ring: FPM (also called Viton or FKM)

### Environmental


Protection: IP67, sun/oil resistant



PCB-Mount



With 0.5m Flying Lead

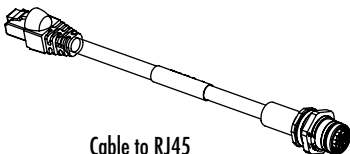

Cable to RJ45


| Old Part No.   | Order No.                   | Description            | Mount                 |
|----------------|-----------------------------|------------------------|-----------------------|
| ERWD2U70       | <a href="#">120109-5005</a> | PCB-Mount              | Back-Panel Mount      |
| ERWD2J30       | <a href="#">120109-5003</a> |                        | Front-Panel Mount/PG9 |
| ERWD2U30       | <a href="#">120109-5004</a> |                        | Front-Panel Mount/M16 |
| ERWAAU7000C050 | <a href="#">120109-5002</a> | With 0.5 M Flying Lead | Back-Panel Mount      |
| ERWAAJ3000C050 | <a href="#">120109-0004</a> |                        | Front-Panel Mount/PG9 |
| ERWAAU3000C050 | <a href="#">120109-5001</a> |                        | Front-Panel Mount/M16 |
| ERWPAU7003M006 | <a href="#">120109-0005</a> | Cable to RJ45          | Back-Panel Mount      |

### Adapters

| Old Part No.  | Order No.                   | Description | Mount                                    |
|---------------|-----------------------------|-------------|------------------------------------------|
| ER1PADAPTER   | <a href="#">130054-0009</a> | Straight    | Back-Panel Mount/<br>M16 to RJ45 Adapter |
| ER1PADAPTER90 | <a href="#">130054-0010</a> | 90°         |                                          |

## Ethernet Field-Attachable Connector M12 Threaded

**130047**



| Old Part No. | Order No.                   | Description |
|--------------|-----------------------------|-------------|
| EIAS06-52    | <a href="#">130047-0018</a> | Male        |
| EIAS00-52    | <a href="#">130047-0017</a> | Female      |

### Features and Benefits

- Mirco-Change® (M12) field attachable connectors allow you to make field connections to bulk cable or single-ended cordsets
- Fast field termination without special tooling
- D-coded to ensure proper alignment/mating

### Electrical

Voltage: 32V  
Current: 4.0A

### Mechanical


Coupling Nut: Zinc die-cast  
Shell Material: Zinc die-cast  
Contacts: Gold-plated Palladium Nickel  
Cable: 22-24 AWG 0.25 to 0.34mm<sup>2</sup>  
Conductor Insulation: PVC  
Conductor Diameter: 1.60 to 2.0mm  
Conductor Cross-Section: 1.60 to 2.0mm  
Cable Diameter: 5.50 to 7.20mm

### Environmental

Protection: IP67

## Ethernet Field-Attachable Connector RJ45 Threaded

**130057**



| Old Part No. | Order No.                   | Description                              |
|--------------|-----------------------------|------------------------------------------|
| ENQAM315     | <a href="#">130057-0001</a> | RJ45 Connector (for Stranded Core Cable) |
| ENSAM315     | <a href="#">130057-0003</a> | RJ45 Connector (for Solid Core Cable)    |

### Features and Benefits

- Create an industrial Ethernet cordset in the field using standard crimp tools
- Achieves IEC IP67 rated seal when mated with an RJ-Lnxx receptacle

### Mechanical


O-Ring Material: Viton  
Insert Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Overmold Material: Polyurethane  
Coupling Nut Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Shell Material: Acrylonitrile-Butadiene-Styrene (ABS)  
Thread Size: UNC 1" - 14

### Environmental

Environmental Rating: IEC IP67

## Receptacle Closure Cap

**130058**



| Old Part No. | Order No.                   | Rating |
|--------------|-----------------------------|--------|
| 67-0300      | <a href="#">130058-0035</a> | IP65   |
| 67-0301      | <a href="#">130058-0036</a> | IP67   |

### Features and Benefits

- Attaches to RJ-Lnxx receptacles to provide an IEC IP65 rated seal for instances when a cordset is not mated

### Mechanical


Material: Protective Cap—PA6 Nylon GF (UV Stabilized)  
Lanyard—EPDM Rubber  
Thread Size: UNC 1" - 14

### Environmental

Environmental Rating: IEC IP65 (65-0300)  
IEC IP67 (67-0300)

# Woodhead® MAX-LOC® Strain Relief Cord Sealing Grip

130098/130099/130180



## Features and Benefits

- Highly resistant to impact
- Totally corrosion resistant
- Non-metallic MAX-LOC cord sealing grip will not support combustion
- Suitable for use in wet locations so long as the listed sealing ring is used between box and fitting

## Applications

- Electrical boxes
- Cabinets
- Push buttons
- Enclosures

## Reference Information

UL File No.: E76954

CSA File No.: LR32159

NEMA:

Without O-Ring—NEMA 3R

With O-Ring—NEMA 6P

## Mechanical

Strain Relief Force: 35 lb.

## Physical

Body: Nylon

Fitting: UL 94V-2

| Old Part No. | Order No.                   | Cable Diameter Range | Mounting Thread           | Body Style    | NEMA Rating |
|--------------|-----------------------------|----------------------|---------------------------|---------------|-------------|
| 5398         | <a href="#">130098-0024</a> | 0.075-0.135"         | 1/4" NPT                  | Straight Male | NEMA 3R     |
| 5400         | <a href="#">130098-0025</a> | 0.135-0.200"         |                           |               |             |
| 5402         | <a href="#">130098-0026</a> | 0.200-0.265"         |                           |               |             |
| 5500         | <a href="#">130098-0027</a> | 0.125-0.187"         | 3/8" NPT                  |               |             |
| 5502         | <a href="#">130098-0029</a> | 0.187-0.250"         |                           |               |             |
| 5504         | <a href="#">130098-0031</a> | 0.250-0.312"         |                           |               |             |
| 5506         | <a href="#">130098-0032</a> | 0.312-0.375"         |                           |               |             |
| 5508         | <a href="#">130098-0034</a> | 0.375-0.437"         |                           |               |             |
| 5518         | <a href="#">130098-0036</a> | 0.062-0.125"         |                           |               |             |
| 5520         | <a href="#">130098-0041</a> | 0.125-0.187"         |                           |               |             |
| 5522         | <a href="#">130098-0046</a> | 0.187-0.250"         |                           |               |             |
| 5524         | <a href="#">130098-0052</a> | 0.250-0.312"         |                           |               |             |
| 5526         | <a href="#">130098-0061</a> | 0.312-0.375"         |                           |               |             |
| 5528         | <a href="#">130098-0069</a> | 0.375-0.437"         |                           |               |             |
| 5530         | <a href="#">130098-0076</a> | 0.437-0.500"         |                           |               |             |
| 5532         | <a href="#">130098-0082</a> | 0.500-0.562"         |                           |               |             |
| 5518W        | <a href="#">130098-0038</a> | 0.062-0.125"         |                           |               |             |
| 5520W        | <a href="#">130098-0043</a> | 0.125-0.187"         | Straight Male with O-Ring |               |             |
| 5522W        | <a href="#">130098-0049</a> | 0.187-0.250"         |                           |               |             |
| 5524W        | <a href="#">130098-0056</a> | 0.250-0.312"         |                           |               |             |
| 5526W        | <a href="#">130098-0064</a> | 0.312-0.375"         |                           |               |             |
| 5528W        | <a href="#">130098-0071</a> | 0.375-0.437"         |                           |               |             |
| 5530W        | <a href="#">130098-0078</a> | 0.437-0.500"         |                           |               |             |
| 5532W        | <a href="#">130098-0086</a> | 0.500-0.562"         |                           |               |             |
| 5620         | <a href="#">130098-0235</a> | 0.187-1.250"         |                           | 3/4" NPT      |             |
| 5622         | <a href="#">130098-0236</a> | 0.250-0.375"         |                           |               |             |
| 5624         | <a href="#">130098-0225</a> | 0.375-0.437"         |                           |               |             |
| 5536         | <a href="#">130098-0096</a> | 0.437-0.562"         |                           |               |             |
| 5538         | <a href="#">130098-0103</a> | 0.500-0.625"         |                           |               |             |
| 5540         | <a href="#">130098-0112</a> | 0.562-0.687"         |                           |               |             |
| 5542         | <a href="#">130098-0118</a> | 0.625-0.750"         |                           |               |             |
| 5620W        | <a href="#">130098-0215</a> | 0.187-1.250"         |                           |               |             |
| 5622W        | <a href="#">130098-0221</a> | 0.250-0.375"         |                           |               |             |
| 5624W        | <a href="#">130098-0227</a> | 0.375-0.437"         |                           |               |             |
| 5536W        | <a href="#">130098-0099</a> | 0.437-0.562"         |                           |               |             |
| 5538W        | <a href="#">130098-0107</a> | 0.500-0.625"         |                           |               |             |
| 5540W        | <a href="#">130098-0114</a> | 0.562-0.687"         |                           |               |             |
| 5542W        | <a href="#">130098-0121</a> | 0.625-0.750"         |                           |               |             |

Note: Additional thread sizes available, contact Molex

## Multi-Hole Strain Relief

| Straight Male |                             | Straight Male with O-Ring |                             | Cable Size | No. of Holes                    | Mounting Thread |
|---------------|-----------------------------|---------------------------|-----------------------------|------------|---------------------------------|-----------------|
| Old Part No.  | Order No.                   | Old Part No.              | Order No.                   |            |                                 |                 |
| 5594-007      | <a href="#">130098-0202</a> | 5594-007W                 | <a href="#">130098-0203</a> | 0.156"     | 2, 3 or 4 <sup>1</sup>          | 1/2" NPT        |
| 5594-008      | <a href="#">130098-0204</a> | 5594-008W                 | <a href="#">130098-0205</a> | 0.187"     | 2, 3, 4, 5, 6 or 7 <sup>1</sup> |                 |
| 5594-004      | <a href="#">130098-0195</a> | 5594-004W                 | <a href="#">130098-0196</a> | 0.225"     | 2, 3 or 4 <sup>1</sup>          |                 |
| 5594-005      | <a href="#">130098-0197</a> | 5594-005W                 | <a href="#">130098-0198</a> | 0.250"     | 2 or 3 <sup>1</sup>             |                 |
| 5594-006      | <a href="#">130098-0199</a> | 5594-006W                 | <a href="#">130098-0200</a> | 0.290"     | 2                               |                 |

Note: Additional thread sizes available, contact Molex

<sup>1</sup> Indicates one or more holes are covered by a thin membrane which can easily be "poked" open if required.

## O-Ring


| Old Part No. | Order No.                   | Mounting Thread |
|--------------|-----------------------------|-----------------|
| 00-0820      | <a href="#">130180-0314</a> | 1/2" NPT        |
| 00-0822      | <a href="#">130180-0333</a> | 3/4" NPT        |

## Lock Nut

| Old Part No. | Order No.                   | Mounting Thread |
|--------------|-----------------------------|-----------------|
| 5599         | <a href="#">130099-0141</a> | 1/4" NPT        |
| 5600         | <a href="#">130099-0142</a> | 3/8" NPT        |
| 5601         | <a href="#">130099-0143</a> | 1/2" NPT        |
| 5602         | <a href="#">130099-0144</a> | 3/4" NPT        |

# Woodhead® Strain Relief Deluxe Cord Grip

130097/130099



## Features and Benefits

- Stainless steel mesh with an aluminum body for corrosion resistance
- Offered in single/double weave construction to help absorb direct pull, to resist flexing and binding and to eliminate strain
- Recommended for indoor and outdoor use
- Suitable for use in hazardous locations per Class I, Div. 2, Class II, Div. 1 and 2, and Class III, Div. 1 and 2

## Applications

- Pendant stations
- Processing equipment
- Hand tools
- Extension cord sets

## Reference Information

UL File No.: E76954  
CSA File No.: LR32159  
Hazardous Locations:  
Class I, Div. 2  
Class II, Div. 1 and 2  
Class III, Div. 1 and 2

## Mechanical

Strain Relief Force: 35 lb

## Physical

Thread: NPT  
Body: Aluminum  
Woven Mesh: Stainless Steel


| Straight Male |                             | Cable Diameter Range | Mounting Thread |
|---------------|-----------------------------|----------------------|-----------------|
| Old Part No.  | Order No.                   |                      |                 |
| 36490         | <a href="#">130097-0250</a> | 0.187-0.250"         | 3/8" NPT        |
| 36430         | <a href="#">130097-0225</a> | 0.250-0.312"         |                 |
| 36431         | <a href="#">130097-0226</a> | 0.312-0.375"         |                 |
| 36432         | <a href="#">130097-0227</a> | 0.375-0.437"         |                 |
| 36250         | <a href="#">130097-0160</a> | 0.187-0.250"         | 1/2" NPT        |
| 36251         | <a href="#">130097-0161</a> | 0.250-0.375"         |                 |
| 36254         | <a href="#">130097-0163</a> | 0.375-0.500"         |                 |
| 36256         | <a href="#">130097-0165</a> | 0.500-0.625"         |                 |
| 36245         | <a href="#">130097-0156</a> | 0.625-0.750"         | 3/4" NPT        |
| 36246         | <a href="#">130097-0157</a> | 0.750-0.875"         |                 |
| 36257         | <a href="#">130097-0166</a> | 0.250-0.375"         |                 |
| 36259         | <a href="#">130097-0167</a> | 0.375-0.500"         |                 |
| 36261         | <a href="#">130097-0168</a> | 0.500-0.625"         | 3/4" NPT        |
| 36263         | <a href="#">130097-0170</a> | 0.625-0.750"         |                 |
| 36248         | <a href="#">130097-0158</a> | 0.750-0.875"         |                 |

Note: Additional thread sizes available, contact Molex

| Lock Nut     |                             | Gasket       |                             | Mounting Thread |
|--------------|-----------------------------|--------------|-----------------------------|-----------------|
| Old Part No. | Order No.                   | Old Part No. | Order No.                   |                 |
| 5600         | <a href="#">130099-0142</a> | 5610         | <a href="#">130099-0148</a> | 3/8" NPT        |
| 5601         | <a href="#">130099-0143</a> | 5611         | <a href="#">130099-0149</a> | 1/2" NPT        |
| 5602         | <a href="#">130099-0144</a> | 5612         | <a href="#">130099-0150</a> | 3/4" NPT        |

# Woodhead® Strain Relief Wide Range Dust Tight Grip

130097



## Features and Benefits

- For indoor use
- Cost effective solution
- Dust tight, rubber membrane conforms to cable
- Includes insulated bushing

## Applications

- Enclosures
- Power boxes
- Machine tools
- Power centers

## Reference Information

UL File No.: E76954  
CSA File No.: LR32159

## Mechanical

Strain Relief Force: 35 lb

## Physical

Thread: NPT  
Body: Aluminum  
Woven Mesh: Galvanized Steel


| Straight Male |                             | Cable Diameter Range | Mounting Thread |
|---------------|-----------------------------|----------------------|-----------------|
| Old Part No.  | Order No.                   |                      |                 |
| 36501         | <a href="#">130097-0256</a> | 0.220-0.320"         | 1/2" NPT        |
| 36503         | <a href="#">130097-0258</a> | 0.300-0.430"         |                 |
| 36505         | <a href="#">130097-0260</a> | 0.400-0.540"         |                 |
| 36508         | <a href="#">130097-0262</a> | 0.520-0.730"         | 3/4" NPT        |

Note: Additional thread sizes available, contact Molex

# Woodhead® Support Grip for Fiber Optics

**130094**

**Closed Mesh, Single Eye**



## Features and Benefits

- Used to support Fiber Optic communication lines for temporary or permanent applications
- Designed to reduce stress on fragile cables in vertical or sloping runs
- Woven nonmagnetic tinned bronze wire
- Available in both single eye and locking bale configurations

## Applications

- Vertical or sloping runs

## Reference Information

CSA File No.: LR32159

## Physical

Woven Mesh: Nonmagnetic Tinned Bronze wire

| Old Part No. | Order No.                   | Cable Diameter Range | Bale Length | Mesh Length | Approximate Break Strength <sup>1</sup> |
|--------------|-----------------------------|----------------------|-------------|-------------|-----------------------------------------|
| 36670        | <a href="#">130094-0522</a> | 0.180-0.250"         | 3"          | 1.7"        | 300 lbs                                 |
| 36671        | <a href="#">130094-0523</a> | 0.230-0.320"         | 3"          | 2.5"        |                                         |
| 36672        | <a href="#">130094-0524</a> | 0.300-0.390"         | 4"          | 2.5"        |                                         |
| 36673        | <a href="#">130094-0525</a> | 0.370-0.480"         | 5"          | 4.0"        |                                         |
| 36674        | <a href="#">130094-0526</a> | 0.460-0.580"         | 6"          | 4.0"        | 400 lbs                                 |
| 36675        | <a href="#">130094-0527</a> | 0.560-0.710"         | 7"          | 5.5"        | 600 lbs                                 |
| 36676        | <a href="#">130094-0528</a> | 0.690-0.880"         | 8"          | 6.0"        | 800 lbs                                 |


Note: Additional thread sizes available, contact Molex

<sup>1</sup> To determine workload safety factor, divide approximate break strength by 10.

# Woodhead® Pulling Grip for Fiber Optics

**130095**

**Closed Mesh, Rotating Eye**



## Features and Benefits

- Used for installation of fiber optic communications lines
- Easily installed on cables and reusable
- Rotating eye eliminates torsional stress between your pulling apparatus and your cable for long runs

## Applications

- Underground
- Overhead
- Through conduit and/or enclosure-type pulls

## Reference Information

CSA File No.: LR32159

| Old Part No. | Order No.                   | Cable Diameter Range | Bale Length | Mesh Length | Approximate Break Strength <sup>1</sup> |
|--------------|-----------------------------|----------------------|-------------|-------------|-----------------------------------------|
| 36662        | <a href="#">130095-0298</a> | 0.350-0.480"         | 5"          | 18"         | 2,200 lbs                               |
| 36663        | <a href="#">130095-0299</a> | 0.420-0.610"         |             | 21"         | 2,800 lbs                               |
| 36664        | <a href="#">130095-0300</a> | 0.530-0.740"         |             | 24"         | 3,300 lbs                               |
| 36665        | <a href="#">130095-0301</a> | 0.640-0.870"         |             | 27"         | 4,700 lbs                               |

Note: Additional thread sizes available, contact Molex

<sup>1</sup> To determine workload safety factor, divide approximate break strength by 10.

# Commercial Micro-D Connector

This commercial line of shielded Micro-D products with a 1.27mm (.050") pitch, offers an economical solution for commercial and industrial applications that require the density of a microminiature connector. The series is available in a right angle and vertical configuration, designed with a metal interface and grounding tabs for improved mechanical and electrical shield connection.

Also available is the cable receptacle, which has a "crimp and poke" configuration designed for hand or semi-automatic crimping. Our unique backshell design will maintain the integrity of the cable construction while the strain relief is crimped over the cable.

A wide variety of pre-made over-moulded cable assemblies are also available. Configurations include single-ended and double-end CMD, as well as CMD to standard D-sub connectors in 9, 15 and 25 circuit densities.

## Features

- Right angle plug available in 9, 15, 18, 25, 30 and 50 circuits
- Vertical plug available in 9, 15 and 25 circuits
- Cable receptacle available in 9, 15 and 25 circuits
- LCP insulator, stamped metal shell
- Crimp and poke contacts on the cable receptacle for customer termination
- Current: 1.0A max.
- UL File No: E34763

## Applications

- Commercial
- Computer I/O
- Data storage
- Telecommunications
- Industrial

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А