

Miniature Relay PT

- 2 pole 12 A, 3 pole 10 A or 4 pole 6 A, 2, 3 or 4 CO contacts
- DC- or AC-coil
- Switching performance up to 3000 VA
- Relay height 29 mm
- Mechanical and electrical indicator
- Manual test tab, optionally lockable.
- White marking tabs
- RoHS compliant (Directive 2002/95/EC)

Applications

Universal use in control and automation



F0191-A

Approvals


VDE REG.-Nr. 115719, **CE** us E214025, **UL** 00/20059(E2)
Technical data of approved types on request

Contact data	PT2	PT3	PT5
Contact configuration	2 CO	3 CO	4 CO
Contact set	single contact		
Type of interruption	micro disconnection		
Rated current	12 A	10 A	6 A
Rated voltage / max.switching voltage AC	240/400 VAC	240/400 VAC	240/240 VAC
Maximum breaking capacity AC	3000 VA	2500 VA	1500 VA
Limiting making capacity, max 20 ms	24 A	20 A	12 A
Contact material	AgNi90/10, AgNi90/10 gold plated		
Minimum contact load	12V/10mA, 20mV/1mA gold plated		
Mechanical endurance DC coil	30x10 ⁶ cycles		
AC coil	20x10 ⁶ cycles		
Rated frequency of operation with / without load	6/600 min ⁻¹		

Contact ratings


Type	Load	Cycles
PT270	12 A, 250 VAC, 3000 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	168x10 ³
PT270	8 A, 250 VAC, 2000 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	750x10 ³
PT270	4 A, 250 VAC, 1000 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	8.3x10 ⁶
PT270	3.75 A, 400 VAC, opp. polarity, 70°C, AC3	
PT270	5 A, 250 VAC, opp. polarity, normal/abnormal, 70°C, AC15	
PT270	8 A, 24 VDC, opp. polarity, normal/abnormal, 70°C, DC13	
PT270	1.7 A, 230 VAC, 400 W, opp. polarity, 70°C, AC5b	
PT370	10 A, 250 VAC, 2500 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	159x10 ³
PT370	8 A, 250 VAC, 2000 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	466x10 ³
PT370	4 A, 250 VAC, 1000 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	1.1x10 ⁶
PT370	2 A, 400 VAC, opp. polarity, 70°C, AC3	
PT370	5 A, 250 VAC, opp. polarity, normal/abnormal, 70°C, AC15	
PT370	8 A, 24 VDC, opp. polarity, normal/abnormal, 70°C, DC13	
PT370	1.7 A, 230 VAC, 400 W, opp. polarity, 70°C, AC5b	
PT570	6 A, 250 VAC, 1500 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	228x10 ³
PT570	2 A, 250 VAC, 500 VA, cosφ=1, DF 50%, 600 h ⁻¹ , NO, 70°C	782x10 ³
PT570	3 A, 400 VAC, opp. polarity, 70°C, AC3	
PT570	4 A, 250 VAC, opp. polarity, normal/abnormal, 70°C, AC15	
PT570	6 A, 24 VDC, opp. polarity, normal/abnormal, 70°C, DC13	
PT570	1.7 A, 230 VAC, 400 W, opp. polarity, 70°C, AC5b	
PT570	0.3 A, 110 VDC, 33 W, L/R=22 ms, 1440 h ⁻¹ , DF 8%, NO, prot.D.	3.6x10 ⁶
PT570	3 A on / 1 A off, 120 VAC, cosφ 0.8on/0.5off, 600h ⁻¹ , DF 15%, NO	423x10 ³

Max. DC load breaking capacity

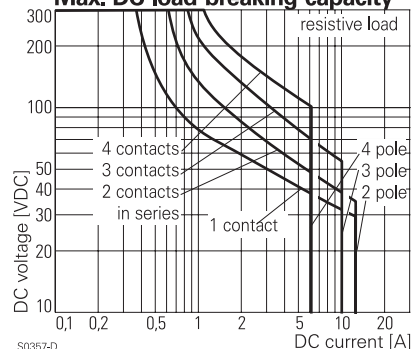

S0357-D

Electrical endurance

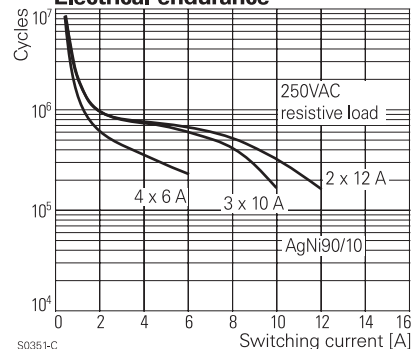

S0351-C

Miniature Relay PT (Continued)

Coil data

Rated coil voltage range DC coil	6...220 VDC
AC coil	6...230 VAC
Coil power DC coil	0.75 mW
AC coil	1.0 VA
Operative range DC coil, AC-coil 50Hz	2
AC coil 60 Hz at 70°C, % of U_{rtd}	90...110%

Coil versions, DC-coil

Coil code	LED	Rated voltage	Operate voltage	Release voltage	Coil resistance	Rated coil power
STD	bipolar	VDC	VDC	VDC	Ohm	mW
006	L06	6	4.5	0.6	$48 \pm 10\%$	750
012	L12	12	9.0	1.2	$192 \pm 10\%$	750
024	L24	24	18.0	2.4	$777 \pm 10\%$	741
048	L48	48	36.0	4.8	$3072 \pm 10\%$	750
060	L60	60	45.0	6.0	$4845 \pm 12\%$	743
110	M10	110	82.5	11.0	$16133 \pm 15\%$	750
220	N20	220	165.0	22.0	$64533 \pm 15\%$	750

All figures are given for coil without preenergization, at ambient temperature +23°C

Coil versions, AC-coil 50/60 Hz

Coil code	LED	Rated voltage	Operate voltage	Release voltage	Coil resistance	Rated coil power
STD		VAC	50/60Hz VAC	50/60Hz VAC	Ohm	50/60Hz VA
506	R06	6	4.8/5.4	1.8	$11 \pm 10\%$	1.0/0.85
512	R12	12	9.6/10.8	3.6	$48 \pm 10\%$	1.0/0.85
524	R24	24	19.2/21.6	7.2	$192 \pm 10\%$	1.0/0.79
548	R48	48	38.4/43.2	14.4	$777 \pm 10\%$	1.0/0.87
560	R60	60	48.0/54.0	18.0	$1306 \pm 10\%$	1.0/0.87
615	S15	115	92.0/103.5	34.5	$4845 \pm 12\%$	1.0/0.86
730	T30	230	184.0/207.0	69.0	$19465 \pm 15\%$	1.0/0.90

All figures are given for coil without preenergization, at ambient temperature +23°C

Insulation

	PT2	PT3	PT5
Dielectric strength coil-contact circuit	2500 V _{rms}	2500 V _{rms}	2500 V _{rms}
open contact circuit	1200 V _{rms}	1200 V _{rms}	1200 V _{rms}
adjacent contact circuits	2500 V _{rms}	2500 V _{rms}	2000 V _{rms}
Clearance / creepage coil-contact circuit	$\geq 4/4$ mm	$\geq 4/4$ mm	$\geq 4/4$ mm
adjacent contact circuits	$\geq 3.5/9.5$ mm	$\geq 2.6/3.5$ mm	$\geq 1.8/3.5$ mm
Material group of insulation parts	$\geq$ IIIa		
Insulation to IEC 60664-1			
Type of insulation coil-contact circuit	basic	basic	basic
open contact circuit	functional	functional	functional
adjacent contact circuits	basic	basic	functional
Rated insulation voltage	250 V	250 V	250 V
Pollution degree	2	2	2
Rated voltage system	240/400 V	240 V	240 V
Overvoltage category	III	III	III

Other data


RoHS - Directive 2002/95/EC	compliant
Ambient temperature range	-40...+70°C
Operate- / release time	15/10 ms
Bounce time NO / NC contact	5 ms
Vibration resistance (function) NO / NC contact	7/4 g
Shock resistance (function) NO / NC contact	20/5 g
Category of protection	RTII- flux proof
Mounting distance	0 mm, dense packing
Resistance to soldering heat	270°C / 10s
Relay weight	30 g
Packaging unit	10/250 pcs

Accessories


For details see datasheet

Accessories Miniature Relay PT

Coil operating range DC

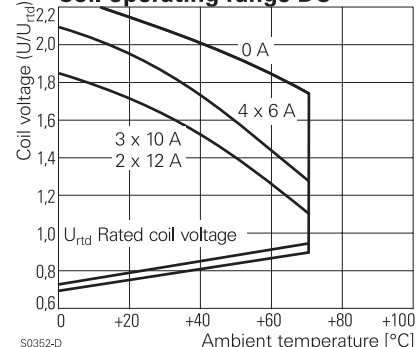

Coil operating range AC

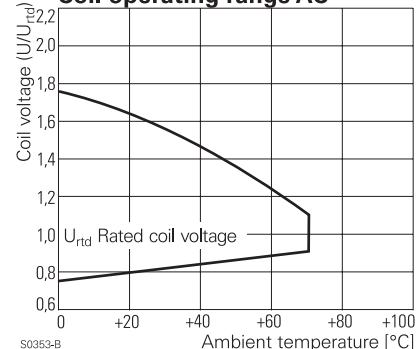

Miniature Relay PT (Continued)


Relay Packages

Complete packages consisting of a relay mounted on a socket see Package PT

PCB layout / terminal assignment


Bottom view on pins

4-pole




S0354-AA

3-pole




S0354-AB


2-pole




S0354-AC



S0354-AD




S0354-AE




S0354-AF

Dimensions

Solder- and plug-in terminals (standard version)

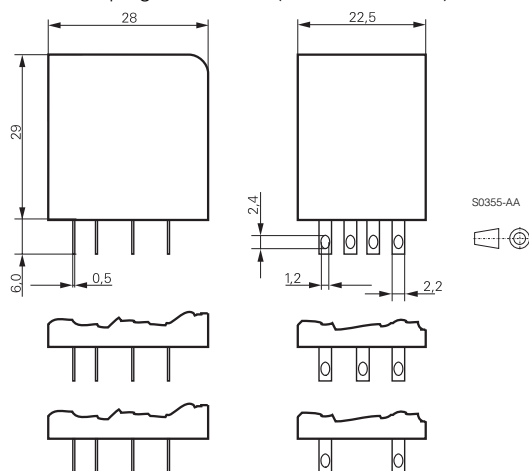

PCB version

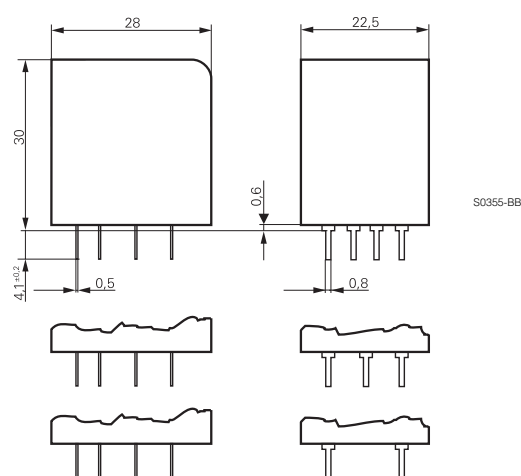

Product key

Type

Contact configuration

- 2** 2 CO contacts
- 3** 3 CO contacts
- 5** 4 CO contacts

Contact material

- 7** AgNi 90/10, with test button*)
- 8** AgNi 90/10 gold plated, with test button*)

Version

- 0** standard, 2.8 mm quick connect term.
- 1** PCB terminals

Coil

Coil code: please refer to coil versions table, preferred types in bold print

*) Version with closed cap without test button available on request

Other types on request

P	T						

Miniature Relay PT (Continued)

Product key	Cont. Config.	Cont. material	Version	Coil	Coil	Part number
PT270024	2 CO contacts	AgNi 90/10 test button	AMP 2.8 connectors	DC-coil	24 VDC	4-1419111-2
PT270524				AC-coil	24 VAC	4-1419111-8
PT270615					115 VAC	5-1419111-0
PT270730					230 VAC	5-1419111-1
PT270L24				DC-coil+LED	24 VDC	9-1415001-1
PT270R24				AC-coil+LED	24 VAC	0-1415002-1
PT270S15					115 VAC	2-1415039-1
PT270T30					230 VAC	3-1415002-1
PT271024			PCB terminals	DC-coil	24 VDC	5-1419111-3
PT271524				AC-coil	24 VAC	5-1419111-6
PT271615					115 VAC	4-1419135-0
PT271730					230 VAC	5-1419111-8
PT370024	3 CO contacts	AgNi 90/10 test button	AMP 2.8 connectors	DC-coil	24 VDC	6-1419111-1
PT370524				AC-coil	24 VAC	6-1419111-6
PT370615					115 VAC	6-1419111-8
PT370730					230 VAC	6-1419111-9
PT370L24				DC-coil+LED	24 VDC	5-1415002-1
PT370R24				AC-coil+LED	24 VAC	7-1415002-1
PT370S15					115 VAC	9-1415039-1
PT370T30					230 VAC	9-1415002-1
PT371024			PCB terminals	DC-coil	24 VDC	7-1419111-1
PT371524				AC-coil	24 VAC	7-1419111-3
PT371615					115 VAC	0-1393154-8
PT371730					230 VAC	7-1419111-5
PT570024	4 CO contacts	AgNi 90/10 test button	AMP 2.8 connectors	DC-coil	24 VDC	1-1393154-2
PT570524				AC-coil	24 VAC	8-1419111-7
PT570615					115 VAC	9-1419111-0
PT570730					230 VAC	9-1419111-1
PT570L24				DC-coil+LED	24 VDC	6-1415001-1
PT570R24				AC-coil+LED	24 VAC	7-1415001-1
PT570S15					115 VAC	7-1415003-1
PT570T30					230 VAC	8-1415001-1
PT571024			PCB terminals	DC-coil	24 VDC	9-1419111-3
PT571524				AC-coil	24 VAC	9-1419111-6
PT571615					115 VAC	1-1393154-5
PT571730					230 VAC	9-1419111-8
PT580024		AgNi 90/10 gold plated test button	AMP 2.8 connectors	DC-coil	24 VDC	1-1393154-7
PT580524				AC-coil	24 VAC	2-1393154-1
PT580730					230 VAC	2-1393154-2
PT580L24				DC-coil+LED	24 VDC	5-1415026-1
PT580R24				AC-coil+LED	24 VAC	6-1415026-1
PT580T30					230 VAC	7-1415026-1
PT581024			PCB terminals	DC-coil	24 VDC	7-1419135-2
PT581730				AC-coil	230 VAC	2-1393154-3

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А