

Wet Tantalum Capacitors Surface Mount, Molded Case



PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C
(to + 125 °C with voltage derating)

Capacitance Tolerance: At 120 Hz, + 25 °C, ± 20 % standard, ± 10 %

DC Leakage Current (DCL Max.): At + 25 °C and above: Leakage current shall not exceed the values listed in the Standard Ratings table.

Life Test: Capacitors are capable of withstanding a 2000 h life test at a temperature of + 85 °C or + 125 °C at the applicable rated DC working voltage.

Following life test:

1. DCL, measured at + 85 °C rated voltage, shall not be in excess of the original requirement.
2. The equivalent series resistance shall not exceed 150 % of the initial requirement.
3. Change in capacitance shall not exceed 10 % from the initial measurement.

FEATURES

- Terminations: standard tin/lead (SnPb), 100 % tin (RoHS compliant) terminations available
- Very high capacitance, 10 µF to 470 µF
6 V to 125 V, - 55 °C to + 125 °C
- Very low ESR
- High ripple current capability
- Low DCL
- Model M34 wet tantalum electrolytic chip capacitors incorporate the advantages of all the varieties of electrolytic capacitors and eliminate most of the disadvantages. These units have a transient reverse voltage capability and a higher ripple current capability than any other electrolytic type with similar combinations of capacitance and case size.
- Compliant to RoHS Directive 2002/95/EC



RoHS*
COMPLIANT

Note

* Pb containing terminations are not RoHS compliant, exemptions may apply

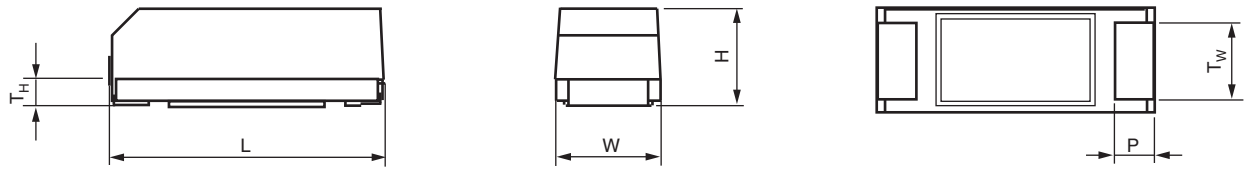
APPLICATION NOTES

- a) No continuous reverse voltage permissible.
- b) Transient reverse voltage surges are acceptable under the following conditions:
The peak reverse voltage does not exceed 1.5 V and the peak current times the duration of the reverse transient does not exceed 0.05 A. In addition, the repetition frequency of the reverse voltage surge is less than 10 Hz.
- c) The peak of the applied AC ripple and the applied DC voltage must not exceed the DC voltage rating of the capacitor.

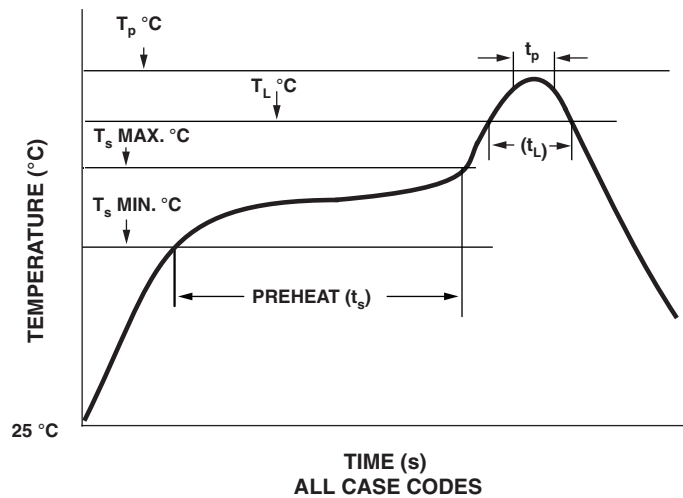
| ORDERING INFORMATION | | | | | | | | |
|----------------------|----------------------------------|--|--------------------------|--|---|-------------------|---------|---------|
| M34 | C | 826 | M | 125 | B | Z | S | S |
| MODEL | CASE CODE | CAPACITANCE | CAPACITANCE TOLERANCE | DC VOLTAGE RATING AT + 85 °C | TERMINATION AND PACKAGING | RELIABILITY LEVEL | TEMP | ESR |
| | See Ratings and Case Codes table | This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow. | K = ± 10 % M = ± 20 % | This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. | A = 100 % tin (RoHS compliant), bulk B = Std, tin/lead, bulk | Z = Non-ER | S = Std | S = Std |

Note

- Packaging: The use of formed plastic tubes for packing bulk components is standard

DIMENSIONS in inches [millimeters]


| CASE CODE | L (MAX.) | W | H | P (MIN.) | T _w | T _H (MIN.) |
|-----------|-----------------|----------------------------|------------------------------|----------------|------------------------------|-----------------------|
| C | 0.835 [21.2] | 0.315 ± 0.012 [8 ± 0.3] | 0.295 ± 0.012 [7.5 ± 0.3] | 0.118 [3.0] | 0.236 ± 0.012 [6.0 ± 0.3] | 0.075 [1.9] |

RECOMMENDED REFLOW PROFILES


| T _p | T _p | t _p | T _L | T _L | T _s MIN. | T _s MIN. | T _s MAX. | T _s MAX. | t _s | t _s | t _L |
|----------------|----------------|----------------|----------------|----------------|---------------------|---------------------|---------------------|---------------------|----------------|----------------|----------------|
| Lead (Pb)-free | Sn/Pb | | Lead (Pb)-free | Sn/Pb | Lead (Pb)-free | Sn/Pb | Lead (Pb)-free | Sn/Pb | Lead (Pb)-free | Sn/Pb | |
| 245 °C | 220 °C | 10 | 217 °C | 183 °C | 150 °C | 100 °C | 200 °C | 150 °C | 60 to 150 | 60 to 90 | 60 |

MOUNTING

Due to the size and weight of these capacitors, we recommend that a supplemental mounting restraint to be used in printed circuit board attachment in addition to the reflowed solder.

One recommendation is to use an adhesive such as defined in the J-STD-001DS.

This is the Space Application Electronic Hardware Addendum to J-STD-001 (Requirements for Solder Electrical and Electronic Assemblies).



| STANDARD RATINGS | | | | | | | | | | |
|--|--------------|---------------------|---|--|------------------------|---------------------|-----------------------------------|---------|----------|---|
| CAPACITANCE (μ F) | CASE CODE | PART NUMBER | MAX. ESR AT + 25 °C 120 Hz (Ω) | MAX. IMP. AT - 55 °C 120 Hz (Ω) | MAX. DCL (μ A) AT | | MAX. CAPACITANCE CHANGE (%) AT | | | MAX. RIPPLE 40 kHz RMS (mA) |
| | | | | | + 25 °C | + 85 °C + 125 °C | - 55 °C | + 85 °C | + 125 °C | |
| 6 V _{DC} AT + 85 °C; 4 V _{DC} AT + 125 °C | | | | | | | | | | |
| 470 | C | M34C477(1)006(2)ZSS | 0.9 | 12 | 1.0 | 3.0 | - 75 | + 10 | + 20 | 1500 |
| 10 V _{DC} AT + 85 °C; 7 V _{DC} AT + 125 °C | | | | | | | | | | |
| 330 | C | M34C337(1)010(2)ZSS | 1.0 | 15 | 1.0 | 3.0 | - 70 | + 8 | + 20 | 1400 |
| 15 V _{DC} AT + 85 °C; 10 V _{DC} AT + 125 °C | | | | | | | | | | |
| 150 | C | M34C157(1)015(2)ZSS | 1.1 | 25 | 1.0 | 3.0 | - 45 | + 8 | + 20 | 1400 |
| 25 V _{DC} AT + 85 °C; 15 V _{DC} AT + 125 °C | | | | | | | | | | |
| 120 | C | M34C127(1)025(2)ZSS | 1.3 | 25 | 1.0 | 5.0 | - 42 | + 8 | + 12 | 1250 |
| 30 V _{DC} AT + 85 °C; 20 V _{DC} AT + 125 °C | | | | | | | | | | |
| 100 | C | M34C107(1)030(2)ZSS | 1.3 | 25 | 1.0 | 5.0 | - 38 | + 8 | + 12 | 1200 |
| 50 V _{DC} AT + 85 °C; 30 V _{DC} AT + 125 °C | | | | | | | | | | |
| 68 | C | M34C686(1)050(2)ZSS | 1.5 | 35 | 1.0 | 5.0 | - 25 | + 8 | + 15 | 1050 |
| 60 V _{DC} AT + 85 °C; 40 V _{DC} AT + 125 °C | | | | | | | | | | |
| 47 | C | M34C476(1)060(2)ZSS | 2.0 | 44 | 1.0 | 5.0 | - 25 | + 8 | + 12 | 1050 |
| 75 V _{DC} AT + 85 °C; 50 V _{DC} AT + 125 °C | | | | | | | | | | |
| 33 | C | M34C336(1)075(2)ZSS | 2.5 | 66 | 1.0 | 5.0 | - 25 | + 5 | + 9 | 1050 |
| 100 V _{DC} AT + 85 °C; 65 V _{DC} AT + 125 °C | | | | | | | | | | |
| 15 | C | M34C156(1)100(2)ZSS | 3.5 | 125 | 1.0 | 5.0 | - 18 | + 3 | + 10 | 1050 |
| 125 V _{DC} AT + 85 °C; 85 V _{DC} AT + 125 °C | | | | | | | | | | |
| 10 | C | M34C106(1)125(2)ZSS | 5.5 | 175 | 1.0 | 5.0 | - 15 | + 3 | + 10 | 1050 |

Note

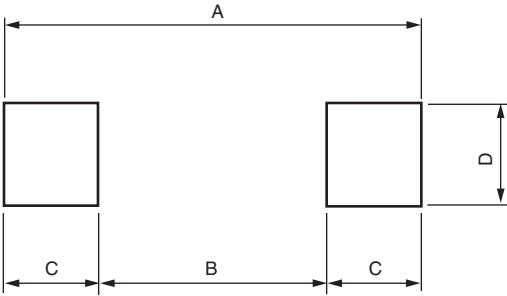
- Part number definitions:
 - (1) Capacitance tolerance: K, M
 - (2) Termination/packaging: A = 100 % tin (RoHS compliant), bulk; B = Std, tin/lead, bulk
- Reliability level: Z = Non-ER
- Temperature: S = STD
- ESR: S = STD

PERFORMANCE CHARACTERISTICS OF M34 CAPACITORS

| ELECTRICAL CHARACTERISTICS | |
|-------------------------------|---|
| ITEM | PERFORMANCE CHARACTERISTICS |
| Operating temperature range | - 55 °C to + 125 °C |
| Capacitor tolerance | \pm 20 %, \pm 10 %, at 120 Hz |
| Capacitance change (maximum) | Limits per standard ratings table |
| ESR | Limits per standard ratings table |
| AC ripple current | Limits per standard ratings table |
| DCL (maximum leakage current) | Limits per standard ratings table |
| Impedance (maximum) | Limits per standard ratings table |
| Reverse voltage | Reverse voltage shall be in accordance with DSCC drawing 93026. There shall be no continuous reverse voltage. Transient reverse voltage surges are acceptable under the following conditions: <ul style="list-style-type: none"> a) Peak reverse voltage is equal to or less than 1.5 V and the product of the peak current times the duration of the reverse transient is 0.05 A or less. b) The repetition rate of the reverse voltage surges is less than 10 Hz. |
| Surge voltage | Surge voltage shall be in accordance with MIL-PRF-39006 and Table II of DSCC93026. The DC rated surge voltage is the maximum voltage to which the capacitors should be subjected under any conditions. This includes transients and ripple at the highest line voltage. The surge voltage is 115 % of rated DC working voltage. |
| Life test | The capacitors shall be capable of withstanding a 2000 h life test at 85 °C at rated voltage |

| ENVIRONMENTAL CHARACTERISTICS | | |
|-------------------------------|----------------------------|--|
| ITEM | CONDITION | COMMENTS |
| Hermeticity | MIL-PRF-39006 | There shall be no evidence of leakage after testing to MIL-PRF-39006 specifications. |
| Moisture resistance | MIL-PRF-39006 | Tested in accordance to MIL-PRF-39006 for 30 cycles. |
| Altitude | MIL-STD-202G, method 105 D | 100 000 feet test |

| MECHANICAL CHARACTERISTICS | | |
|----------------------------|----------------------------|--|
| ITEM | CONDITION | COMMENTS |
| Thermal shock | MIL-STD-202G, method 107 A | Per M39006 and DSCC93026, 30 cycles |
| Shock | MIL-STD-202G, method 213 I | Per M39006 and DSCC93026, 100 g |
| Vibration (high frequency) | MIL-STD-202G, method 204 D | Per M39006 and DSCC93026, 20 g |
| Resistance to solder heat | MIL-STD-202G, method 210 F | Terminals at 260 °C for 10 s. The capacitor must not be visibly damaged and the electrical characteristics must not be affected. |
| Solderability | ANSI J-STD-002 | The terminations must be solderable per the MIL standard. |
| Terminals | MIL-STD-1276 | All terminals shall be permanently secured internally and externally, as applicable. All external joints shall be welded. |
| Part markings | MIL-STD-1285 | The part marking shall include Vishay name, trademark, capacitance, voltage, date code and lot symbol. |
| Weight (typical) in g | 3.5 | |

| PAD DIMENSIONS in millimeters | | | | |
|--|----------|----------|----------|----------|
|  | | | | |
| CASE CODE | A (MIN.) | B (NOM.) | C (NOM.) | D (NOM.) |
| C | 22.7 | 14.7 | 4.0 | 6.4 |

| STANDARD PACKAGING QUANTITY | | |
|-----------------------------|-----------|-----------|
| SERIES | CASE CODE | BULK/TUBE |
| M34 | C | 10 pcs |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А