



Features

- Low voltage operation
- Low current consumption
- Miniature SMD package size
- I²C communication protocol
- Reliable capacitive technology
- Relative humidity accuracy of ±2 % (Typical)

Applications

Industrial:

- HVAC systems
- Process monitoring
- Packaging automation

**Medical Devices (low/medium risk):

- Diagnostic equipment
- Analysis equipment

BPS230 Series - 2 mm Humidity Sensor

Absolute Maximum Ratings

| | |
|--|-----------------------------------|
| Supply Voltage (V_{CC})..... | -0.3 to 7.0 V |
| Input Voltage (V_I) | |
| CE..... | -0.3 to $V_{CC} + 0.3$ V |
| SCL/SDA..... | -0.3 to 7.0 V |
| Output Voltage (V_O)..... | -0.3 to $V_{CC} + 0.3$ V |
| Hi-level Output Current (IOH) | |
| 1 Terminal..... | -5 mA |
| All Terminals Total..... | -20 mA |
| Low-level Output Current (IOL) | |
| 1 Terminal..... | 5 mA |
| All Terminals Total..... | 20 mA |
| Operating Temperature (T_a)..... | -40°C to +105°C (-40°F to +221°F) |
| Storage Temperature (T_{stg})..... | -50°C to +125°C (-58°F to +257°F) |

Recommended Operating Conditions

| | |
|--|----------------------|
| Power Supply Voltage (V_{CC})..... | 1.62 to 5.5 VDC |
| Capacitance between V_{CC} and V_{SS} (C_P)..... | 0.1 μ F typical |
| Pull Up Resistor Value on SDA ¹ (R1)..... | 5 k Ω typical |
| Pull Up Resistor Value on SCL ¹ (R2)..... | 5 k Ω typical |

¹ Select the resistance value to meet AC characteristics.

Electrical Characteristics

| | |
|---|------------------|
| Humidity Detection | |
| Measurement Range..... | 0 to 100 % RH |
| Resolution (10-bit)..... | 0.1 % RH typical |
| Humidity Accuracy - Typical (see Humidity Sensor Accuracy Graph for Maximum Rating) | |
| @ 25 °C (20 to 80 % RH)..... | ±2 % RH |
| @ 5 °C to 45 °C (0 to 100 % RH)..... | ±4 % RH |
| Hysteresis @ 5 °C to 45 °C (0 to 100 % RH)..... ± 1 % RH typical | |
| Response Time | |
| Reach (τ 63 % @ 25 °C, wind velocity @ 1.0 m/s)..... | 8 seconds |

Unless otherwise specified: $V_{CC} = 1.62$ to 5.5 V, $V_{SS} = 0$ V, $T_a = -20$ °C to 100 °C

| | |
|--|---------------------------------------|
| Temperature Detection | |
| Measurement Range..... | -30 °C to +100 °C (-22 °F to +212 °F) |
| Resolution (11 bit) | |
| -10 °C to +70 °C..... | 0.1 °C (0.18 °F) |
| All other temperatures..... | 0.4 °C (0.72 °F) |
| Temperature Accuracy | |
| @ 5 °C to 60 °C..... | ± 0.4 °C (±0.72 °F) |
| @ -20 °C to 85 °C..... | ± 1.0 °C (±1.8 °F) |
| Reproducibility @ -30 °C to 100 °C..... ± 0.1 °C (±0.18 °F) | |
| Response Time | |
| Reach (τ 63 % (dependent on surrounding heat conduction NOTE 1)..... | 30 seconds |

Unless otherwise specified: $V_{CC} = 1.62$ to 5.5 V, $V_{SS} = 0$ V, $T_a = -30$ °C to 100 °C

NOTE 1 Extended exposure to >90 % RH causes a shift of up to 3 % RH which is reversible after a period of 14 days.

Current Consumption

| | |
|---------------------------------------|--|
| Sleep Current (CE=0, Sleep Mode)..... | 10 nA typical, 400 nA maximum |
| Average Operating Current..... | 13 μ A typical, 35 μ A maximum |

Unless otherwise specified: $V_{CC} = 1.62$ to 5.5 V, $V_{SS} = 0$ V, $T_a = 0$ °C to 60 °C

* RoHS3 Directive 2015/863 Amendments of Annex II on March 31, 2015

** Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice on the last page of this document.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.



WARNING Cancer and Reproductive Harm
www.P65Warnings.ca.gov

BPS230 Series - 2 mm Humidity Sensor



Input/Output Terminal Characteristics


| | |
|--|--|
| High Level Input Voltage 1 (VIH1) [Target Terminal: SCL, SDA] | 0.7 V _{CC} minimum, V _{CC} maximum |
| High Level Input Voltage 2 (VIH2) [Target Terminal: CE] | 0.8 V _{CC} minimum, V _{CC} maximum |
| Low Level Input Voltage 1 (VIL1) [Target Terminal: SCL, SDA] | V _{SS} minimum, 0.3 V _{CC} maximum |
| Low Level Input Voltage 2 (VIL2) [Target Terminal: CE] | V _{SS} minimum, 0.2 V _{CC} maximum |
| Low Level Output Current (IOL) [VOL = 0.1 V _{CC} , Target Terminal: SCL, SDA] | 0.5 mA minimum |
| Terminal Leak Current 1 (IL1) [Terminal voltage = V _{CC} , Target Terminal: SCL, SDA] | ± 1 μA |
| Terminal Leak Current 2 (IL2) [Terminal voltage = 0 V, Target Terminal: SCL, SDA, CE] | ± 1 μA |
| Input Pull-Down Resistance (RPD) [Terminal voltage = V _{CC} , Target Terminal: CE] | 60 kΩ minimum, 150 kΩ typical, 450 kΩ maximum |

Unless otherwise specified: V_{CC} = 1.62 to 5.5 V, V_{SS} = 0 V, T_a = -30 °C to 100 °C


Product Characteristics

| | |
|----------------------------|-----------------------------|
| Moisture Sensitivity Level | 1 |
| ESD Classification (HBM) | 1 kV |
| Marking | B , Date Code |
| Standard Packaging | 3,000 pcs. per 13-inch reel |
| Weight | 0.059 grams (0.002 oz) |

Product Dimensions

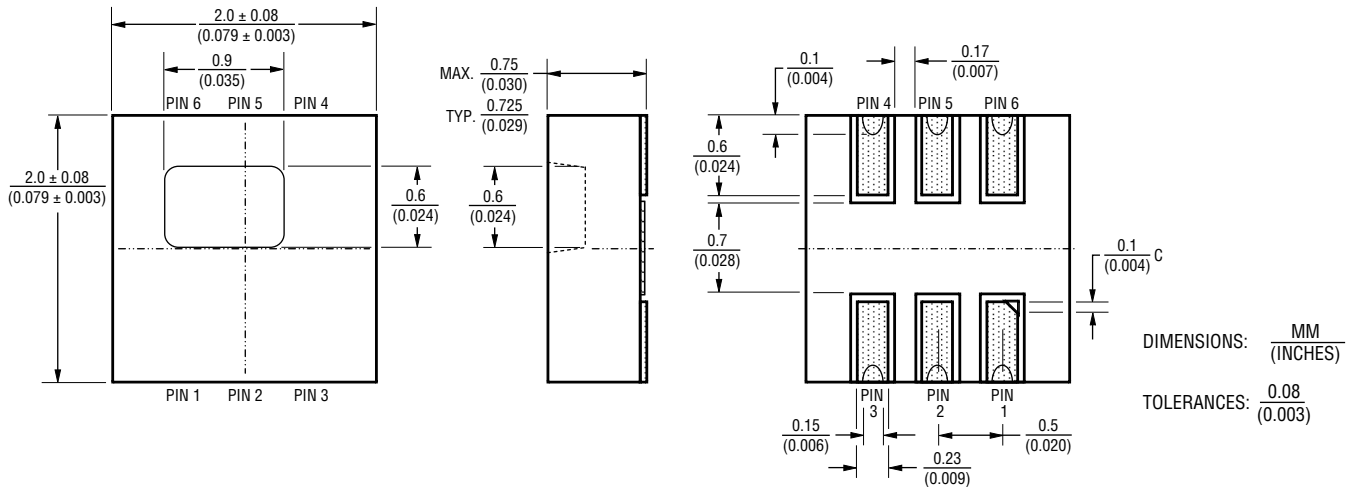

Recommended PCB Layout

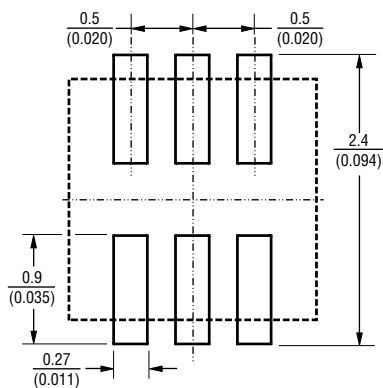

Terminal Assignment

| No. | Terminal Name | Function |
|-----|-----------------|-------------------------------|
| 1 | CE | Chip enable terminal |
| 2 | V _{SS} | Power supply terminal (-) |
| 3 | V _{CC} | Power supply terminal (+) |
| 4 | NC | No connection |
| 5 | SDA | I ² C serial data |
| 6 | SCL | I ² C serial clock |

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

BPS230 Series - 2 mm Humidity Sensor

BOURNS®

Basic Circuit Schematic

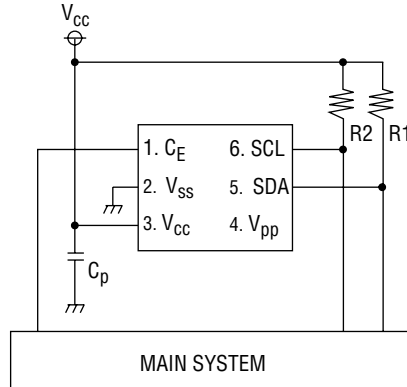

C_p 0.1 μ F
 R_1 5k Ω
 R_2 5k Ω

NOTE: R_1 and R_2 are reference values. Resistor values should be selected to meet the AC characteristics.

Operation Mode

| Operation Mode | Terminal Setup | Operation State of Each Functional Block | | | | | | |
|----------------|----------------|--|--------------|-------------|-----------------|-----------------------|-------------------|----------------------|
| | CE | V_{pp} | Power Supply | Oscillation | Temp. Detection | Capacitance Detection | OTP Memory | I ² C-Bus |
| Sleep *1 | 0 | NC | Stop | Stop | Stop | Stop | Stop | Stop |
| Standby | 1 | NC | Operation | Operation | Stop | Stop | Read-out Possible | Operation |

*1 In case of power control mode, there is no sleep operation.
 I²C slave address (SADR) is defined as "111 1111" (7Fh).

Control Register Map

| Address | Bit | Bit Name | Function | Value | Read-Out | Write-In | R/W | Init. |
|---------|-----------------------|---------------------------------------|------------------------------------|----------------------|-----------------------|----------|-----|-------|
| 00h | D7-1 | - | Reserved | - | | | R | 0 |
| | D0 | RESET | Reset | 0 | Normal Operation | None | R/W | 0 |
| 1 | | | | - | Reset Action | | | |
| 01h | D7-6 | MANMODE | Manual Detection Mode | 00 | Normal Operation Mode | | R/W | 0 |
| | D5-3 | HAVE[2:0] | Humidity Detection Value Avg. Mode | 000 | No Averaging Process | | | |
| | | | | 001 | 2 Times Average Mode | | | |
| | | | | 01x | 4 Times Average Mode | | | |
| | | | | 1xx | 8 Times Average Mode | | | |
| D2 | TAVE | Temperature Detection Value Avg. Mode | 0 | 8 Times Average Mode | | R/W | 0 | |
| 1 | 16 Times Average Mode | | | | | | | |

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Control Register Map (Continued)

| Address | Bit | Bit Name | Function | Value | Read-Out | Write-In | R/W | Init. |
|---------|------|----------|---|----------------|---------------------------|---------------------------|-----|-------|
| 01h | D1 | - | Reserved | - | | | R | 0 |
| | D0 | MAN | Manual Detection Mode | 0 | Standby State | Detection Operation Stop | R/W | 0 |
| | | | | 1 | Under Detection Operation | Detection Operation Start | | |
| 03h | D7-1 | - | Reserved | - | | | R | 0 |
| | D0 | ERR | Manual Detection Error Flag | 0 | No Error | Nothing is Done | R/W | 0 |
| 1 | | | | Error Occurred | Error Flag Reset | | | |
| 04h | D7-0 | HC[7:0] | Humidity Detection Result <i>(After Correction Operation)</i> | 000h-3FFh | | | R | X |
| 05h | D7-2 | - | Reserved | - | | | R | 0 |
| | D1-0 | HC[9:8] | Humidity Detection Result <i>(After Correction Operation)</i> | | | | R | X |
| 06h | D7-0 | TC[7:0] | Temperature Detection Result <i>(After Correction Operation)</i> | 000h-7FFh | | | R | X |
| 07h | D7-3 | - | Reserved | - | | | R | 0 |
| | D2-0 | TC[10:8] | Temperature Detection Result <i>(After Correction Operation)</i> | | | | R | X |
| 0Ah | D7-0 | K[7:0] | Capacity Detection Result <i>(Before Correction Operation)</i> | 000h-FFFFh | | | R | 0 |

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Control Register Map (Continued)

| Address | Bit | Bit Name | Function | Value | Read-Out | Write-In | R/W | Init. |
|---------|---------------|--------------------------------------|--|----------------|-----------------------------|-----------------|-----|-------|
| 0Bh | D7-0 | K[15:8] | Capacity Detection Result <i>(Before Correction Operation)</i> | | | | R | 0 |
| 2Ch | D7-5 | - | Reserved | - | - | | R | 0 |
| | D4 | SCR_ON_R | Standard Capacity Connection Control | 0 | Outside Capacity Cutting | R/W | 0 | |
| | | | | 1 | Outside Capacity Connection | | | |
| D3-0 | SCI_ON_R[3:0] | Internal Capacity Connection Control | 0h~Fh x 0.6 pF Example: At the time of 8 hours, access to internal capacity of 4.8 pF | | R/W | X | | |
| 03h | D7-1 | - | Reserved | - | | | R | 0 |
| | D0 | ERR | Manual Detection Error Flag | 0 | No Error | Nothing is Done | R/W | 0 |
| 1 | | | | Error Occurred | Error Flag Reset | | | |

Transfer Function Formula

Humidity

$$RH = \frac{100}{2^{10}} \times RH_{IC} \quad (0 \sim 100 \% RH)$$

RH_{IC} : IC Humidity Output Data (10 bit)

Refer to Register Map:

RH_{IC} = Data of the addresses 04H and 05H (000h ~ 3FFh)
It changes into a decimal and is operation.

Temperature


$$T = [T_{IC} - (2^{10} - \frac{25}{0.1})] \times 0.1 \quad (-30 \sim 100 \text{ }^\circ\text{C})$$

T_{IC} : IC Temperature Output Data (11 bit)

Refer to Register Map:

T_{IC} = Data of the addresses 06H and 07H (000h ~ 7FFh)
It changes into a decimal and is operation.

Capacitance/Temperature Detection Sequence

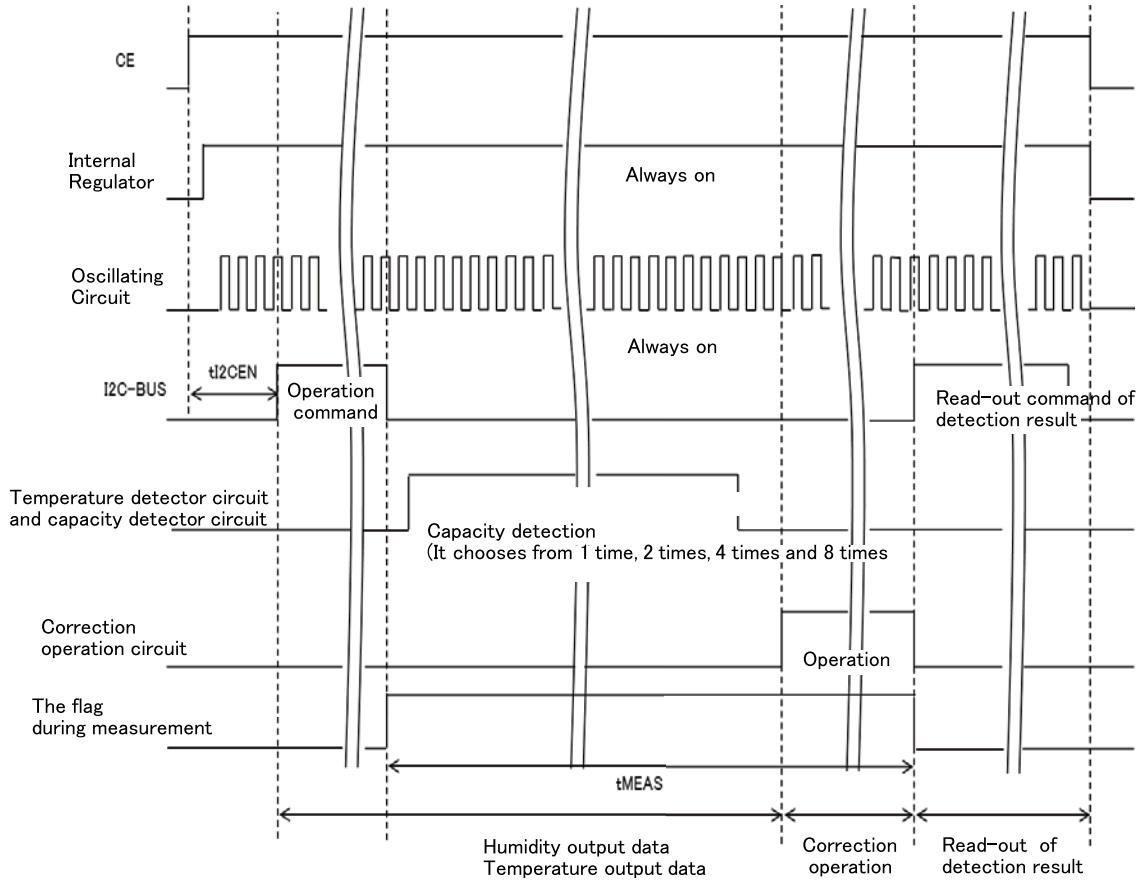

How To Order

BPS230 - D 3P0 - S 10 E


| | |
|----------------------------|-------------------------------|
| Model Series _____ | Humidity-Temperature Sensor |
| Output Type _____ | D = Digital |
| Accuracy (% RH) _____ | 3P0 = ±3.0 |
| Moisture Sensitivity _____ | S = Standard |
| Resolution _____ | 10 = 10-bit |
| Packaging Designator _____ | E = 3000 pcs. per 7-inch Reel |

Specifications are subject to change without notice.
 Users should verify actual device performance in their specific applications.
 The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Output Type Waveform and Data Read/Write Procedure

I²C-BUS Data Read-out Procedure

- ① I²C master device releases START condition.
- ② I²C master device transmits slave address and WRITE mode selection.
- ③ I²C master device transmits register address of this IC.
- ④ I²C master device releases repeated START condition. (Release method is same as START condition.)
- ⑤ I²C master device again transmits slave address and READ mode selection. (Read mode can be selected by transmitting "1" in 8th bit.)
- ⑥ I²C master device reads-out data from register address designated at ③.
It is possible to read-out data while register address increments one, by reading-out multiple data continuously. However, during continuous read-out, please return ACK to this IC as a reply of master.
- ⑦ After the completion of all read-out, I²C master device releases STOP condition.

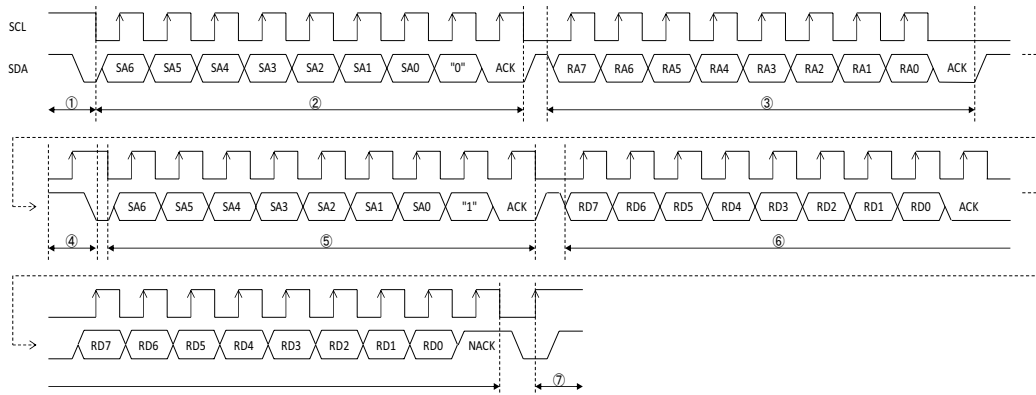


~ Continued ~

Output Type Waveform and Data Read/Write Procedure (Continued)


I²C-BUS Data Write-in Procedure

- ① I²C master device releases START condition. (Start condition can be released by changing SDA from “H” to “L” while SCL is in “H” state.)
- ② I²C master device transmits slave address and WRITE mode selection. (Write mode can be selected by transmitting “0” in 8th bit while 1~7th bits are slave address.)
- ③ I²C master device transmits register address of this IC.
- ④ I²C master device transmits write-in data.
- ⑤ It is possible to write-in data while register address increments one, by transmitting multiple write-in data continuously.

After the completion of transmitting all write-in data, I²C master device releases stop condition. (Stop condition can be released by changing SDA from “L” to “H” while SCL is in “H” state.)

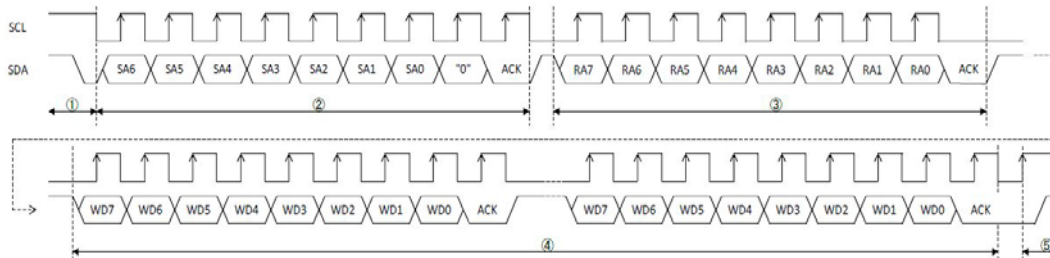

Solder Profile

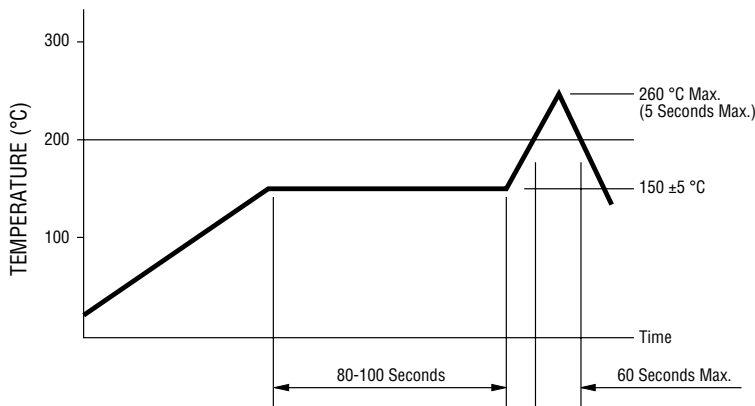

Processing Method: Reflow soldering with infrared heat or forced air convection (only once).

Notes:

1. No clean solder paste is recommended.
2. Aqueous wash is not recommended.
3. Use of water soluble soldering flux should be avoided due to possible corrosion.
4. Multiple passes through the soldering process is not recommended.
5. Other SMD processes and profiles should be verified by the customer.


Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Humidity Sensor Accuracy

| Relative Humidity (% RH) | Maximum | Typical |
|--------------------------|---------|---------|
| 0 | 5 | 4 |
| 10 | 4 | 3 |
| 20 | 3 | 2 |
| 30 | 3 | 2 |
| 40 | 3 | 2 |
| 50 | 3 | 2 |
| 60 | 3 | 2 |
| 70 | 3 | 2 |
| 80 | 3 | 2 |
| 90 | 4 | 3 |
| 100 | 5 | 4 |

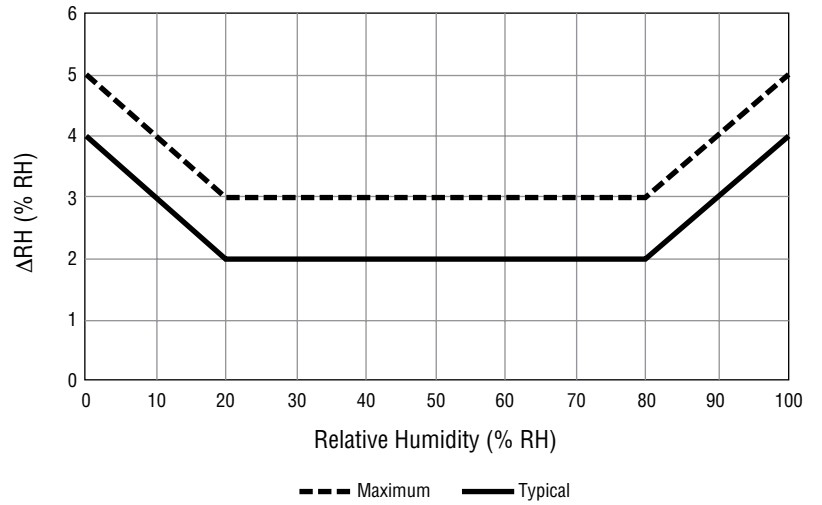

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

BPS230 Series - 2 mm Humidity Sensor

BOURNS®

Packaging Specification

3000 pieces per 7-inch reel.
Meets specifications of
EIA-481-1 or EIA-481-2.

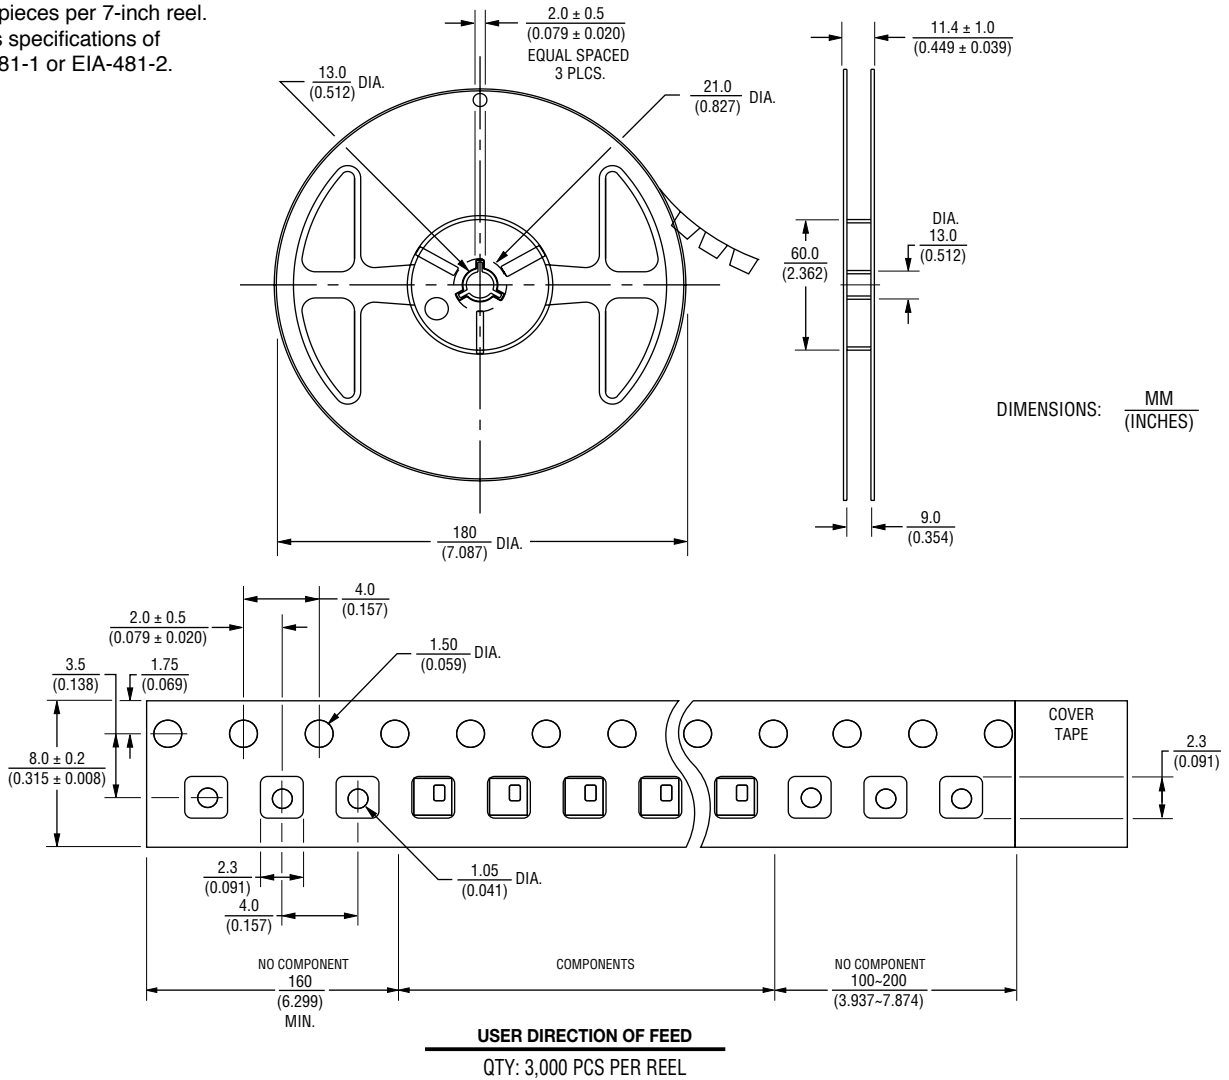

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

REV. 07/19

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А