

# G3VM-61AY1/DY1

## MOS FET Relays

**Compact, General-purpose, Analog switching MOS FET Relays, with Dielectric Strength of 5 kVAC between I/O Using Optical Isolation.**

- Switches minute analog signals.
- Continuous load current of 500 mA.

RoHS compliant

### Application Examples



- Electrical power unit
- Test & Measurement equipment
- Security equipment
- Industrial equipment



**NEW**

Note: The actual product is marked differently from the image shown here.

### Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

### List of Models

| Package type | Contact form | Terminals                  | Load voltage (peak value) * | Model            | Minimum package quantity |                          |
|--------------|--------------|----------------------------|-----------------------------|------------------|--------------------------|--------------------------|
|              |              |                            |                             |                  | Number per tube          | Number per tape and reel |
| DIP4         | 1a (SPST-NO) | PCB Terminals              | 60 V                        | G3VM-61AY1       | 100                      | -                        |
|              |              | Surface-mounting Terminals |                             | G3VM-61DY1       |                          |                          |
|              |              |                            |                             | G3VM-61DY1(TR05) | -                        | 500                      |

\* The AC peak and DC value are given for the load voltage.

### Absolute Maximum Ratings (Ta = 25°C)


| Item                                          |                                      | Symbol                  | Rating      | Unit           | Measurement conditions        |
|-----------------------------------------------|--------------------------------------|-------------------------|-------------|----------------|-------------------------------|
| Input                                         | LED forward current                  | IF                      | 30          | mA             |                               |
|                                               | Repetitive peak LED forward current  | IFP                     | 1           | A              | 100 $\mu$ s pulses, 100 pps   |
|                                               | LED forward current reduction rate   | $\Delta I_F / ^\circ C$ | -0.3        | mA/ $^\circ C$ | Ta $\geq 25^\circ C$          |
|                                               | LED reverse voltage                  | VR                      | 5           | V              |                               |
|                                               | Connection temperature               | TJ                      | 125         | $^\circ C$     |                               |
| Output                                        | Load voltage (AC peak/DC)            | VOFF                    | 60          | V              |                               |
|                                               | Continuous load current (AC peak/DC) | IO                      | 500         | mA             |                               |
|                                               | ON current reduction rate            | $\Delta I_O / ^\circ C$ | -5          | mA/ $^\circ C$ | Ta $\geq 25^\circ C$          |
|                                               | Pulse ON current                     | IOP                     | 1.5         | A              | t = 100 ms, Duty = 1/10       |
|                                               | Connection temperature               | TJ                      | 125         | $^\circ C$     |                               |
| Dielectric strength between I/O (See note 1.) |                                      | VI-O                    | 5000        | Vrms           | AC for 1 min                  |
| Ambient operating temperature                 |                                      | Ta                      | -40 to +85  | $^\circ C$     | With no icing or condensation |
| Ambient storage temperature                   |                                      | Tstg                    | -55 to +125 | $^\circ C$     | With no icing or condensation |
| Soldering temperature                         |                                      | -                       | 260         | $^\circ C$     | 10 s                          |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

### Electrical Characteristics (Ta = 25°C)

| Item                                        |                                        | Symbol | Minimum | Typical | Maximum | Unit       | Measurement conditions                                  |
|---------------------------------------------|----------------------------------------|--------|---------|---------|---------|------------|---------------------------------------------------------|
| Input                                       | LED forward voltage                    | VF     | 1.1     | 1.27    | 1.4     | V          | IF = 10 mA                                              |
|                                             | Reverse current                        | IR     | -       | -       | 10      | $\mu A$    | VR = 5 V                                                |
|                                             | Capacity between terminals             | CT     | -       | 50      | -       | pF         | V = 0, f = 1 MHz                                        |
|                                             | Trigger LED forward current            | IFT    | -       | 0.6     | 3       | mA         | IO = 500 mA                                             |
| Output                                      | Maximum resistance with output ON      | RON    | -       | 0.6     | 2       | $\Omega$   | IF = 5 mA, IO = 500 mA                                  |
|                                             | Current leakage when the relay is open | ILEAK  | -       | -       | 1000    | nA         | VOFF = 60 V                                             |
|                                             | Capacity between terminals             | COFF   | -       | 130     | -       | pF         | V = 0, f = 1 MHz                                        |
|                                             | Capacity between I/O terminals         | CI-O   | -       | 0.8     | -       | pF         | f = 1 MHz, Vs = 0 V                                     |
| Insulation resistance between I/O terminals |                                        | RI-O   | 1000    | -       | -       | M $\Omega$ | VI-O = 500 VDC, RoH $\leq 60\%$                         |
| Turn-ON time                                |                                        | TON    | -       | 1       | 3       | ms         | IF = 5 mA, RL = 200 $\Omega$ , VDD = 20 V (See note 2.) |
| Turn-OFF time                               |                                        | TOFF   | -       | 0.2     | 1       | ms         |                                                         |

Note: 2. Turn-ON and Turn-OFF Times



### Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item                                 | Symbol   | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|---------|------|
| Load voltage (AC peak/DC)            | $V_{DD}$ | -       | -       | 48      | V    |
| Operating LED forward current        | $I_F$    | 5       | 7.5     | 25      | mA   |
| Continuous load current (AC peak/DC) | $I_O$    | -       | -       | 500     | mA   |
| Ambient operating temperature        | $T_a$    | -20     | -       | 65      | °C   |

### Spacing and Insulation


| Item                         | Minimum | Unit |
|------------------------------|---------|------|
| Creepage distances           | 7.0     | mm   |
| Clearance distances          | 7.0     |      |
| Internal isolation thickness | 0.4     |      |

### Engineering Data


LED forward current vs. Ambient temperature

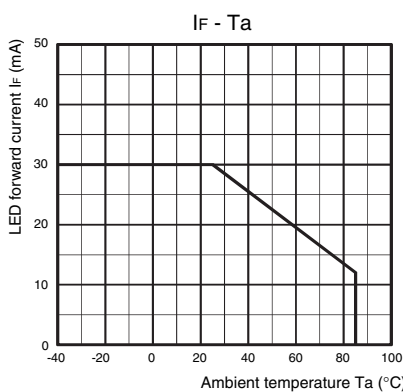


Continuous load current vs. Ambient temperature

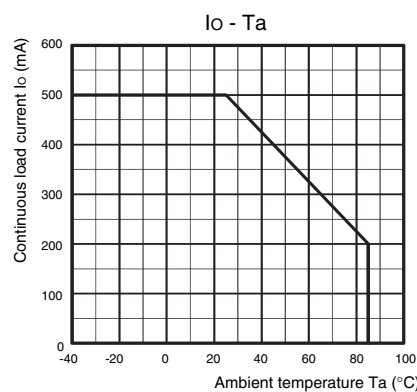


LED forward current vs. LED forward voltage

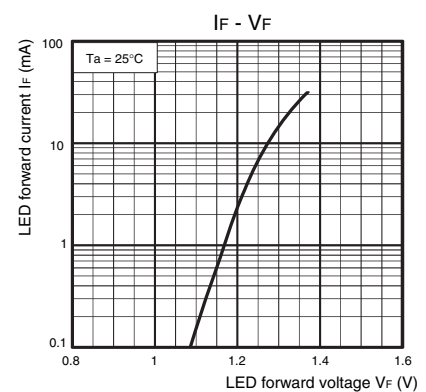


Continuous load current vs. On-state voltage

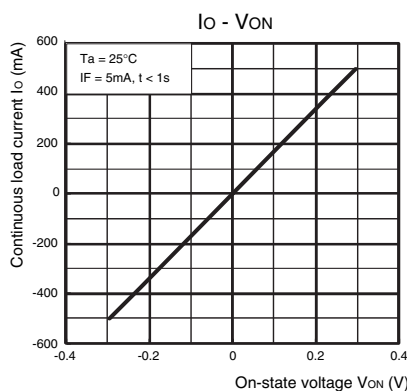


On-state resistance vs. Ambient temperature

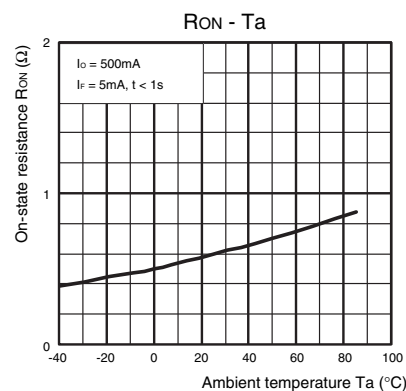


Trigger LED forward current vs. Ambient temperature

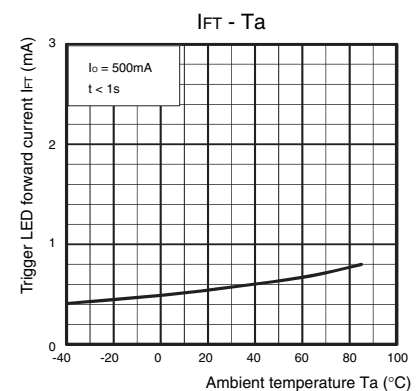


Turn ON, Turn OFF time vs. LED forward current

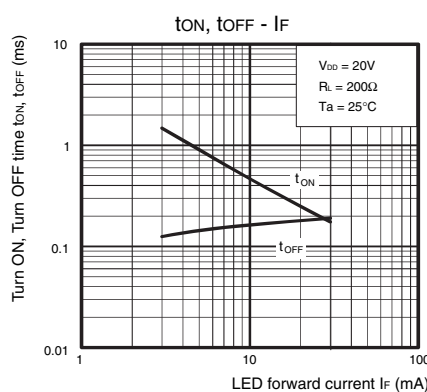

Turn ON, Turn OFF time vs. Ambient temperature

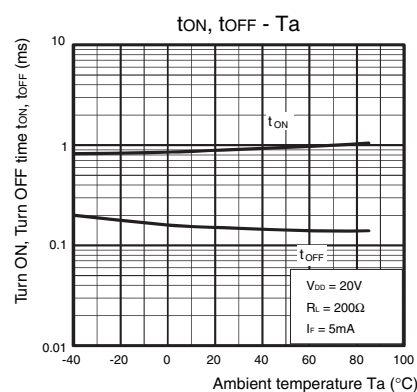

Current leakage vs. Ambient temperature

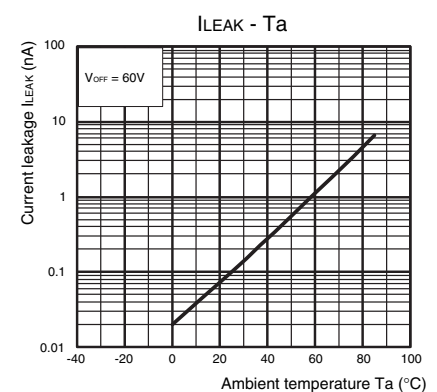


### Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

## ■ Appearance

### DIP (Dual Inline Package) DIP4

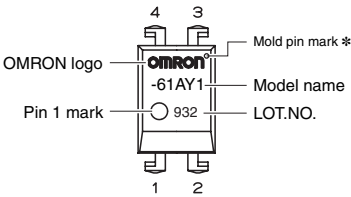


Note: The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


## ■ Dimensions

(Unit:mm)




### PCB Terminals

Weight: 0.25 g




### Surface-mounting Terminals

Weight: 0.25 g




### PCB Dimensions (BOTTOM VIEW)



### Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

**OMRON Corporation**

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

Cat. No. K260-E1-01  
0913(0913)(O)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А