


Aluminum Capacitors Radial Low Leakage Current



Fig.1 Component outline



FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Radial leads, cylindrical aluminum case, all-insulated (light blue)
- Natural pitch 2.5 mm and 5 mm
- Charge and discharge proof
- Miniaturized, high CV-product per unit volume
- Low leakage current, low energy consumption
- Lead (Pb)-free versions are RoHS compliant



RoHS
COMPLIANT

APPLICATIONS

- Telecommunication, automotive, audio-video, EDP and industrial
- Coupling, decoupling, buffering, timing, energy storage
- Portable and mobile equipment
- Low surface demand on printed-circuit board

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$)
- Rated voltage (in V)
- Date code in accordance with IEC 60062
- Code indicating factory of origin
- Name of manufacturer
- Minus-sign on top to identify the negative terminal
- Series number (013)

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case sizes ($\varnothing D \times L$ in mm)	5 x 11 and 8.2 x 11
Rated capacitance range, C_R	0.47 to 470 μF
Tolerance on C_R	$\pm 20\%$; $\pm 10\%$ on request
Rated voltage range, U_R	6.3 to 50 V
Category temperature range	- 40 to + 85 °C
Leakage current after 2 minutes: $U_R = 6.3$ to 25 V $U_R = 35$ and 50 V	 0.002 $C_R \times U_R$ or 0.7 μA , whichever is greater 0.002 $C_R \times U_R + 1 \mu\text{A}$
Endurance test at 85 °C	2000 hours
Useful life at 105 °C	750 hours
Useful life at 85 °C	3000 hours
Useful life at 40 °C, 1.4 x I_R applied	80 000 hours
Shelf life at 0 V, 85 °C	500 hours
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	40/085/56

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm)

C_R (μF)	U_R (V)					
	6.3	10	16	25	35	50
0.47	-	-	-	-	-	5 x 11
1.0	-	-	-	5 x 11	-	5 x 11
2.2	-	-	-	5 x 11	-	5 x 11
3.3	-	-	-	5 x 11	-	5 x 11
4.7	-	-	-	5 x 11	-	5 x 11
10	-	-	-	5 x 11	-	5 x 11
22	-	-	-	5 x 11	-	5 x 11
33	-	-	5 x 11	-	5 x 11	8.2 x 11
47	-	5 x 11	5 x 11	8.2 x 11	-	8.2 x 11
68	-	5 x 11	-	-	-	8.2 x 11
100	-	5 x 11	-	-	8.2 x 11	-
220	-	8.2 x 11	-	-	-	-
330	8.2 x 11	-	-	-	-	-
470	8.2 x 11	-	-	-	-	-

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

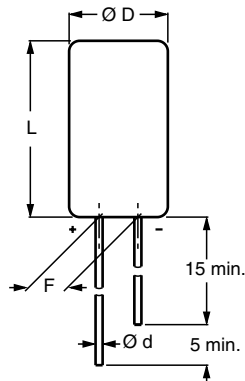


Fig.2 Form CA: Long leads

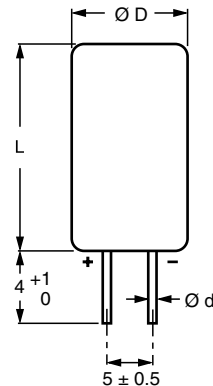
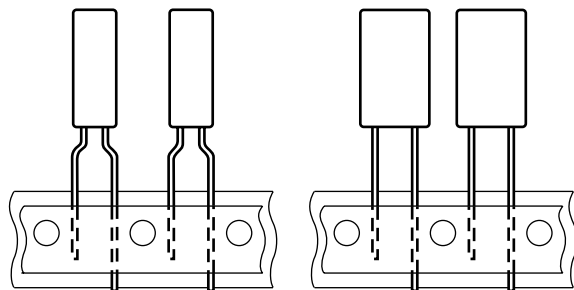



Fig.3 Form CB: Cut leads



Case Ø D x L = 5 x 11 and 8.2 x 11 mm
Pitch F = 5 mm

Fig.4 Form TFA: Taped in box (ammopack)



Case Ø D x L = 5 x 11 mm only
Pitch F = 2.5 mm

Fig.5 Form TFA: Taped in box (ammopack)

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES								
NOMINAL CASE SIZE Ø D x L	CASE CODE	Ø d	Ø D _{max.}	L _{max.}	F	MASS (g)	PACKAGING QUANTITIES	
							FORM CA, CB	FORM TFA, TNA
5 x 11	11	0.5	5.5	12	2.5 ± 0.5	≈ 0.4	1000	2000
8.2 x 11	13	0.6	8.7	12	5.0 ± 0.5	≈ 1.1	1000	1000

Note
Detailed tape dimensions see section 'PACKAGING'.



Aluminum Capacitors Radial Low Leakage Current

Vishay BCcomponents

ELECTRICAL DATA

SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	rated RMS ripple current at 100 Hz, 85 °C
I_{L2}	max. leakage current after 2 minutes at U_R
$\tan \delta$	max. dissipation factor at 100 Hz
Z	max. impedance at 10 kHz and + 20 °C

ORDERING EXAMPLE

Electrolytic capacitor 013 series

100 μ F/16 V; $\pm 20\%$ Nominal case size: $\varnothing 8.2 \times 11$ mm; Form TFA

Ordering Code: MAL201335101E3

Former 12NC: 2222 013 35101

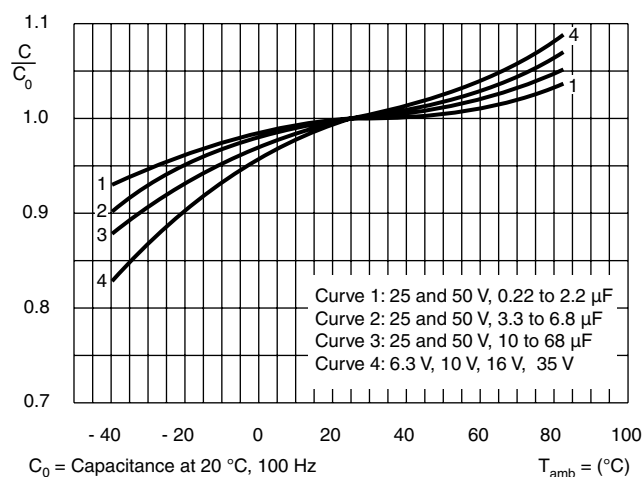
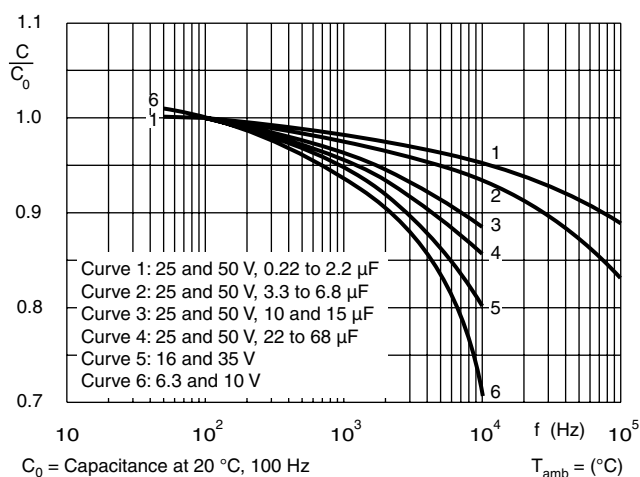
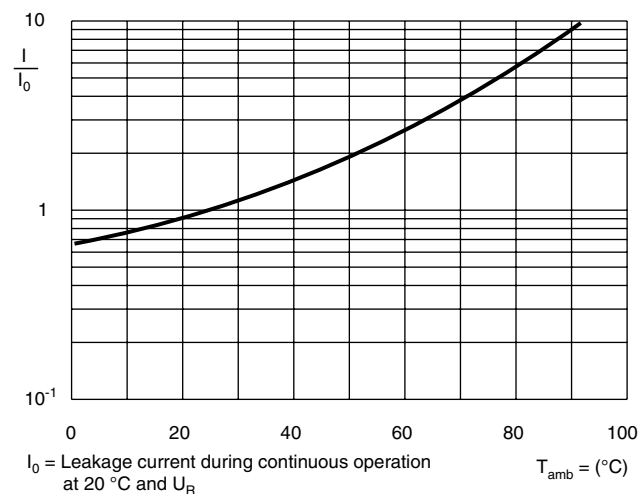
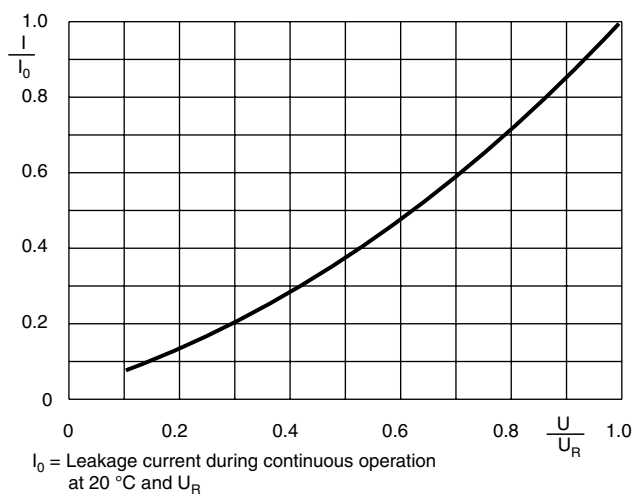
Note

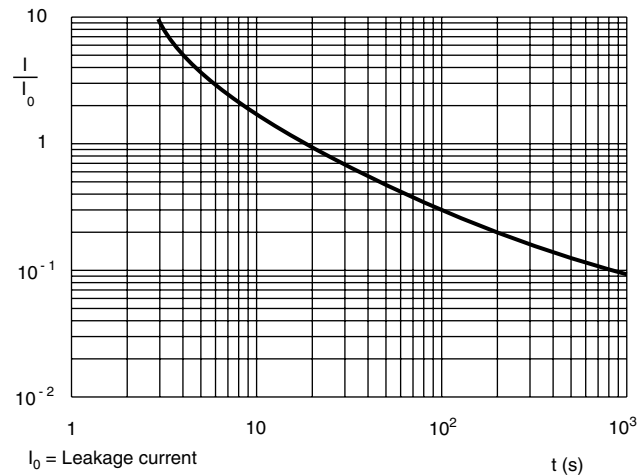
1. Unless otherwise specified, all electrical values in Table 1 apply at $T_{amb} = 20\text{ °C}$, $P = 86$ to 106 kPa , $RH = 45$ to 75% .

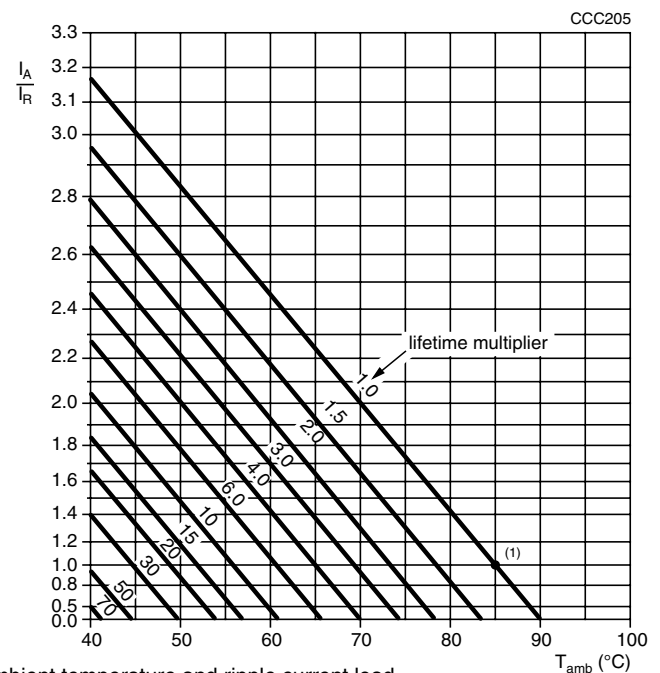
Table 1

ELECTRICAL DATA AND ORDERING INFORMATION														
U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE Ø D x L (mm)	I _R 100 Hz 85 °C (mA)	I _{L2} 2 min (μA)	tan δ 100 Hz	Z 10 kHz (Ω)	ORDERING CODE MAL2013.....							
							BULK PACKAGING				TAPED AMMOPACK			
							LONG LEADS		CUT LEADS					
							FORM CA	F (mm)	FORM CB	F (mm)	FORM TFA	F (mm)	FORM TNA	F (mm)
6.3	330	8.2 x 11	210	4.2	0.2	0.9	53331E3	5.0	63331E3	5.0	33331E3	5.0	-	-
	470	8.2 x 11	250	5.9	0.2	0.64	53471E3	5.0	63471E3	5.0	33471E3	5.0	-	-
10	47	5 x 11	75	1.0	0.16	2.8	54479E3	2.5	-	-	34479E3	5.0	74479E3	2.5
	68	5 x 11	90	1.4	0.16	2.5	54689E3	2.5	-	-	34689E3	5.0	74689E3	2.5
	100	5 x 11	110	2.0	0.16	1.7	54101E3	2.5	-	-	34101E3	5.0	74101E3	2.5
	220	8.2 x 11	190	4.4	0.16	0.9	54221E3	5.0	64221E3	5.0	34221E3	5.0	-	-
16	33	5 x 11	70	1.1	0.13	2.8	55339E3	2.5	-	-	35339E3	5.0	75339E3	2.5
	47	5 x 11	85	1.5	0.13	2.1	55479E3	2.5	-	-	35479E3	5.0	75479E3	2.5
	100	8.2 x 11	150	3.2	0.13	1.0	55101E3	5.0	65101E3	5.0	35101E3	5.0	-	-
25	1.0	5 x 11	5	0.7	0.06	40	56108E3	2.5	-	-	36108E3	5.0	76108E3	2.5
	2.2	5 x 11	10	0.7	0.06	18	56228E3	2.5	-	-	36228E3	5.0	76228E3	2.5
	3.3	5 x 11	18	0.7	0.06	12	56338E3	2.5	-	-	36338E3	5.0	76338E3	2.5
	4.7	5 x 11	25	0.7	0.06	8.5	56478E3	2.5	-	-	36478E3	5.0	76478E3	2.5
	10	5 x 11	50	0.7	0.06	4.0	56109E3	2.5	-	-	36109E3	5.0	76109E3	2.5
	22	5 x 11	75	1.1	0.08	2.7	56229E3	2.5	-	-	36229E3	5.0	76229E3	2.5
	47	8.2 x 11	130	2.4	0.08	1.3	56479E3	5.0	66479E3	5.0	36479E3	5.0	-	-
35	33	5 x 11	70	3.3	0.13	2.8	50339E3	5.0	-	-	30339E3	5.0	70339E3	2.5
	100	8.2 x 11	150	8.0	0.13	1.0	50101E3	5.0	60101E3	5.0	30101E3	5.0	-	-
50	0.47	5 x 11	5	1.1	0.06	85	51477E3	2.5	-	-	31477E3	5.0	71477E3	2.5
	1.0	5 x 11	10	1.1	0.06	40	51108E3	2.5	-	-	31108E3	5.0	71108E3	2.5
	2.2	5 x 11	20	1.2	0.06	18	51228E3	2.5	-	-	31228E3	5.0	71228E3	2.5
	3.3	5 x 11	32	1.3	0.06	12	51338E3	2.5	-	-	31338E3	5.0	71338E3	2.5
	4.7	5 x 11	38	1.5	0.06	8.5	51478E3	2.5	-	-	31478E3	5.0	71478E3	2.5
	10	5 x 11	55	2.0	0.06	4.0	51109E3	2.5	-	-	31109E3	5.0	71109E3	2.5
	22	5 x 11	75	3.2	0.08	2.7	51229E3	2.5	-	-	31229E3	5.0	71229E3	2.5
	33	8.2 x 11	110	4.3	0.06	1.4	51339E3	5.0	61339E3	5.0	31339E3	5.0	-	-
	47	8.2 x 11	130	5.7	0.08	1.3	51479E3	5.0	61479E3	5.0	31479E3	5.0	-	-
	68	8.2 x 11	150	7.8	0.08	1.2	51689E3	5.0	61689E3	5.0	31689E3	5.0	-	-

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage		$U_s \leq 1.3 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
Current		
Leakage current	After 2 minutes at U_R : $U_R = 6.3$ to 25 V $U_R = 35$ and 50 V	$I_{L2} \leq 0.002 C_R \times U_R$ or $0.7 \mu\text{A}$, whichever is greater $I_{L2} \leq 0.002 C_R \times U_R + 1 \mu\text{A}$
Inductance		
Equivalent series inductance (ESL)	Case $\varnothing D \times L = 5 \times 11 \text{ mm}$	typ. 13 nH
	Case $\varnothing D \times L = 8.2 \times 11 \text{ mm}$	typ. 16 nH
Resistance		
Equivalent series resistance (ESR)	Calculated from $\tan \delta_{max.}$ and C_R (see Table 1)	$ESR = \tan \delta / 2 \pi f C_R$

CAPACITANCE (C)**Fig.6** Typical multiplier of capacitance as a function of ambient temperature**Fig.7** Typical multiplier of capacitance as a function of frequency**LEAKAGE CURRENT****Fig.8** Typical multiplier of leakage current as a function of ambient temperature**Fig.9** Typical multiplier of leakage current as a function of time

LEAKAGE CURRENT

Fig.10 Typical multiplier of leakage current
 a function of time

RIPPLE CURRENT AND USEFUL LIFE

 I_A = Actual ripple current at 100 Hz

 I_R = Ripple current at 85 °C, 100 Hz

 (1) Useful life at 85 °C and I_R ripple current load

Fig.11 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 2

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 6.3 \text{ V}$	$U_R = 10, 16 \text{ and } 35 \text{ V}$	$U_R = 25 \text{ and } 50 \text{ V}$
50	0.90	0.85	0.80
100	1.00	1.00	1.00
300	1.12	1.20	1.25
1000	1.20	1.30	1.40
3000	1.25	1.35	1.50
$\geq 10\,000$	1.30	1.40	1.60

Table 3

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300, subclause 4.13	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R applied; 2000 hours	$U_R \leq 6.3\text{ V}$; $\Delta C/C$: + 15/- 30 % $U_R > 6.3\text{ V}$; $\Delta C/C$: $\pm 15\text{ }%$ $\tan \delta \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$
Useful life	CECC 30301, subclause 1.8.1	$T_{amb} = 85\text{ }^{\circ}\text{C}$; U_R and I_R applied; 3000 hours	$U_R \leq 6.3\text{ V}$; $\Delta C/C$: + 45/- 50 % $U_R > 6.3\text{ V}$; $\Delta C/C$: $\pm 45\text{ }%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1\text{ }%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300, subclause 4.17	$T_{amb} = 85\text{ }^{\circ}\text{C}$; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$, $\tan \delta$, Z : for requirements see 'Endurance test' above $I_{L2} \leq 2 \times \text{spec. limit}$



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А