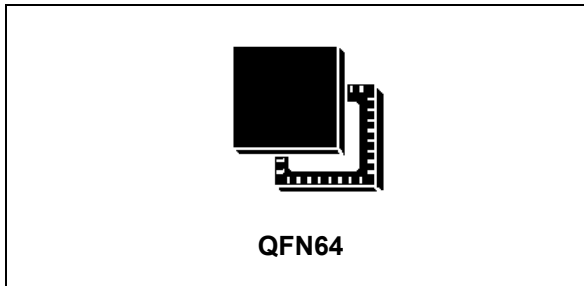


UHF RFID Single Chip Reader EPC Class1 Gen2 Compatible**Data brief - not recommended for new design****Features**

- Supply voltage: 4.1 V to 5.5 V
- Filters dedicated to 250 kHz and 320 kHz M4 and M8 DRM operation.
- Available RX modes:
 - BLF = 40 kHz or 160 kHz with FM0, M2, M4, M8
 - BLF = 250 kHz, 320 kHz, 640 kHz with M4, M8
- ISO18000-6C (EPC Gen2) full protocol support
- ISO18000-6A/B compatibility in direct mode
- Programmable dense reader mode filters on chip offering a worldwide shippable device
- Improved RX sensitivity down to -86dBm
- On chip TX pre-distortion
- Integrated low level transmission encoding
- Integrated low level decoders
- Integrated data framing
- Integrated CRC checking
- Parallel 8-bit or serial 4-pin SPI interface to MCU using 24 bytes FIFO
- Voltage range for communication to MCU between 1.8 V and 5.5 V
- Can be powered by USB with no need for step conversion from 4.1 V to 5.5 V
- Configurable clock output for MCU
- Integrated supply voltage regulator (20mA) for external circuitry
- Integrated supply voltage regulator for the RF output stage improving power supply noise rejection
- Internal power amplifier (20 dBm) for short range applications
- ASK or PR-ASK TX modulation
- Adjustable ASK modulation index
- AM & PM demodulation avoiding communication holes with automatic I/Q selection
- Configurable RX gain
- Automatic gain control for reception
- AD converter for measuring TX power using an external RF power detector
- DA converter for controlling an external power amplifier
- Frequency hopping support
- On-board VCO and PLL covering complete RFID frequency range 840 MHz to 960 MHz
- Oscillator using 20 MHz crystal
- Power down, standby and active mode available

Description

The ST25RU3992 is an UHF RFID Reader chip comprising of an integrated analog front-end and protocol handling for ISO18000-6c/b. Equipped with multiple built-in programming options, the device is suitable for a wide range of UHF RFID applications.

The ST25RU3992 is pin to pin and firmware compatible with the previous ST25RU3991 IC. It offers improved receive sensitivity down to -86 dB, a programmable Rx Dense Reader Mode (DRM) filters on chip and a TX pre-distortion feature.

Fully scalable, the ST25RU3992 is ideal for longer range and higher power applications. Offering DRM filtering on chip, combined with improved RX sensitivity and TX pre-distortion allows the ST25RU3992 to be a worldwide shippable IC.

The reader configuration and fine tuning is achieved by setting up control registers. The ST25RU3992 reader IC complies with EPC Class 1 Generation 2 protocol (ISO 18000-6C) and ISO 18000-6A/B (in direct mode).

For communication between the host system (MCU) and the reader IC a parallel or serial interface can be selected. When the hardware encoder and decoder are used for transmission and reception, base band data is transferred via a 24 bytes FIFO register. In case of direct transmission or reception, the encoder and decoder are bypassed and the host system can service the analog front end in real time.

The transmitter generates 20 dBm output power when matched to a 50 Ω load and is capable of ASK or PR-ASK modulation. The integrated power supply voltage regulators ensure supply noise rejection of the complete reader system. The transmission system comprises of a low level data coding. Automatic generation of Frame-Sync, Preamble, and CRC check is supported.

The receiver system allows AM and PM demodulation. The receiver features an automatic gain control option (patent pending), selectable gain and signal bandwidth to cover a range of different back scatter link frequencies and coding options. The signal strength of AM and PM modulation can be measured and the result is accessible through dedicated RSSI registers. The receiver output is selectable between digitized sub-carrier signal and decoded sub-carrier signal. The selected decoders deliver bit stream and data clock as outputs. The receiver system also comprises of a framing system. This system performs a CRC check and organizes the data in bytes. The base band data is then accessible to the host system through a 24 byte FIFO register.

To support an external MCU and other circuitries a 3.3 V regulated supply voltage is available along with a clock output. This voltage regulator has a current capability of 20 mA.

The ST25RU3992 is available in a 64-pin QFN (9 mm x 9 mm), ensuring the smallest possible footprint.

1 Revision history

Table 1. Document revision history

Date	Revision	Changes
29-Nov-2016	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А