




## PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1 = 4.7 \text{ k}\Omega$ )
- BCR169S: Two internally isolated transistors with good matching in one multichip package
- BCR169S: For orientation in reel see package information below
- Pb-free (RoHS compliant) package <sup>1)</sup>
- Qualified according AEC Q101

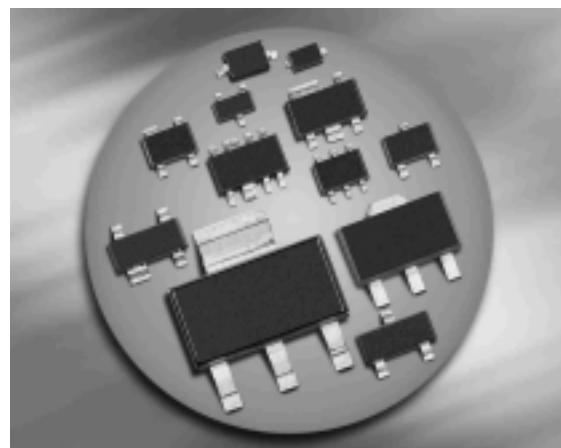

### BCR169/F/W

### BCR169S



| Type    | Marking | Pin Configuration |      |      |      |      |      | Package |
|---------|---------|-------------------|------|------|------|------|------|---------|
| BCR169  | WSs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT23   |
| BCR169F | WSs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | TSFP-3  |
| BCR169S | WSs     | 1=E1              | 2=B1 | 3=C2 | 4=E2 | 5=B2 | 6=C1 | SOT363  |
| BCR169W | WSs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT323  |

<sup>1)</sup>Pb-containing package may be available upon special request

**Maximum Ratings**

| Parameter                             | Symbol       | Value       | Unit             |
|---------------------------------------|--------------|-------------|------------------|
| Collector-emitter voltage             | $V_{CEO}$    | 50          | V                |
| Collector-base voltage                | $V_{CBO}$    | 50          |                  |
| Input forward voltage                 | $V_{i(fwd)}$ | 30          |                  |
| Input reverse voltage                 | $V_{i(rev)}$ | 5           |                  |
| Collector current                     | $I_C$        | 100         | mA               |
| Total power dissipation               | $P_{tot}$    |             | mW               |
| BCR169, $T_S \leq 102^\circ\text{C}$  |              | 200         |                  |
| BCR169F, $T_S \leq 128^\circ\text{C}$ |              | 250         |                  |
| BCR169S, $T_S \leq 115^\circ\text{C}$ |              | 250         |                  |
| BCR169W, $T_S \leq 124^\circ\text{C}$ |              | 250         |                  |
| Junction temperature                  | $T_j$        | 150         | $^\circ\text{C}$ |
| Storage temperature                   | $T_{stg}$    | -65 ... 150 |                  |

**Thermal Resistance**

| Parameter                                | Symbol     | Value      | Unit |
|------------------------------------------|------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |            | K/W  |
| BCR169                                   |            | $\leq 240$ |      |
| BCR169F                                  |            | $\leq 90$  |      |
| BCR169S                                  |            | $\leq 140$ |      |
| BCR169W                                  |            | $\leq 105$ |      |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                                            | Symbol                      | Values |      |      | Unit |
|------------------------------------------------------------------------------------------------------|-----------------------------|--------|------|------|------|
|                                                                                                      |                             | min.   | typ. | max. |      |
| DC Characteristics                                                                                   |                             |        |      |      |      |
| Collector-emitter breakdown voltage<br>$I_C = 100\ \mu\text{A}$ , $I_B = 0$                          | $V_{(\text{BR})\text{CEO}}$ | 50     | -    | -    | V    |
| Collector-base breakdown voltage<br>$I_C = 10\ \mu\text{A}$ , $I_E = 0$                              | $V_{(\text{BR})\text{CBO}}$ | 50     | -    | -    |      |
| Collector-base cutoff current<br>$V_{\text{CB}} = 40\ \text{V}$ , $I_E = 0$                          | $I_{\text{CBO}}$            | -      | -    | 100  | nA   |
| Emitter-base cutoff current<br>$V_{\text{EB}} = 5\ \text{V}$ , $I_C = 0$                             | $I_{\text{EBO}}$            | -      | -    | 100  | nA   |
| DC current gain <sup>1)</sup><br>$I_C = 5\ \text{mA}$ , $V_{\text{CE}} = 5\ \text{V}$                | $h_{\text{FE}}$             | 120    | -    | 630  | -    |
| Collector-emitter saturation voltage <sup>1)</sup><br>$I_C = 10\ \text{mA}$ , $I_B = 0.5\ \text{mA}$ | $V_{\text{CEsat}}$          | -      | -    | 0.3  | V    |
| Input off voltage<br>$I_C = 100\ \mu\text{A}$ , $V_{\text{CE}} = 5\ \text{V}$                        | $V_{\text{i(off)}}$         | 0.4    | -    | 0.8  |      |
| Input on voltage<br>$I_C = 2\ \text{mA}$ , $V_{\text{CE}} = 0.3\ \text{V}$                           | $V_{\text{i(on)}}$          | 0.5    | -    | 1.1  |      |
| Input resistor                                                                                       | $R_1$                       | 3.2    | 4.7  | 6.2  | kΩ   |


**AC Characteristics**

|                                                                                                |          |   |     |   |     |
|------------------------------------------------------------------------------------------------|----------|---|-----|---|-----|
| Transition frequency<br>$I_C = 10\ \text{mA}$ , $V_{CE} = 5\ \text{V}$ , $f = 100\ \text{MHz}$ | $f_T$    | - | 200 | - | MHz |
| Collector-base capacitance<br>$V_{CB} = 10\ \text{V}$ , $f = 1\ \text{MHz}$                    | $C_{cb}$ | - | 3   | - | pF  |

<sup>1</sup>Pulse test:  $t < 300\ \mu\text{s}$ ;  $D < 2\%$


### DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5 \text{ V}$  (common emitter configuration)

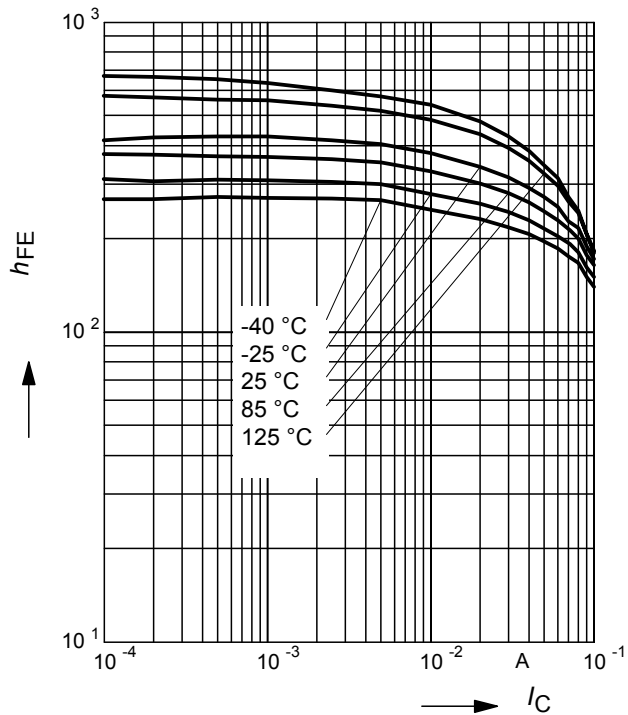


### Collector-emitter saturation voltage

$V_{CEsat} = f(I_C), h_{FE} = 20$

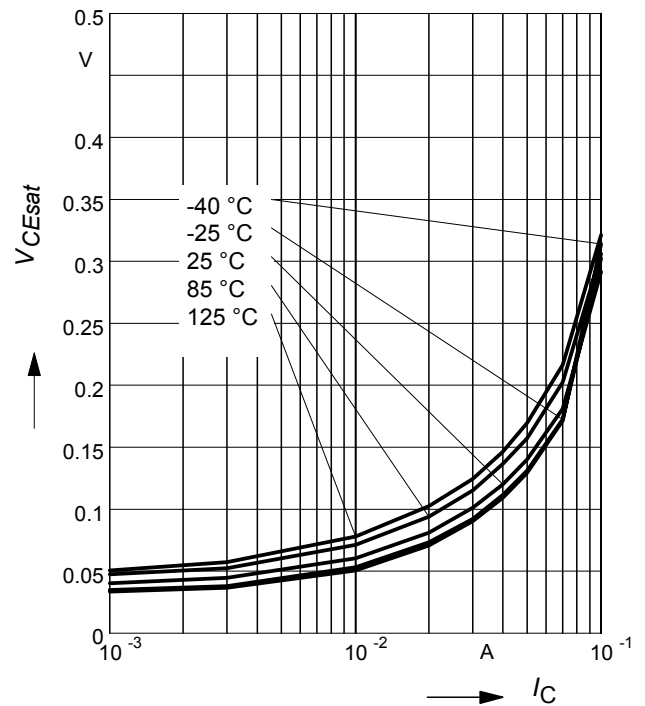


### Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3 \text{ V}$  (common emitter configuration)

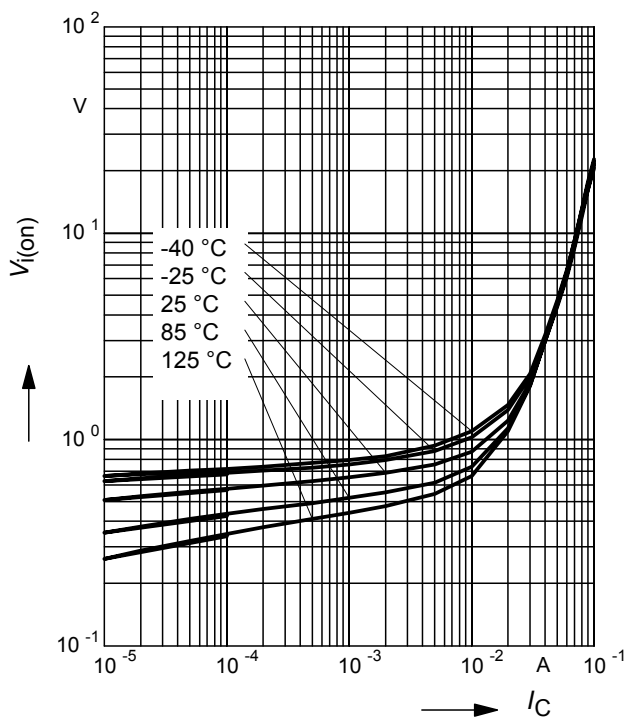

### Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5 \text{ V}$  (common emitter configuration)

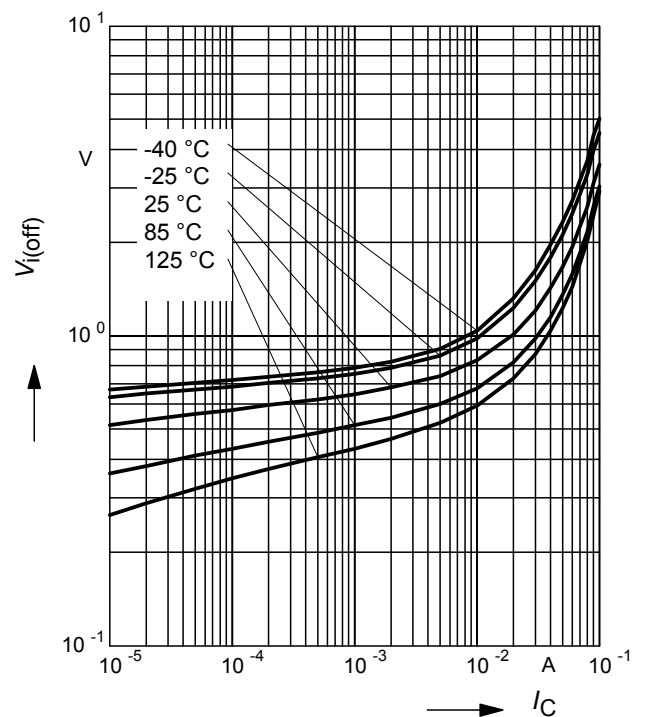

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

**BCR169**



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

**BCR169F**



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

**BCR169S**



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

**BCR169W**



### Permissible Pulse Load $R_{thJS} = f(t_p)$

BCR169



### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR169



### Permissible Puls Load $R_{thJS} = f(t_p)$

BCR169F



### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR169F



**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR169S



**Permissible Pulse Load**

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR169S

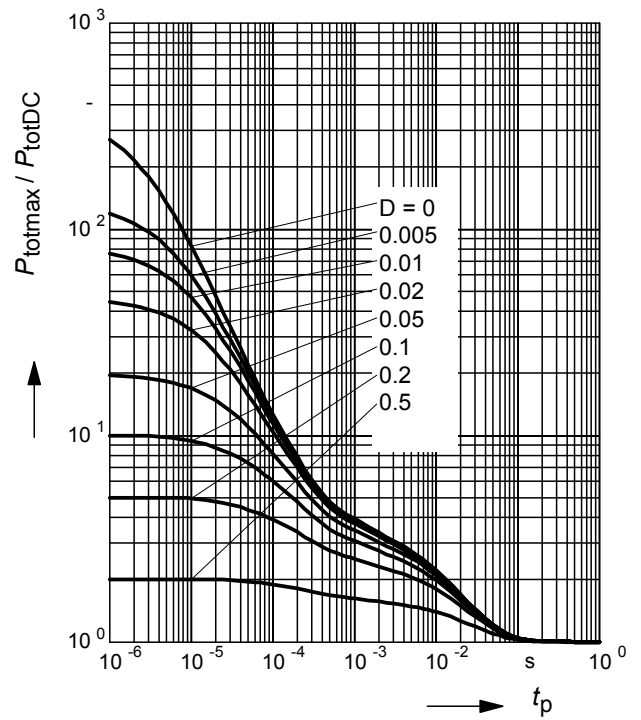

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR169W




**Permissible Pulse Load**

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR169W

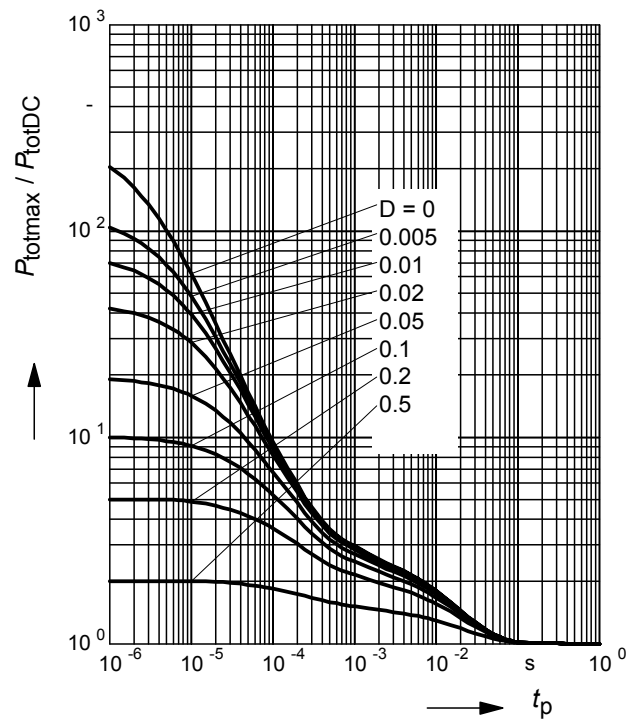

## Package Outline

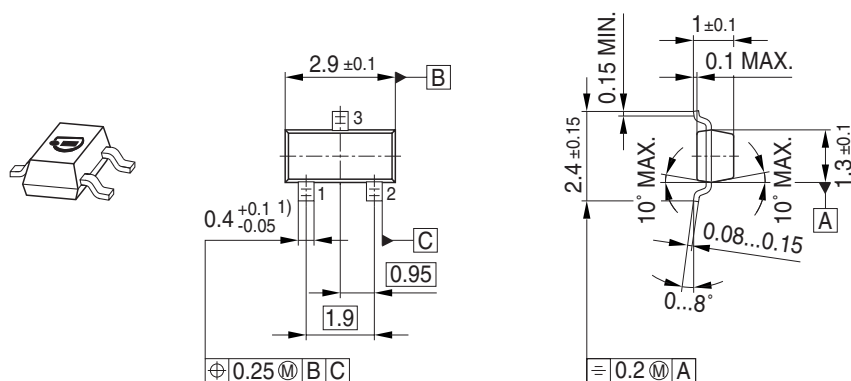


1) Lead width can be 0.6 max. in dambar area

## Foot Print




## Marking Layout (Example)

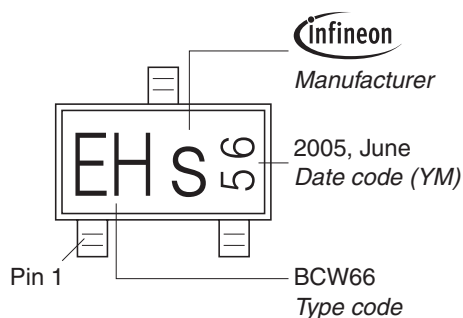

## Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

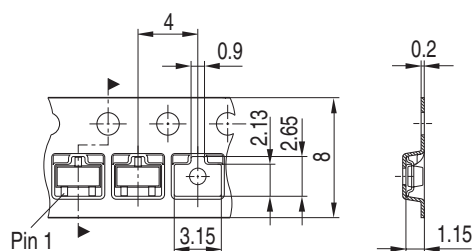


## Package Outline



## Foot Print




## Marking Layout (Example)

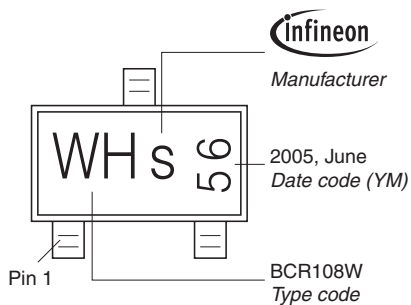


## Standard Packing

Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
 Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

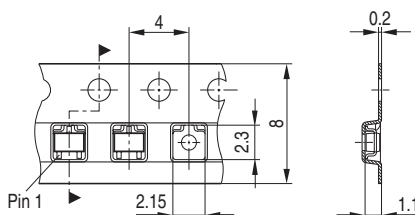

## Package Outline

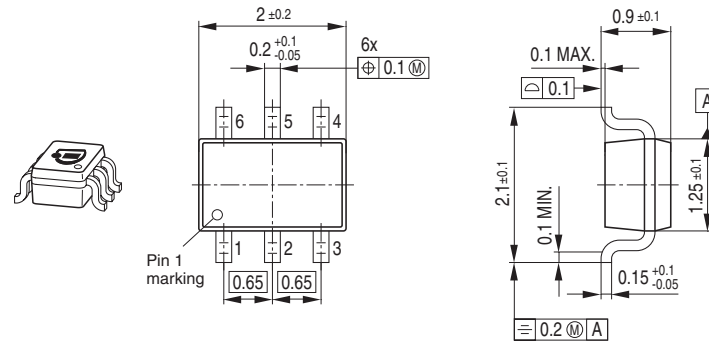

## Foot Print



## Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.




## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

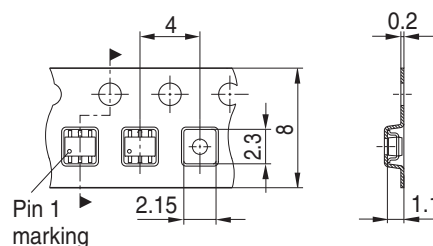

## Package Outline

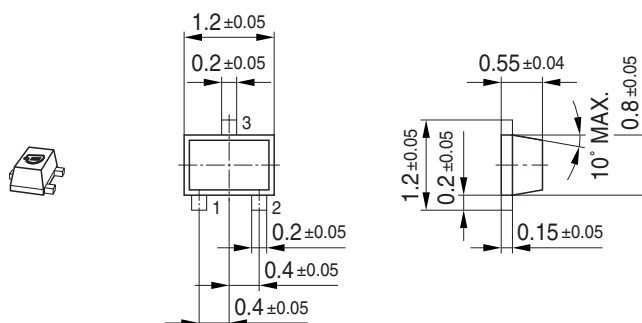

## Foot Print



## Marking Layout (Example)



## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø330 mm = 10.000 Pieces/Reel



Edition 2006-02-01  
Published by  
Infineon Technologies AG  
81726 München, Germany  
© Infineon Technologies AG 2007.  
All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А