

## MAXM17516 Evaluation Kit

## Evaluates: MAXM17516, 6A Integrated Power Module

### General Description

The MAXM17516 evaluation kit (EV kit) is a fully assembled and tested PCB that demonstrates the typical 6A application circuit of the MAXM17516. The MAXM17516 is a fixed-frequency, integrated inductor, step-down power module for low-voltage, low-power applications.

The EV kit provides a 1.5V output voltage from a 2.4V to 5.5V input range and delivers up to 6A output current while achieving greater than 90.6% efficiency. The EV kit operates at 1MHz switching frequency and has superior line and load-transient response. The EV kit also allows the evaluation of other adjustable output voltages from 0.75V to 1.8V by changing resistors R1 and R2.

[Ordering Information](#) appears at end of data sheet.

### Features

- High-Integration Solution/Integrated Shielded Inductor
- 2.4V to 5.5V Input Range
- Configured for 1.5V Output Voltage
- Adjustable Output-Voltage Range (0.75V to 1.8V)
- 6A Output Current
- 90.6% Efficiency ( $V_{IN} = 3.3V$ ,  $V_{OUT} = 1.5V$  at 1.79A)
- 1MHz Switching Frequency
- Enable Input
- Power-Good Output Indicator (POK)
- Low-Profile, Surface-Mount Components
- Proven PCB Layout
- Fully Assembled and Tested

**Quick Start**

**Recommended Equipment**

- MAXM17516 EV kit
- 2.4V to 5.5V DC power supply (V<sub>IN</sub>)
- 5V DC power supply (V<sub>CC</sub>)
- Dummy load capable of sinking 6A
- Digital multimeter (DMM)
- 100MHz dual-trace oscilloscope

**Procedure**

The EV kit is fully assembled and tested. Follow the steps below to verify board operation. **Caution: Do not turn on the power supply until all connections are completed.**

- 1) Ensure that the circuit is correctly connected to the supplies and dummy load prior to applying any power.
- 2) Verify that a shunt is installed across jumper JU1.
- 3) Enable the power supply (V<sub>IN</sub> = 5V).
- 4) Observe the 1.5V output with the DMM and/or oscilloscope. Look at the EP2 switching node while varying the load current.

**Detailed Description of Hardware**

**Input Supply Voltage**

The EV kit can operate from a minimum 4.5V single DC power supply at the V<sub>IN</sub> PCB pad with a shunt installed across JU1. The EV kit is also configured to power a lower input voltage at the V<sub>IN</sub> PCB pad, which requires an additional 5V power supply at the V<sub>CC</sub> PCB pad, a capacitor (C4) to be installed, and a connecting trace between V<sub>IN</sub> and V<sub>CC</sub> (next to R3's footprint) to be cut. [Table 1](#) lists all operating configurations of the EV kit at different input-voltage sources. The electrolytic capacitor (C1) is required only when the V<sub>IN</sub> power supply is situated far from device circuit. On the bottom layer, additional footprints of optional components are included to ease board modification for different input/output configurations.

**Enable Input**

The EV kit features a 2-pin jumper (JU1) that selects the enable/disable control input. The shunt is installed across JU1 to enable the device and vice versa.

**Switching Frequency (FREQ)**

The EV kit features a PWM-mode switching frequency. The switching frequency is fixed at 1MHz.

**Programming the Output Voltage**

The EV kit includes a default output programmed at 1.5V and also produces an adjustable 0.75V to 1.8V output voltage by connecting FB to a resistive divider. To obtain an output voltage other than the default programmed output, modify the R1 and R2 resistors with values according to the following equation:

$$V_{OUT} = V_{FB} \left( 1 + \frac{R1}{R2} \right)$$

where V<sub>FB</sub> = 0.765V. Changes to output capacitance selection are required for either an output voltage greater than 2V or a capacitor temperature rise above 105°C. Refer to the MAXM17516 IC data sheet for output capacitance selection.






**Table 1. Jumper JU1 Functions**

SHUNT (JU1) POSITION	V <sub>IN</sub> /V <sub>CC</sub> RANGE	REGULATOR OUTPUT
Installed	V <sub>IN</sub> = 4.5V to 5.5V V <sub>CC</sub> = V <sub>IN</sub>	Enabled
Installed	V <sub>IN</sub> = 2.4V to 5.5V Require an additional V <sub>CC</sub> = 4.5V to 5.5V	Enabled
Not installed*	V <sub>IN</sub> = 2.4V to 5.5V V <sub>CC</sub> = V <sub>IN</sub>	Disabled

\*The thin trace connecting V<sub>IN</sub> and V<sub>CC</sub> (next to R3's footprint) must be cut before applying the additional power supply to the V<sub>CC</sub> PCB pad.

**Typical Operating Characteristics**

( $V_{CC} = 5V$ ,  $V_{IN} = 3.3V$  to  $5V$ ,  $V_{OUT} = 1.5V$ ,  $I_{OUT} = 0-6A$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.)

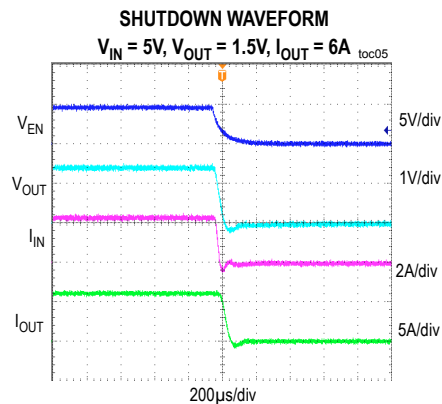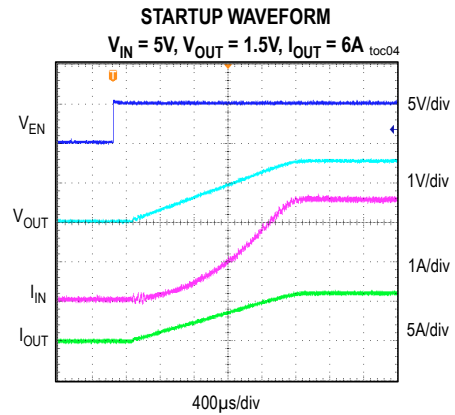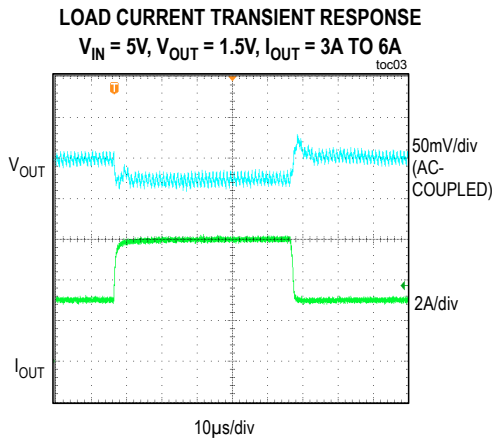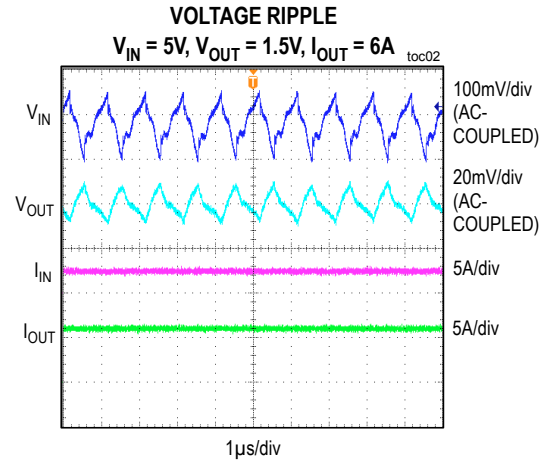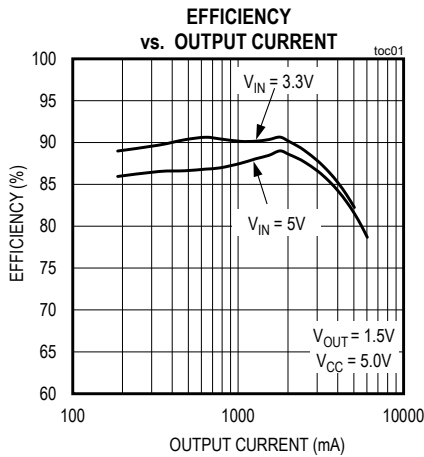

## Component Suppliers

SUPPLIER	PHONE	WEBSITE
Keystone Electronics Corp.	800-221-5510	www.keyelco.com
Lite-On, Inc.	408-946-4873	www.liteon.com
Murata Americas	800-241-6574	www.murataamericas.com
Panasonic Corp.	800-344-2112	www.panasonic.com
TDK Corp.	847-803-6100	www.component.tdk.com

**Note:** Indicate that you are using the MAXM17516 when contacting these component suppliers.

## Component List and Schematic

Refer to the following files attached to this data sheet for component information and schematic:

- MAXM17516\_EV\_BOM.xls
- MAXM17516EV\_Schematic.pdf

# MAXM17516 Evaluation Kit

# Evaluates: MAXM17516, 6A Integrated Power Module

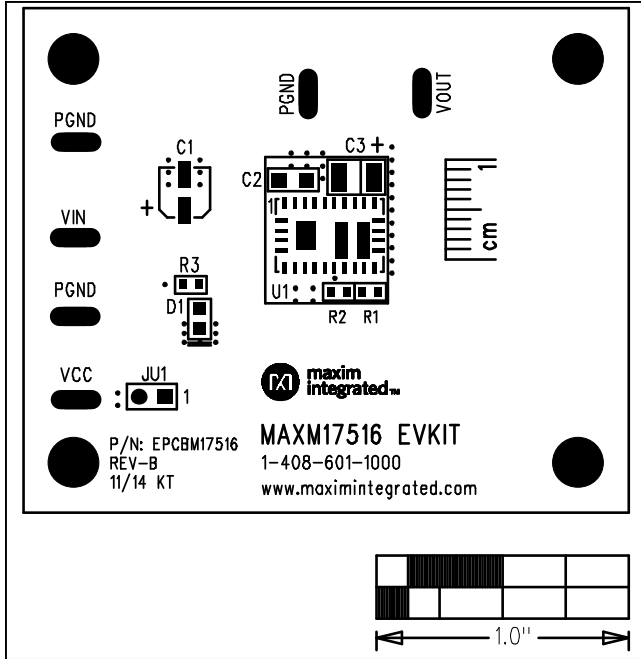


Figure 1. MAXM17516 EV Kit Component Placement Guide—Component Side

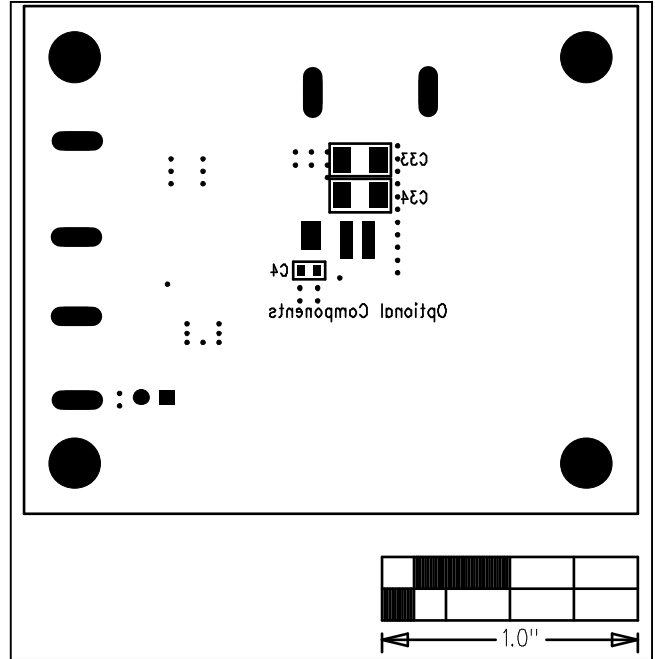


Figure 2. MAXM17516 Component Placement Guide—Solder Side

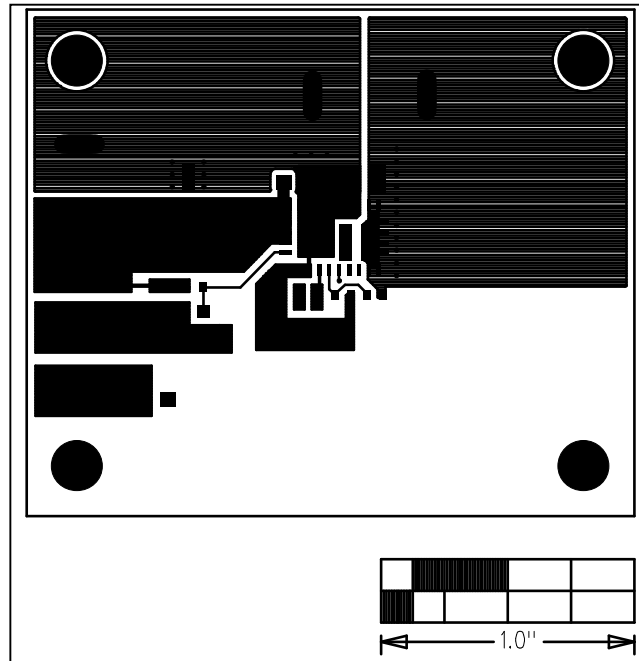


Figure 3. MAXM17516 EV Kit PCB Layout—Component Side

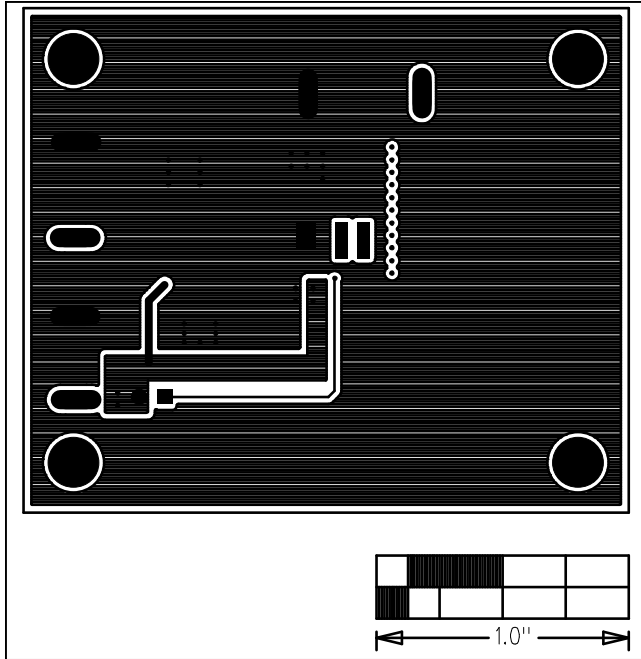


Figure 4. MAXM17516 EV Kit PCB Layout—PGND Layer 2

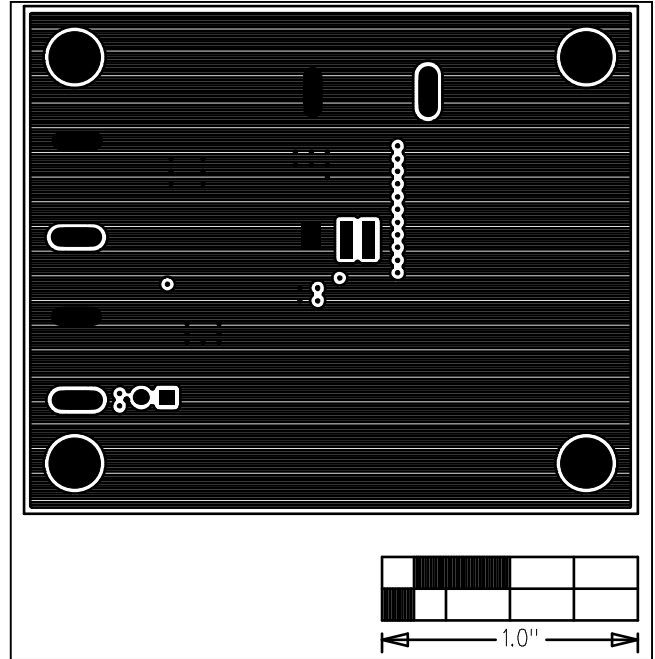


Figure 5. MAXM17516 EV Kit PCB Layout—PGND Layer 3

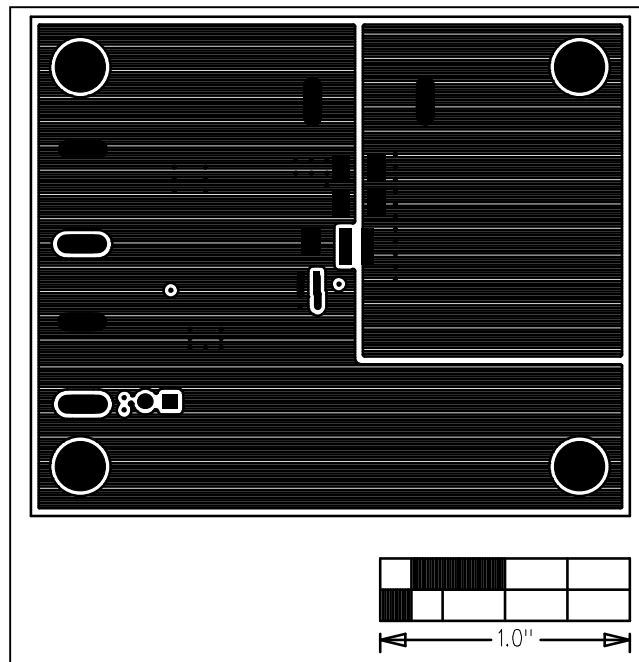


Figure 6. MAXM17516 EV Kit PCB Layout—Solder Side

---

MAXM17516 Evaluation Kit

Evaluates: MAXM17516,  
6A Integrated Power Module

### Ordering Information

PART	TYPE
MAXM17516EVKIT#	EV Kit

*#Denotes RoHS compliant.*

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	4/15	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А