

Power Resistor for Mounting onto a Heatsink Thick Film Technology



FEATURES



- High power rating: 250 W
- High overload capability up to 4 times nominal power (see energy curve)
- Easy mounting
- Low thermal radiation of the case


RoHS
COMPLIANT

Developed for specific applications such as railroad electrical traction, this series can bear short overloads as high as fifteen times the nominal power. Designed to be mounted onto a heatsink, these power resistors exhibit remarkable characteristics.

DIMENSIONS in millimeters

RPS 250D

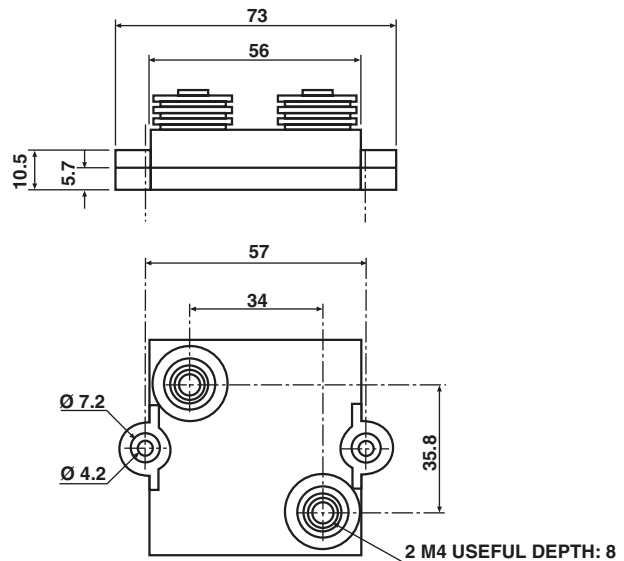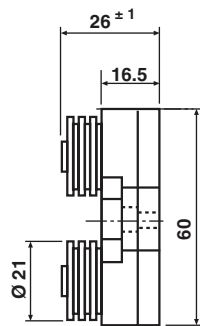

• Tolerance unless stated: ± 0.2 mm

MECHANICAL SPECIFICATIONS

| | |
|---|----------------------------|
| Mechanical Protection | Insulated case |
| Substrate | Alumina onto aluminum base |
| Resistive Element | Cermet |
| End Connections | Screws M4, (M5 on request) |
| Tightening Torque on connections | 2 Nm |
| Weight | 170 g \pm 10 % |

ENVIRONMENTAL SPECIFICATIONS

| | |
|---------------------------|--------------------------|
| Thermal Resistance | R_{TH} (j-c) 0.22 °C/W |
| Temperature Range | - 55 °C + 125 °C |
| Climatic Category | 55/125/56 |

ELECTRICAL SPECIFICATIONS

| | |
|--|---|
| Resistance Range | 0.24 Ω to 1M E24 series |
| Tolerances | ± 1 % to ± 10 % |
| Power Rating chassis mounted 250 W 1000 W | at 50 °C continuous at 25 °C for 10 s |
| Temperature Coefficient Standard | ± 250 ppm/°C < 1 ± 150 ppm/°C > 1 |
| Limiting Element Voltage U_L | 5 kVRMS |
| Dielectric Strength MIL STD 202 (301), 1 min, 10 mA max. | L connections 7 kVRMS H connections 12 kVRMS |
| Insulation Resistance | > 10^6 M Ω |
| Inductance | < 50 nH |
| Capacitance Resistor/ ground | < 40 pF < 120 pF |

| PERFORMANCE | | |
|--------------------------|---|---------------------------------|
| TESTS | CONDITIONS | REQUIREMENTS |
| Momentary Overload | NF EN 140 000 CEI 115_1 4 Pr/10 s/ $U_L = 5000$ V | $< \pm (0.25 \% + 0.05 \Omega)$ |
| Rapid Temperature Change | NF EN 140 000 CEI 68214 Test Na 5 cycles - 55 °C + 125 °C | $< \pm (0.25 \% + 0.05 \Omega)$ |
| Load Life | NF EN 140 000 CEI 115_1 1000 h Pr at 70 °C | $< \pm (0.5 \% + 0.05 \Omega)$ |
| Humidity (steady state) | MIL STD 202 Method 103 B and D 56 days R.H. 95 % | $< \pm (0.5 \% + 0.05 \Omega)$ |

| RESISTANCE VALUE IN RELATION TO TOLERANCE AND TCR | | |
|---|-----------------------------------|------------------|
| Ohmic Value | $< 1 \Omega$ | $> 1 \Omega$ |
| Standard Tolerance | $\pm 5 \%$ | $\pm 5 \%$ |
| Standard TCR (- 55 °C to + 125 °C) | ± 250 ppm/°C | ± 150 ppm/°C |
| Tolerance On Request | $\pm 1 \% - \pm 2 \% - \pm 10 \%$ | |

CHOICE OF THE HEATSINK

The user must choose the heatsink according to the working conditions of the component (power, room temperature). Maximum working temperature must not exceed 125 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{TH} (j-c) + R_{TH} (c-a)]} \quad (1)$$

P: Expressed in W

T: Difference between maximum working temperature and room temperature

$R_{TH} (j-c)$: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component: (see specifications environmental paragraph).

$R_{TH} (c-a)$: Thermal resistance value measured between outer side of the resistor and room temperature. It is the thermal resistance of the heatsink, depending on the heatsink itself (type, shape) and the quality of the fastening device.

Example:

$R_{TH} (c-a)$ for RPS 250 power dissipation 180 W at + 50 °C room temperature.

$$\Delta T \leq 125 \text{ °C} - 50 \text{ °C} \leq 75 \text{ °C}$$

$$R_{TH} (j-c) + R_{TH} (c-a) = \frac{\Delta T}{P} = \frac{75}{180} = 0.42 \text{ °C/W}$$

$$R_{TH} (j-c) = 0.22 \text{ °C/W}$$

$$R_{TH} (c-a) \leq 0.42 \text{ °C/W} - 0.22 \text{ °C/W} \leq 0.20 \text{ °C/W}$$

RECOMMENDATIONS FOR MOUNTING ONTO A HEATSINK

Surfaces in contact must be carefully cleaned. The heatsink must have an acceptable flatness: from 0.05 mm to 0.1 mm/100 mm. Roughness of the heatsink must be around 6.3 μm . In order to improve thermal conductivity, surfaces in contact should be coated with a silicone grease (type SI 340 from Rhône-Poulenc or Dow 340 from Dow Corning).

The fastening of the resistor to the heatsink is under pressure control of two screws (tightening torque 3 Nm).

In order to improve the dissipation, either forced-air cooling or liquid cooling may be used.

Do not forget to respect an insulation value between two resistors (dielectric strength in dry air 1 kV/mm).

In any case the hot spot temperature, measured locally on the case must not exceed 125 °C.

Test should be performed by the user.




OVERLOADS

In any case the applied voltage must be lower than 2.5 Un. $U_{maxi} < 2.5 U_n < 12\ 500\ V$.

Short time overload: $4 P_n/10\ s$

Accidental overload: The values indicated on the graph below are applicable to resistors in air or mounted onto a heatsink.


ENERGY CURVE

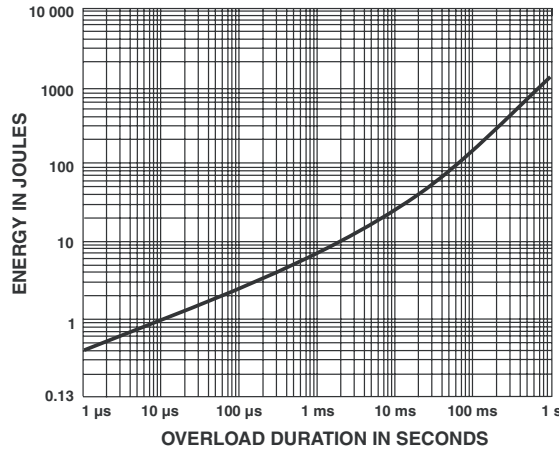

POWER RATING CHART

The temperature of the heatsink should be maintained in the limit specified.

To improve the thermal conductivity, surfaces in contact should be coated with a silicone grease.

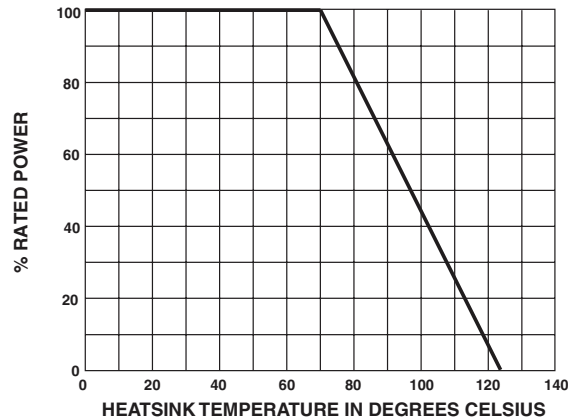

MARKING

Series, style, ohmic value (in Ω), tolerance in %, manufacturing date, VISHAY trademark

PACKAGING

Packaging box of 15 units



| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | | | |
|--------------------------------|--|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|
| R | P | S | 0 | 2 | 5 | 0 | D | L | 2 | R | 2 | 0 | J | B | Z | A | 3 |
| GLOBAL MODEL | STYLE | DIELECTRIC | OHMIC VALUE | | | TOLERANCE | | | PACKAGING | | | TYPE | | | | | |
| RPS250 | D = Diagonal connections A = Straight connections | H = Dielectric strength 12 kV L = Dielectric strength 7 kV | The first three digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. 2R20 = 2.20 Ω 48R7 = 48.7 Ω 47R0 = 47 Ω 1001 = 1 kΩ 4R70 = 4.7 Ω R240 = 0.24 Ω | | | F = 1 % G = 2 % J = 5 % K = 10 % | | | B = Box, 15 pcs N = Box, 15 pcs N/A (1 to 14 pcs by box) | | | Standard RPS250A = Blank Standard RPS250D = ZA3 Special = Blank (for RPS250D) or as applicable = ZAx | | | | | |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А