


Product Overview


The Qorvo TGF2934 is a 14 W (P_{3dB}) discrete GaN on SiC HEMT which operates from DC to 25 GHz and 28 V supply. The device is constructed with Qorvo’s proven QGaN15 process. The device can support pulsed, CW, and linear operations.

Lead-free and ROHS compliant

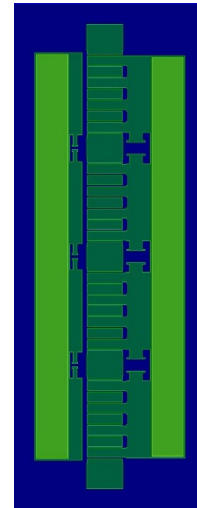

1.457 x 0.551 x 0.100 mm

Functional Block Diagram

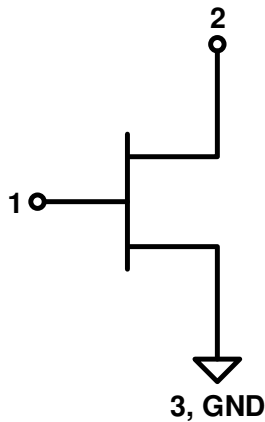

Key Features

- Frequency: DC to 25 GHz
 - Output Power (P_{3dB})¹: 14 W
 - Linear Gain¹: 14 dB
 - Typical PAE_{3dB}¹: 49%
 - Typical Noise Figure¹: 1.5 dB
 - Operating Voltage: 28 V
 - CW and Pulse capable
 - Non-linear & Noise Models available
- Note 1: @ 10 GHz

Applications

- Defense and Aerospace
- Broadband wireless
- Low noise amplifier

Ordering info

Part No.	ECCN	Description
TGF2934	3A001b.3.b	DC–25 GHz, 28 V, 3.5 W GaN RF Transistor

Absolute Maximum Ratings¹

Parameter	Rating	Units
Breakdown Voltage, BV_{DG}	+60	V
Gate Voltage Range, V_G	-7 to +1.5	V
Drain Current, $I_{D_{MAX}}$	4	A
Gate Current Range, I_G	See page 20.	mA
Power Dissipation, CW, P_{DISS}^2	17.4	W
RF Input Power, CW, 10 GHz, $T = 25\text{ }^\circ\text{C}$	+33	dBm
Channel Temperature, T_{CH}	275	$^\circ\text{C}$
Mounting Temperature (30 Seconds)	320	$^\circ\text{C}$
Storage Temperature	-65 to +150	$^\circ\text{C}$

Notes:

1. Operation of this device outside the parameter ranges given above may cause permanent damage.
2. Base temperature at 85 $^\circ\text{C}$

Recommended Operating Conditions¹

Parameter	Min	Typ	Max	Units
Operating Temp. Range	-40	+25	+85	$^\circ\text{C}$
Drain Voltage Range, V_D	+12	+20	+29.5	V
Drain Bias Current, I_{DQ}	80	160	320	mA
Drain Current, I_D	-	1000	-	mA
Gate Voltage, V_G^3	-	-2.8	-	V
Channel Temperature (T_{CH})	-	-	250	$^\circ\text{C}$
Power Dissipation, CW (P_D) ²	-	-	15.8	W

Notes:

1. Electrical performance is measured under conditions noted in the electrical specifications table. Specifications are not guaranteed over all recommended operating conditions.
2. Package base at 85 $^\circ\text{C}$
3. To be adjusted to desired I_{DQ}

Model Load Pull Performance – Power Tuned¹

Parameter	Typical Values								Units
	3		6		10		18		
Frequency, F									GHz
Drain Voltage, V_D	20	28	20	28	20	28	20	28	V
Drain Bias Current, I_{DQ}	160	160	160	160	160	160	160	160	mA
Output Power at 3dB compression, P_{3dB}	40.7	41.6	40.8	41.7	40.8	41.5	39.5	41.8	dBm
Power Added Efficiency at 3dB compression, PAE_{3dB}	56.9	51.7	55.0	51.3	51.4	49.3	43.7	44.9	%
Gain at 3dB compression, G_{3dB}	18.7	21.5	13.3	15.4	8.9	11.2	5.9	6.9	dB
Load Reflection Coefficient ⁽²⁾ , Γ_L	$0.63 \angle 162^\circ$	$0.45 \angle 153^\circ$	$0.73 \angle 164^\circ$	$0.67 \angle 153^\circ$	$0.82 \angle 166^\circ$	$0.85 \angle 159^\circ$	$0.92 \angle 167^\circ$	$0.92 \angle 167^\circ$	--

Notes:

1. CW, bondwires not included
2. Characteristic Impedance, $Z_0 = 50 \Omega$.

Model Load Pull Performance – Efficiency Tuned¹

Parameter	Typical Values								Units
	3		6		10		18		
Frequency, F									GHz
Drain Voltage, V_D	20	28	20	28	20	28	20	28	V
Drain Bias Current, I_{DQ}	160	160	160	160	160	160	160	160	mA
Output Power at 3dB compression, P_{3dB}	40.2	41.3	40.1	41.7	40.8	41.5	39.5	41.8	dBm
Power Added Efficiency at 3dB compression, PAE_{3dB}	58	53.1	57.5	51.3	51.4	49.3	43.7	44.9	%
Gain at 3dB compression, G_{3dB}	18.4	23.0	13.6	15.4	8.9	11.2	5.9	6.9	dB
Load Reflection Coefficient ⁽²⁾ , Γ_L	$0.67 \angle 153^\circ$	$0.50 \angle 143^\circ$	$0.76 \angle 157^\circ$	$0.67 \angle 153^\circ$	$0.82 \angle 166^\circ$	$0.85 \angle 159^\circ$	$0.92 \angle 167^\circ$	$0.92 \angle 167^\circ$	--

Notes:


1. CW, bondwires not included
2. Characteristic Impedance, $Z_0 = 50 \Omega$.

Model S-parameters¹


Notes:

- Bondwires are not included. T = 25 °C.


S11 from 0.01 GHz to 40 GHz

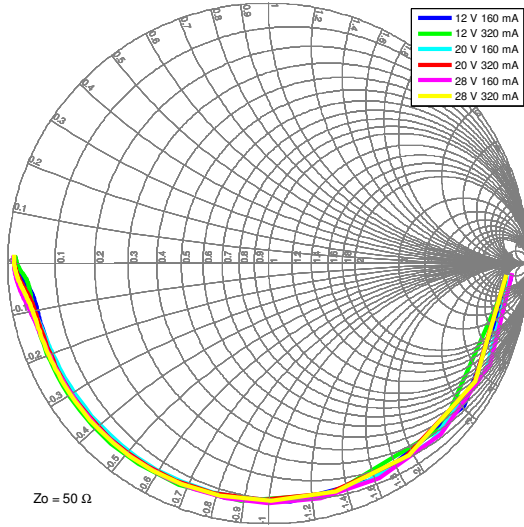


S21

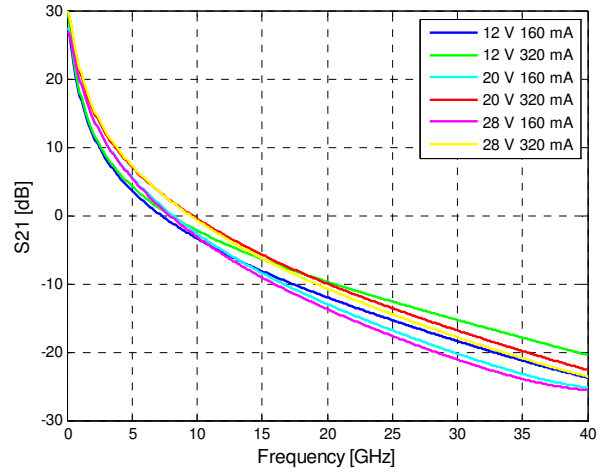

S12

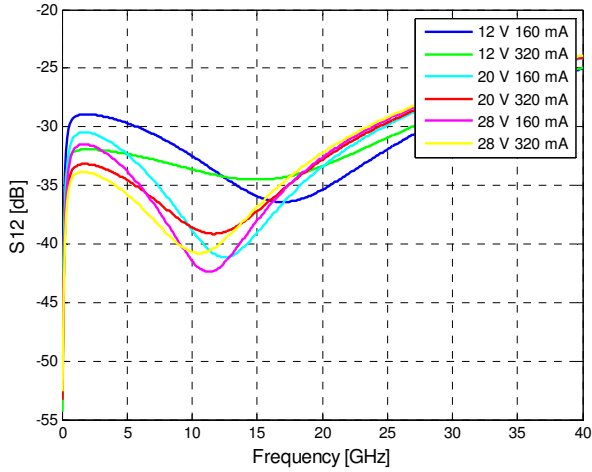


S22 from 0.01 GHz to 40 GHz

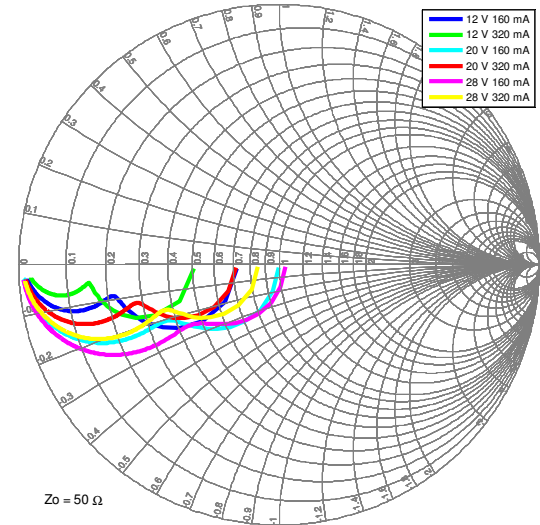

Model Maximum Available Gain¹

Notes:




1. Bondwires are not included. T = 25 °C.

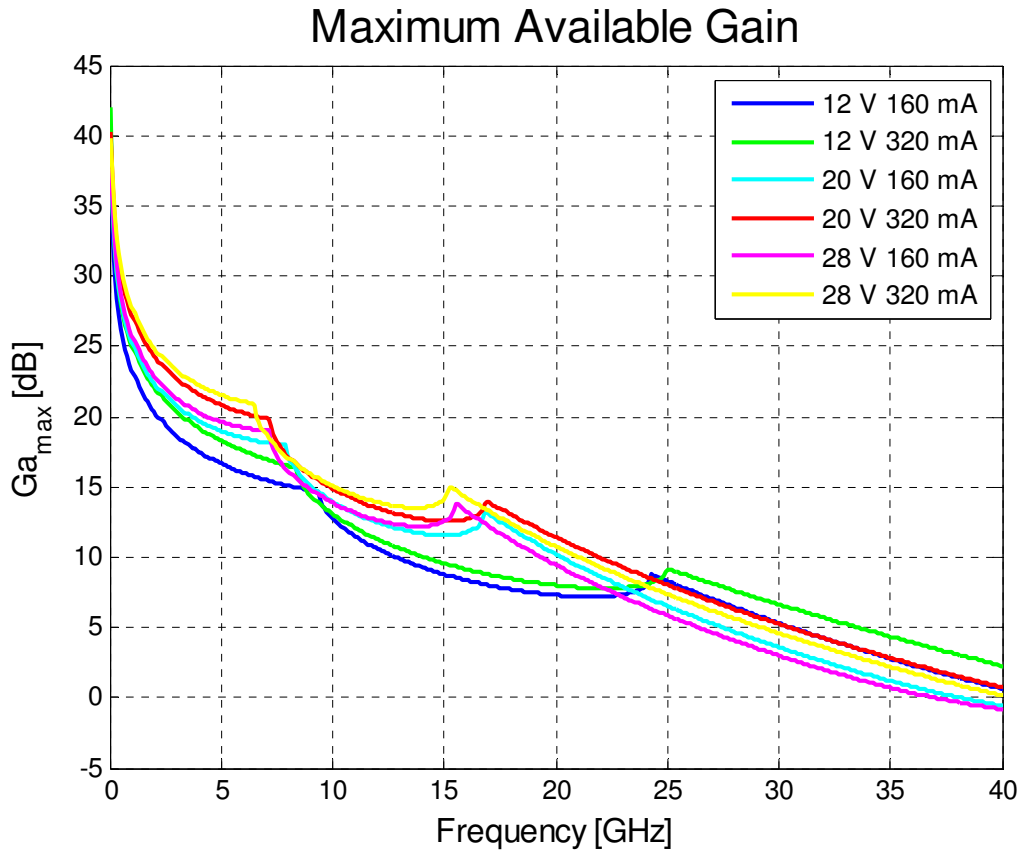

Model Noise¹

Notes:

- 1. Bondwires are not included. T = 25 °C.

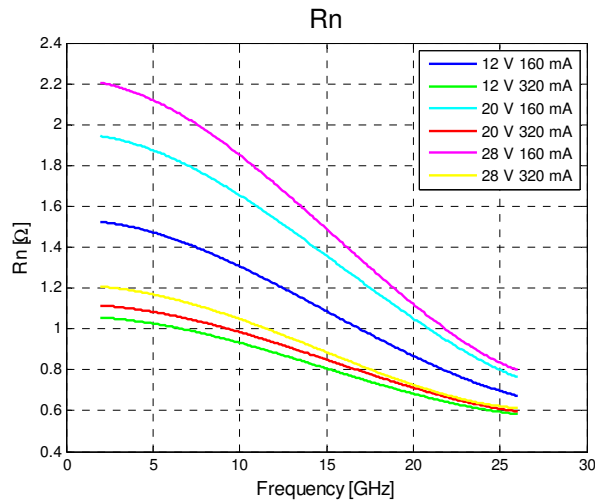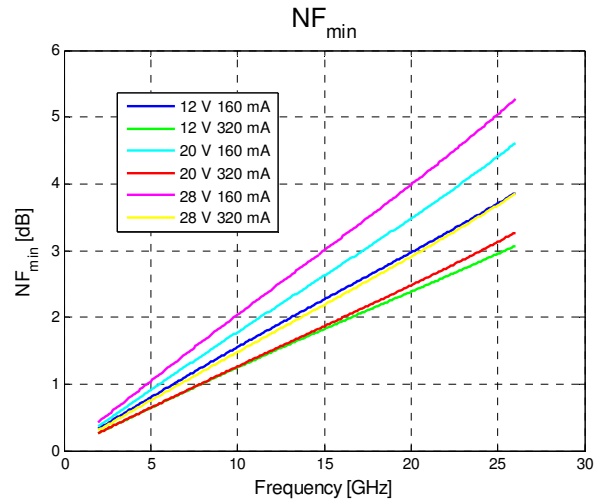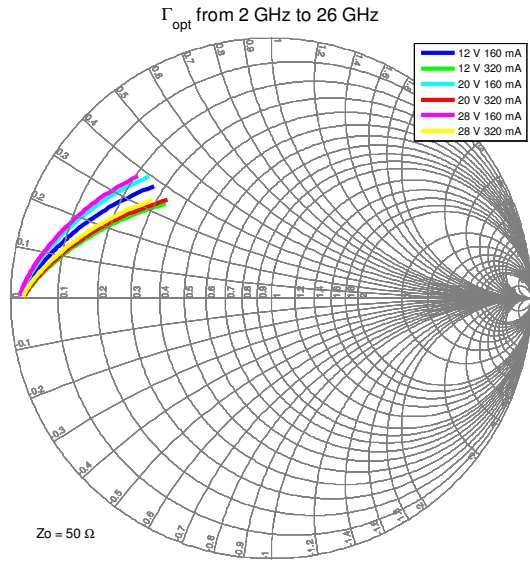


Model Load-Pull Smith Charts^{1, 2, 3}

Notes:

1. Test Conditions: $V_D = 20\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

3GHz, Load-pull

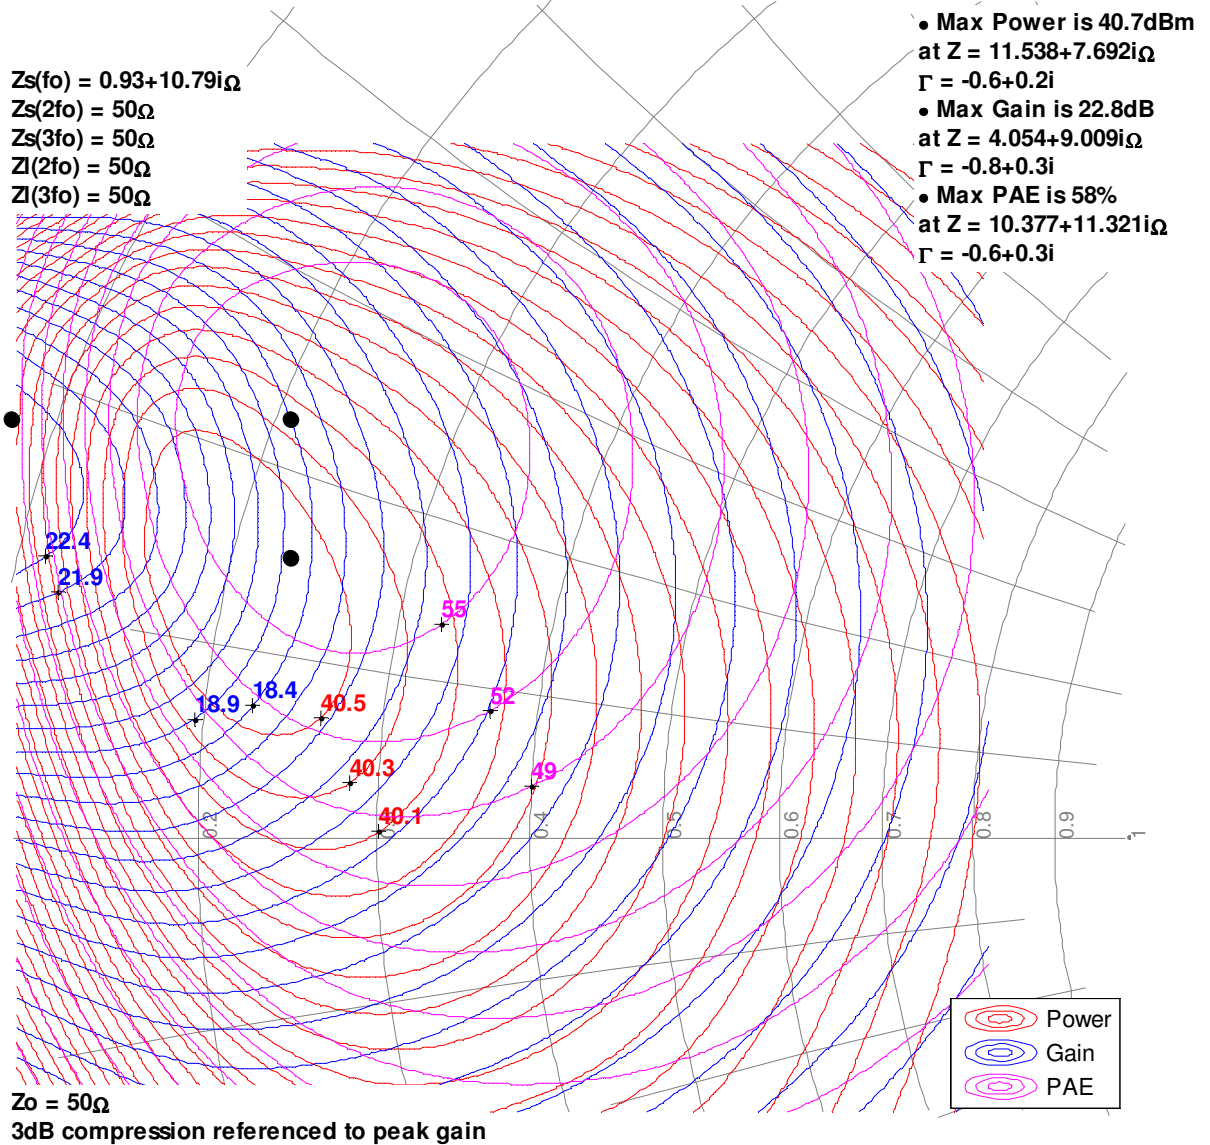

Model Load-Pull Smith Charts^{1,2}


Notes:

1. Test Conditions: $V_D = 20\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

6GHz, Load-pull

$Z_s(f_0) = 2.04 + 5.42i\Omega$
 $Z_s(2f_0) = 50\Omega$
 $Z_s(3f_0) = 50\Omega$
 $Z_l(2f_0) = 50\Omega$
 $Z_l(3f_0) = 50\Omega$

- Max Power is 40.8dBm at $Z = 8.02 + 6.826i\Omega$
 $\Gamma = -0.7 + 0.2i$
- Max Gain is 14.3dB at $Z = 4.054 + 9.009i\Omega$
 $\Gamma = -0.8 + 0.3i$
- Max PAE is 57.5% at $Z = 7.047 + 10.067i\Omega$
 $\Gamma = -0.7 + 0.3i$

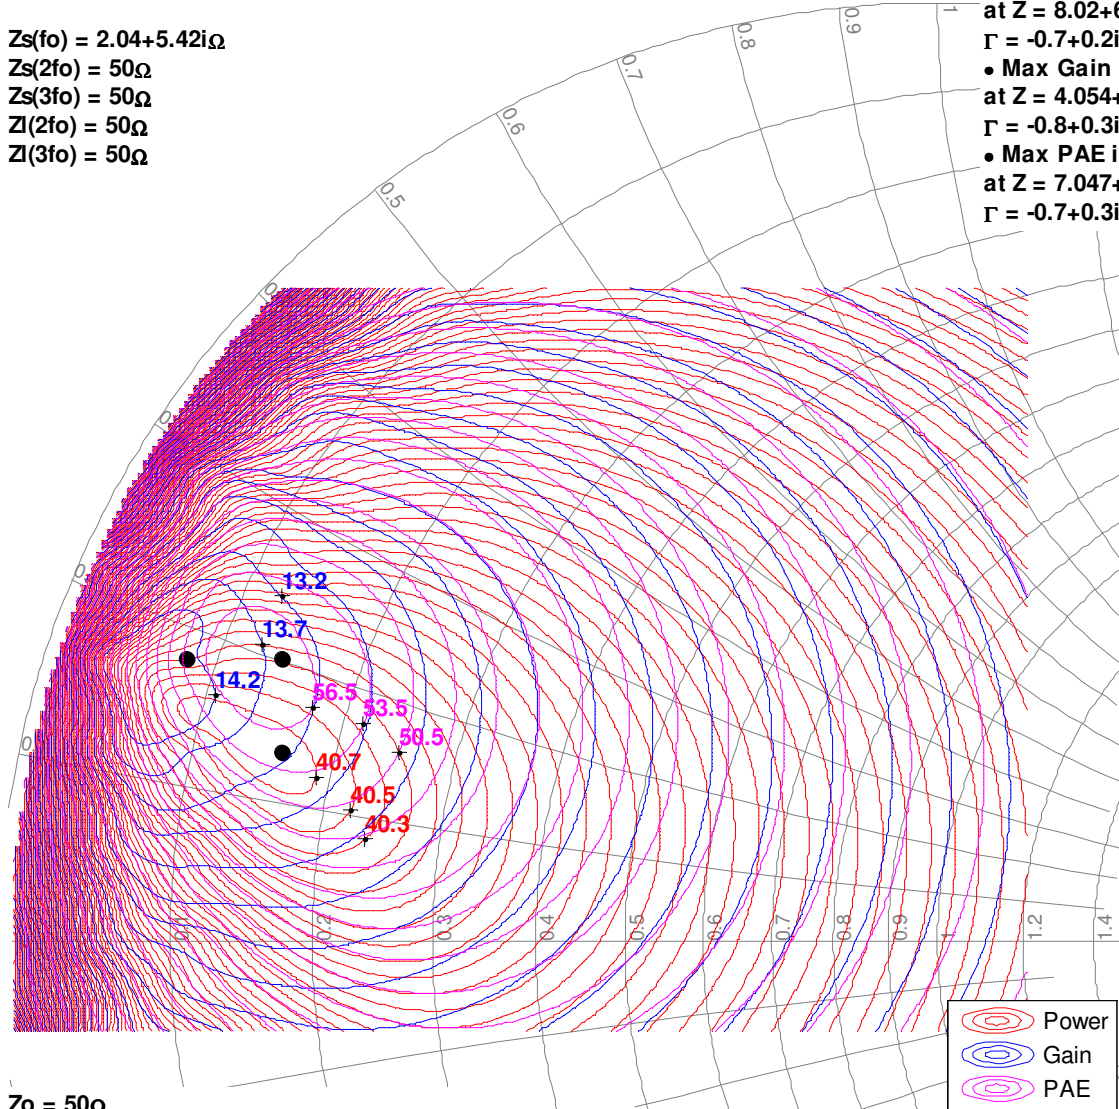

$Z_0 = 50\Omega$
 3dB compression referenced to peak gain

Model Load-Pull Smith Charts^{1, 2}


Notes:

1. Test Conditions: $V_D = 20\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

10GHz, Load-pull

$Z_s(f_0) = 2.33 + 3.2i\Omega$
 $Z_s(2f_0) = 50\Omega$
 $Z_s(3f_0) = 50\Omega$
 $Z_l(2f_0) = 50\Omega$
 $Z_l(3f_0) = 50\Omega$

- Max Power is 40.8dBm at $Z = 4.878 + 6.097i\Omega$
 $\Gamma = -0.8 + 0.2i$
- Max Gain is 9dB at $Z = 4.054 + 9.009i\Omega$
 $\Gamma = -0.8 + 0.3i$
- Max PAE is 51.4% at $Z = 4.878 + 6.097i\Omega$
 $\Gamma = -0.8 + 0.2i$

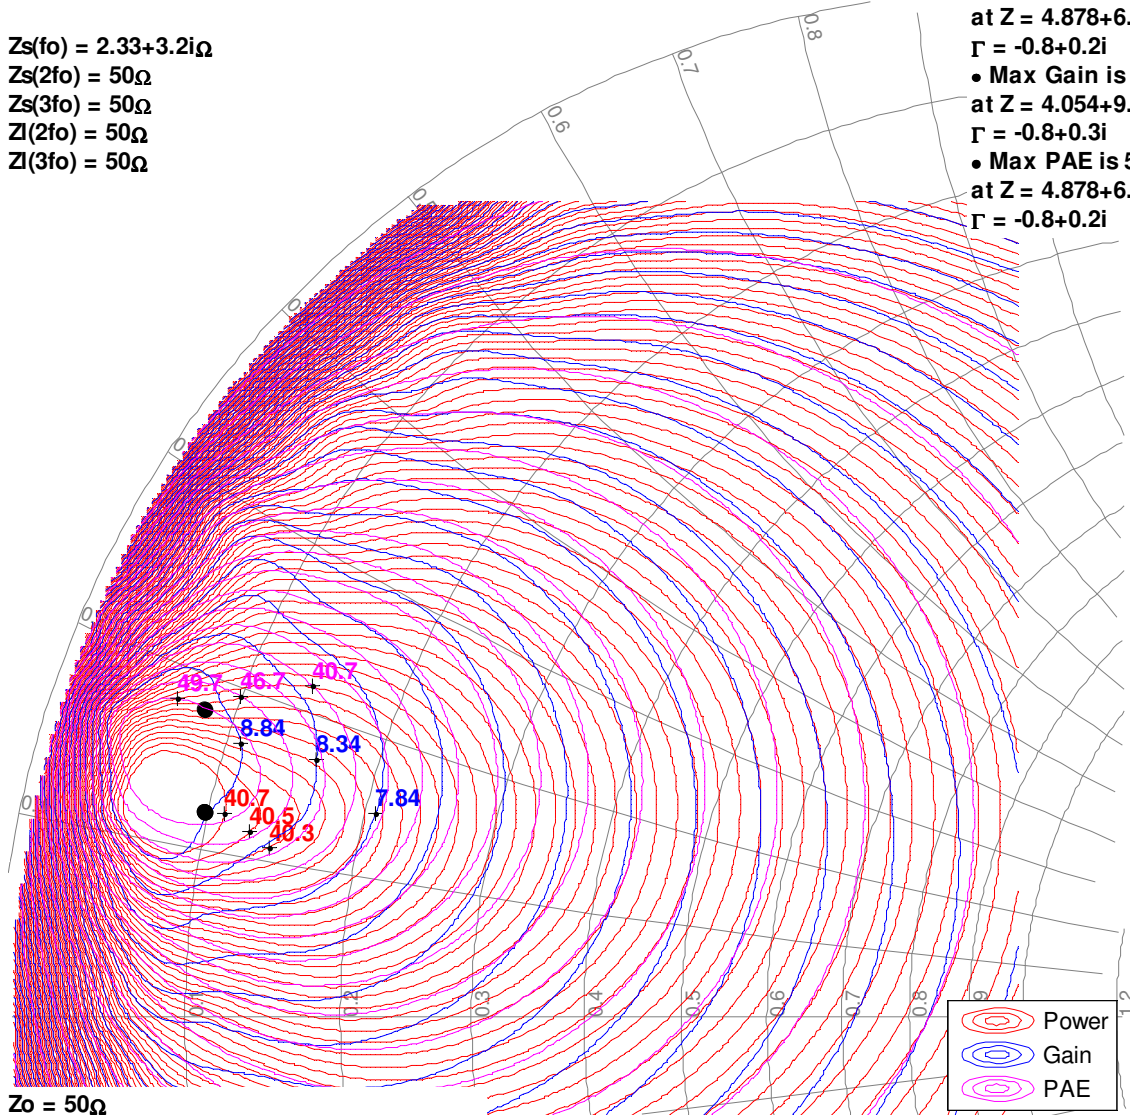


$Z_0 = 50\Omega$
 3dB compression referenced to peak gain

Model Load-Pull Smith Charts^{1, 2}

Notes:

1. Test Conditions: $V_D = 20\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

18GHz, Load-pull

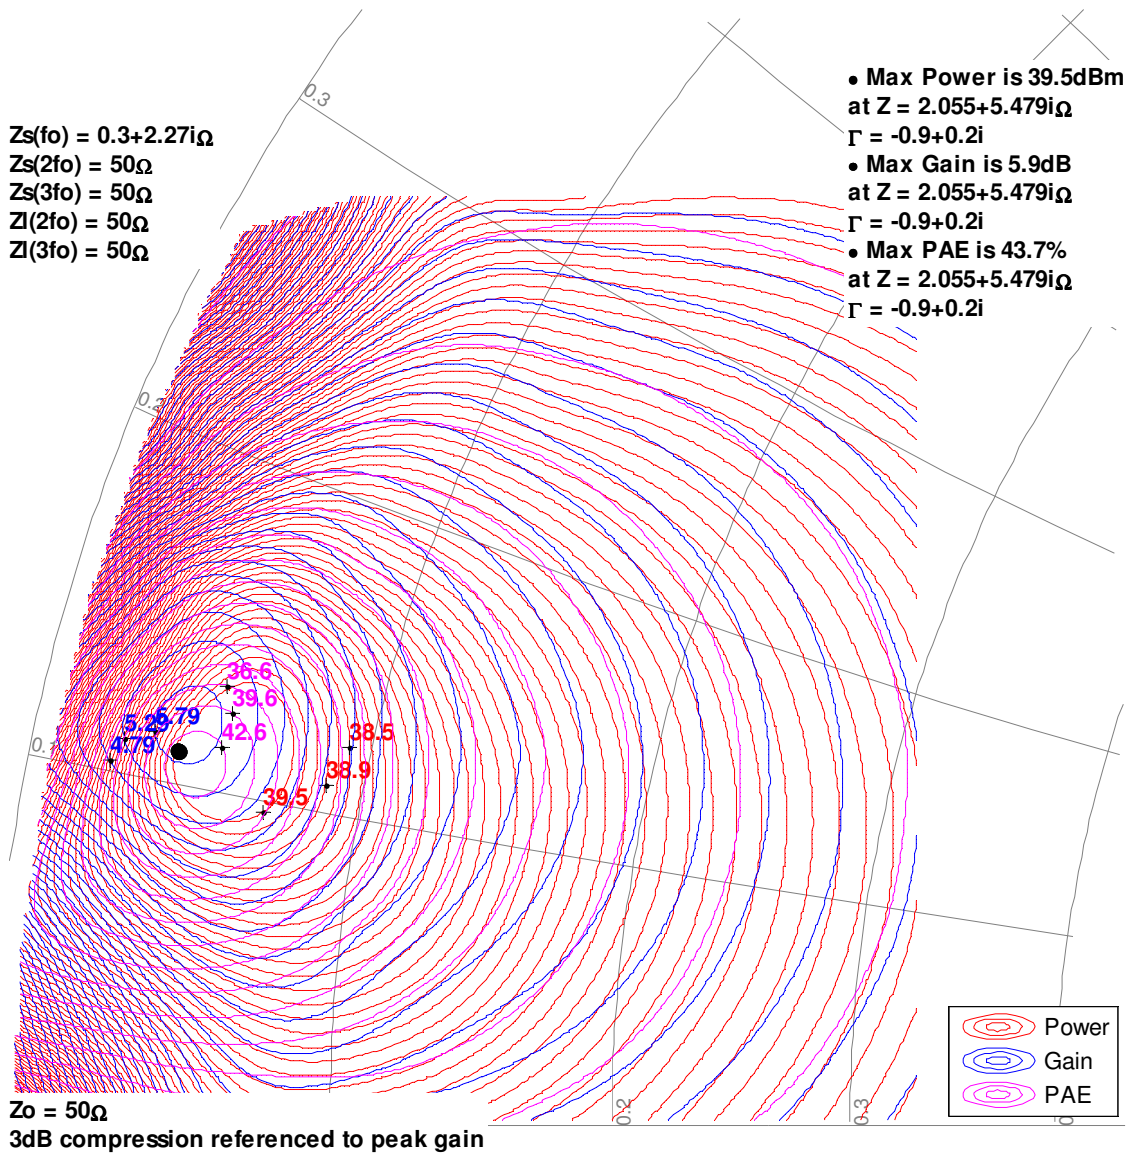


Model Load-Pull Smith Charts^{1,2}

Notes:

1. Test Conditions: $V_D = 28\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

3GHz, Load-pull

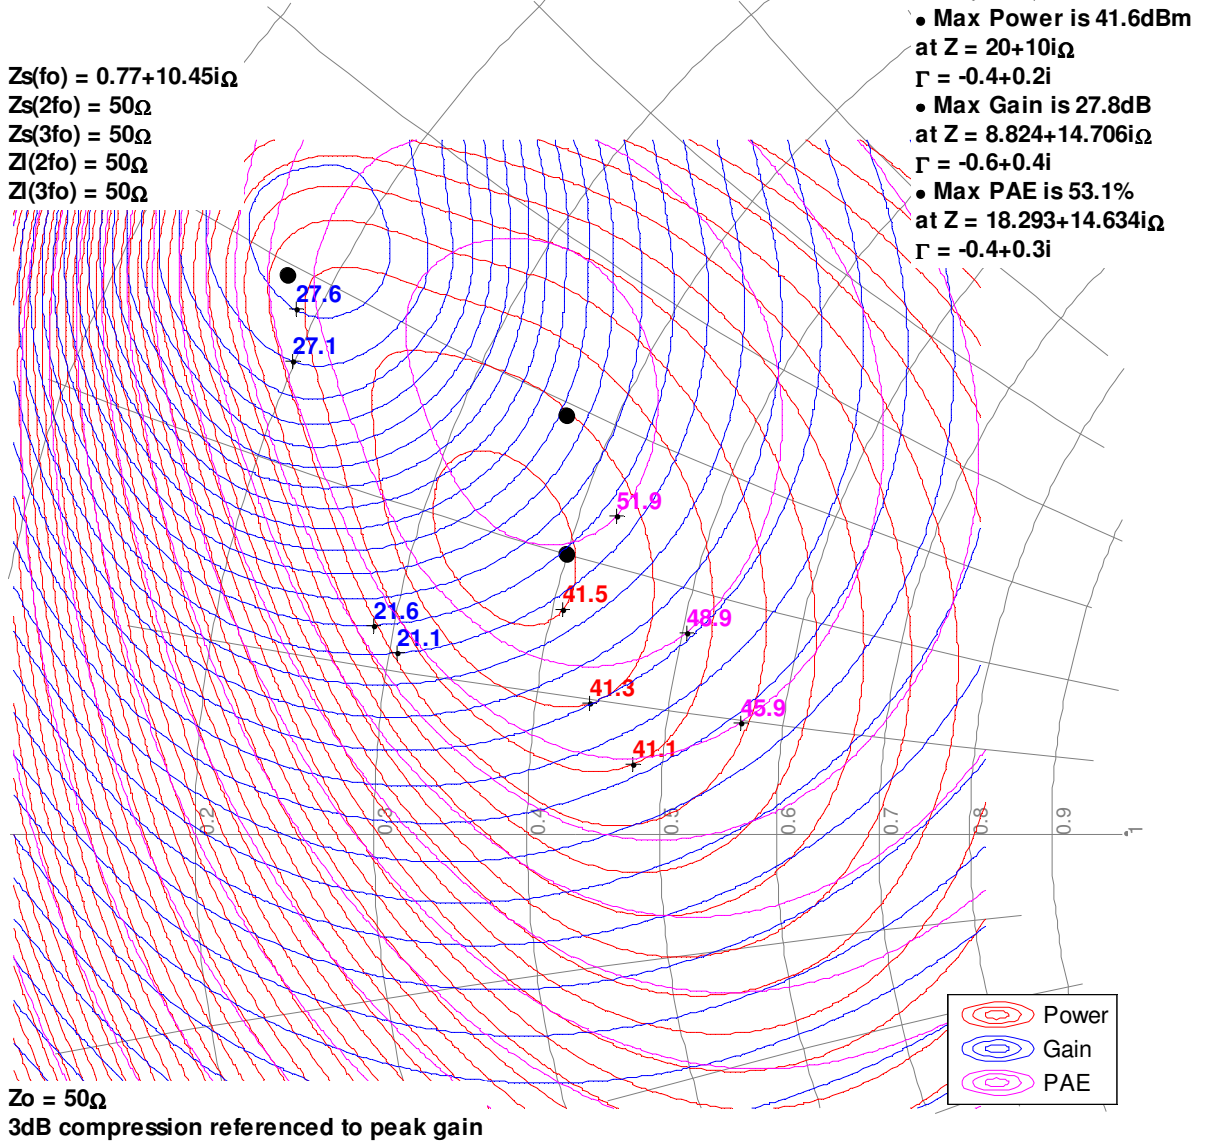

Model Load-Pull Smith Charts^{1,2}


Notes:

1. Test Conditions: $V_D = 28\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

6GHz, Load-pull

$Z_s(f_0) = 2.04 + 5.42i\Omega$
 $Z_s(2f_0) = 50\Omega$
 $Z_s(3f_0) = 50\Omega$
 $Z_l(2f_0) = 50\Omega$
 $Z_l(3f_0) = 50\Omega$

- Max Power is 41.7dBm at $Z = 10.377 + 11.321i\Omega$
 $\Gamma = -0.6 + 0.3i$
- Max Gain is 16.4dB at $Z = 2.941 + 11.765i\Omega$
 $\Gamma = -0.8 + 0.4i$
- Max PAE is 51.4% at $Z = 10.377 + 11.321i\Omega$
 $\Gamma = -0.6 + 0.3i$

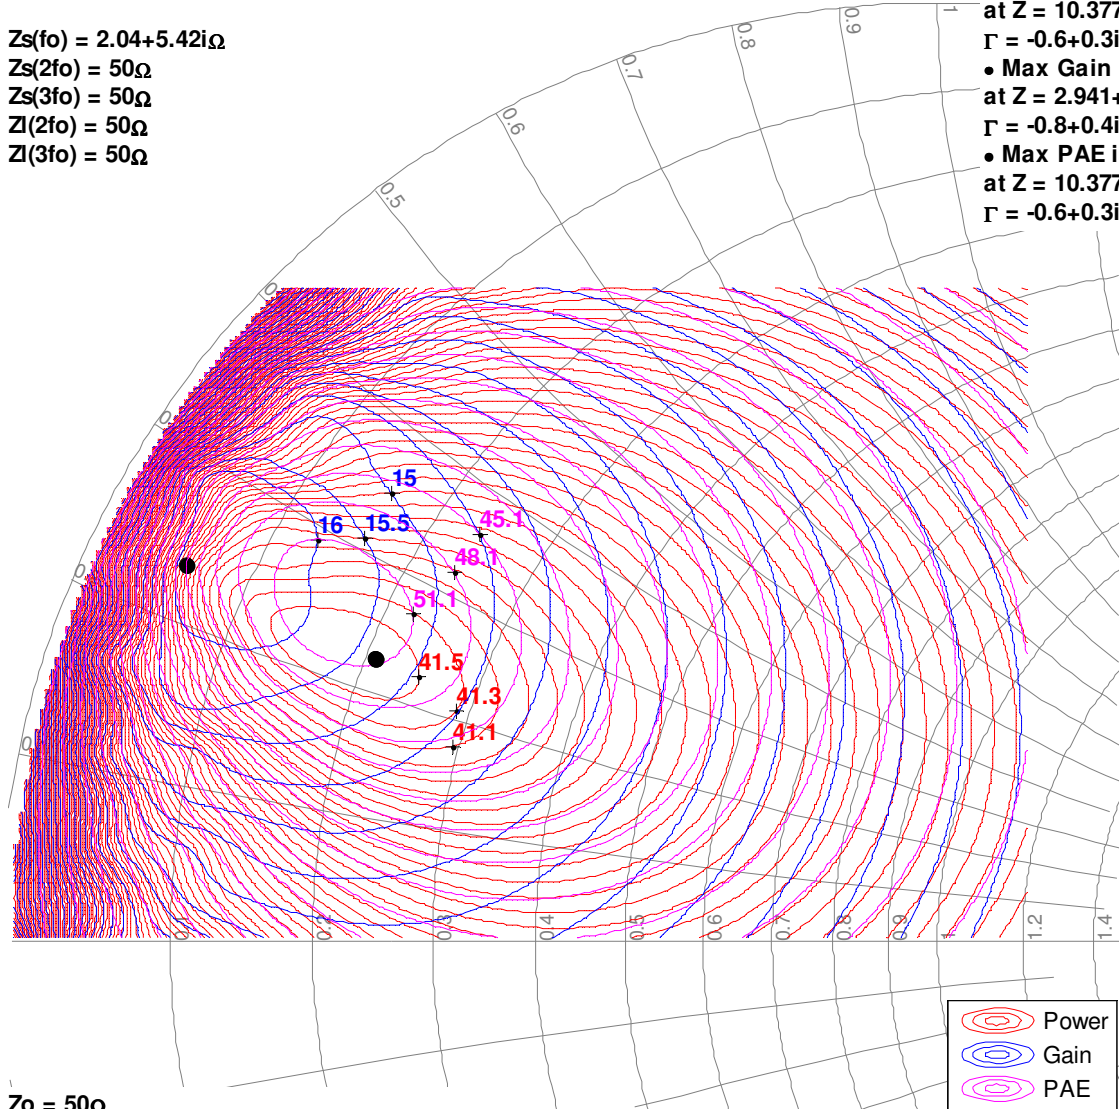

$Z_0 = 50\Omega$
 3dB compression referenced to peak gain

Model Load-Pull Smith Charts^{1, 2}


Notes:

1. Test Conditions: $V_D = 28\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

10GHz, Load-pull

$Z_s(f_0) = 0.29 + 3.65i\Omega$
 $Z_s(2f_0) = 50\Omega$
 $Z_s(3f_0) = 50\Omega$
 $Z_l(2f_0) = 50\Omega$
 $Z_l(3f_0) = 50\Omega$

- Max Power is 41.5dBm at $Z = 4.054 + 9.009i\Omega$
 $\Gamma = -0.8 + 0.3i$
- Max Gain is 11.3dB at $Z = 2.941 + 11.765i\Omega$
 $\Gamma = -0.8 + 0.4i$
- Max PAE is 49.1% at $Z = 4.054 + 9.009i\Omega$
 $\Gamma = -0.8 + 0.3i$

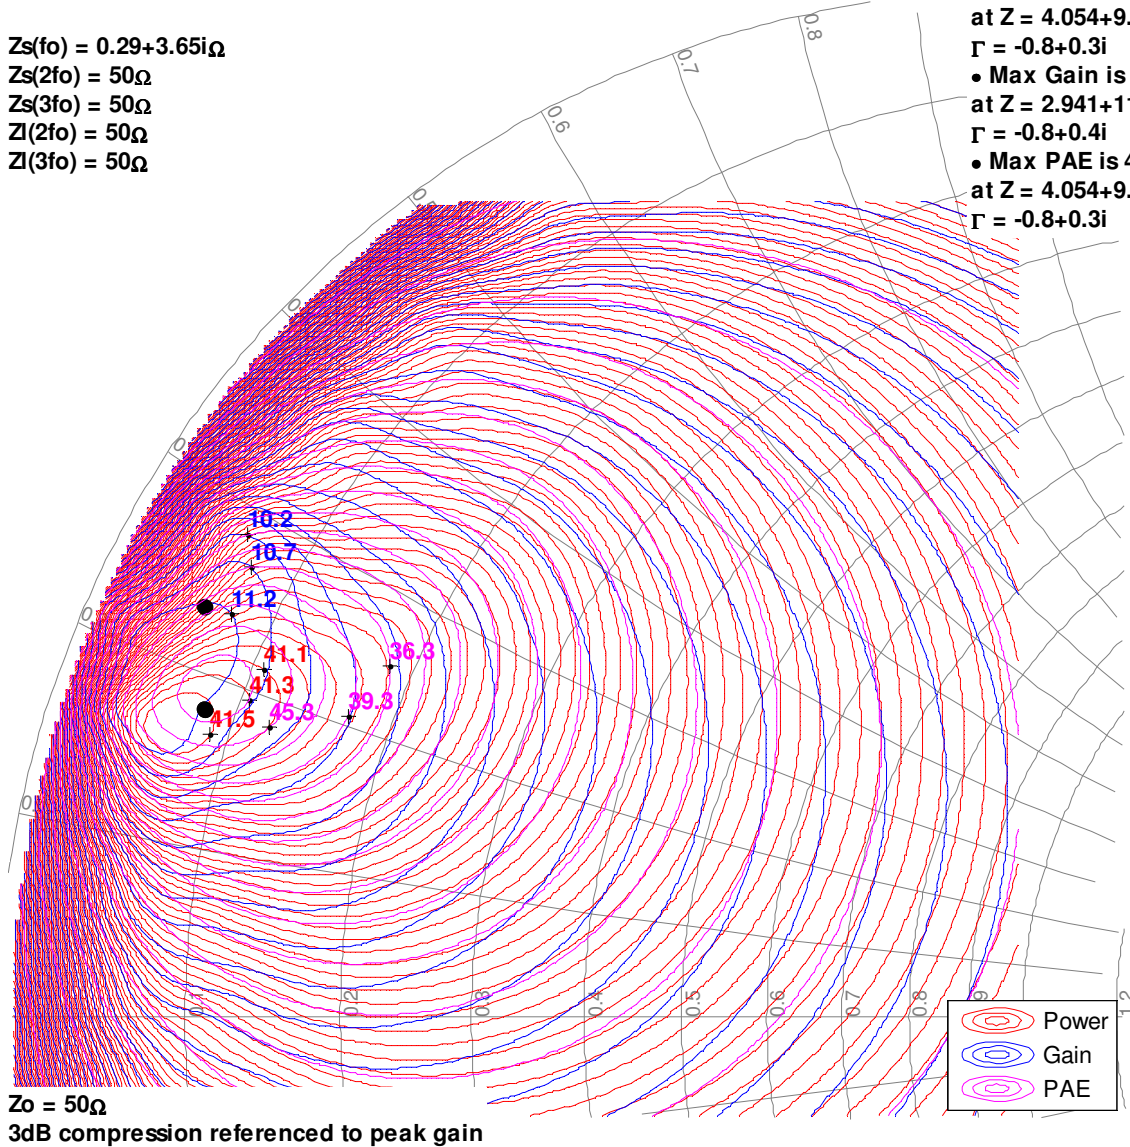


Model Load-Pull Smith Charts^{1, 2}

Notes:

1. Test Conditions: $V_D = 28\text{ V}$, $I_{DQ} = 160\text{ mA}$, CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.





18GHz, Load-pull

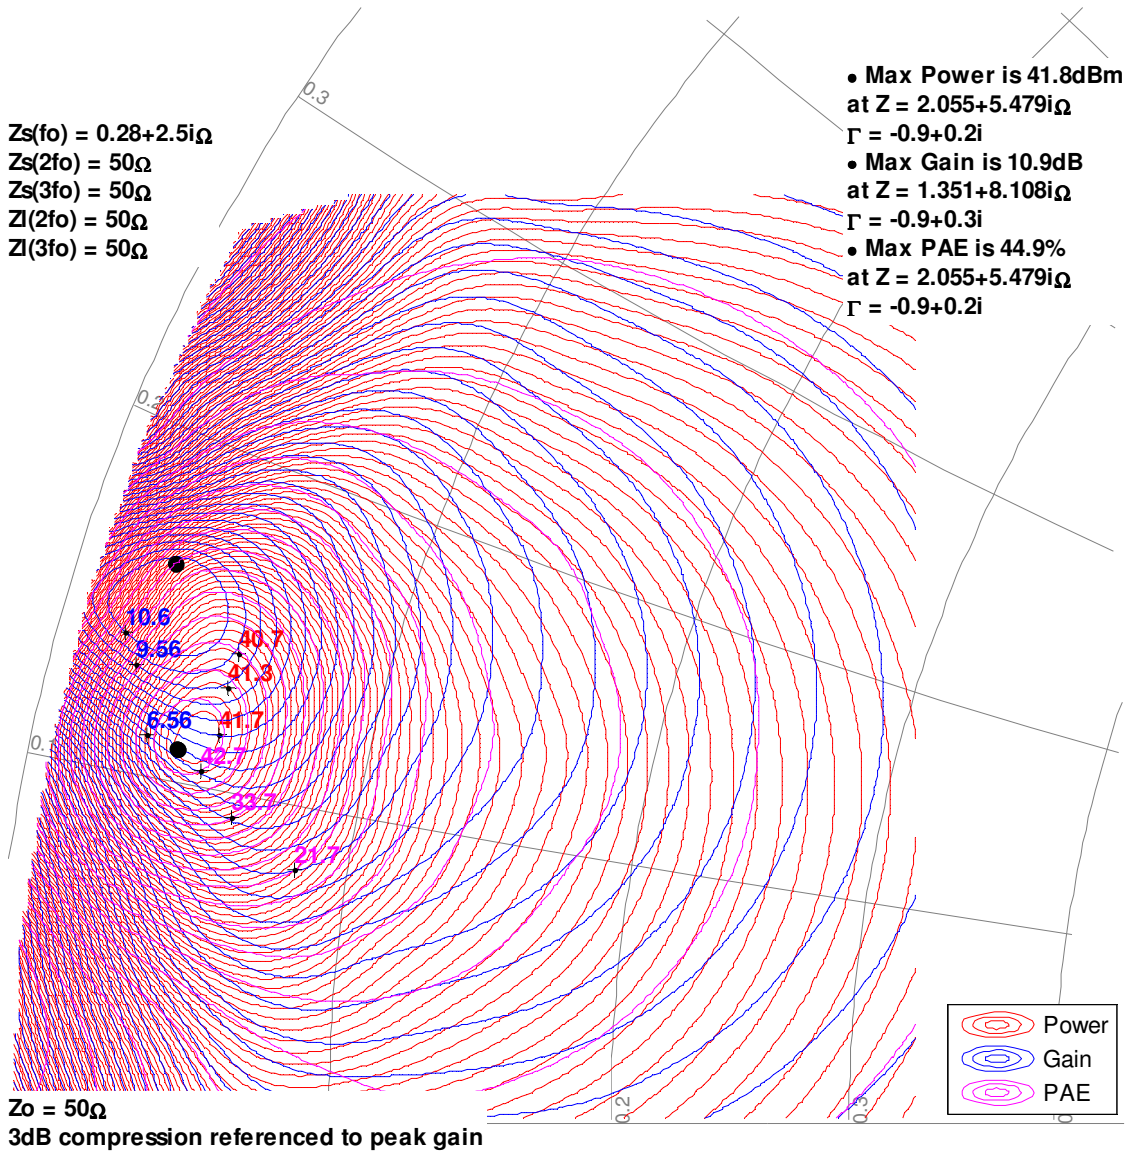

Typical Model Performance – Load-Pull Drive-up^{1, 2}

Notes:





1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

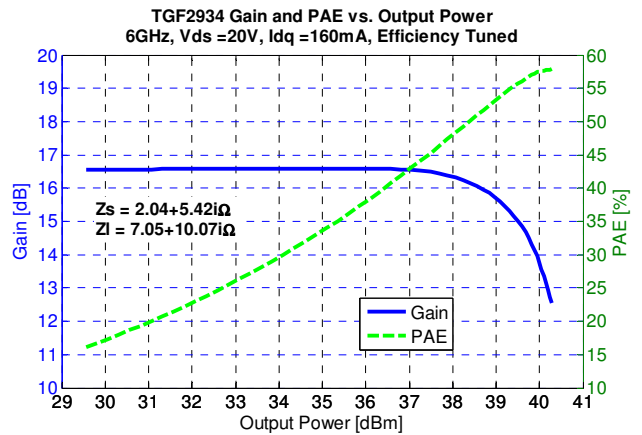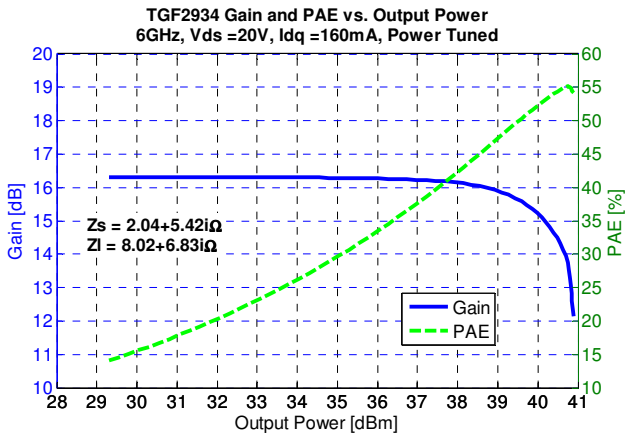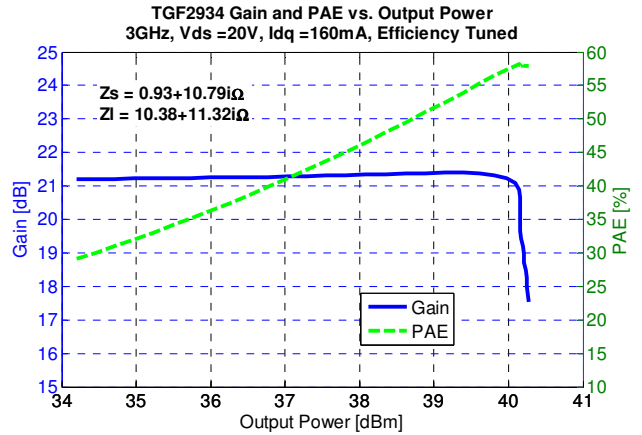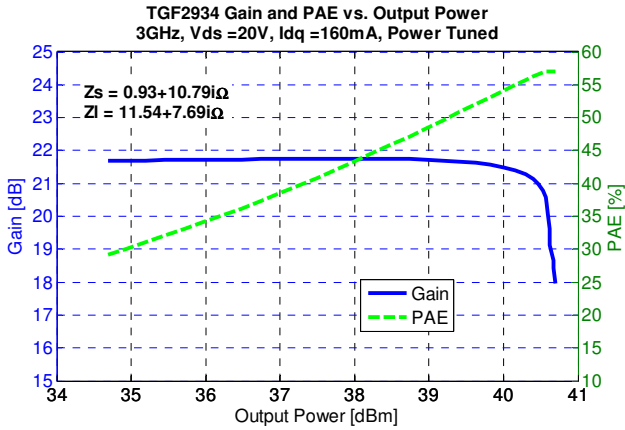

Typical Model Performance – Load-Pull Drive-up^{1,2}

Notes:





1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

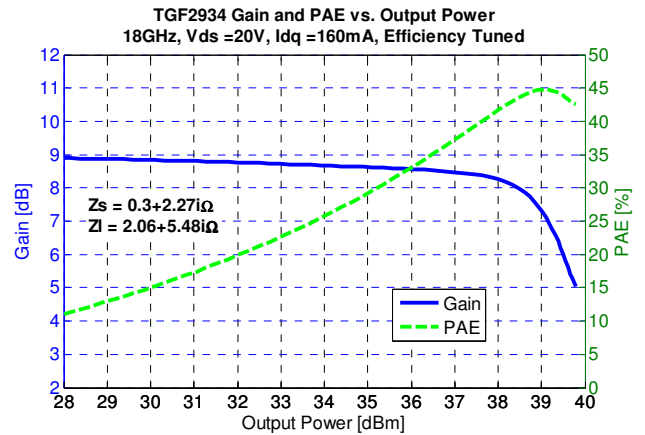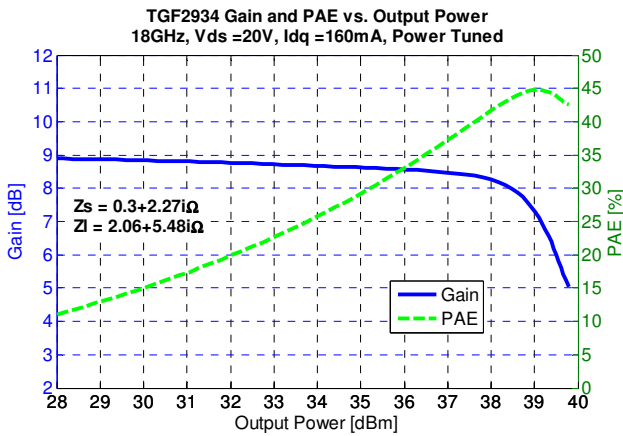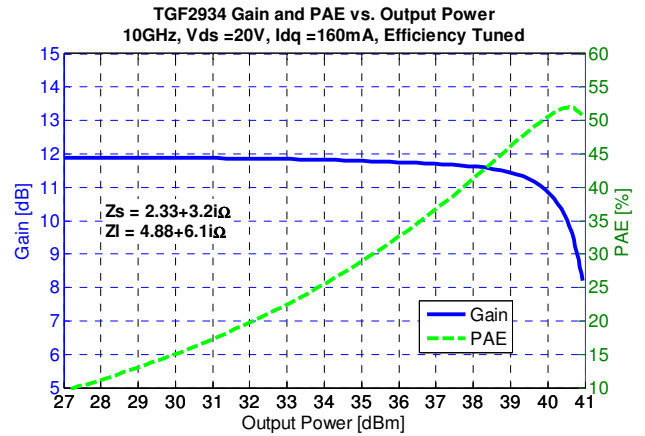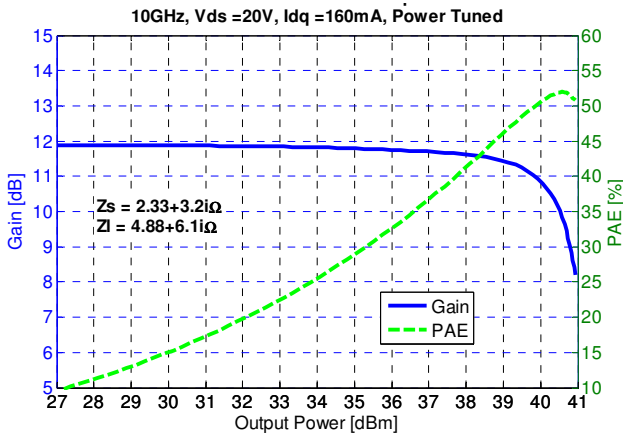

Typical Model Performance – Load-Pull Drive-up^{1,2}

Notes:





1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

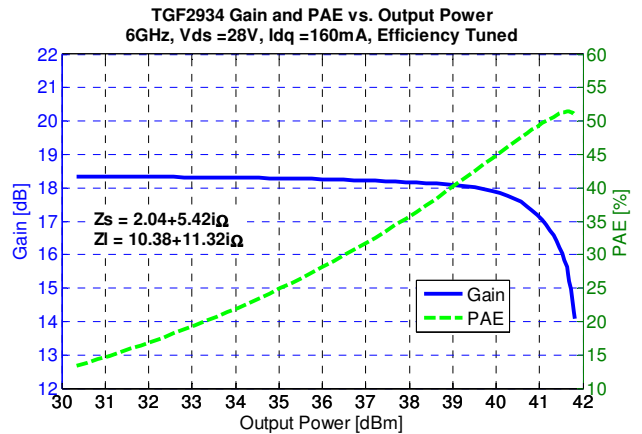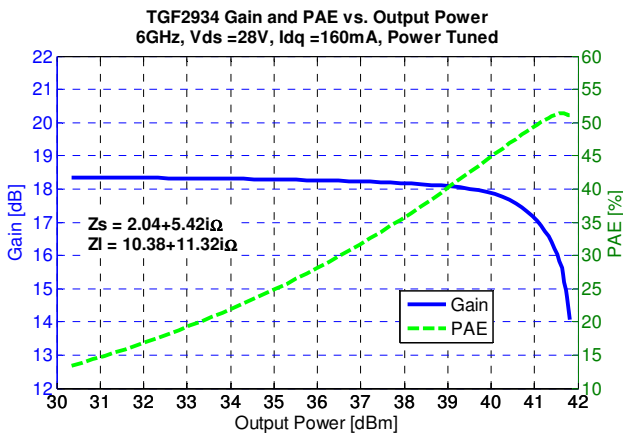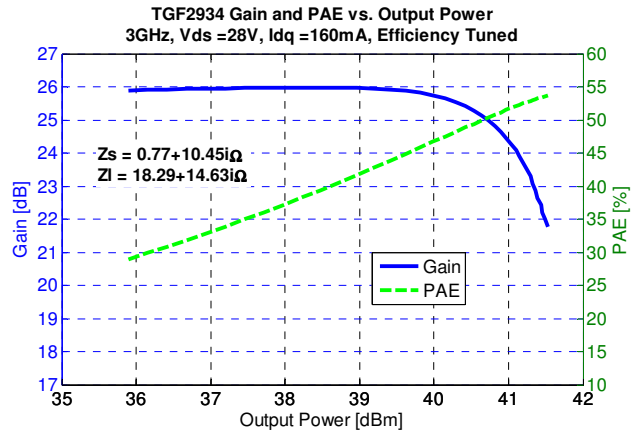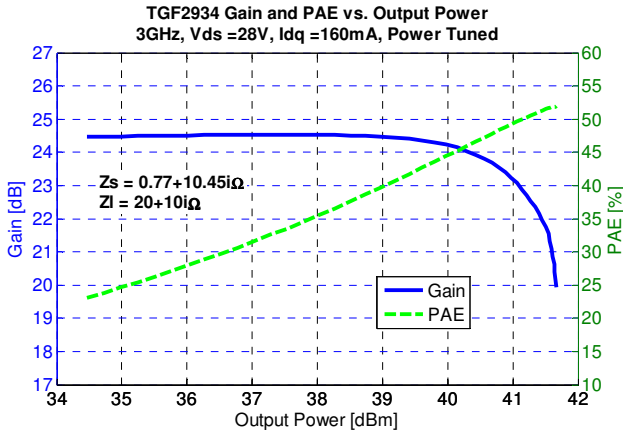


Typical Model Performance – Load-Pull Drive-up^{1,2}

Notes:

1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

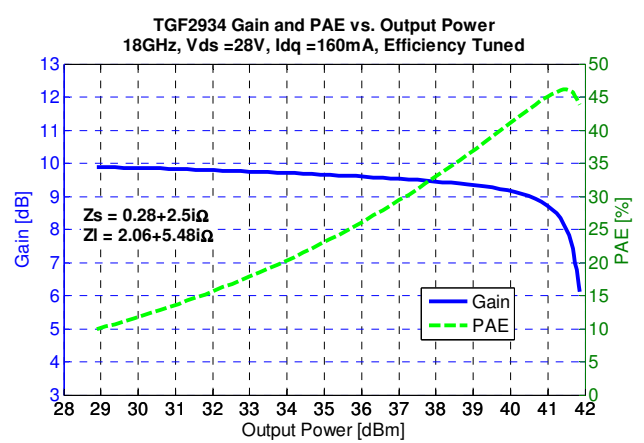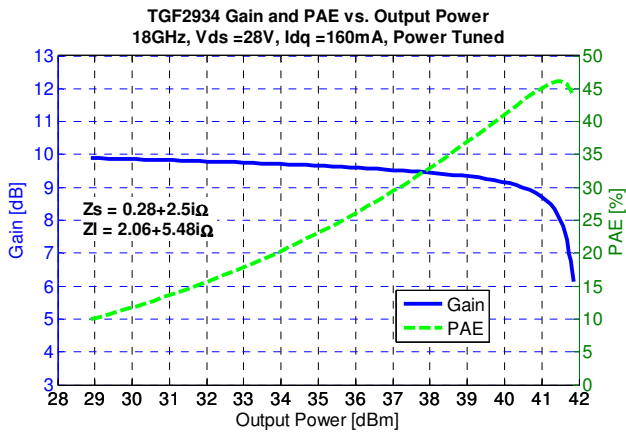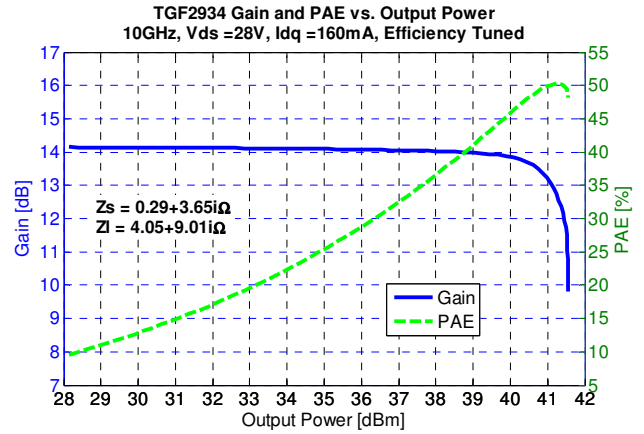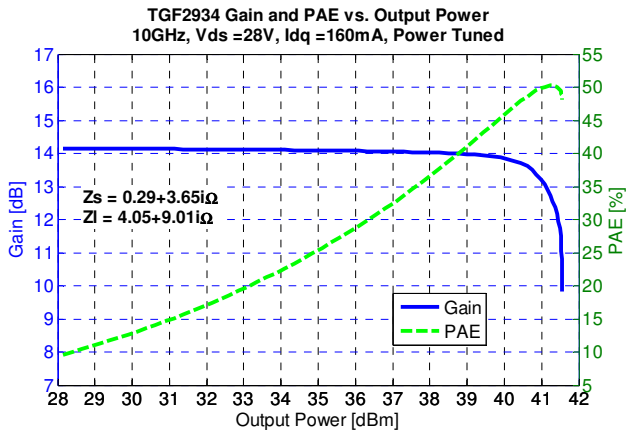


Median Lifetime¹

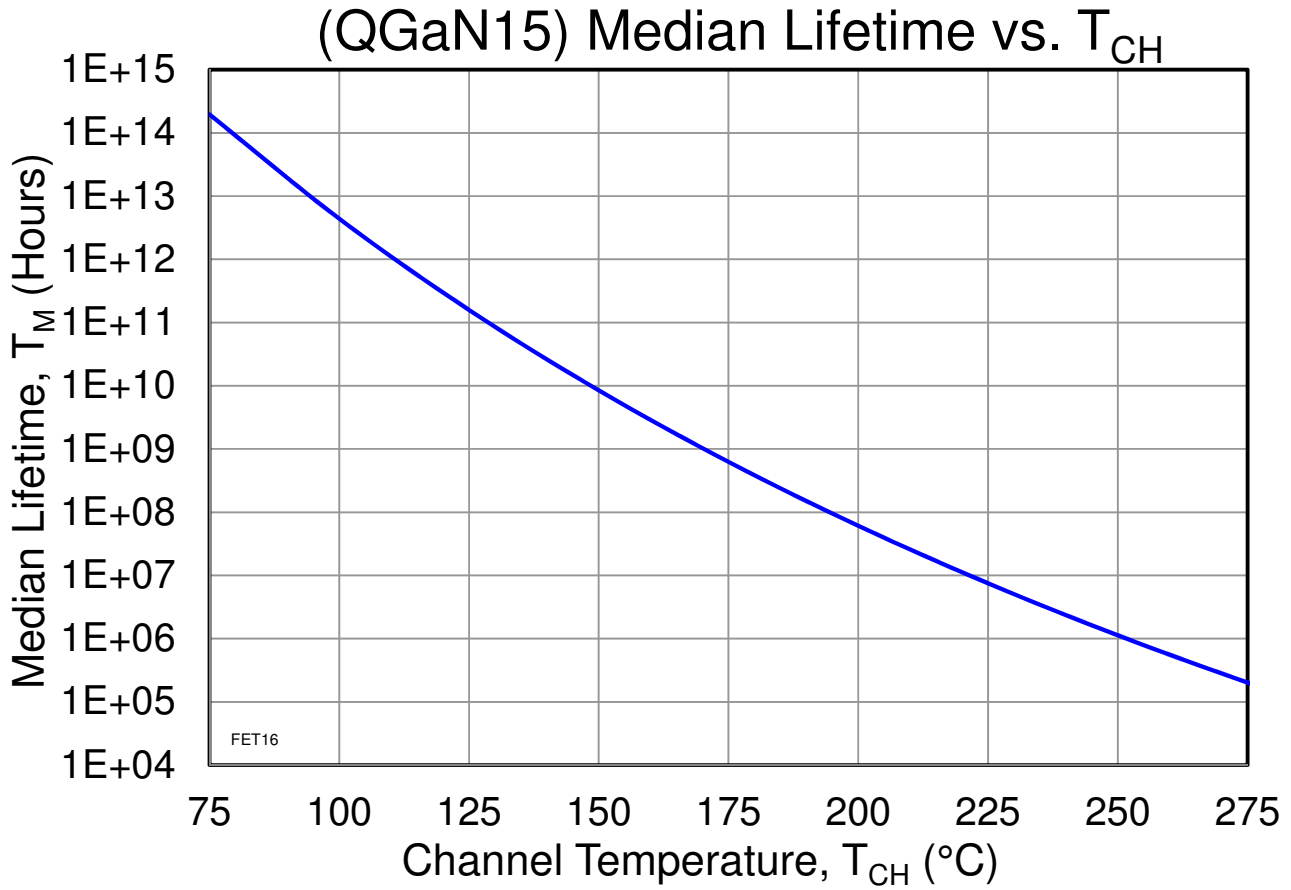

Notes:

1. Test Conditions: $V_D = +28\text{ V}$; Failure Criteria = 10% reduction in I_{D_MAX} during DC Life Testing

Maximum Gate Current

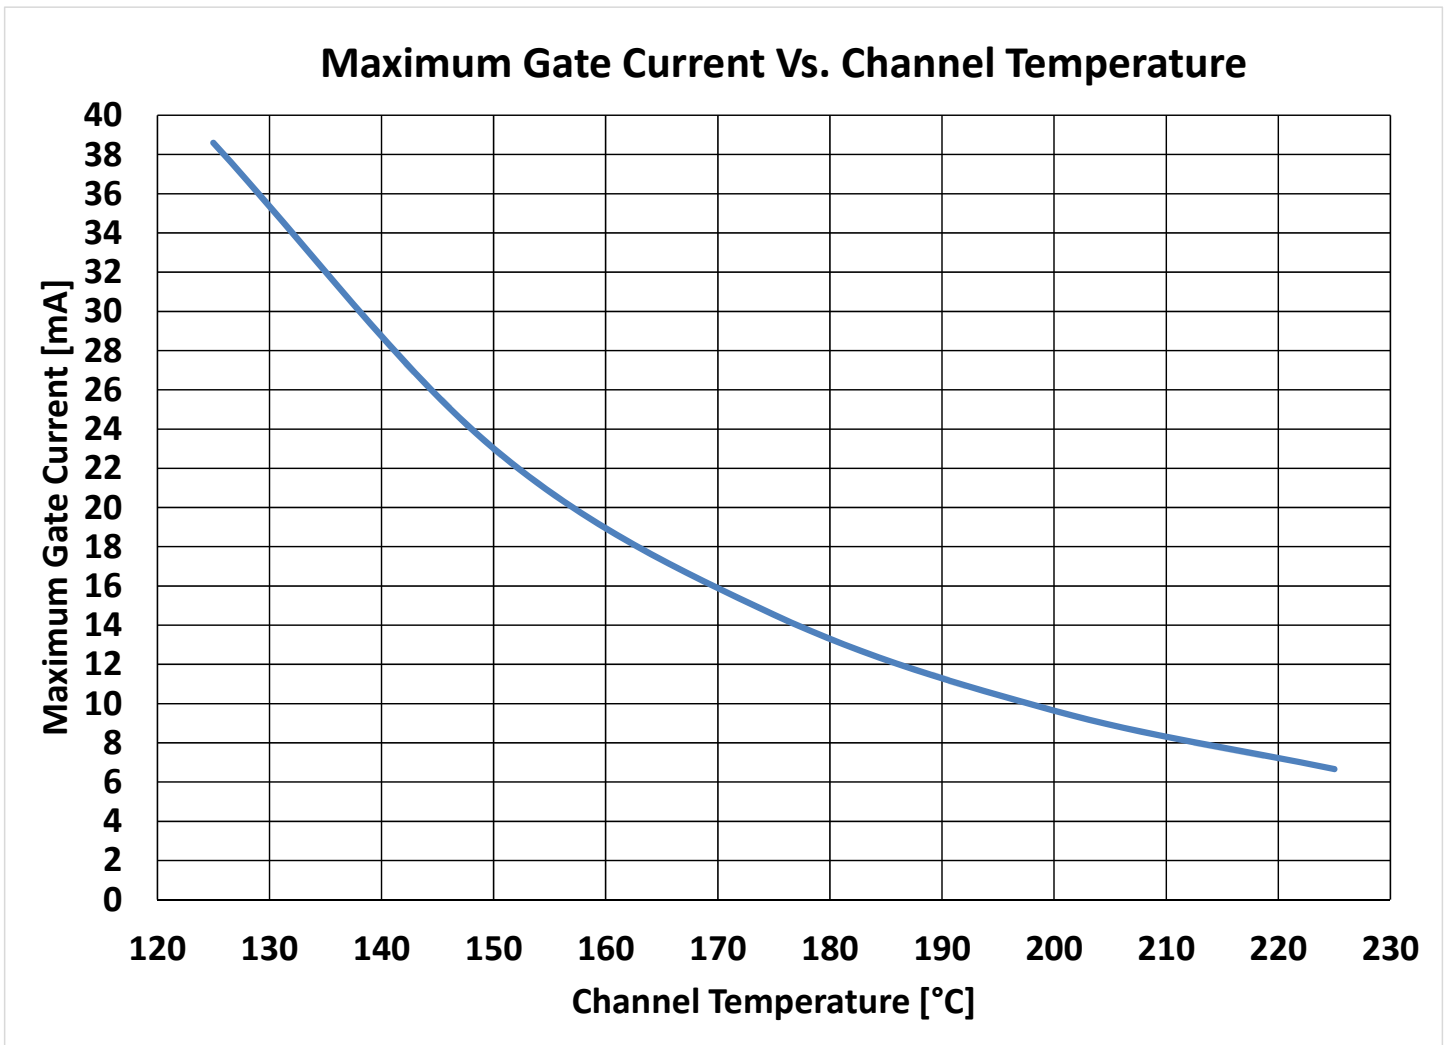


Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance, θ_{JC} ⁽¹⁾	CW	8.1	°C/W
Channel Temperature, T_{CH}	$T_{baseplate} = +85\text{ °C}$	111	°C
Median Lifetime, T_M	$P_{DISS} = 3.2\text{ W}$	9.7E11	Hrs
Thermal Resistance, θ_{JC} ⁽¹⁾	CW	8.6	°C/W
Channel Temperature, T_{CH}	$T_{baseplate} = +85\text{ °C}$	140	°C
Median Lifetime, T_M	$P_{DISS} = 6.4\text{ W}$	2.6E10	Hrs
Thermal Resistance, θ_{JC} ⁽¹⁾	CW	9.1	°C/W
Channel Temperature, T_{CH}	$T_{baseplate} = +85\text{ °C}$	172	°C
Median Lifetime, T_M	$P_{DISS} = 9.6\text{ W}$	8.4E8	Hrs
Thermal Resistance, θ_{JC} ⁽¹⁾	CW	9.7	°C/W
Channel Temperature, T_{CH}	$T_{baseplate} = +85\text{ °C}$	209	°C
Median Lifetime, T_M	$P_{DISS} = 12.8\text{ W}$	2.8E7	Hrs
Thermal Resistance, θ_{JC} ⁽¹⁾	CW	10.5	°C/W
Channel Temperature, T_{CH}	$T_{baseplate} = +85\text{ °C}$	253	°C
Median Lifetime, T_M	$P_{DISS} = 16\text{ W}$	9.1E5	Hrs
Thermal Resistance, θ_{JC} ⁽¹⁾	CW	11.4	°C/W
Channel Temperature, T_{CH}	$T_{baseplate} = +85\text{ °C}$	304	°C
Median Lifetime, T_M	$P_{DISS} = 19.2\text{ W}$	3.3E4	Hrs

Notes:

1. Thermal resistance measured at back of package.

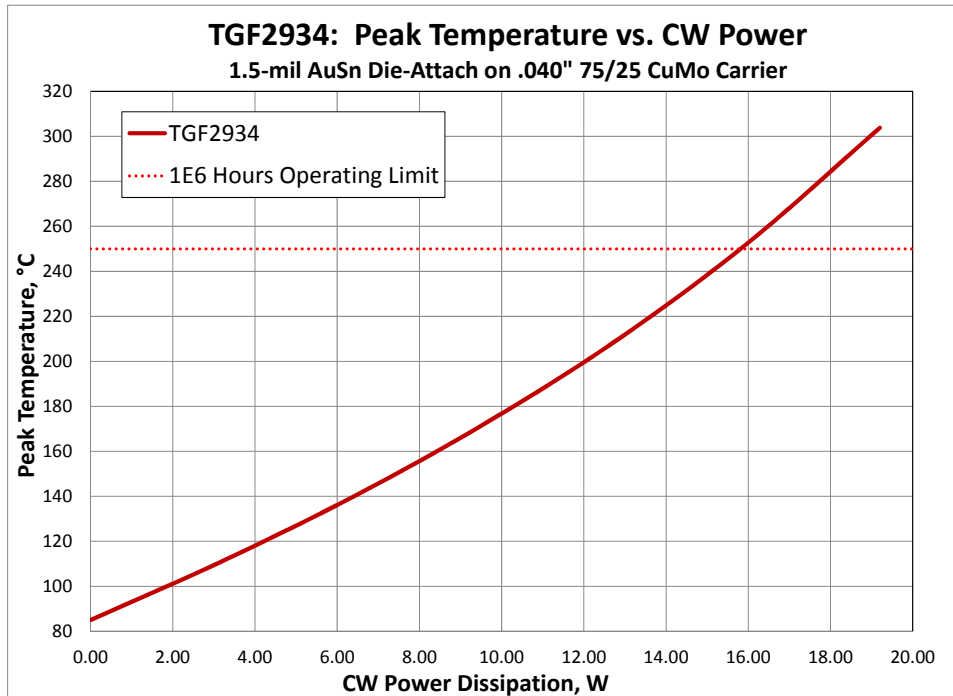

Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e. epoxy) not recommended.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Ball bonding is the preferred interconnect technique, except where noted on the assembly diagram.
- Force, time, and ultrasonics are critical bonding parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

Disclaimer

GaN/SiC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Bias-up Procedure	Bias-down Procedure
<ol style="list-style-type: none">1. Set V_G to -4 V.2. Set I_D limit to 200 mA.3. Slowly adjust V_G until I_D reaches 160 mA.4. Set I_D limit to 1200 mA.5. Apply RF signal.	<ol style="list-style-type: none">1. Turn off RF signal.2. Turn off V_D and wait 1 second to allow drain capacitor discharge.3. Turn of V_G.

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	N/A	ESDA / JEDEC JS-001-2012
ESD – Charged Device Model (CDM)	N/A	JEDEC JESD22-C101F
MSL – Moisture Sensitivity Level	N/A	IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

Solderability

Compatible with both lead-free (260°C max. reflow temp.) and tin/lead (245°C max. reflow temp.) soldering processes.

Solder profiles available upon request.

Contact plating: NiPdAu

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about Qorvo:

Web: www.Qorvo.com
Email: info-sales@qorvo.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information: Email: info-products@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2016 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А