


Agilent 4 mm Super Oval Precision Optical Performance AlInGaP and InGaN LEDs Data Sheet

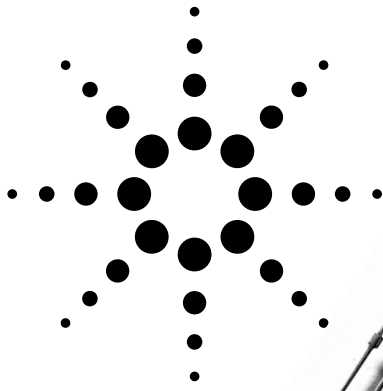

SunPower Series

Agilent HLMP-RG10, HLMP-SG10, HLMP-RL10, HLMP-SL10,
HLMP-RD11, HLMP-SD11, HLMP-RL11, HLMP-SL11,
HLMP-RM11, HLMP-SM11, HLMP-RB11, HLMP-SB11

Description

These Precision Optical Performance Oval LEDs are specifically designed for Full Color/Video and Passenger Information signs. The oval shaped radiation pattern (60° x 120°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential. These lamps have very smooth, matched radiation patterns ensuring consistent color mixing in full color applications, message uniformity across the viewing angle of the sign.

High efficiency LED materials are used in these lamps: Aluminum Indium Gallium Phosphide

(AlInGaP) for Red and Amber color and Indium Gallium Nitride (InGaN) for Blue and Green. There are two families of red and amber lamps, AlInGaP and the higher performance AlInGaP II. Each lamp is made with an advanced optical grade epoxy offering superior high temperature and high moisture resistance in outdoor applications. The package epoxy contains both uv-a and uv-b inhibitors to reduce the effects of long term exposure to direct sunlight.

Designers can select parallel (where the axis of the leads is parallel to the wide axis of the oval radiation pattern) or perpendicular orientation. Both lamps are available in tinted version.

Features

- Well defined spatial radiation pattern
- Viewing angle:
major axis 120°
minor axis 60°
- High luminous output
- Two red and amber intensity levels
AlInGaP (bright) and
AlInGaP II (brightest)
- Colors
626/630nm red
590/592nm amber
526 nm green
470 nm blue
- Superior resistance to moisture
- UV resistant epoxy

Benefits

- Viewing angle designed for wide field of view applications
- Superior performance for outdoor environments
- Radiation pattern matched for red, green, and blue for full color sign

Applications


- Full color signs

CAUTION: The Blue and Green LEDs are Class 1 ESD sensitive. Please observe appropriate precautions during handling and processing. Refer to Agilent Technologies Application Note AN-1142 for additional details.



Agilent Technologies

Package Dimensions

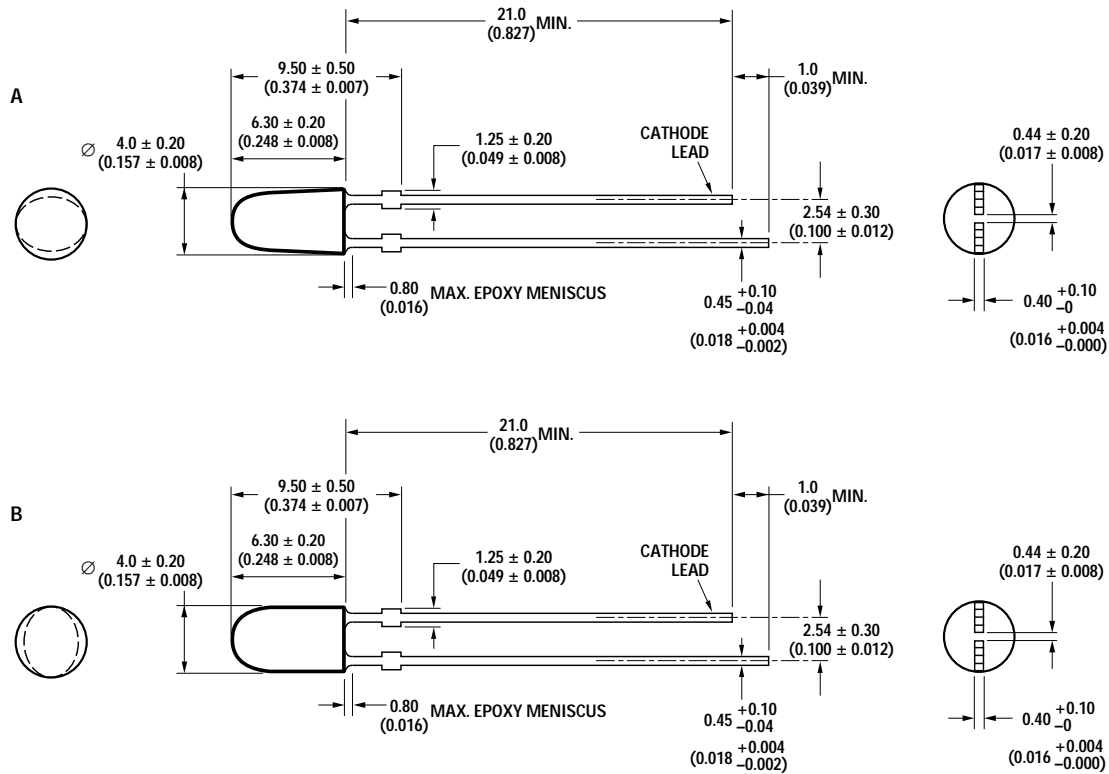

DIMENSIONS ARE IN MILLIMETERS (INCHES).

Device Selection Guide for AlInGaP

| Part Number | Color and Dominant Wavelength λ_d (nm) Typ. | Luminous Intensity I_V (mcd) at 20 mA | | Leads with Stand-Offs | Leadframe Orientation | Package Drawing |
|-----------------|--|--|------|-----------------------|-----------------------|-----------------|
| | | Min. | Max. | | | |
| HLMP-SG10-JM000 | Red 626 | 240 | 680 | Yes | Perpendicular | A |
| HLMP-RG10-JM000 | Red 626 | 240 | 680 | Yes | Parallel | B |
| HLMP-SL10-LP0xx | Amber 590 | 400 | 1150 | Yes | Perpendicular | A |
| HLMP-RL10-LP0xx | Amber 590 | 400 | 1150 | Yes | Parallel | B |

Notes:

1. The luminous intensity is measured on the mechanical axis of the lamp package.
2. The optical axis is closely aligned with the package mechanical axis.
3. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.

Device Selection Guide for AlInGaP II

| Part Number | Color and Dominant Wavelength λ_d (nm) Typ. | Luminous Intensity I_v (mcd) at 20 mA | | Leads with Stand-Offs | Leadframe Orientation | Package Drawing |
|-----------------|---|---|------|-----------------------|-----------------------|-----------------|
| | | Min. | Max. | | | |
| HLMP-RD11-J0000 | Red 630 | 240 | - | Yes | Parallel | B |
| HLMP-RD11-LP000 | Red 630 | 400 | 1150 | Yes | Parallel | B |
| HLMP-RD11-LPT00 | Red 630 | 400 | 1150 | Yes | Parallel | B |
| HLMP-RL11-H0000 | Amber 592 | 180 | - | Yes | Parallel | B |
| HLMP-RL11-LP000 | Amber 592 | 400 | 1150 | Yes | Parallel | B |
| HLMP-RL11-LPRxx | Amber 592 | 400 | 1150 | Yes | Parallel | B |
| HLMP-SD11-J0000 | Red 630 | 240 | - | Yes | Perpendicular | A |
| HLMP-SD11-LP000 | Red 630 | 400 | 1150 | Yes | Perpendicular | A |
| HLMP-SD11-LPT00 | Red 630 | 400 | 1150 | Yes | Perpendicular | A |
| HLMP-SD11-MN0xx | Red 630 | 520 | 880 | Yes | Perpendicular | A |
| HLMP-SD11-MNTxx | Red 630 | 520 | 880 | Yes | Perpendicular | A |
| HLMP-SL11-H0000 | Amber 592 | 180 | - | Yes | Perpendicular | A |
| HLMP-SL11-HL0xx | Amber 592 | 180 | 520 | Yes | Perpendicular | A |
| HLMP-SL11-KN0xx | Amber 592 | 310 | 880 | Yes | Perpendicular | A |
| HLMP-SL11-LP0xx | Amber 592 | 400 | 1150 | Yes | Perpendicular | A |
| HLMP-SL11-LPRxx | Amber 592 | 400 | 1150 | Yes | Perpendicular | A |

Notes:

1. The luminous intensity is measured on the mechanical axis of the lamp package.
2. The optical axis is closely aligned with the package mechanical axis.
3. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.

Device Selection Guide for InGaN


| Part Number | Color and Dominant Wavelength λ_d (nm) Typ. | Luminous Intensity I_v (mcd) at 20 mA | | Leads with Stand-Offs | Leadframe Orientation | Package Drawing |
|-----------------|---|---|------|-----------------------|-----------------------|-----------------|
| | | Min. | Max. | | | |
| HLMP-SM11-LP0xx | Green 526 | 400 | 1150 | Yes | Perpendicular | A |
| HLMP-RM11-H00xx | Green 526 | 180 | - | Yes | Parallel | B |
| HLMP-RM11-M00xx | Green 526 | 520 | - | Yes | Parallel | B |
| HLMP-SB11-H00xx | Blue 470 | 180 | - | Yes | Perpendicular | A |
| HLMP-RB11-D00xx | Blue 470 | 65 | - | Yes | Parallel | B |
| HLMP-RB11-H00xx | Blue 470 | 180 | - | Yes | Parallel | B |

Notes:

4. The luminous intensity is measured on the mechanical axis of the lamp package.
5. The optical axis is closely aligned with the package mechanical axis.
6. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.

Part Numbering System

HLMP - **x** **x** **xx** - **x** **x** **x** **xx**

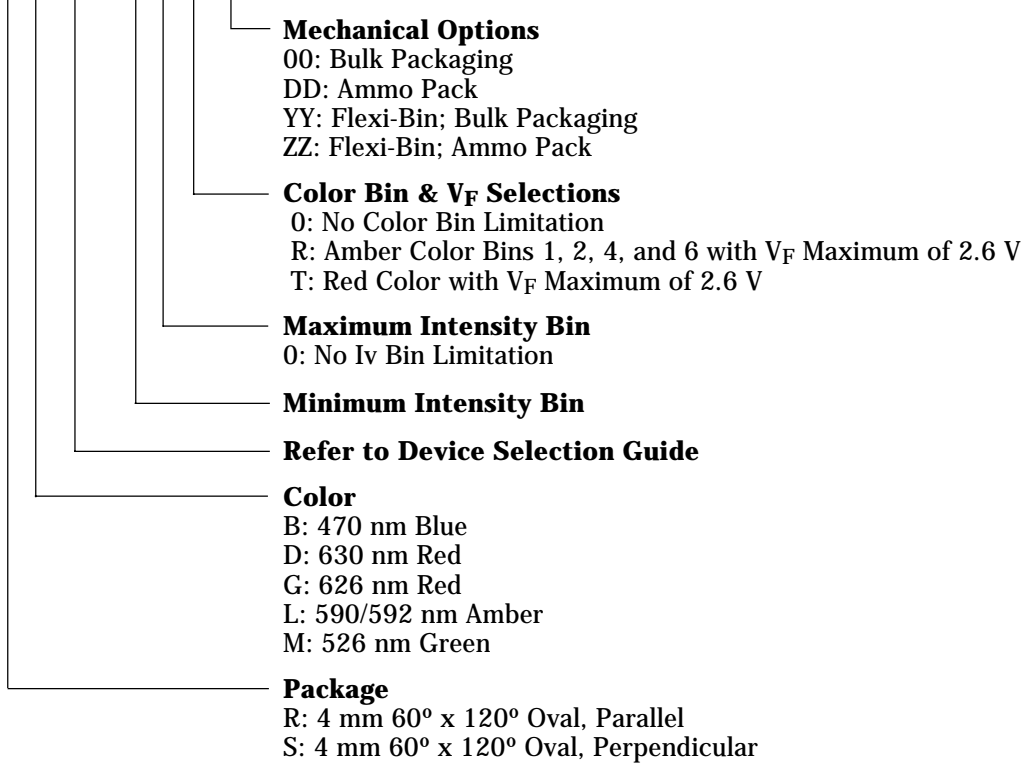

Absolute Maximum Ratings

T_A = 25°C

| Parameter | Blue and Green | Amber and Red |
|---|-----------------|-----------------|
| DC Forward Current ^[1] | 30 mA | 50 mA |
| Peak Pulsed Forward Current | 100 mA | 100 mA |
| Average Forward Current | 30 mA | 30 mA |
| Reverse Voltage (I _R = 100 μA) | 5 V | 5 V |
| Power Dissipation | 120 mW | 120 mW |
| LED Junction Temperature | 130°C | 130°C |
| Operating Temperature Range | -40°C to +80°C | -40°C to +100°C |
| Storage Temperature Range | -40°C to +100°C | -40°C to +120°C |

Note:

1. Derate linearly as shown in Figures 6 and 7.

Electrical/Optical Characteristics

$T_A = 25^\circ\text{C}$

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|---------------------------------------|-------------------------|------|------|--------------------|-------|---|
| Typical Viewing Angle ^[1] | $2\theta_{1/2}$ | | | | deg | |
| Major | | | 120 | | | |
| Minor | | | 60 | | | |
| Forward Voltage | V_F | | | | V | $I_F = 20\text{ mA}$ |
| Red ($\lambda_d = 626\text{ nm}$) | | | 1.9 | 2.4 | | |
| Red ($\lambda_d = 630\text{ nm}$) | | | 2.0 | 2.4 ^[2] | | |
| Amber ($\lambda_d = 590\text{ nm}$) | | | 2.02 | 2.4 | | |
| Amber ($\lambda_d = 592\text{ nm}$) | | | 2.15 | 2.4 ^[2] | | |
| Blue ($\lambda_d = 470\text{ nm}$) | | | 3.5 | 4.0 | | |
| Green ($\lambda_d = 526\text{ nm}$) | | | 3.5 | 4.0 | | |
| Reverse Voltage | V_R | | | | V | $I_R = 100\ \mu\text{A}$ |
| Amber and Red | | 5 | 20 | | | |
| Blue and Green | | 5 | – | | | |
| Peak Wavelength | λ_{PEAK} | | | | nm | Peak of Wavelength of Spectral Distribution at $I_F = 20\text{ mA}$ |
| Red ($\lambda_d = 626\text{ nm}$) | | | 635 | | | |
| Red ($\lambda_d = 630\text{ nm}$) | | | 639 | | | |
| Amber ($\lambda_d = 590\text{ nm}$) | | | 592 | | | |
| Amber ($\lambda_d = 592\text{ nm}$) | | | 594 | | | |

LED Indicators

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|---|--------------------------|------|------|------|--------------------|---|
| Blue ($\lambda_d = 470\text{ nm}$) | | | 467 | | | |
| Green ($\lambda_d = 526\text{ nm}$) | | | 524 | | | |
| Spectral Halfwidth | $\Delta\lambda_{1/2}$ | | | | nm | Wavelength Width at Spectral Distribution $1/2$ Power Point at $I_F = 20\text{ mA}$ |
| Red ($\lambda_d = 626/630\text{ nm}$) | | | 17 | | | |
| Amber ($\lambda_d = 590/592\text{ nm}$) | | | 17 | | | |
| Blue ($\lambda_d = 470\text{ nm}$) | | | 20 | | | |
| Green ($\lambda_d = 526\text{ nm}$) | | | 35 | | | |
| Capacitance | C | | | | pF | $V_F = 0, F = 1\text{ MHz}$ |
| All Colors | | | 40 | | | |
| Thermal Resistance | $R\theta_{\text{J-PIN}}$ | | | | $^\circ\text{C/W}$ | LED Junction-to-Cathode Lead |
| All Colors | | | 240 | | | |
| Luminous Efficacy ^[3] | η_v | | | | lm/W | Emitted Luminous Power / Emitted Radiant Power |
| Red ($\lambda_d = 626\text{ nm}$) | | | 150 | | | |
| Red ($\lambda_d = 630\text{ nm}$) | | | 155 | | | |
| Amber ($\lambda_d = 590\text{ nm}$) | | | 480 | | | |
| Amber ($\lambda_d = 592\text{ nm}$) | | | 500 | | | |
| Blue ($\lambda_d = 470\text{ nm}$) | | | 70 | | | |
| Green ($\lambda_d = 526\text{ nm}$) | | | 540 | | | |

Notes:

- $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is the on-axis intensity.
- For options -xxRxx, -xxTxx, and -xxVxx, maximum forward voltage, V_F , is 2.6 V. Please refer to V_F Bin Table below.
- The radiant intensity, I_e , in watts per steradian, may be found from the equation $I_e = I_v / \eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.

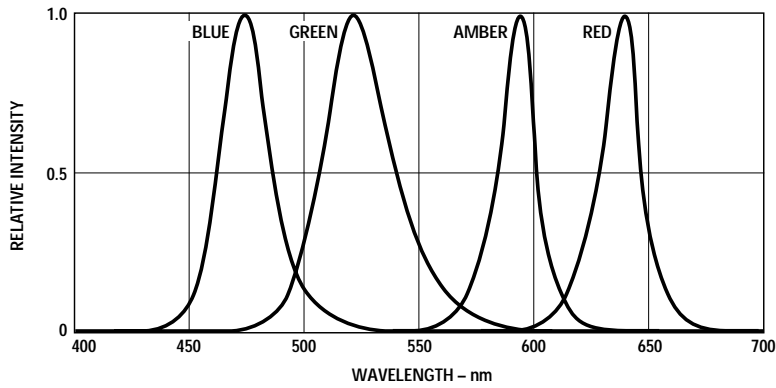


Figure 1. Relative intensity vs. wavelength.

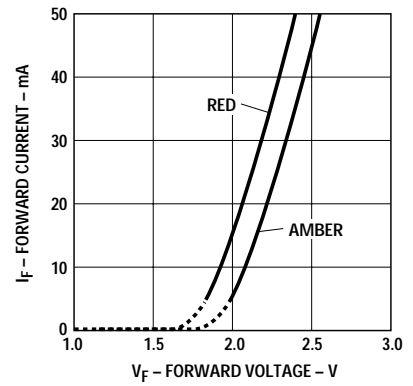


Figure 2. Amber, Red forward current vs. forward voltage.

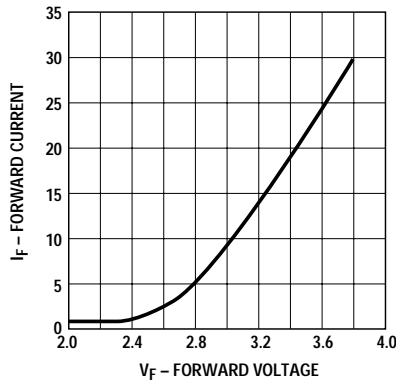


Figure 3. Blue, Green forward current vs. forward voltage.

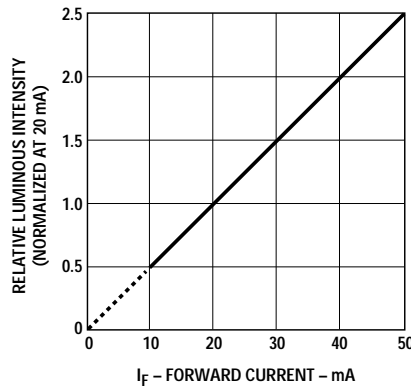


Figure 4. Amber, Red relative luminous intensity vs. forward current.

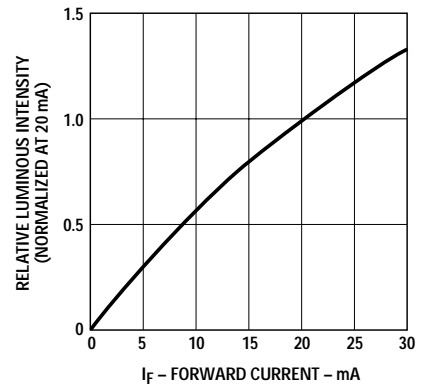


Figure 5. Blue, Green relative luminous intensity vs. forward current.

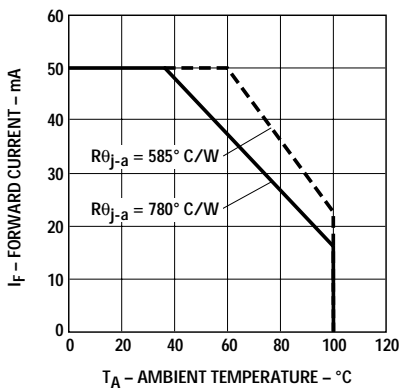


Figure 6. Amber, Red maximum forward current vs. ambient temperature.

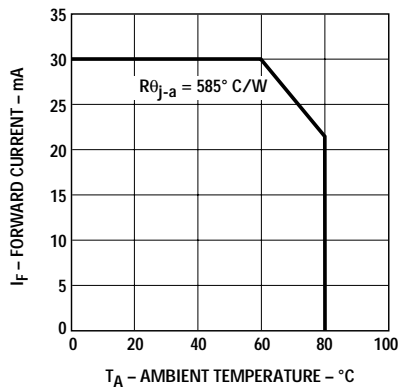


Figure 7. Blue, Green maximum forward current vs. ambient temperature.

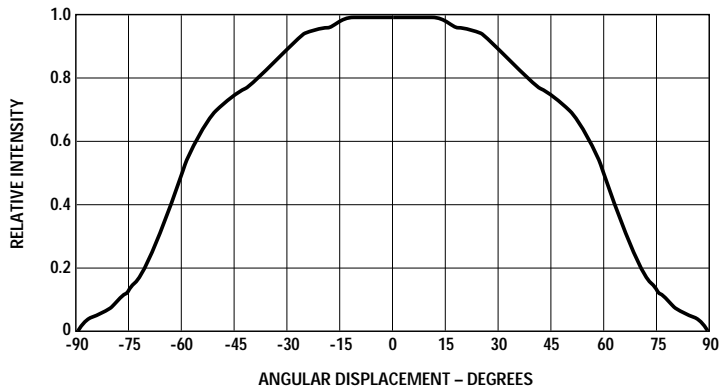


Figure 8a. Representative spatial radiation pattern for major axis.

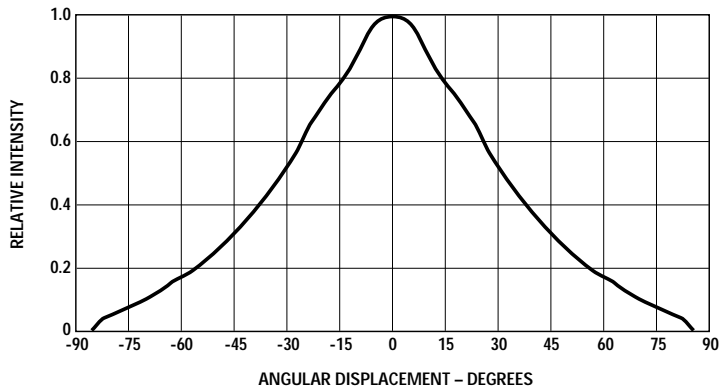


Figure 8b. Representative spatial radiation pattern for minor axis.

Intensity Bin Limits
(mcd at 20 mA)

| Bin Name | Min. | Max. |
|----------|------|------|
| D | 65 | 85 |
| E | 85 | 110 |
| F | 110 | 140 |
| G | 140 | 180 |
| H | 180 | 240 |
| J | 240 | 310 |
| K | 310 | 400 |
| L | 400 | 520 |
| M | 520 | 680 |
| N | 680 | 880 |
| P | 880 | 1150 |

Tolerance for each bin limit is $\pm 15\%$.

VF Bin Table^[2]

| Bin Name | Min. | Max. |
|----------|------|------|
| VA | 2.0 | 2.2 |
| VB | 2.2 | 2.4 |
| VC | 2.4 | 2.6 |

Tolerance for each bin is ± 0.05 V.

Note:

1. Bin categories are established for classification of products. Products may not be available in all bin categories.

Color Bin Limits
(nm at 20 mA)

| Blue Bin | Color Range (nm) | |
|----------|------------------|-------|
| | Min. | Max. |
| 1 | 460.0 | 464.0 |
| 2 | 464.0 | 468.0 |
| 3 | 468.0 | 472.0 |
| 4 | 472.0 | 476.0 |
| 5 | 476.0 | 480.0 |

Tolerance for each bin limit is ± 0.5 nm.

| Green Bin ID | Color Range (nm) | |
|--------------|------------------|-------|
| | Min. | Max. |
| 1 | 520.0 | 524.0 |
| 2 | 524.0 | 528.0 |
| 3 | 528.0 | 532.0 |
| 4 | 532.0 | 536.0 |
| 5 | 536.0 | 540.0 |

Tolerance for each bin limit is ± 0.5 nm.

| Amber Bin ID | Color Range (nm) | |
|--------------|------------------|-------|
| | Min. | Max. |
| 1 | 584.5 | 587.0 |
| 2 | 587.0 | 589.5 |
| 4 | 589.5 | 592.0 |
| 6 | 592.0 | 594.5 |

Tolerance for each bin limit is ± 0.5 nm.

Note:

1. All bin categories are established for classification of products. Products may not be available in all bin categories. Please contact your Agilent representatives for further information.

Precautions

Lead Forming

- The leads of an LED lamp may be preformed or cut to length prior to insertion and soldering into PC board.
- If lead forming is required before soldering, care must be taken to avoid any excessive mechanical stress induced to LED package. Otherwise, cut the leads of LED to length after soldering process at room temperature. The solder joint formed will absorb the mechanical stress of the lead cutting from traveling to the LED chip die attach and wirebond.
- It is recommended that tooling made to precisely form and cut the leads to length rather than rely upon hand operation.

Soldering Conditions

- Care must be taken during PCB assembly and soldering process to prevent damage to LED component.
- The closest LED is allowed to solder on board is 1.59 mm below the body (encapsulant epoxy) for those parts without standoff.
- Recommended soldering conditions:

| | Wave Soldering | Manual Solder Dipping |
|----------------------|----------------|-----------------------|
| Pre-heat Temperature | 105 °C Max. | – |
| Pre-heat Time | 30 sec Max. | – |
| Peak Temperature | 250 °C Max. | 260 °C Max. |
| Dwell Time | 3 sec Max. | 5 sec Max. |

- Wave soldering parameter must be set and maintained according to recommended temperature and dwell time in the solder wave. Customer is advised to periodically check on the soldering profile to ensure the soldering profile used is always conforming to recommended soldering condition.
- If necessary, use fixture to hold the LED component in proper orientation with respect to the PCB during soldering process.
- Proper handling is imperative to avoid excessive thermal stresses to LED components when heated. Therefore, the soldered PCB must be allowed to cool to room temperature, 25°C, before handling.
- Special attention must be given to board fabrication, solder masking, surface plating and lead holes size and component orientation to assure solderability.
- Recommended PC board plated through hole sizes for LED component leads:

| LED Component Lead Size | Diagonal | Plated Through Hole Diameter |
|--|--------------------------|--|
| 0.457 x 0.457 mm (0.018 x 0.018 inch) | 0.646 mm (0.025 inch) | 0.976 to 1.078 mm (0.038 to 0.042 inch) |
| 0.508 x 0.508 mm (0.020 x 0.020 inch) | 0.718 mm (0.028 inch) | 1.049 to 1.150 mm (0.041 to 0.045 inch) |

Note: Refer to application note AN1027 for more information on soldering LED components.

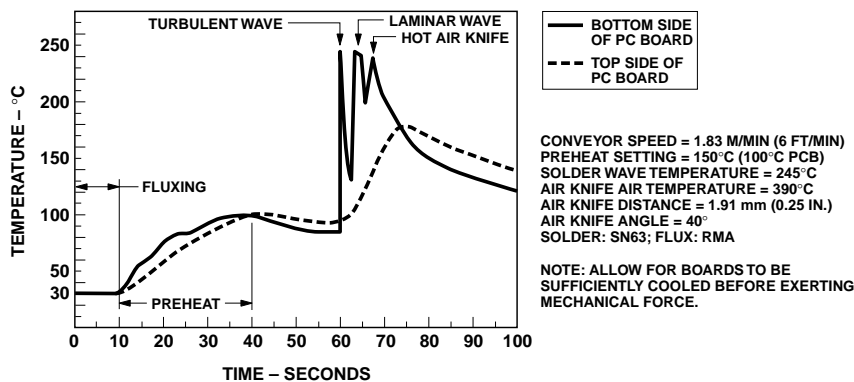


Figure 9. Recommended wave soldering profile.

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152 (Domestic/International), or 0120-61-1280 (Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2005 Agilent Technologies, Inc.

Obsoletes 5989-2793EN

October 28, 2005

5989-4174EN



Agilent Technologies

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А