

## Plug - PP-H 2,5/15 - 3210004

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug, Connection method: Push-in connection, Number of positions: 15, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 26 - 12, Width: 78 mm, Height: 40.2 mm, Color: gray

The illustration shows 6-position versions

### Product Features

- Large-surface labeling option
- The Push-in technology COMBI plugs for self-assembly provide solutions that users can implement themselves
- Tested for railway applications



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 10 pc    |
| Weight per Piece (excluding packing) | 55.0 g   |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Poland   |

### Technical data

#### General

|                                        |                     |
|----------------------------------------|---------------------|
| Number of levels                       | 1                   |
| Number of connections                  | 15                  |
| Nominal cross section                  | 2.5 mm <sup>2</sup> |
| Color                                  | gray                |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Area of application                    | Railway industry    |
|                                        | Machine building    |
|                                        | Plant engineering   |

## Plug - PP-H 2,5/15 - 3210004

### Technical data

#### General

|                                  |                                                           |
|----------------------------------|-----------------------------------------------------------|
| Maximum load current             | 24 A (with a 2.5 mm <sup>2</sup> conductor cross section) |
| Rated surge voltage              | 6 kV                                                      |
| Degree of pollution              | 3                                                         |
| Overvoltage category             | III                                                       |
| Insulating material group        | I                                                         |
| Connection in acc. with standard | IEC 61984                                                 |
| Maximum load current             | 24 A (with 4 mm <sup>2</sup> conductor cross section)     |
| Nominal current I <sub>N</sub>   | 24 A                                                      |
| Nominal voltage U <sub>N</sub>   | 500 V                                                     |
| Open side panel                  | No                                                        |

#### Dimensions

|        |          |
|--------|----------|
| Width  | 78 mm    |
| Length | 15.8 mm  |
| Height | 40.2 mm  |
|        | 24.00 mm |
| Pitch  | 5.20 mm  |

#### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| Connection method                                                                       | Push-in connection   |
| Connection in acc. with standard                                                        | IEC 61984            |
| Conductor cross section solid min.                                                      | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.                                                      | 4 mm <sup>2</sup>    |
| Conductor cross section AWG min.                                                        | 26                   |
| Conductor cross section AWG max.                                                        | 12                   |
| Conductor cross section flexible min.                                                   | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible max.                                                   | 2.5 mm <sup>2</sup>  |
| Min. AWG conductor cross section, flexible                                              | 26                   |
| Max. AWG conductor cross section, flexible                                              | 14                   |
| Conductor cross section flexible, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm <sup>2</sup>  |
| Stripping length                                                                        | 8 mm ... 10 mm       |
| Internal cylindrical gage                                                               | A3                   |

#### Standards and Regulations

## Plug - PP-H 2,5/15 - 3210004

### Technical data

#### Standards and Regulations

|                                        |           |
|----------------------------------------|-----------|
| Connection in acc. with standard       | CSA       |
|                                        | IEC 61984 |
| Flammability rating according to UL 94 | V0        |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27141151 |
| eCl@ss 7.0 | 27141151 |
| eCl@ss 8.0 | 27141151 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC002021 |
| ETIM 5.0 | EC002021 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211802 |
| UNSPSC 7.0901 | 39121402 |
| UNSPSC 11     | 39121402 |
| UNSPSC 12.01  | 39121402 |
| UNSPSC 13.2   | 39121402 |

### Approvals

#### Approvals

---

##### Approvals

CSA / LR / RS / ABS / NK / UL Recognized / cUL Recognized / BV / EAC / EAC / cULus Recognized

---

##### Ex Approvals

---

## Plug - PP-H 2,5/15 - 3210004

### Approvals

Approvals submitted

#### Approval details

| CSA  |       |       |
|---------------------------------------------------------------------------------------|-------|-------|
|                                                                                       | B     | C     |
| mm <sup>2</sup> /AWG/kcmil                                                            | 26-12 | 26-12 |
| Nominal current I <sub>N</sub>                                                        | 20 A  | 20 A  |
| Nominal voltage U <sub>N</sub>                                                        | 300 V | 300 V |

|    |
|----|
| LR |
|----|

|    |
|----|
| RS |
|----|

|     |
|-----|
| ABS |
|-----|

|    |
|----|
| NK |
|----|

| UL Recognized  |       |       |       |
|---------------------------------------------------------------------------------------------------|-------|-------|-------|
|                                                                                                   | B     | C     | D     |
| mm <sup>2</sup> /AWG/kcmil                                                                        | 26-12 | 26-12 | 26-12 |
| Nominal current I <sub>N</sub>                                                                    | 20 A  | 20 A  | 5 A   |
| Nominal voltage U <sub>N</sub>                                                                    | 300 V | 300 V | 600 V |

| cUL Recognized  |       |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|-------|
|                                                                                                    | B     | C     | D     |
| mm <sup>2</sup> /AWG/kcmil                                                                         | 26-12 | 26-12 | 26-12 |
| Nominal current I <sub>N</sub>                                                                     | 20 A  | 20 A  | 5 A   |
| Nominal voltage U <sub>N</sub>                                                                     | 300 V | 300 V | 600 V |

|    |
|----|
| BV |
|----|

## Plug - PP-H 2,5/15 - 3210004

### Approvals

EAC

EAC

cULus Recognized 

### Accessories

#### Accessories

#### Cable housing

Cable housing - PH 2,5/ 2 - 3209691



Cable housing, Length: 19.9 mm, Width: 10.4 mm, Height: 36.8 mm, Number of positions: 2, Color: gray

Cable housing - PH 2,5/ 3 - 3209701



Cable housing, Length: 19.9 mm, Width: 15.6 mm, Height: 36.8 mm, Number of positions: 3, Color: gray

Cable housing - PH 2,5/ 4 - 3209714



Cable housing, Length: 19.9 mm, Width: 20.8 mm, Height: 36.8 mm, Number of positions: 4, Color: gray

## Plug - PP-H 2,5/15 - 3210004

### Accessories

Cable housing - PH 2,5/ 5 - 3209727



Cable housing, Length: 19.9 mm, Width: 26 mm, Height: 36.8 mm, Number of positions: 5, Color: gray

---

Cable housing - PH 2,5/ 6 - 3209730



Cable housing, Length: 19.9 mm, Width: 31.2 mm, Height: 36.8 mm, Number of positions: 6, Color: gray

---

Cable housing - PH 2,5/ 7 - 3209743



Cable housing, Length: 19.9 mm, Width: 36.4 mm, Height: 36.8 mm, Number of positions: 7, Color: gray

---

Cable housing - PH 2,5/ 8 - 3209756



Cable housing, Length: 19.9 mm, Width: 41.6 mm, Height: 36.8 mm, Number of positions: 8, Color: gray

---

Cable housing - PH 2,5/ 9 - 3209507



Cable housing, Length: 19.9 mm, Width: 46.8 mm, Height: 36.8 mm, Number of positions: 9, Color: gray

---

## Plug - PP-H 2,5/15 - 3210004

### Accessories

Cable housing - PH 2,5/10 - 3209769



Cable housing, Length: 19.9 mm, Width: 52 mm, Height: 36.8 mm, Number of positions: 10, Color: gray

---

Cable housing - PH 2,5/11 - 3209772



Cable housing, Length: 19.9 mm, Width: 57.2 mm, Height: 36.8 mm, Number of positions: 11, Color: gray

---

Cable housing - PH 2,5/12 - 3209785



Cable housing, Length: 19.9 mm, Width: 62.4 mm, Height: 36.8 mm, Number of positions: 12, Color: gray

---

Cable housing - PH 2,5/13 - 3209798



Cable housing, Length: 19.9 mm, Width: 67.6 mm, Height: 36.8 mm, Number of positions: 13, Color: gray

---

Cable housing - PH 2,5/14 - 3209808



Cable housing, Length: 19.9 mm, Width: 72.8 mm, Height: 36.8 mm, Number of positions: 14, Color: gray

---

## Plug - PP-H 2,5/15 - 3210004

### Accessories

Cable housing - PH 2,5/15 - 3209811



Cable housing, Length: 19.9 mm, Width: 78 mm, Height: 36.8 mm, Number of positions: 15, Color: gray

---

### End cover

Flange cover - DF-SP-H 2,5 - 3209824



Flange cover, Length: 35.8 mm, Width: 4.5 mm, Height: 24.7 mm, Color: gray

---

### Flange

Flange cover - DFS-SP-H 2,5 - 3061431



Flange cover, Length: 35.8 mm, Width: 4.5 mm, Height: 24.7 mm, Color: gray

---

### Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, Color: white

## Plug - PP-H 2,5/15 - 3210004

### Accessories

Insulating sleeve - MPS-IH RD - 0201676



Insulating sleeve, Color: red

Insulating sleeve - MPS-IH BU - 0201689



Insulating sleeve, Color: blue

Insulating sleeve - MPS-IH YE - 0201692



Insulating sleeve, Color: yellow

Insulating sleeve - MPS-IH GN - 0201702



Insulating sleeve, Color: green

Insulating sleeve - MPS-IH GY - 0201728



Insulating sleeve, Color: gray

## Plug - PP-H 2,5/15 - 3210004

### Accessories

Insulating sleeve - MPS-IH BK - 0201731



Insulating sleeve, Color: black

---

Insulating sleeve - ISH 2,5/0,2 - 3002843



Insulating sleeve, Color: white

---

Insulating sleeve - ISH 2,5/0,5 - 3002856



Insulating sleeve, Color: gray

---

Insulating sleeve - ISH 2,5/1,0 - 3002869



Insulating sleeve, Color: black

---

### Mounting material

Latching - PR - 3040559



Latching, Number of positions: 1, Color: orange

## Plug - PP-H 2,5/15 - 3210004

### Accessories

Latching - PR/2 - 3040630



Latching, Number of positions: 2, Color: orange

---

Latching - PRT/2 - 3040631



Latching, can only be released using a screwdriver, Number of positions: 2, Color: orange

---

Latching - PRZ - 3040614



Latching, Length: 3 mm, Width: 5.2 mm, Number of positions: 2, Color: orange

---

### Screwdriver tools

Screwdriver - ST-BW - 1207608



Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages

---

### Shield connection

Shield connection clip - PSH 3- 6 - 3040591



Shield connection clip, Color: black

## Plug - PP-H 2,5/15 - 3210004

### Accessories

---

Shield connection clip - PSH 5-10 - 3040601



Shield connection clip, Color: black

---

### Strain relief

Strain relief - PZ/2 - 3040627



Strain relief, Number of positions: 2, Color: black

---

Strain relief - PZ/4 - 3040643



Strain relief, Number of positions: 4, Color: black

---

### Test plug terminal block

Test plugs - MPS-MT - 0201744




Test plugs, Color: silver

---


### Drawings

## Plug - PP-H 2,5/15 - 3210004

Circuit diagram



Diagram

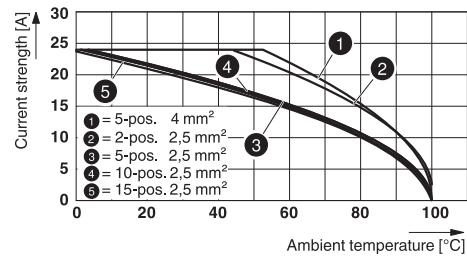

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А