

## Aluminum Capacitors Power Standard Miniature Snap-In


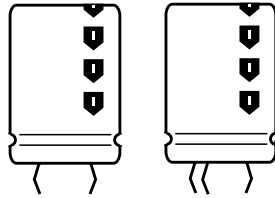


Fig. 1 Component outlines

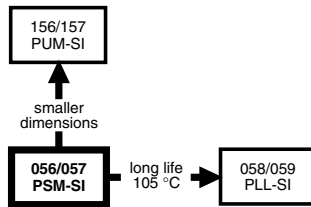

### FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, minimized dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Pressure relief on the top of the aluminum case
- Charge and discharge proof
- Long useful life: 12 000 hours at 85 °C
- High ripple current capability
- Keyed polarity version available


**RoHS  
COMPLIANT**

### APPLICATIONS

- General purpose, industrial and audio/video systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems

### MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in  $\mu\text{F}$ )
- Tolerance code on rated capacitance, code letter in accordance with IEC 60062 (M for  $\pm 20\%$ )
- Rated voltage (in V)
- Date code (YYMM)
- Name of manufacturer
- Code for factory of origin
- ‘-’ sign to identify the negative terminal, visible from the top and side of the capacitor
- Code number
- Climatic category in accordance with IEC 60068

QUICK REFERENCE DATA		
DESCRIPTION	VALUE	
	056	057
Nominal case size ( $\varnothing$ D x L in mm)	22 x 25 to 35 x 50	
Rated capacitance range (E6 series), $C_R$	470 to 68 000 $\mu\text{F}$	47 to 1500 $\mu\text{F}$
Tolerance on $C_R$	$\pm 20\%$	
Rated voltage range, $U_R$ <sup>(1)</sup>	10 to 100 V	200 to 450 V
Category temperature range	- 40 to + 85 °C	- 25 to + 85 °C
Endurance test at 85 °C	5000 hours (450 V: 2000 hours)	
Useful life at 85 °C	12 000 hours (450 V: 5000 hours)	
Useful life at 40 °C and 1.4 x $I_R$ applied	210 000 hours (450 V: 90 000 hours)	
Shelf life at 0 V, 85 °C	500 hours	
Based on sectional specification	IEC 60384-4/EN130300	
Climatic category IEC 60068	40/085/056	25/085/56

**Note**


<sup>(1)</sup> A 420 V range is available on request

SELECTION CHART FOR $C_R$ , $U_R$ AND RELEVANT NOMINAL CASE SIZES FOR 056 SERIES ( $\varnothing$ D x L in mm)							
$C_R$ ( $\mu\text{F}$ )	$U_R$ (V)						
	10	16	25	40	50	63	100
470	-	-	-	-	-	-	22 x 25
680	-	-	-	-	-	-	22 x 30
1000	-	-	-	-	-	22 x 25	25 x 30
	-	-	-	-	-	-	22 x 40
1500	-	-	-	-	22 x 25	22 x 30	30 x 30
	-	-	-	-	-	-	25 x 40
2200	-	-	-	22 x 25	22 x 30	25 x 30	30 x 40
	-	-	-	-	-	22 x 40	25 x 50
3300	-	-	22 x 25	22 x 30	25 x 30	30 x 30	35 x 40
	-	-	-	-	22 x 40	25 x 40	30 x 50




<b>SELECTION CHART FOR C<sub>R</sub>, U<sub>R</sub> AND RELEVANT NOMINAL CASE SIZES FOR 056 SERIES (∅ D x L in mm)</b>							
C <sub>R</sub> (μF)	U <sub>R</sub> (V)						
	10	16	25	40	50	63	100
4700	-	22 x 25	22 x 30	25 x 30	30 x 30	30 x 40	35 x 50
	-	-	-	22 x 40	25 x 40	25 x 50	-
6800	22 x 25	22 x 30	25 x 30	30 x 30	30 x 40	35 x 40	-
	-	-	22 x 40	25 x 40	25 x 50	30 x 50	-
10 000	22 x 30	25 x 30	30 x 30	30 x 40	35 x 40	35 x 50	-
	-	22 x 40	25 x 40	25 x 50	30 x 50	-	-
15 000	25 x 30	30 x 30	30 x 40	35 x 40	35 x 50	-	-
	22 x 40	25 x 40	25 x 50	30 x 50	-	-	-
22 000	30 x 30	30 x 40	35 x 40	35 x 50	-	-	-
	25 x 40	25 x 50	30 x 50	-	-	-	-
33 000	30 x 40	35 x 40	35 x 50	-	-	-	-
	25 x 50	30 x 50	-	-	-	-	-
47 000	35 x 40	35 x 50	-	-	-	-	-
	30 x 50	-	-	-	-	-	-
68 000	35 x 50	-	-	-	-	-	-

<b>SELECTION CHART FOR C<sub>R</sub>, U<sub>R</sub> AND RELEVANT NOMINAL CASE SIZES FOR 057 SERIES (∅ D x L in mm)</b>					
C <sub>R</sub> (μF)	U <sub>R</sub> (V)				
	200	250	385	400	450
47	-	-	22 x 25	22 x 25	22 x 30
68	-	-	22 x 30	22 x 30	22 x 30
100	-	22 x 25	25 x 30	25 x 30	30 x 30
	-	-	22 x 40	22 x 35	25 x 35
	-	-	22 x 35	-	-
150	22 x 25	22 x 30	30 x 30	30 x 30	25 x 50
	-	-	25 x 40	-	30 x 35
	-	-	-	25 x 40	-
220	22 x 30	25 x 30	30 x 45	30 x 35	35 x 40
	-	22 x 40	30 x 40	25 x 40	30 x 45
	-	-	30 x 35	-	-
	-	-	25 x 50	-	-
330	25 x 30	30 x 30	35 x 35	35 x 40	35 x 50
	22 x 40	25 x 40	-	35 x 50	35 x 45
470	30 x 30	30 x 40	35 x 50	35 x 50	-
	25 x 40	25 x 50	35 x 45	-	-
680	30 x 40	35 x 40	-	-	-
	25 x 50	30 x 50	-	-	-
1000	35 x 40	35 x 50	-	-	-
	30 x 50	-	-	-	-
1500	35 x 50	-	-	-	-

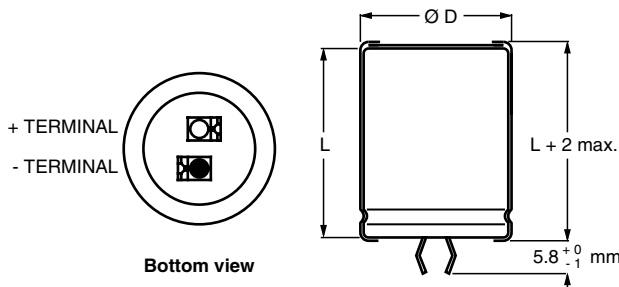**DIMENSIONS** in millimeters **AND AVAILABLE FORMS**
**TWO TERMINALS SNAP-IN**


The minus terminal can be marked with a black dot or with an imprinted '-' sign.

Fig.2 Two terminal snap-in

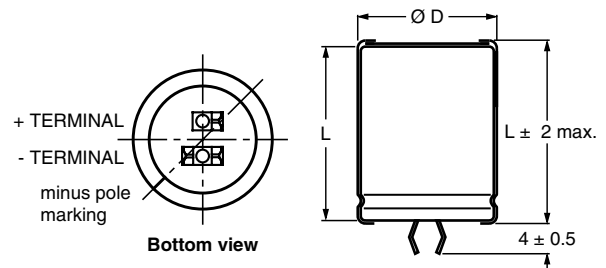**THREE TERMINAL SNAP-IN**


The negative terminal has **TWO** pins which are **BOTH** electrically connected.

Fig.4 Three terminal snap-in


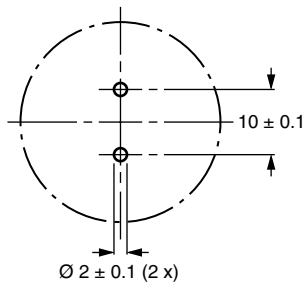


Fig.3 Mounting hole diagram

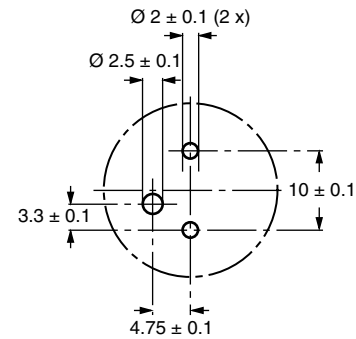

The 10 mm spacing of the 2 pin snap-in is used as the base layout and a third hole is added.

The third hole is closer to the negative primary hole so that polarization is always maintained, together with added mechanical stability.

Fig.5 Mounting hole diagram

Table 1

<b>DIMENSIONS</b> in millimeters, <b>MASS AND PACKAGING QUANTITIES</b>					
NOMINAL CASE SIZE $\varnothing D \times L$	$\varnothing D_{\text{max.}}$	$L_{\text{max.}}$	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS $L \times W \times H$ (mm)
22 x 25	23	27	≈ 12	100	260 x 250 x 39
22 x 30	23	32	≈ 16	100	260 x 250 x 44
22 x 35	23	37	≈ 20	100	260 x 250 x 49
22 x 40	23	42	≈ 23	100	260 x 250 x 54
25 x 30	26	32	≈ 22	100	290 x 280 x 44
25 x 35	26	37	≈ 24	100	290 x 280 x 49
25 x 40	26	42	≈ 27	100	290 x 280 x 54
25 x 50	26	52	≈ 38	100	290 x 280 x 64
30 x 30	31	32	≈ 30	100	340 x 330 x 44
30 x 35	31	37	≈ 35	100	340 x 330 x 49
30 x 40	31	42	≈ 40	100	340 x 330 x 54
30 x 45	31	47	≈ 45	100	340 x 330 x 59
30 x 50	31	52	≈ 50	100	340 x 330 x 64
35 x 35	36	37	≈ 48	50	390 x 198 x 49
35 x 40	36	42	≈ 55	50	390 x 198 x 54
35 x 45	36	47	≈ 63	50	390 x 198 x 59
35 x 50	36	52	≈ 72	50	390 x 198 x 64

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
$C_R$	rated capacitance at 100 Hz
$I_R$	rated RMS ripple current at 100 Hz or $\geq 10$ kHz and 85 °C
$I_{L1}$	max. leakage current after 1 minute at $U_R$
$I_{L5}$	max. leakage current after 5 minutes at $U_R$
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 10 kHz

**Note**

- Unless otherwise specified, all electrical values in Tables 2 and 3 apply at  $T_{amb} = 20$  °C,  $P = 86$  to 106 kPa,  $RH = 45$  to 75 %

**ORDERING EXAMPLE**

Electrolytic capacitor 056 series

10 000  $\mu$ F/25 V;  $\pm 20$  %Nominal case size:  $\varnothing 25 \times 40$  mm

2-terminal snap-in

Ordering code: MAL205646103E3

Former 12NC: 222205646103

3-terminal snap-in

Ordering code: MAL205626103E3

Former 12NC: 222205626103

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION FOR 056 SERIES										
$U_R$ (V)	$C_R$ 100 Hz ( $\mu$ F)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	$I_R$ 100 Hz 85 °C (A)	$I_R$ $\geq 10$ kHz 85 °C (A)	$I_{L1}$ 1 min ( $\mu$ A)	$I_{L5}$ 5 min ( $\mu$ A)	ESR 100 Hz (m $\Omega$ )	Z 10 kHz (m $\Omega$ )	ORDERING CODE MAL2056.....	
									2-TERM.	3-TERM.
10	6800	22 x 25	2.04	2.40	412	140	76	62	54682E3	74682E3
	10 000	22 x 30	2.56	3.02	608	205	56	45	54103E3	74103E3
	15 000	25 x 30	3.12	3.68	904	304	44	39	54153E3	74153E3
	15 000	22 x 40	3.39	4.00	904	304	41	34	44153E3	24153E3
	22 000	30 x 30	3.47	4.09	1324	444	44	37	54223E3	74223E3
	22 000	25 x 40	4.12	4.86	1324	444	34	28	44223E3	24223E3
	33 000	30 x 40	4.58	5.40	1984	664	32	28	54333E3	74333E3
	33 000	25 x 50	4.70	5.55	1984	664	30	27	44333E3	24333E3
	47 000	35 x 40	5.10	6.02	2824	944	31	26	54473E3	74473E3
	47 000	30 x 50	5.39	6.36	2824	944	28	24	44473E3	24473E3
68 000	35 x 50	5.88	6.94	4084	1364	28	23	54683E3	74683E3	
16	4700	22 x 25	2.01	2.37	455	154	79	62	55472E3	75472E3
	6800	22 x 30	2.54	3.00	657	222	57	45	55682E3	75682E3
	10 000	25 x 30	3.02	3.56	964	324	47	39	55103E3	75103E3
	10 000	22 x 40	3.28	3.87	964	324	44	34	45103E3	25103E3
	15 000	30 x 30	3.36	3.96	1444	484	47	37	55153E3	75153E3
	15 000	25 x 40	4.00	4.72	1444	484	34	28	45153E3	25153E3
	22 000	30 x 40	4.51	5.32	2116	708	33	28	55223E3	75223E3
	22 000	25 x 50	3.97	4.68	2116	708	42	41	45223E3	25223E3
	33 000	35 x 40	5.02	5.92	3172	1060	32	28	55333E3	75333E3
	33 000	30 x 50	4.75	5.61	3172	1060	36	34	45333E3	25333E3
47 000	35 x 50	5.34	6.30	4516	1508	34	32	55473E3	75473E3	
25	3300	22 x 25	1.88	2.22	499	169	89	61	56332E3	76332E3
	4700	22 x 30	2.37	2.80	709	239	65	45	56472E3	76472E3
	6800	25 x 30	2.81	3.32	1024	344	54	41	56682E3	76682E3
	6800	22 x 40	3.16	3.73	1024	344	47	38	46682E3	26682E3
	10 000	30 x 30	3.25	3.84	1504	504	50	38	56103E3	76103E3
	10 000	25 x 40	3.73	4.40	1504	504	39	30	46103E3	26103E3
	15 000	30 x 40	4.73	5.58	2254	754	30	28	56153E3	76153E3
	15 000	25 x 50	3.92	4.63	2254	754	43	39	46153E3	26153E3
	22 000	35 x 40	4.48	5.29	3304	1104	40	28	56223E3	76223E3
	22 000	30 x 50	4.96	5.85	3304	1104	36	23	46223E3	26223E3
	33 000	35 x 50	4.98	5.88	4954	1654	39	33	56333E3	76333E3



ELECTRICAL DATA AND ORDERING INFORMATION FOR 056 SERIES										
U <sub>R</sub> (V)	C <sub>R</sub> 100 Hz (µF)	NOMINAL CASE SIZE Ø D x L (mm)	I <sub>R</sub> 100 Hz 85 °C (A)	I <sub>R</sub> ≥ 10 kHz 85 °C (A)	I <sub>L1</sub> 1 min (µA)	I <sub>L5</sub> 5 min (µA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	ORDERING CODE MAL2056.....	
									2-TERM.	3-TERM.
40	2200	22 x 25	1.85	2.26	532	180	92	61	57222E3	77222E3
	3300	22 x 30	2.09	2.55	796	260	67	45	57332E3	77332E3
	4700	25 x 30	2.28	2.78	1132	380	82	70	57472E3	77472E3
	4700	22 x 40	3.10	3.78	1132	380	49	38	47472E3	27472E3
	6800	30 x 30	3.16	3.85	1636	548	53	38	57682E3	77682E3
	6800	25 x 40	3.06	3.73	1636	548	58	50	47682E3	27682E3
	10 000	30 x 40	4.20	5.12	2404	804	38	28	57103E3	77103E3
	10 000	25 x 50	3.88	4.73	2404	804	44	39	47103E3	27103E3
	15 000	35 x 40	4.05	4.94	3604	1204	49	41	57153E3	77153E3
	15 000	30 x 50	4.45	5.43	3604	1204	41	34	47153E3	27153E3
	22 000	35 x 50	4.86	5.93	5284	1764	40	33	57223E3	77223E3
50	1500	22 x 25	1.36	1.66	454	154	170	130	51152E3	71152E3
	2200	22 x 30	1.75	2.14	664	224	120	91	51222E3	71222E3
	3300	25 x 30	2.17	2.65	994	334	90	72	51332E3	71332E3
	3300	22 x 40	2.42	2.95	994	334	80	63	41332E3	21332E3
	4700	30 x 30	2.65	3.23	1414	474	75	63	51472E3	71472E3
	4700	25 x 40	2.89	3.53	1414	474	65	52	41472E3	21472E3
	6800	30 x 40	3.56	4.34	2044	684	53	45	51682E3	71682E3
	6800	25 x 50	3.75	4.58	2044	684	50	43	41682E3	21682E3
	10 000	35 x 40	4.05	4.94	3004	1004	49	42	51103E3	71103E3
	10 000	30 x 50	4.50	5.49	3004	1004	40	35	41103E3	21103E3
		15 000	35 x 50	4.98	6.08	4504	1504	39	33	51153E3
63	1000	22 x 25	1.46	1.78	382	130	148	104	58102E3	78102E3
	1500	22 x 30	1.87	2.28	571	193	105	72	58152E3	78152E3
	2200	25 x 30	2.32	2.83	836	281	79	59	58222E3	78222E3
	2200	22 x 40	2.54	3.10	836	281	73	53	48222E3	28222E3
	3300	30 x 30	2.87	3.50	1251	420	64	50	58332E3	78332E3
	3300	25 x 40	3.14	3.83	1251	420	55	44	48332E3	28332E3
	4700	30 x 40	3.67	4.48	1780	596	50	38	58472E3	78472E3
	4700	25 x 50	3.71	4.53	1780	596	48	38	48472E3	28472E3
	6800	35 x 40	4.33	5.28	2574	861	43	38	58682E3	78682E3
	6800	30 x 50	4.75	5.80	2574	861	42	37	48682E3	28682E3
		10 000	35 x 50	5.26	6.42	3784	1264	35	30	58103E3
100	470	22 x 25	0.77	0.94	286	98	535	470	59471E3	79471E3
	680	22 x 30	0.99	1.21	412	160	375	328	59681E3	79681E3
	1000	25 x 30	1.27	1.55	604	204	265	235	59102E3	79102E3
	1000	22 x 40	1.35	1.65	604	204	260	225	49102E3	29102E3
	1500	30 x 30	1.67	2.04	904	304	190	170	59152E3	79152E3
	1500	25 x 40	1.75	2.14	904	304	180	160	49152E3	29152E3
	2200	30 x 40	2.27	2.77	1324	444	130	120	59222E3	79222E3
	2200	25 x 50	2.30	2.80	1324	444	125	110	49222E3	29222E3
	3300	35 x 40	2.84	3.46	1984	664	100	95	59332E3	79332E3
	3300	30 x 50	2.97	3.62	1984	664	92	85	49332E3	29332E3
		4700	35 x 50	3.59	4.38	2824	677	75	70	59472E3

Table 3

ELECTRICAL DATA AND ORDERING INFORMATION FOR 057 SERIES										
U <sub>R</sub> (V)	C <sub>R</sub> 100 Hz (μF)	NOMINAL CASE SIZE Ø D x L (mm)	I <sub>R</sub> 100 Hz 85 °C (A)	I <sub>L1</sub> 1 min (μA)	I <sub>L5</sub> 5 min (μA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	ORDERING CODE MAL2057.....		
								2-TERM.	3-TERM.	
200	150	22 x 25	0.77	184	64	950	620	52151E3	72151E3	
	220	22 x 30	1.00	268	92	650	435	52221E3	72221E3	
	330	25 x 30	1.36	400	136	430	310	52331E3	72331E3	
	330	22 x 40	1.36	400	136	430	310	42331E3	22331E3	
	470	30 x 30	1.80	568	192	310	230	52471E3	72471E3	
	470	25 x 40	1.80	568	192	310	230	42471E3	22471E3	
	680	30 x 40	2.39	820	276	210	180	52681E3	72681E3	
	680	25 x 50	2.39	820	276	210	180	42681E3	22681E3	
	1000	35 x 40	2.85	1204	404	160	135	52102E3	72102E3	
	1000	30 x 50	2.85	1204	404	160	135	42102E3	22102E3	
	1500	35 x 50	3.66	1804	604	120	105	52152E3	72152E3	
250	100	22 x 25	0.63	154	54	1440	770	53101E3	73101E3	
	150	22 x 30	0.83	229	79	960	520	53151E3	73151E3	
	220	25 x 30	1.10	334	114	660	365	53221E3	73221E3	
	220	22 x 40	1.10	334	114	660	365	43221E3	23221E3	
	330	30 x 30	1.49	499	169	440	265	53331E3	73331E3	
	330	25 x 40	1.49	499	169	440	265	43331E3	23331E3	
	470	30 x 40	1.98	709	239	310	185	53471E3	73471E3	
	470	25 x 50	1.98	709	239	310	185	43471E3	23471E3	
	680	35 x 40	2.60	1024	344	240	145	53681E3	73681E3	
	680	30 x 50	2.60	1024	344	240	145	43681E3	23681E3	
	1000	35 x 50	3.12	1504	504	160	105	53102E3	73102E3	
385	47	22 x 25	0.50	112	40	3000	1400	58479E3	78479E3	
	68	22 x 30	0.63	161	56	2100	1000	58689E3	68689E3	
	100	25 x 30	0.86	235	81	1400	780	58101E3	78101E3	
	100	22 x 40	0.86	235	81	1400	780	48101E3	68101E3	
	100	22 x 35	0.84	235	81	1400	780	38101E3	88101E3	
	150	30 x 30	1.16	350	119	950	520	58151E3	78151E3	
	150	25 x 40	1.16	350	119	950	520	48151E3	68151E3	
	220	30 x 40	1.57	512	173	650	400	58221E3	78221E3	
	220	30 x 35	1.50	512	173	650	400	38221E3	90051E3	
	220	25 x 50	1.57	512	173	650	400	48221E3	88221E3	
	330	35 x 35	1.73	766	258	480	280	68331E3	88331E3	
	330	30 x 45	1.75	766	258	480	280	38331E3	78331E3	
	470	35 x 50	2.40	1089	366	340	220	58471E3	78471E3	
470	35 x 45	2.29	1089	366	340	220	48471E3	28471E3		
400	47	22 x 25	0.50	117	42	3000	1400	56479E3	76479E3	
	68	22 x 30	0.63	167	58	2100	1000	56689E3	76689E3	
	100	25 x 30	0.86	244	84	1400	780	56101E3	76101E3	
	100	22 x 35	0.84	240	84	1400	780	36101E3	66101E3	
	150	30 x 30	1.16	364	124	950	520	56151E3	90054E3	
	150	25 x 40	1.16	364	124	950	520	46151E3	86151E3	
	220	30 x 35	1.50	532	180	650	400	36221E3	90055E3	
	220	25 x 50	1.57	532	180	650	400	46221E3	86221E3	
	330	35 x 40	1.85	796	268	480	280	56331E3	76331E3	
	330	30 x 50	1.85	796	268	480	280	46331E3	26331E3	
	470	35 x 50	2.40	1132	380	340	220	56471E3	76471E3	
	450	47	22 x 30	0.26	131	45	5600	4400	67479E3	87479E3
		68	22 x 30	0.33	188	65	3900	3100	57689E3	77689E3
100		30 x 30	0.48	274	94	2600	2100	57101E3	77101E3	
100		25 x 35	0.46	274	94	2600	2100	37101E3	17101E3	
150		30 x 35	0.66	409	140	1600	1300	37151E3	17151E3	
150		25 x 50	0.70	409	140	1600	1300	47151E3	27151E3	
220		35 x 40	0.92	598	202	1100	900	57221E3	77221E3	
220		30 x 45	0.73	598	202	1100	900	37221E3	17221E3	
330		35 x 50	1.26	895	301	700	600	57331E3	77331E3	
330		35 x 45	1.20	895	301	700	600	47331E3	27331E3	



ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
<b>Voltage</b>		
Surge voltage	≤ 250 V versions	$U_s = 1.15 \times U_R$
	≥ 385 V versions	$U_s = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
<b>Current</b>		
Leakage current	After 1 minute at $U_R$	$I_{L1} \leq 0.006 C_R \times U_R + 4 \mu\text{A}$
	After 5 minutes at $U_R$	$I_{L5} \leq 0.002 C_R \times U_R + 4 \mu\text{A}$
<b>Inductance</b>		
Equivalent series inductance (ESL)	All case sizes	typ. 19 nH
		max. 25 nH

**CAPACITANCE (C)**

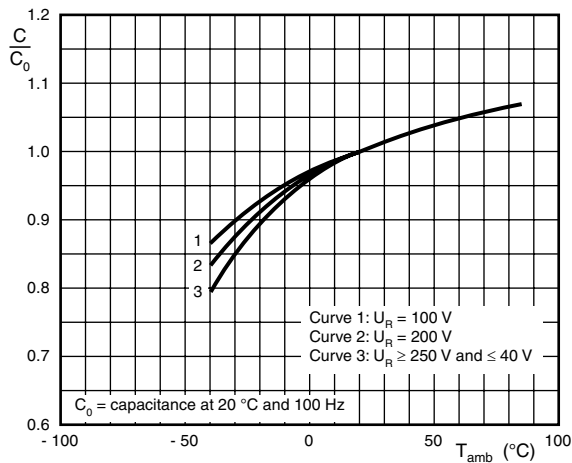


Fig.6 Typical multiplier of capacitance as a function of ambient temperature

**EQUIVALENT SERIES RESISTANCE (ESR)**

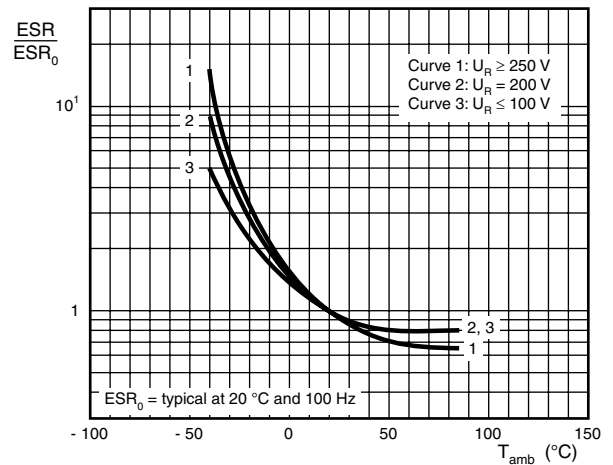


Fig.8 Typical multiplier of ESR as a function of ambient temperature

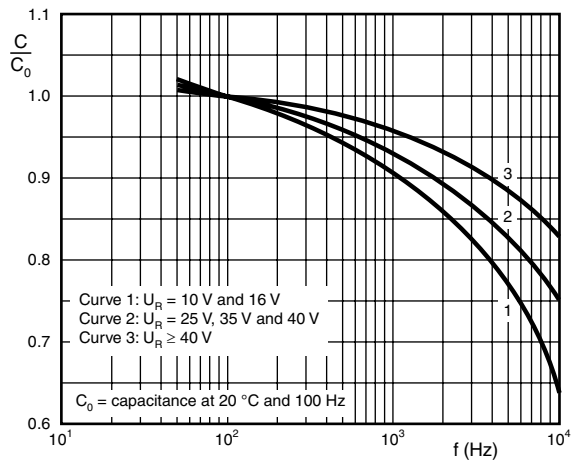


Fig.7 Typical multiplier of capacitance as a function of frequency

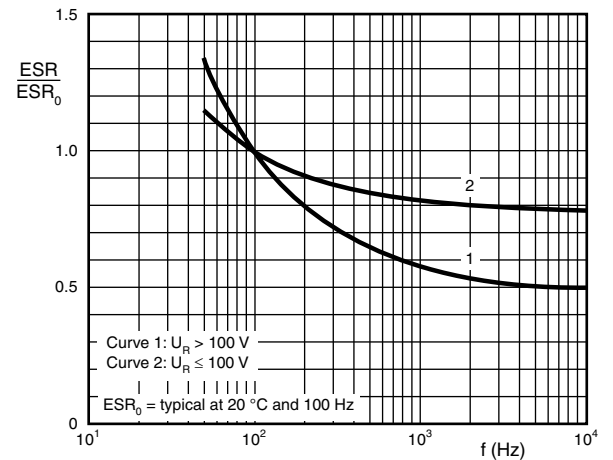


Fig.9 Typical multiplier of ESR as a function of frequency

**IMPEDANCE (Z)**

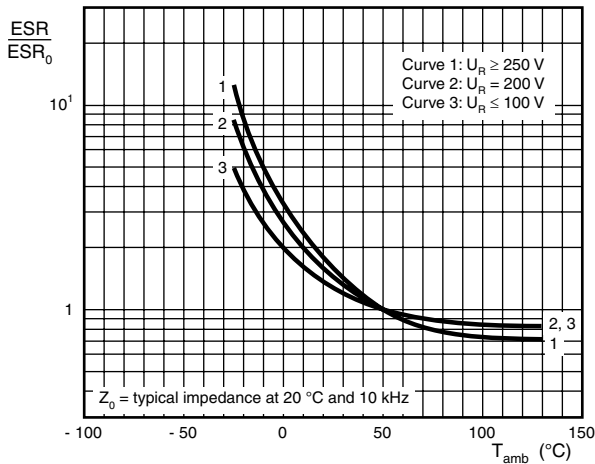


Fig.10 Typical multiplier of impedance as a function of ambient temperature

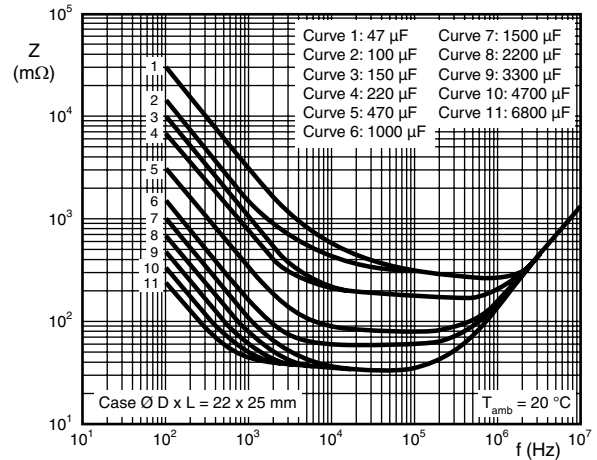


Fig.11 Typical impedance as a function of frequency

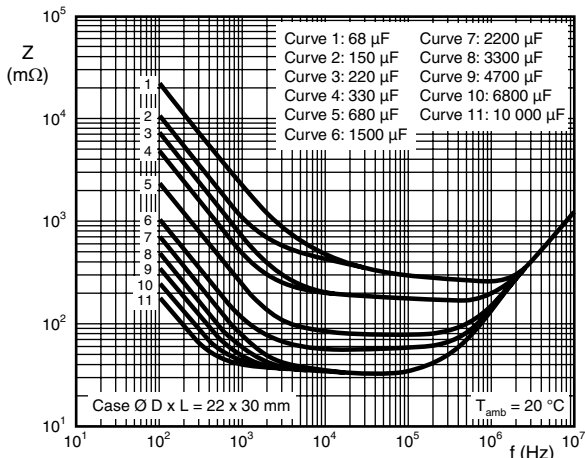


Fig.12 Typical impedance as a function of frequency

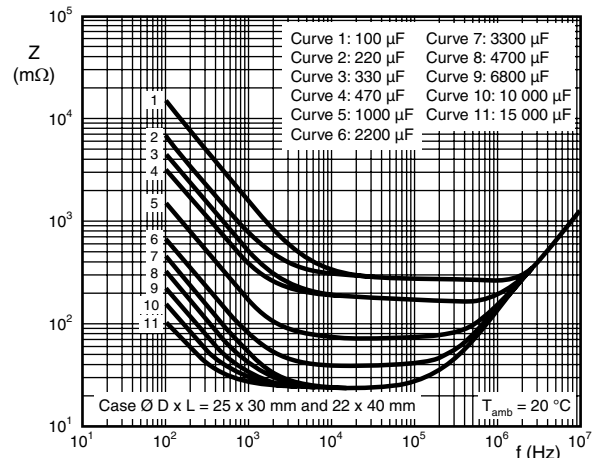


Fig.13 Typical impedance as a function of frequency

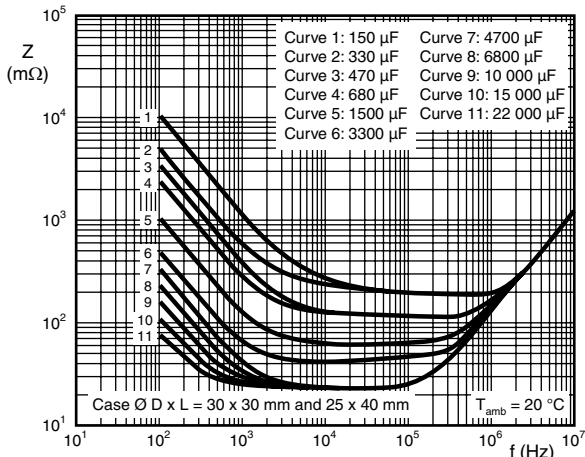


Fig.14 Typical impedance as a function of frequency

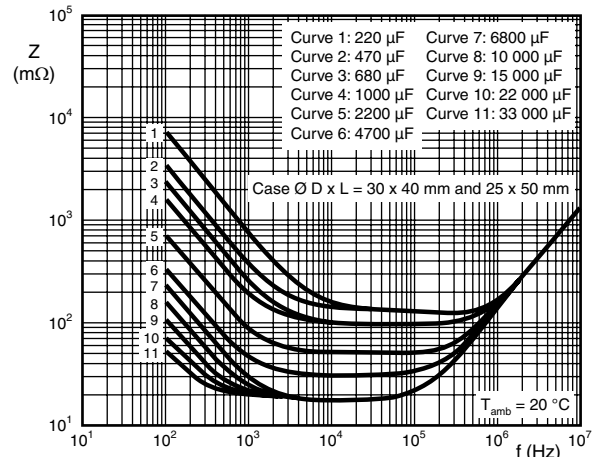


Fig.15 Typical impedance as a function of frequency



**IMPEDANCE (Z)**

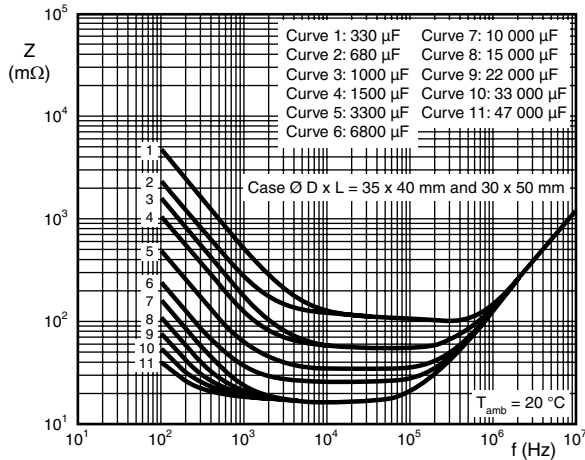


Fig.16 Typical impedance as a function of frequency


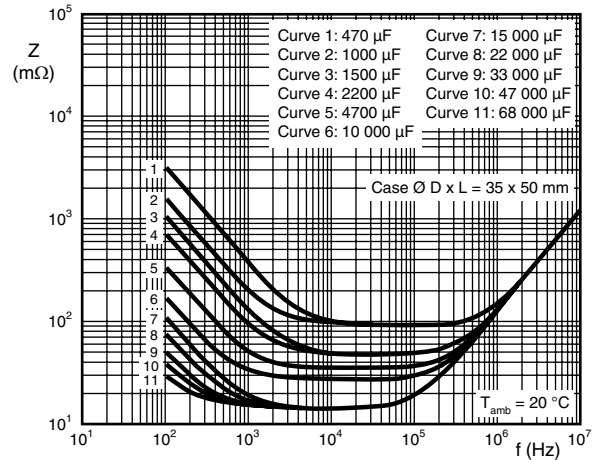


Fig.17 Typical impedance as a function of frequency

**RIPPLE CURRENT AND USEFUL LIFE**

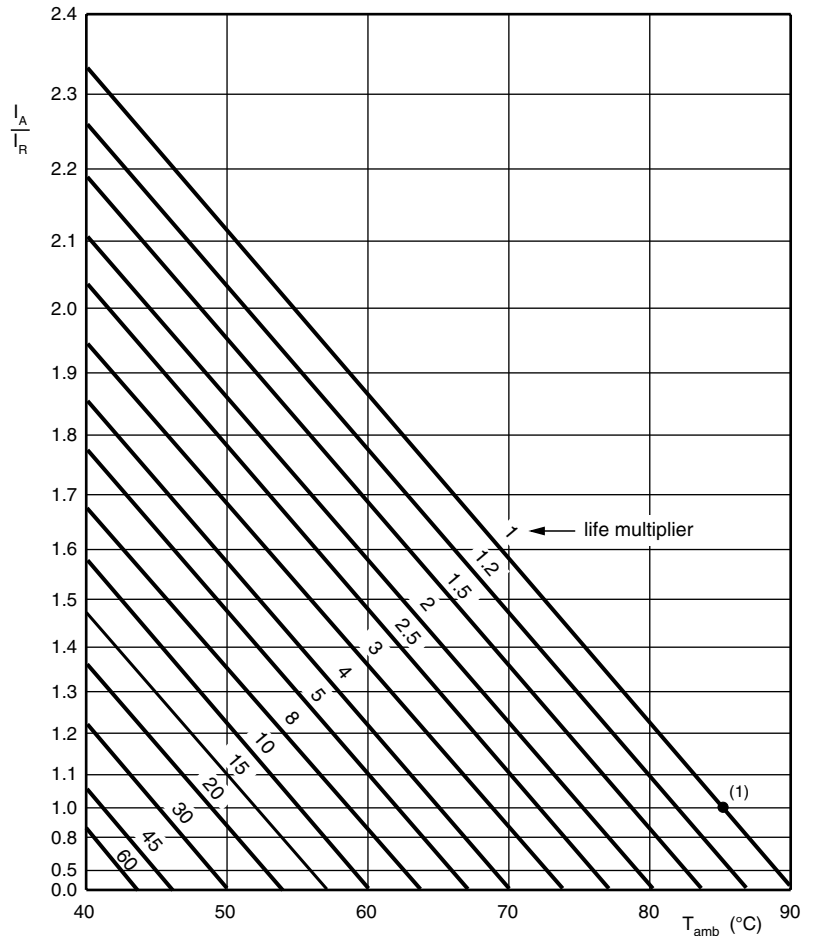

$I_A$  = actual ripple current at 100 Hz and 85 °C  
 $I_R$  = rated ripple current at 100 Hz and 85 °C  
 (1) Useful life at 85 °C and  $I_R$  applied:  
 12 000 hours (450 V types: 5000 hours)

Fig.18 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 4

<b>MULTIPLIER OF RIPPLE CURRENT (<math>I_R</math>) AS A FUNCTION OF FREQUENCY</b>			
FREQUENCY (Hz)	$I_R$ MULTIPLIER		
	$U_R = 10$ to 25 V	$U_R = 40$ to 100 V	$U_R > 100$ V
50	0.93	0.91	0.86
100	1.00	1.00	1.00
200	1.04	1.05	1.13
400	1.07	1.09	1.21
1000	1.11	1.13	1.29
2000	1.13	1.15	1.32
4000	1.15	1.18	1.35
$\geq 10\ 000$	1.18	1.22	1.40

Table 5

<b>TEST PROCEDURES AND REQUIREMENTS</b>			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85\ ^\circ\text{C}$ ; $U_R$ applied; 5000 hours (450 V types: 2000 hours)	$U_R \leq 100$ V; $\Delta C/C$ : $\pm 15\ \%$ $U_R > 100$ V; $\Delta C/C$ : $\pm 10\ \%$ $ESR \leq 1.3$ x spec. limit $Z \leq 2$ x spec. limit $I_{L5} \leq$ spec. limit
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\ ^\circ\text{C}$ ; $U_R$ and $I_R$ applied; 12 000 hours (450 V types: 5000 hours)	$U_R \leq 100$ V; $\Delta C/C$ : $\pm 45\ \%$ $U_R > 100$ V; $\Delta C/C$ : $\pm 30\ \%$ $ESR \leq 3$ x spec. limit $Z \leq 3$ x spec. limit $I_{L5} \leq$ spec. limit no short or open circuit, no visible damage total failure percentage: $U_R \leq 100$ V: $\leq 1\ \%$ ; $U_R > 100$ V: $\leq 3\ \%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85\ ^\circ\text{C}$ ; no voltage applied; 500 hours After test: $U_R$ to be applied for 30 minutes 24 hours to 48 hours before measurement	$\Delta C/C$ : $\pm 10\ \%$ $ESR \leq 1.2$ x spec. limit $I_{L5} \leq 2$ x spec. limit



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А