

IS63LV1024

IS63LV1024L



128K x 8 HIGH-SPEED CMOS STATIC RAM

3.3V REVOLUTIONARY PINOUT

MAY 2012

FEATURES

- High-speed access times:
8, 10, 12 ns
- High-performance, low-power CMOS process
- Multiple center power and ground pins for greater noise immunity
- Easy memory expansion with \overline{CE} and \overline{OE} options
- \overline{CE} power-down
- Fully static operation: no clock or refresh required
- TTL compatible inputs and outputs
- Single 3.3V power supply
- Packages available:
 - 32-pin 300-mil SOJ
 - 32-pin 400-mil SOJ
 - 32-pin TSOP (Type II)
 - 32-pin STSOP (Type I)
 - 36-pin BGA (8mmx10mm)
- Lead-free Available

DESCRIPTION

The ISSI IS63LV1024/IS63LV1024L is a very high-speed, low power, 131,072-word by 8-bit CMOS static RAM in revolutionary pinout. The IS63LV1024/IS63LV1024L is fabricated using ISSI's high-performance CMOS technology. This highly reliable process coupled with innovative circuit design techniques, yields higher performance and low power consumption devices.

When \overline{CE} is HIGH (deselected), the device assumes a standby mode at which the power dissipation can be reduced down to 250 μ W (typical) with CMOS input levels.

The IS63LV1024/IS63LV1024L operates from a single 3.3V power supply and all inputs are TTL-compatible.

FUNCTIONAL BLOCK DIAGRAM



Copyright © 2010 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products.

Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances

PIN CONFIGURATION
32-Pin SOJ



PIN CONFIGURATION
32-Pin TSOP (Type II) (T)
32-Pin STSOP (Type I) (H)



PIN DESCRIPTIONS

| | |
|-----------------|---------------------|
| A0-A16 | Address Inputs |
| \overline{CE} | Chip Enable Input |
| \overline{OE} | Output Enable Input |
| \overline{WE} | Write Enable Input |
| I/O0-I/O7 | Data Inputs/Outputs |
| VDD | Power |
| GND | Ground |

PIN CONFIGURATION
36-mini BGA (B) (8 mm x 10 mm)



TRUTH TABLE

| Mode | \overline{WE} | \overline{CE} | \overline{OE} | I/O Operation | V _{DD} Current |
|------------------------------|-----------------|-----------------|-----------------|------------------|-------------------------------------|
| Not Selected (Power-down) | X | H | X | High-Z | ISB1, ISB2 |
| Output Disabled | H | L | H | High-Z | I _{CC1} , I _{CC2} |
| Read | H | L | L | D _{OUT} | I _{CC1} , I _{CC2} |
| Write | L | L | X | D _{IN} | I _{CC1} , I _{CC2} |

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| Symbol | Parameter | Value | Unit |
|-------------------|--------------------------------------|-------------------------------|------|
| V _{TERM} | Terminal Voltage with Respect to GND | -0.5 to V _{DD} + 0.5 | V |
| T _{STG} | Storage Temperature | -65 to +150 | °C |
| P _T | Power Dissipation | 1.0 | W |

Notes:

1. Stress greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

OPERATING RANGE

| Range | Ambient Temperature | V _{DD} |
|------------|---------------------|-----------------|
| Commercial | 0°C to +70°C | 3.3V ± 0.3V |
| Industrial | -40°C to +85°C | 3.3V ± 0.15V |

DC ELECTRICAL CHARACTERISTICS (Over Operating Range)

| Symbol | Parameter | Test Conditions | Min. | Max. | Unit |
|-----------------|----------------------------------|---|--------------|-----------------------|--------------|
| V _{OH} | Output HIGH Voltage | V _{DD} = Min., I _{OH} = -4.0 mA | 2.4 | — | V |
| V _{OL} | Output LOW Voltage | V _{DD} = Min., I _{OL} = 8.0 mA | — | 0.4 | V |
| V _{IH} | Input HIGH Voltage | | 2.2 | V _{DD} + 0.3 | V |
| V _{IL} | Input LOW Voltage ⁽¹⁾ | | -0.3 | 0.8 | V |
| I _{LI} | Input Leakage | GND ≤ V _{IN} ≤ V _{DD} | Com. Ind. | -1 5 | 1 5 μA |
| I _{LO} | Output Leakage | GND ≤ V _{OUT} ≤ V _{DD} , Outputs Disabled | Com. Ind. | -1 -5 | 1 5 μA |

Note:

1. V_{IL} (min.) = -0.3V DC; V_{IL} (min.) = -2.0V AC (pulse width under V_{SS} < 5ns). Not 100% tested.
V_{IH} (max.) = V_{DD} + 0.3V DC; V_{IH} (max.) = V_{DD} + 2.0V AC (pulse width over V_{DD} < 5ns). Not 100% tested.

IS63LV1024 POWER SUPPLY CHARACTERISTICS⁽¹⁾ (Over Operating Range)

| Symbol | Parameter | Test Conditions | | -8 ns | | -10 ns | | -12 ns | | Unit |
|------------------|--|--|---------------------|-------|------|--------|------|--------|------|------|
| | | | | Min. | Max. | Min. | Max. | Min. | Max. | |
| I _{CC1} | V _{DD} Operating Supply Current | V _{DD} = Max., $\overline{CE} = V_{IL}$ I _{OUT} = 0 mA, f = Max. | Com. | — | 160 | — | 150 | — | 130 | mA |
| | | | Ind. | — | 170 | — | 160 | — | 140 | |
| | | | typ. ⁽²⁾ | — | 105 | — | 95 | — | 75 | |
| | | | Ind. (@15 ns) | | | | | — | 90 | |
| I _{SB} | TTL Standby Current (TTL Inputs) | V _{DD} = Max., V _{IN} = V _{IH} or V _{IL} $\overline{CE} \geq V_{IH}$, f = Max | Com. | — | 55 | — | 45 | — | 40 | mA |
| | | | Ind. | — | 55 | — | 45 | — | 40 | |
| I _{SB1} | TTL Standby Current (TTL Inputs) | V _{DD} = Max., V _{IN} = V _{IH} or V _{IL} $\overline{CE} \geq V_{IH}$, f = 0 | Com. | — | 25 | — | 25 | — | 25 | mA |
| | | | Ind. | — | 30 | — | 30 | — | 30 | |
| I _{SB2} | CMOS Standby Current (CMOS Inputs) | V _{DD} = Max., $\overline{CE} \geq V_{DD} - 0.2V$, V _{IN} ≥ V _{DD} - 0.2V, or V _{IN} ≤ 0.2V, f = 0 | Com. | — | 5 | — | 5 | — | 5 | mA |
| | | | Ind. | — | 10 | — | 10 | — | 10 | |
| | | | typ. ⁽²⁾ | — | 0.5 | — | 0.5 | — | 0.5 | |

Notes:

- At f = f_{MAX}, address and data inputs are cycling at the maximum frequency, f = 0 means no input lines change.
- Typical values are measured at V_{DD} = 3.3V, T_A = 25°C. Not 100% tested.

IS63LV1024L POWER SUPPLY CHARACTERISTICS⁽¹⁾ (Over Operating Range)

| Symbol | Parameter | Test Conditions | | -8 ns | | -10 ns | | -12 ns | | Unit |
|------------------|--|--|---------------------|-------|------|--------|------|--------|------|------|
| | | | | Min. | Max. | Min. | Max. | Min. | Max. | |
| I _{CC1} | V _{DD} Operating Supply Current | V _{DD} = Max., $\overline{CE} = V_{IL}$ I _{OUT} = 0 mA, f = Max. | Com. | — | 100 | — | 95 | — | 90 | mA |
| | | | Ind. | — | 110 | — | 105 | — | 100 | |
| | | | typ. ⁽²⁾ | — | 75 | — | 70 | — | 65 | |
| I _{SB} | TTL Standby Current (TTL Inputs) | V _{DD} = Max., V _{IN} = V _{IH} or V _{IL} $\overline{CE} \geq V_{IH}$, f = Max | Com. | — | 35 | — | 30 | — | 25 | mA |
| | | | Ind. | — | 40 | — | 35 | — | 30 | |
| I _{SB1} | TTL Standby Current (TTL Inputs) | V _{DD} = Max., V _{IN} = V _{IH} or V _{IL} $\overline{CE} \geq V_{IH}$, f = 0 | Com. | — | 15 | — | 15 | — | 15 | mA |
| | | | Ind. | — | 20 | — | 20 | — | 20 | |
| I _{SB2} | CMOS Standby Current (CMOS Inputs) | V _{DD} = Max., $\overline{CE} \geq V_{DD} - 0.2V$, V _{IN} ≥ V _{DD} - 0.2V, or V _{IN} ≤ 0.2V, f = 0 | Com. | — | 1 | — | 1 | — | 1 | mA |
| | | | Ind. | — | 1.5 | — | 1.5 | — | 1.5 | |
| | | | typ. ⁽²⁾ | — | 0.05 | — | 0.05 | — | 0.05 | |

Notes:

- At f = f_{MAX}, address and data inputs are cycling at the maximum frequency, f = 0 means no input lines change.
- Typical values are measured at V_{DD} = 3.3V, T_A = 25°C. Not 100% tested.

CAPACITANCE^(1,2)

| Symbol | Parameter | Conditions | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|
| C _{IN} | Input Capacitance | V _{IN} = 0V | 6 | pF |
| C _{I/O} | Input/Output Capacitance | V _{OUT} = 0V | 8 | pF |

Notes:

- Tested initially and after any design or process changes that may affect these parameters.
- Test conditions: T_A = 25°C, f = 1 MHz, V_{DD} = 3.3V.

READ CYCLE SWITCHING CHARACTERISTICS⁽¹⁾ (Over Operating Range)

| Symbol | Parameter | -8 ns | | -10 ns | | -12 ns | | Unit |
|------------------|------------------------------------|-------|------|--------|------|--------|------|------|
| | | Min. | Max. | Min. | Max. | Min. | Max. | |
| t_{RC} | Read Cycle Time | 8 | — | 10 | — | 12 | — | ns |
| t_{AA} | Address Access Time | — | 8 | — | 10 | — | 12 | ns |
| t_{OHA} | Output Hold Time | 2 | — | 2 | — | 2 | — | ns |
| t_{ACE} | \overline{CE} Access Time | — | 8 | — | 10 | — | 12 | ns |
| t_{DOE} | \overline{OE} Access Time | — | 4 | — | 5 | — | 6 | ns |
| $t_{LZOE}^{(2)}$ | \overline{OE} to Low-Z Output | 0 | — | 0 | — | 0 | — | ns |
| $t_{HZOE}^{(2)}$ | \overline{OE} to High-Z Output | 0 | 4 | 0 | 5 | 0 | 6 | ns |
| $t_{LZCE}^{(2)}$ | \overline{CE} to Low-Z Output | 3 | — | 3 | — | 3 | — | ns |
| $t_{HZCE}^{(2)}$ | \overline{CE} to High-Z Output | 0 | 4 | 0 | 5 | 0 | 6 | ns |
| t_{PU} | \overline{CE} to Power Up Time | 0 | — | 0 | — | 0 | — | ns |
| t_{PD} | \overline{CE} to Power Down Time | — | 8 | — | 10 | — | 12 | ns |

Notes:

1. Test conditions assume signal transition times of 3 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V loading specified in Figure 1.
2. Tested with the loading specified in Figure 2. Transition is measured ± 500 mV from steady-state voltage. Not 100% tested.

AC TEST CONDITIONS

| Parameter | Unit |
|--|---------------------|
| Input Pulse Level | 0V to 3.0V |
| Input Rise and Fall Times | 3 ns |
| Input and Output Timing and Reference Levels | 1.5V |
| Output Load | See Figures 1 and 2 |

AC TEST LOADS



Figure 1




Figure 2

AC WAVEFORMS

READ CYCLE NO. 1^(1,2)



READ CYCLE NO. 2^(1,3)

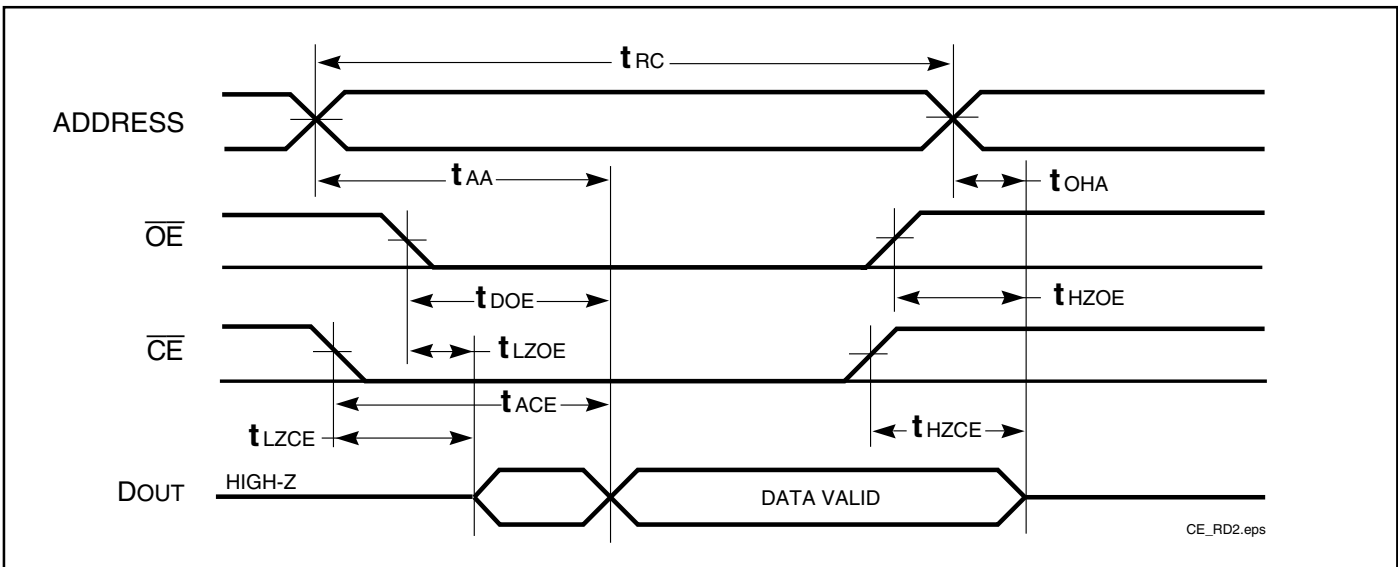

Notes:

1. \overline{WE} is HIGH for a Read Cycle.
2. The device is continuously selected. \overline{OE} , $\overline{CE} = V_{IL}$.
3. Address is valid prior to or coincident with \overline{CE} LOW transitions.

WRITE CYCLE SWITCHING CHARACTERISTICS^(1,3) (Over Operating Range)

| Symbol | Parameter | -8 ns | | -10 ns | | -12 ns | | Unit |
|----------------------------------|---|-------|------|--------|------|--------|------|------|
| | | Min. | Max. | Min. | Max. | Min. | Max. | |
| t _{WC} | Write Cycle Time | 8 | — | 10 | — | 12 | — | ns |
| t _{SCE} | \overline{CE} to Write End | 7 | — | 7 | — | 8 | — | ns |
| t _{AW} | Address Setup Time to Write End | 8 | — | 8 | — | 8 | — | ns |
| t _{HA} | Address Hold from Write End | 0 | — | 0 | — | 0 | — | ns |
| t _{SA} | Address Setup Time | 0 | — | 0 | — | 0 | — | ns |
| t _{PWE1} ⁽¹⁾ | \overline{WE} Pulse Width (\overline{OE} High) | 7 | — | 7 | — | 8 | — | ns |
| t _{PWE2} ⁽²⁾ | \overline{WE} Pulse Width (\overline{OE} Low) | 8 | — | 10 | — | 12 | — | ns |
| t _{SD} | Data Setup to Write End | 5 | — | 5 | — | 6 | — | ns |
| t _{HD} | Data Hold from Write End | 0 | — | 0 | — | 0 | — | ns |
| t _{HZWE} ⁽²⁾ | \overline{WE} LOW to High-Z Output | — | 4 | — | 5 | — | 6 | ns |
| t _{LZWE} ⁽²⁾ | \overline{WE} HIGH to Low-Z Output | 3 | — | 3 | — | 3 | — | ns |

Notes:

1. Test conditions assume signal transition times of 3ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V and output loading specified in Figure 1.
2. Tested with the load in Figure 2. Transition is measured ± 500 mV from steady-state voltage. Not 100% tested.
3. The internal write time is defined by the overlap of \overline{CE} LOW and \overline{WE} LOW. All signals must be in valid states to initiate a Write, but any one can go inactive to terminate the Write. The Data Input Setup and Hold timing are referenced to the rising or falling edge of the signal that terminates the Write.

AC WAVEFORMS

WRITE CYCLE NO. 1^(1,2) (\overline{CE} Controlled, \overline{OE} = HIGH or LOW)




AC WAVEFORMS

WRITE CYCLE NO. 2⁽¹⁾ (\overline{WE} Controlled, \overline{OE} = HIGH during Write Cycle)



WRITE CYCLE NO. 3 (\overline{WE} Controlled: \overline{OE} is LOW During Write Cycle)

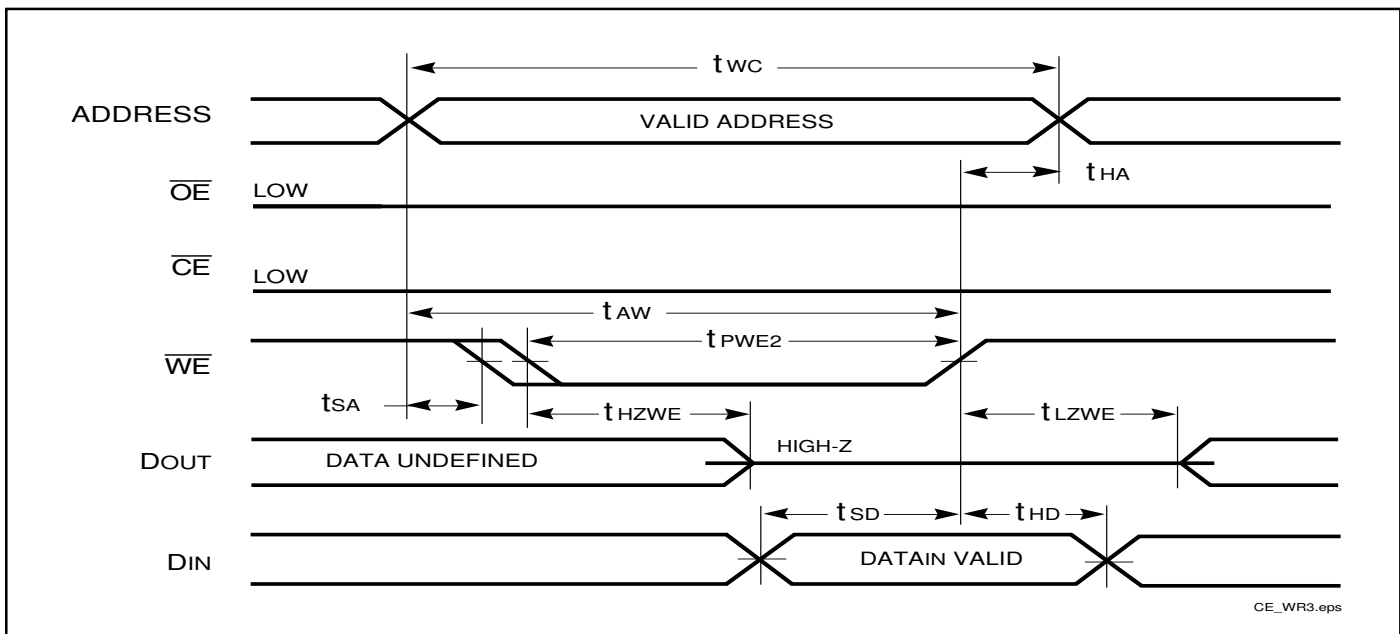

Notes:

1. The internal write time is defined by the overlap of \overline{CE} LOW and \overline{WE} LOW. All signals must be in valid states to initiate a Write, but any one can go inactive to terminate the Write. The Data Input Setup and Hold timing are referenced to the rising or falling edge of the signal that terminates the Write.
2. I/O will assume the High-Z state if $\overline{OE} > V_{IH}$.

DATA RETENTION SWITCHING CHARACTERISTICS

| Symbol | Parameter | Test Condition | Options | Min. | Typ. ⁽¹⁾ | Max. | Unit |
|------------------|------------------------------------|--|---------------------------|-----------------|---------------------|-----------|------|
| V _{DR} | V _{DD} for Data Retention | See Data Retention Waveform | | 2.0 | — | 3.6 | V |
| I _{DR} | Data Retention Current | V _{DD} = 2.0V, $\overline{CE} \geq V_{DD} - 0.2V$ | IS63LV1024 IS63LV1024L | — | 0.5 0.05 | 10 1.5 | mA |
| t _{SDR} | Data Retention Setup Time | See Data Retention Waveform | | 0 | — | — | ns |
| t _{RDR} | Recovery Time | See Data Retention Waveform | | t _{RC} | — | — | ns |

Note 1: Typical values are measured at V_{DD} = 3.0V, T_A = 25°C and not 100% tested.

DATA RETENTION WAVEFORM (\overline{CE} Controlled)



IS63LV1024 ORDERING INFORMATION

Commercial Range: 0 °C to +70 °C

| Speed (ns) | Order Part No. | Package |
|------------|-----------------|--------------------------------|
| 8 | IS63LV1024-8K | 400-mil Plastic SOJ |
| | IS63LV1024-8KL | 400-mil Plastic SOJ, Lead-free |
| 10 | IS63LV1024-10T | TSOP (Type II) |
| | IS63LV1024-10J | 300-mil Plastic SOJ |
| | IS63LV1024-10K | 400-mil Plastic SOJ |
| 12 | IS63LV1024-12T | TSOP (Type II) |
| | IS63LV1024-12J | 300-mil Plastic SOJ |
| | IS63LV1024-12JL | 300-mil Plastic SOJ, Lead-free |
| | IS63LV1024-12KL | 400-mil Plastic SOJ, Lead-free |

Industrial Range: -40 °C to +85 °C

| Speed (ns) | Order Part No. | Package |
|------------|-----------------|---------------------|
| 8 | IS63LV1024-8KI | 400-mil Plastic SOJ |
| 10 | IS63LV1024-10KI | 400-mil Plastic SOJ |
| 12 | IS63LV1024-12TI | TSOP (Type II) |

IS63LV1024L ORDERING INFORMATION

Commercial Range: 0° C to +70° C

| Speed (ns) | Order Part No. | Package |
|------------|------------------|---|
| 8 | IS63LV1024L-8T | TSOP (Type II) |
| | IS63LV1024L-8TL | TSOP (Type II), Lead-free |
| | IS63LV1024L-8B | mBGA (8mmx10mm) |
| 10 | IS63LV1024L-10T | TSOP (Type II) |
| | IS63LV1024L-10TL | TSOP (Type II), Lead-free |
| | IS63LV1024L-10HL | sTSOP (Type I) (8mm x13.4mm), Lead-free |
| 12 | IS63LV1024L-12T | TSOP (Type II) |
| | IS63LV1024L-12TL | TSOP (Type II), Lead-free |
| | IS63LV1024L-12H | sTSOP (Type I) (8mm x13.4mm) |
| | IS63LV1024L-12JL | 300-mil Plastic SOJ, Lead-free |
| | IS63LV1024L-12B | mBGA (8mmx10mm) |

Industrial Range: -40° C to +85° C

| Speed (ns) | Order Part No. | Package |
|------------|-------------------|--------------------------------|
| 8 | IS63LV1024L-8TI | TSOP (Type II) |
| | IS63LV1024L-8KI | 400-mil Plastic SOJ |
| | IS63LV1024L-8BI | mBGA (8mmx10mm) |
| 10 | IS63LV1024L-10HI | sTSOP (Type I) (8mm x13.4mm) |
| | IS63LV1024L-10JLI | 300-mil Plastic SOJ, Lead-free |
| | IS63LV1024L-10KLI | 400-mil Plastic SOJ, Lead-free |
| | IS63LV1024L-10TLI | TSOP (Type II), Lead-free |
| 12 | IS63LV1024L-12BI | mBGA (8mmx10mm) |
| | IS63LV1024L-12BLI | mBGA (8mmx10mm), Lead-free |
| | IS63LV1024L-12TI | TSOP (Type II) |
| | IS63LV1024L-12TLI | TSOP (Type II), Lead-free |

Special Part Numbers

Industrial Range: -40° C to +85° C

| Speed (ns) | Top Mark | Order Part No. | Package |
|------------|-------------------|----------------|--------------------------------|
| 8 | IS63LV1024L-10KLI | U788B-8KLI | 400-mil Plastic SOJ, Lead-free |
| | IS63LV1024L-10TLI | U788A-8TLI | TSOP (Type II), Lead-free |



| SYMBOL | DIMENSION IN MM | | DIMENSION IN INCH | |
|--------|-----------------|-----------|-------------------|-----------|
| | MIN. | NOM. MAX. | MIN. | NOM. MAX. |
| A | 3.05 | 3.76 | 0.120 | 0.148 |
| A1 | 2.08 | 2.41 | 0.082 | 0.095 |
| A2 | 2.41 | 2.54 | 0.095 | 0.100 |
| A3 | 0.64 | 1.09 | 0.025 | 0.043 |
| b | 0.41 | 0.51 | 0.016 | 0.020 |
| b2 | 0.66 | 0.81 | 0.026 | 0.032 |
| D | 20.82 | 21.09 | 0.820 | 0.830 |
| E | 8.38 | 8.51 | 0.330 | 0.340 |
| E1 | 7.49 | 7.62 | 0.295 | 0.305 |
| E2 | 6.48 | 6.99 | 0.255 | 0.275 |
| e | 1.27 | BSC. | 0.050 | BSC. |
| ZD | 0.95 | REF. | 0.037 | REF. |

NOTE :

1. CONTROLLING DIMENSION : MM
2. DIMENSION D AND E1 DO NOT INCLUDE MOLD PROTRUSION.
3. DIMENSION b2 DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION.



32L 300mil SOJ
Package Outline

REV. C

DATE

08/14/2009

| SYMBOL | DIMENSION IN MM | | DIMENSION IN INCH | |
|--------|-----------------|-----------|-------------------|-----------|
| | MIN. | NOM. MAX. | MIN. | NOM. MAX. |
| A | 3.25 | 3.76 | 0.128 | 0.148 |
| A1 | 2.08 | | 0.082 | |
| A3 | 0.635 | | 0.025 | |
| b | 0.38 | 0.51 | 0.015 | 0.020 |
| b2 | 0.66 | 0.71 | 0.026 | 0.028 |
| D | 20.82 | 20.95 | 0.820 | 0.825 |
| E | 11.05 | 11.18 | 0.435 | 0.440 |
| E1 | 10.03 | 10.16 | 0.395 | 0.400 |
| E2 | 9.40 | BSC | 0.370 | BSC |
| e | 1.27 | BSC. | 0.050 | BSC. |
| ZD | 0.95 | REF | 0.037 | REF |




NOTE :

1. Controlling dimension : mm
2. Dimension D and E1 do not include mold protrusion .
3. Dimension b2 does not include dambar protrusion/intrusion.
4. Formed leads shall be planar with respect to one another within 0.1mm at the seating plane after final test.
5. Reference document : JEDEC SPEC MS-027.

| | | | | | | |
|--|-------|-----------------------------------|------|---|------|------------|
| | TITLE | 32L 400mil SOJ Package Outline | REV. | E | DATE | 12/19/2007 |
|--|-------|-----------------------------------|------|---|------|------------|



| | | | |
|--|--------------------------------------|------|------------|
| | TITLE | REV. | DATE |
| | 32L 400mil TSOP-2 Package Outline | E | 06/23/2009 |

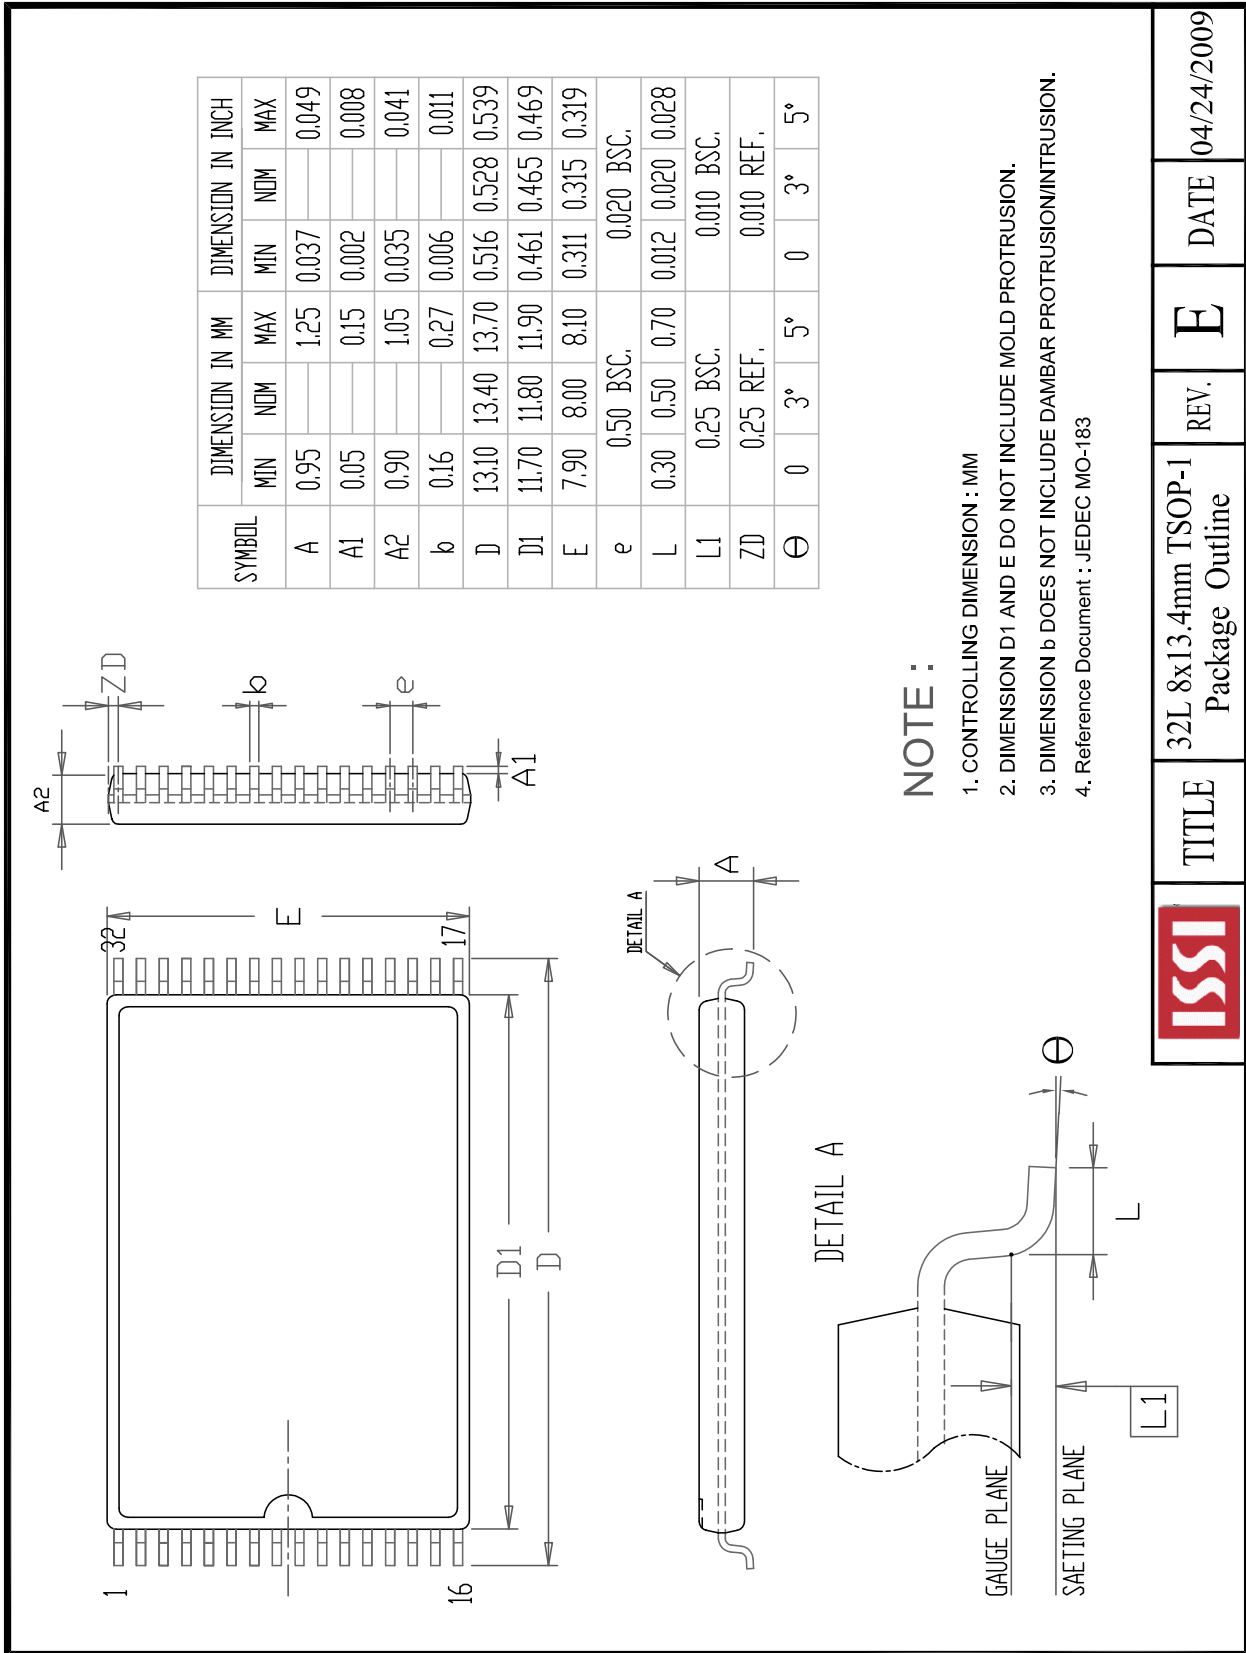

| | | | | | | |
|------|-------|--|------|---|------|------------|
| ISSI | TITLE | 32L 8x13.4mm TSOP-1 Package Outline | REV. | E | DATE | 04/24/2009 |
|------|-------|--|------|---|------|------------|



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А