

# IDP31-190

**100% flat fronted touch and non-touch, Industrial grade monitors. Ultra thin profile, smooth rounded corners and rugged glass fronted for a totally contemporary outlook.**

**NEW**



## Features

- 19.0" LCD panel with LED backlight for long service life
- Wide operating temperature -10 to +70° C for broad range of applications
- Regular brightness 350 CD/m<sup>2</sup>
- True flat surface – contemporary Proflat style
- Wide view-angle for portrait and landscape mode
- Built-in audio and speakers
- Thin profile, enclosure – no need for additional enclosures or metalwork
- Multi-touch PCT touch overlay
- Configurable Options:
  - Brightness 350 CD/m<sup>2</sup>
  - View angle 85°/85°/80°/80°
  - Mechanical housing
  - VGA, DVI, HDMI interface

## Introduction

The IDP31-190 Proflat series responds to a demand for contemporary styling in demanding applications such as public signage, front of house information, medical and point-of-sale. Each product features a truly-flat, easy to clean and maintain glass surface with long term product availability. All products can be used in either portrait or landscape mode and are cleverly packaged in such a way that no further mechanical parts are needed other than a VESA mount to create a display system. The use of a metal chassis provides a rugged and stable platform to build solutions for the widest range of applications. Optional multi-touch and the choice of both black or white finish creates further opportunity for those seeking to differentiate their next product design.

## Typical Applications


- Signage and public information
- Way-finder
- Kiosks and point of sale
- Medical
- Digital assistant

## Specifications

Display Features	Spec	Notes
Model	IDP31-190	
Backlight	LED	Light source
Resolution	1280 x 1024	Native resolution. Other resolutions supported by A/D card scaling
Brightness	350 cd/m <sup>2</sup>	Measured at typical operating voltage
Viewing Angle	85°/85°/80°/80°	Left/Right/Up/Down
Surface Treatment	3H	MoHS/Anti glare
Contrast Ratio	1000:1	In laboratory measurement conditions
Max Colors	16.7M	6 bit per colour
Response Time	10 ms	Typical
Backlight Lifetime	50,000 hours	Typ. time to half brightness in room temperature operation
Cover glass	3mm toughened	
Operating Temp	-10° to +70° C	Industrial use
Touch Screen	10 points PCT	Projected Capacitive overlay (USB)
Input / Output	VGA, DVI, HDMI	Audio output 3W
IP Rating	IP54	Front & Side of the monitor

## Dimensions

Unit: mm

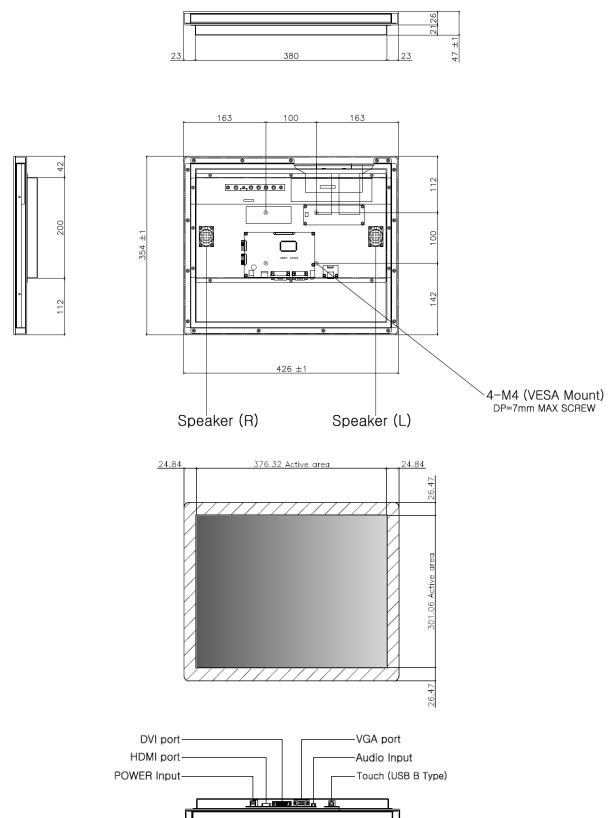

## Touch Screen Options

Type 19.0" Screen	Cover glass (CG)	Analogue Resistive (AR)	Surface Acoustic Wave (SAW)	Surface Capacitive (SCAP)	Projected Capacitive (PCT)	Infra-red (IR)	Multi-touch
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Construction	3mm heat strengthened glass	ITO film to ITO coated glass	4mm pure glass sensor	Hard coat ITO pure glass	ITO film/film with Chemical strengthened glass	3mm tempered glass with infrared sensor	Either PCT or IR
Surface Durability (no of touches)	7H	3H	7H	<4H	<4H	7H	-
IP Rating (potential)	-	> 1m	>5m	>1m	>1m	>1m	-
IP Rating (potential)	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Touches	0	1	1	1	1/2/10/30	1040g/63.5mm	-
Transparency	93±2%	81%	90±5%	91±1.5%	82%	-	-
Drop Ball	500g / 50cm	227g/38Φ steel ball from 80cm height	1040g / 90cm	UL60950 (Tough touch only)	227g/38Φ steel ball from 80cm height	1040g/63.5mm ball dropped from height of 1.0m	227g/38Φ steel ball from 80cm height
Added thickness (typ.)	4/5/6/10/12mm	1.8mm	6mm	8mm	3/4/5/6m	See drawing	See drawing
Custom Options	AR coating Optical bonding	Optical bonding	Dustproof, Waterproof, Antiglare, Safe touch	Optical bonding, Tough touch	AR coating, Glass painting, Customer logo, 10point touch (21.5",23",24"), Optical bonding	2point, AR coating, Optical bonding	Extended cover glass Back printing Whole cutting

## System/Electrical Features

System / Electrical	Spec	Unit / Notes
Power Consumption	18.0W	Typical consumption at standard brightness and temperature
Power Supply	12V / 3.5A	External DC power brick (included) Input voltage-DC +12V +/-5% @ 2.5A max Power connector: DC jack
Video Input (available options)	<input checked="" type="checkbox"/> VGA <input checked="" type="checkbox"/> DVI <input checked="" type="checkbox"/> HDMI COMPOSITE USB DisplayPort	Native resolution. Other resolutions supported by A/D card scaling
On-screen Display (OSD)	5- keys Menu Functions	Menu / up / down / enter / Power ON-OFF Brightness, Contrast, Screen Setting, Colour Temp, Language OSD Settings, VGA/DVI, Recall, Auto Adjust
Custom BIOS options		

## Mechanical Features

Mechanical	Spec	Notes
Overall size	426 x 354 x 47 mm	[proflat]
Active Area Size	376.32 (H) x 301.06 (V) mm	
Case / Bezel color	Black or White powder coat	Custom colour and finishes available
Weight	4.5kg	Typ .inc touch
VESA Mounting Options:	100 x 100	For User defined mounting requirements contact rep

## Environmental Features

Environmental	Spec
Operating Temp	-10 to +70° C
Storage Temp	-30 to +85° C
Humidity	80% RH
Vibration	1.5G, (10~200Hz, P-P) 30 mins/axis (X, Y, Z)
Agency Approvals	CE, FCC, RoHS

## Ordering Information

Model Name	Description
IDP31-190-P35HIB1E	19.0" Industrial black ProFlat monitor with PCT Multi-touch touchscreen, 350CD/m <sup>2</sup> brightness, VGA & DVI & HDMI input
IDP31-190-P35HIW1E	19.0" Industrial white ProFlat monitor with PCT Multi-touch touchscreen, 350CD/m <sup>2</sup> brightness, VGA & DVI & HDMI input

## Accessory Package

- Power supply (110V-240V), UK/EU/US power cord, VGA cable, DVI cable, USB cable for touch function

All Advantech monitors are configurable to order. Use [www.advantech.com](http://www.advantech.com) for guidance on versions, pricing and deliver for all models

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А