5.0 kV RMS, 5-Channel Digital Isolators

Data Sheet

ADuM250N/ADuM251N/ADuM252N

FEATURES

- High common-mode transient immunity: 100 kV/µs
- High robustness to radiated and conducted noise
- Low propagation delay
  - 13 ns maximum for 5 V operation
  - 15 ns maximum for 1.8 V operation
- 150 Mbps maximum guaranteed data rate
- Safety and regulatory approvals (pending)
  - UL recognition: 5000 V rms for 1 minute per UL 1577
  - CSA Component Acceptance Notice 5A
  - VDE certificate of conformity
    - DIN V VDE V 0884-10 (VDE V 0884-10):2006-12
    - V_{IORM} = 849 V peak
  - CQC certification per GB4943.1-2011
- Low dynamic power consumption
- 1.8 V to 5 V level translation
- High temperature operation: 125°C
- Fail-safe high or low options
- 16-lead, RoHS compliant, wide-body SOIC_IC package

APPLICATIONS

- General-purpose multichannel isolation
- Serial peripheral interface (SPI)/data converter isolation
- Industrial field bus isolation

GENERAL DESCRIPTION

The ADuM250N/ADuM251N/ADuM252N[1] are 5-channel digital isolators based on Analog Devices, Inc., *i*Coupler® technology. Combining high speed, complementary metal-oxide semiconductor (CMOS) and monolithic air core transformer technology, these isolation components provide outstanding performance characteristics superior to alternatives such as optocoupler devices and other integrated couplers. The maximum propagation delay is 13 ns with a pulse width distortion of less than 4.5 ns at 5 V operation. Channel to channel matching of propagation delay is tight at 4.0 ns maximum.

The ADuM250N/ADuM251N/ADuM252N data channels are independent and are available in a variety of configurations with a withstand voltage rating of 5.0 kV rms (see the Ordering Guide). The devices operate with the supply voltage on either side ranging from 1.7 V to 5.5 V, providing compatibility with lower voltage systems as well as enabling voltage translation functionality across the isolation barrier.

FUNCTIONAL BLOCK DIAGRAMS

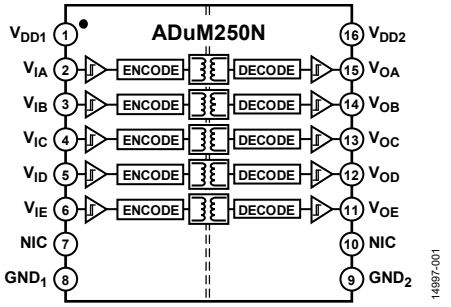

Figure 1. ADuM250N Functional Block Diagram

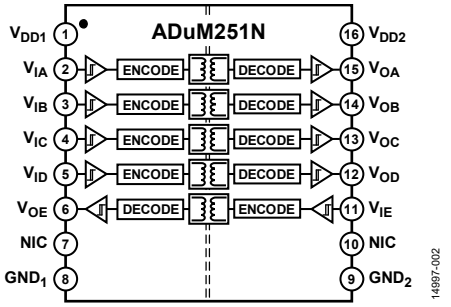

Figure 2. ADuM251N Functional Block Diagram

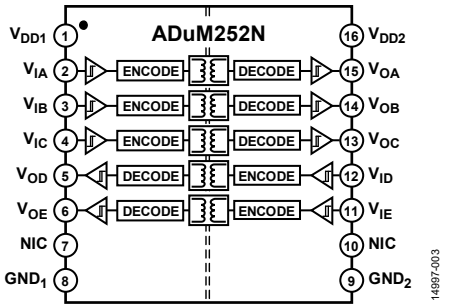

Figure 3. ADuM252N Functional Block Diagram

Unlike other optocoupler alternatives, dc correctness is ensured in the absence of input logic transitions. Two different fail-safe options are available by which the outputs transition to a predetermined state when the input power supply is not applied.

[1] Protected by U.S. Patents 5,952,849; 6,873,065; 6,903,578; and 7,075,329. Other patents are pending.

Rev. A
Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700

©2016–2019 Analog Devices, Inc. All rights reserved.

Technical Support
www.analog.com

TABLE OF CONTENTS

Features ... 1
Applications ... 1
General Description ... 1
Functional Block Diagrams ... 1
Revision History ... 2
Specifications ... 3
Electrical Characteristics—5 V Operation ... 3
Electrical Characteristics—3.3 V Operation ... 5
Electrical Characteristics—2.5 V Operation ... 7
Electrical Characteristics—1.8 V Operation ... 9
Insulation and Safety Related Specifications ... 11
Package Characteristics ... 11
Regulatory Information ... 11
DIN V VDE V 0884-10 (VDE V 0884-10) Insulation Characteristics ... 12
Recommended Operating Conditions ... 12
Absolute Maximum Ratings ... 13
ESD Caution ... 13
Pin Configurations and Function Descriptions ... 14
Typical Performance Characteristics ... 17
Theory of Operation ... 19
Applications Information ... 20
PCB Layout ... 20
Propagation Delay Related Parameters ... 20
Jitter Measurement ... 20
Insulation Lifetime ... 20
Outline Dimensions ... 22
Ordering Guide ... 22

REVISION HISTORY

8/2019—Rev. 0 to Rev. A

Changes to Table 11 ... 11
Updated Outline Dimensions ... 22
Changes to Ordering Guide ... 22

12/2016—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS—5 V OPERATION

All typical specifications are at T_A = 25°C, V_{DD1} = V_{DD2} = 5 V. Minimum/maximum specifications apply over the entire recommended operation range of 4.5 V ≤ V_{DD1} ≤ 5.5 V, 4.5 V ≤ V_{DD2} ≤ 5.5 V, and −40°C ≤ T_A ≤ +125°C, unless otherwise noted. Switching specifications are tested with C_L = 15 pF and CMOS signal levels, unless otherwise noted. Supply currents are specified with 50% duty cycle signals.

Table 1.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
SWITCHING SPECIFICATIONS						
Pulse Width	PW	6.6			ns	Within pulse width distortion (PWD) limit
Data Rate[1]		150			Mbps	Within PWD limit
Propagation Delay	t_{PHL}, t_{PLH}	4.8	7.2	13	ns	50% input to 50% output
Pulse Width Distortion	PWD		0.5	4.5	ns	$\lvert t_{PLH} - t_{PHL} \rvert$
Change vs. Temperature			1.5		ps/°C	
Propagation Delay Skew	t_{PSK}			6.1	ns	Between any two units at the same temperature, voltage, and load
Channel Matching						
Codirectional	t_{PSKCD}		0.5	4.0	ns	
Opposing Direction	t_{PSKOD}		0.5	4.5	ns	
Jitter			490		ps p-p	See the Jitter Measurement section
			70		ps rms	See the Jitter Measurement section
DC SPECIFICATIONS						
Input Threshold Voltage						
Logic High	V_{IH}	0.7 × V_{DDx}			V	
Logic Low	V_{IL}			0.3 × V_{DDx}	V	
Output Voltage						
Logic High	V_{OH}	V_{DDx} − 0.1	V_{DDx}		V	I_{Ox}[2] = −20 μA, V_{Ix} = V_{IxH}[3]
		V_{DDx} − 0.4	V_{DDx} − 0.2		V	I_{Ox}[2] = −4 mA, V_{Ix} = V_{IxH}[3]
Logic Low	V_{OL}		0.0	0.1	V	I_{Ox}[2] = 20 μA, V_{Ix} = V_{IxL}[4]
			0.2	0.4	V	I_{Ox}[2] = 4 mA, V_{Ix} = V_{IxL}[4]
Input Current per Channel	I_I	−10	+0.01	+10	μA	0 V ≤ V_{Ix} ≤ V_{DDx}
Quiescent Supply Current						
ADuM250N						
	$I_{DD1 (Q)}$		2.54	3.70	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		3.34	4.56	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		16.8	27.5	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		3.57	4.90	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM251N						
	$I_{DD1 (Q)}$		2.79	4.09	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		3.20	4.22	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		14.2	23	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		7.08	11.1	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM252N						
	$I_{DD1 (Q)}$		2.91	4.11	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		2.95	4.15	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		11.1	19.5	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		10.5	16.7	mA	V_I[5] = 1 (N0), 0 (N1)[6]
Dynamic Supply Current						Inputs switching, 50% duty cycle
Dynamic Input	$I_{DDI (D)}$		0.01		mA/Mbps	
Dynamic Output	$I_{DDO (D)}$		0.02		mA/Mbps	

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
Undervoltage Lockout	UVLO					
Positive V_{DDx} Threshold	V_{DDxUV+}		1.6		V	
Negative V_{DDx} Threshold	V_{DDxUV-}		1.5		V	
V_{DDx} Hysteresis	V_{DDxUVH}		0.1		V	
AC SPECIFICATIONS						
Output Rise/Fall Time	t_R/t_F		2.5		ns	10% to 90%
Common-Mode Transient Immunity[7]	$\|CM_H\|$	75	100		kV/µs	$V_{Ix} = V_{DDx}$, V_{CM} = 1000 V, transient magnitude = 800 V
	$\|CM_L\|$	75	100		kV/µs	V_{Ix} = 0 V, V_{CM} = 1000 V, transient magnitude = 800 V

[1] 150 Mbps is the highest data rate that can be guaranteed, although higher data rates are possible.
[2] I_{Ox} is the Channel x output current, where x = A, B, C, D, or E.
[3] V_{IxH} is the input side logic high.
[4] V_{IxL} is the input side logic low.
[5] V_I is the voltage input.
[6] N0 refers to the ADuM250N0/ADuM251N0/ADuM252N0 models. N1 refers to the ADuM250N1/ADuM251N1/ADuM252N1 models. See the Ordering Guide section.
[7] $|CM_H|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining the voltage output (V_O) > 0.8 V_{DDx}. $|CM_L|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining the output voltage (V_O) > 0.8 V. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

Table 2. Total Supply Current vs. Data Throughput

		1 Mbps			25 Mbps			100 Mbps			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM250N											
Supply Current Side 1	I_{DD1}		9.63	14.6		10.9	17.1		16.0	24.0	mA
Supply Current Side 2	I_{DD2}		3.61	5.61		5.36	8.50		11.1	19.0	mA
ADuM251N											
Supply Current Side 1	I_{DD1}		8.51	13.7		9.85	16.1		15.0	23.3	mA
Supply Current Side 2	I_{DD2}		5.28	8.95		6.89	11.5		12.3	20.0	mA
ADuM252N											
Supply Current Side 1	I_{DD1}		7.08	11.6		8.56	13.9		13.7	20.4	mA
Supply Current Side 2	I_{DD2}		6.83	10.5		8.35	12.8		13.4	20.6	mA

ELECTRICAL CHARACTERISTICS—3.3 V OPERATION

All typical specifications are at T_A = 25°C, V_{DD1} = V_{DD2} = 3.3 V. Minimum/maximum specifications apply over the entire recommended operation range: 3.0 V ≤ V_{DD1} ≤ 3.6 V, 3.0 V ≤ V_{DD2} ≤ 3.6 V, and −40°C ≤ T_A ≤ +125°C, unless otherwise noted. Switching specifications are tested with C_L = 15 pF and CMOS signal levels, unless otherwise noted. Supply currents are specified with 50% duty cycle signals.

Table 3.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
SWITCHING SPECIFICATIONS						
Pulse Width	PW	6.6			ns	Within PWD limit
Data Rate[1]		150			Mbps	Within PWD limit
Propagation Delay	t_{PHL}, t_{PLH}	4.8	6.8	14	ns	50% input to 50% output
Pulse Width Distortion	PWD		0.7	4.5	ns	$\lvert t_{PLH} - t_{PHL} \rvert$
Change vs. Temperature			1.5		ps/°C	
Propagation Delay Skew	t_{PSK}			7.5	ns	Between any two units at the same temperature, voltage, and load
Channel Matching						
Codirectional	t_{PSKCD}		0.7	4.0	ns	
Opposing Direction	t_{PSKOD}		0.7	4.5	ns	
Jitter			580		ps p-p	See the Jitter Measurement section
			120		ps rms	See the Jitter Measurement section
DC SPECIFICATIONS						
Input Threshold Voltage						
Logic High	V_{IH}	0.7 × V_{DDx}			V	
Logic Low	V_{IL}			0.3 × V_{DDx}	V	
Output Voltage						
Logic High	V_{OH}	V_{DDx} − 0.1	V_{DDx}		V	I_{Ox}[2] = −20 μA, V_{Ix} = V_{IxH}[3]
		V_{DDx} − 0.4	V_{DDx} − 0.2		V	I_{Ox}[2] = −2 mA, V_{Ix} = V_{IxH}[3]
Logic Low	V_{OL}		0.0	0.1	V	I_{Ox}[2] = 20 μA, V_{Ix} = V_{IxL}[4]
			0.2	0.4	V	I_{Ox}[2] = 2 mA, V_{Ix} = V_{IxL}[4]
Input Current per Channel	I_I	−10	+0.01	+10	μA	0 V ≤ V_{Ix} ≤ V_{DDx}
Quiescent Supply Current						
ADuM250N						
	$I_{DD1 (Q)}$		2.36	3.52	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		3.20	4.42	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		16.5	27.2	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		3.43	4.76	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM251N						
	$I_{DD1 (Q)}$		2.61	3.91	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		3.05	4.07	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		14.0	22.8	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		6.91	10.9	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM252N						
	$I_{DD1 (Q)}$		2.74	3.94	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		2.79	3.99	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		10.9	19.3	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		10.3	16.5	mA	V_I[5] = 1 (N0), 0 (N1)[6]
Dynamic Supply Current						Inputs switching, 50% duty cycle
Dynamic Input	$I_{DDI (D)}$		0.01		mA/Mbps	
Dynamic Output	$I_{DDO (D)}$		0.01		mA/Mbps	
Undervoltage Lockout	UVLO					
Positive V_{DDx} Threshold	V_{DDxUV+}		1.6		V	
Negative V_{DDx} Threshold	V_{DDxUV-}		1.5		V	
V_{DDx} Hysteresis	V_{DDxUVH}		0.1		V	

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
AC SPECIFICATIONS						
Output Rise/Fall Time	t_R/t_F		2.5		ns	10% to 90%
Common-Mode Transient Immunity[7]	$\|CM_H\|$	75	100		kV/µs	$V_{Ix} = V_{DDx}$, V_{CM} = 1000 V, transient magnitude = 800 V
	$\|CM_L\|$	75	100		kV/µs	V_{Ix} = 0 V, V_{CM} = 1000 V, transient magnitude = 800 V

[1] 150 Mbps is the highest data rate that can be guaranteed, although higher data rates are possible.
[2] I_{Ox} is the Channel x output current, where x = A, B, C, D, or E.
[3] V_{IxH} is the input side logic high.
[4] V_{IxL} is the input side logic low.
[5] V_I is the voltage input.
[6] N0 refers to the ADuM250N0/ADuM251N0/ADuM252N0 models. N1 refers to the ADuM250N1/ADuM251N1/ADuM252N1 models. See the Ordering Guide section.
[7] $|CM_H|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining the voltage output (V_O) > 0.8 V_{DDx}. $|CM_L|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining V_O > 0.8 V. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

Table 4. Total Supply Current vs. Data Throughput

		1 Mbps			25 Mbps			100 Mbps			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM250N											
Supply Current Side 1	I_{DD1}		9.36	14.3		10.4	16.6		14.6	22.6	mA
Supply Current Side 2	I_{DD2}		3.45	5.45		5.03	8.23		10.2	18.1	mA
ADuM251N											
Supply Current Side 1	I_{DD1}		8.26	13.5		9.41	15.7		13.9	22.2	mA
Supply Current Side 2	I_{DD2}		5.09	8.76		6.55	11.2		11.4	19.1	mA
ADuM252N											
Supply Current Side 1	I_{DD1}		6.84	11.3		8.12	13.5		12.7	19.4	mA
Supply Current Side 2	I_{DD2}		6.60	10.3		7.94	12.4		12.6	19.8	mA

ELECTRICAL CHARACTERISTICS—2.5 V OPERATION

All typical specifications are at T_A = 25°C, V_{DD1} = V_{DD2} = 2.5 V. Minimum/maximum specifications apply over the entire recommended operation range: 2.25 V ≤ V_{DD1} ≤ 2.75 V, 2.25 V ≤ V_{DD2} ≤ 2.75 V, −40°C ≤ T_A ≤ +125°C, unless otherwise noted. Switching specifications are tested with C_L = 15 pF and CMOS signal levels, unless otherwise noted. Supply currents are specified with 50% duty cycle signals.

Table 5.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
SWITCHING SPECIFICATIONS						
Pulse Width	PW	6.6			ns	Within PWD limit
Data Rate[1]		150			Mbps	Within PWD limit
Propagation Delay	t_{PHL}, t_{PLH}	5.0	7.0	14	ns	50% input to 50% output
Pulse Width Distortion	PWD		0.7	5.0	ns	$\lvert t_{PLH} - t_{PHL} \rvert$
Change vs. Temperature			1.5		ps/°C	
Propagation Delay Skew	t_{PSK}			6.8	ns	Between any two units at the same temperature, voltage, load
Channel Matching						
Codirectional	t_{PSKCD}		0.7	5.0	ns	
Opposing Direction	t_{PSKOD}		0.7	5.0	ns	
Jitter			800		ps p-p	See the Jitter Measurement section
			190		ps rms	See the Jitter Measurement section
DC SPECIFICATIONS						
Input Threshold Voltage						
Logic High	V_{IH}	0.7 × V_{DDx}			V	
Logic Low	V_{IL}			0.3 × V_{DDx}	V	
Output Voltage						
Logic High	V_{OH}	V_{DDx} − 0.1	V_{DDx}		V	I_{Ox}[2] = −20 μA, V_{Ix} = V_{IxH}[3]
		V_{DDx} − 0.4	V_{DDx} − 0.2		V	I_{Ox}[2] = −2 mA, V_{Ix} = V_{IxH}[3]
Logic Low	V_{OL}		0.0	0.1	V	I_{Ox}[2] = 20 μA, V_{Ix} = V_{IxL}[4]
			0.2	0.4	V	I_{Ox}[2] = 2 mA, V_{Ix} = V_{IxL}[4]
Input Current per Channel	I_I	−10	+0.01	+10	μA	0 V ≤ V_{Ix} ≤ V_{DDx}
Quiescent Supply Current						
ADuM250N						
	$I_{DD1 (Q)}$		2.28	3.44	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		3.13	4.35	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		16.4	27.1	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		3.34	4.67	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM251N						
	$I_{DD1 (Q)}$		2.52	3.82	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		2.97	3.99	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		13.9	22.7	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		6.83	10.8	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM252N						
	$I_{DD1 (Q)}$		2.66	3.86	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		2.71	3.91	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		10.8	19.2	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		10.2	16.4	mA	V_I[5] = 1 (N0), 0 (N1)[6]
Dynamic Supply Current						Inputs switching, 50% duty cycle
Dynamic Input	$I_{DDI (D)}$		0.01		mA/Mbps	
Dynamic Output	$I_{DDO (D)}$		0.01		mA/Mbps	
Undervoltage Lockout						
Positive V_{DDx} Threshold	V_{DDxUV+}		1.6		V	
Negative V_{DDx} Threshold	V_{DDxUV-}		1.5		V	
V_{DDx} Hysteresis	V_{DDxUVH}		0.1		V	

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
AC SPECIFICATIONS						
Output Rise/Fall Time	t_R/t_F		2.5		ns	10% to 90%
Common-Mode Transient Immunity[7]	$\|CM_H\|$	75	100		kV/µs	$V_{Ix} = V_{DDx}$, V_{CM} = 1000 V, transient magnitude = 800 V
	$\|CM_L\|$	75	100		kV/µs	V_{Ix} = 0 V, V_{CM} = 1000 V, transient magnitude = 800 V

[1] 150 Mbps is the highest data rate that can be guaranteed, although higher data rates are possible.
[2] I_{Ox} is the Channel x output current, where x = A, B, C, D, or E.
[3] V_{IxH} is the input side logic high.
[4] V_{IxL} is the input side logic low.
[5] V_I is the voltage input.
[6] N0 refers to the ADuM250N0/ADuM251N0/ADuM252N0 models. N1 refers to the ADuM250N1/ADuM251N1/ADuM252N1 models. See the Ordering Guide section.
[7] $|CM_H|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining the voltage output (V_O) > 0.8 V_{DDx}. $|CM_L|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining V_O > 0.8 V. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

Table 6. Total Supply Current vs. Data Throughput

		1 Mbps			25 Mbps			100 Mbps			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM250N											
Supply Current Side 1	I_{DD1}		9.25	14.2		10.2	16.4		14.0	22.0	mA
Supply Current Side 2	I_{DD2}		3.35	5.35		4.58	7.78		8.61	16.5	mA
ADuM251N											
Supply Current Side 1	I_{DD1}		8.14	13.4		9.14	15.4		13.1	21.4	mA
Supply Current Side 2	I_{DD2}		4.98	8.65		6.14	10.8		10.1	17.8	mA
ADuM252N											
Supply Current Side 1	I_{DD1}		6.74	11.2		7.80	13.2		11.8	18.5	mA
Supply Current Side 2	I_{DD2}		6.48	10.2		7.56	12.0		11.5	18.7	mA

ELECTRICAL CHARACTERISTICS—1.8 V OPERATION

All typical specifications are at T_A = 25°C, V_{DD1} = V_{DD2} = 1.8 V. Minimum/maximum specifications apply over the entire recommended operation range: 1.7 V ≤ V_{DD1} ≤ 1.9 V, 1.7 V ≤ V_{DD2} ≤ 1.9 V, and −40°C ≤ T_A ≤ +125°C, unless otherwise noted. Switching specifications are tested with C_L = 15 pF and CMOS signal levels, unless otherwise noted. Supply currents are specified with 50% duty cycle signals.

Table 7.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
SWITCHING SPECIFICATIONS						
Pulse Width	PW	6.6			ns	Within PWD limit
Data Rate[1]		150			Mbps	Within PWD limit
Propagation Delay	t_{PHL}, t_{PLH}	5.8	8.7	15	ns	50% input to 50% output
Pulse Width Distortion	PWD		0.7	5.0	ns	$\lvert t_{PLH} - t_{PHL} \rvert$
Change vs. Temperature			1.5		ps/°C	
Propagation Delay Skew	t_{PSK}			7.0	ns	Between any two units at the same temperature, voltage, and load
Channel Matching						
Codirectional	t_{PSKCD}		0.7	5.0	ns	
Opposing Direction	t_{PSKOD}		0.7	5.0	ns	
Jitter			470		ps p-p	See the Jitter Measurement section
			70		ps rms	See the Jitter Measurement section
DC SPECIFICATIONS						
Input Threshold Voltage						
Logic High	V_{IH}	0.7 × V_{DDx}			V	
Logic Low	V_{IL}			0.3 × V_{DDx}	V	
Output Voltage						
Logic High	V_{OH}	V_{DDx} − 0.1	V_{DDx}		V	I_{Ox}[2] = −20 μA, V_{Ix} = V_{IxH}[3]
		V_{DDx} − 0.4	V_{DDx} − 0.2		V	I_{Ox}[2] = −2 mA, V_{Ix} = V_{IxH}[3]
Logic Low	V_{OL}		0.0	0.1	V	I_{Ox}[2] = 20 μA, V_{Ix} = V_{IxL}[4]
			0.2	0.4	V	I_{Ox}[2] = 2 mA, V_{Ix} = V_{IxL}[4]
Input Current per Channel	I_I	−10	+0.01	+10	μA	0 V ≤ V_{Ix} ≤ V_{DDx}
Quiescent Supply Current						
ADuM250N						
	$I_{DD1 (Q)}$		2.19	3.35	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		3.07	4.29	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		16.3	27.0	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		3.28	4.61	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM251N						
	$I_{DD1 (Q)}$		2.44	3.74	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		2.91	3.93	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		13.7	22.5	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		6.75	10.7	mA	V_I[5] = 1 (N0), 0 (N1)[6]
ADuM252N						
	$I_{DD1 (Q)}$		2.58	3.78	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD2 (Q)}$		2.64	3.84	mA	V_I[5] = 0 (N0), 1 (N1)[6]
	$I_{DD1 (Q)}$		10.7	19.1	mA	V_I[5] = 1 (N0), 0 (N1)[6]
	$I_{DD2 (Q)}$		10.1	16.3	mA	V_I[5] = 1 (N0), 0 (N1)[6]
Dynamic Supply Current						Inputs switching, 50% duty cycle
Dynamic Input	$I_{DDI (D)}$		0.01		mA/Mbps	
Dynamic Output	$I_{DDO (D)}$		0.01		mA/Mbps	
Undervoltage Lockout	UVLO					
Positive V_{DDx} Threshold	V_{DDxUV+}		1.6		V	
Negative V_{DDx} Threshold	V_{DDxUV-}		1.5		V	
V_{DDx} Hysteresis	V_{DDxUVH}		0.1		V	

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
AC SPECIFICATIONS						
Output Rise/Fall Time	t_R/t_F		2.5		ns	10% to 90%
Common-Mode Transient Immunity[7]	$\|CM_H\|$	75	100		kV/µs	$V_{Ix} = V_{DDx}$, V_{CM} = 1000 V, transient magnitude = 800 V
	$\|CM_L\|$	75	100		kV/µs	V_{Ix} = 0 V, V_{CM} = 1000 V, transient magnitude = 800 V

[1] 150 Mbps is the highest data rate that can be guaranteed, although higher data rates are possible.
[2] I_{Ox} is the Channel x output current, where x = A, B, C, D, or E.
[3] V_{IxH} is the input side logic high.
[4] V_{IxL} is the input side logic low.
[5] V_I is the voltage input.
[6] N0 refers to the ADuM250N0/ADuM251N0/ADuM252N0 models. N1 refers to the ADuM250N1/ADuM251N1/ADuM252N1 models. See the Ordering Guide section.
[7] $|CM_H|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining the voltage output (V_O) > 0.8 V_{DDx}. $|CM_L|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining V_O > 0.8 V. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

Table 8. Total Supply Current vs. Data Throughput

		1 Mbps			25 Mbps			100 Mbps			
Parameter	Symbol	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
SUPPLY CURRENT											
ADuM250N											
Supply Current Side 1	I_{DD1}		9.07	14.0		10.0	16.2		13.8	21.8	mA
Supply Current Side 2	I_{DD2}		3.30	5.30		4.55	7.75		8.71	16.4	mA
ADuM251N											
Supply Current Side 1	I_{DD1}		7.99	13.3		8.98	15.3		12.8	21.1	mA
Supply Current Side 2	I_{DD2}		4.89	8.56		6.06	10.7		10.1	17.8	mA
ADuM252N											
Supply Current Side 1	I_{DD1}		6.62	11.1		7.68	13.1		11.6	18.3	mA
Supply Current Side 2	I_{DD2}		6.38	10.1		7.45	11.9		11.5	18.7	mA

INSULATION AND SAFETY RELATED SPECIFICATIONS

For additional information, see www.analog.com/icouplersafety.

Table 9.

Parameter	Symbol	Value	Unit	Test Conditions/Comments
Rated Dielectric Insulation Voltage		5000	V rms	1-minute duration
Minimum External Air Gap (Clearance)	L (I01)	8.3	mm min	Measured from input terminals to output terminals, shortest distance through air
Minimum External Tracking (Creepage)	L (I02)	8.3	mm min	Measured from input terminals to output terminals, shortest distance path along body
Minimum Clearance in the Plane of the Printed Circuit Board (PCB Clearance)	L (PCB)	8.3	mm min	Measured from input terminals to output terminals, shortest distance through air, line of sight, in the PCB mounting plane
Minimum Internal Gap (Internal Clearance)		25.5	µm min	Minimum distance through insulation
Tracking Resistance (Comparative Tracking Index)	CTI	>400	V	DIN IEC 112/VDE 0303 Part 1
Material Group		II		Material Group (DIN VDE 0110, 1/89, Table 1)

PACKAGE CHARACTERISTICS

Table 10.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
Resistance (Input to Output)[1]	R_{I-O}		10^{13}		Ω	
Capacitance (Input to Output)[1]	C_{I-O}		2.2		pF	f = 1 MHz
Input Capacitance[2]	C_I		4.0		pF	
IC Junction to Ambient Thermal Resistance	θ_{JA}		45		°C/W	Thermocouple located at center of package underside

[1] The device is considered a 2-terminal device: Pin 1 through Pin 8 are shorted together, and Pin 9 through Pin 16 are shorted together.
[2] Input capacitance is from any input data pin to ground.

REGULATORY INFORMATION

See Table 15 and the Insulation Lifetime section for details regarding recommended maximum working voltages for specific cross-isolation waveforms and insulation levels.

Table 11.

UL (Pending)	CSA (Pending)	VDE (Pending)	CQC (Pending)
Recognized Under UL 1577 Component Recognition Program[1]	Approved under CSA Component Acceptance Notice 5A	Certified according to DIN V VDE V 0884-10 (VDE V 0884-10):2006-12[2]	Certified under CQC11-471543-2015, GB4943.1-2011:
Single Protection, 5000 V rms Isolation Voltage	CSA 60950-1-07+A1+A2 and IEC 60950-1, second edition, +A1+A2:	Reinforced insulation, V_{IORM} = 849 V peak, V_{IOSM} =10 kV peak	Basic insulation at 830 V rms (1174 V peak)
	Basic insulation at 830 V rms (1174 V peak)	Basic insulation, V_{IORM} = 849 V peak, V_{IOSM} = 16 kV peak	Reinforced insulation at 415 V rms (587 V peak)
	Reinforced insulation at 415 V rms (587 V peak)		Tropical climate, altitude ≤ 5000 meters
	IEC 60601-1 Edition 3+A1, two means of patient protection (2 MOPP), 261 V rms (369 V peak)		
	CSA 61010-1-12 and IEC 61010-1 third edition:		
	Basic insulation at 300 V rms mains, 830 V rms secondary (1174 V peak)		
File E214100	File 205078	File 2471900-4880-0001	File CQC18001192420

[1] In accordance with UL 1577, each ADuM250N/ADuM251N/ADuM252N in the RI-16 wide-body (SOIC_IC) package is proof tested by applying an insulation test voltage ≥ 6000 V rms for 1 sec.
[2] In accordance with DIN V VDE V 0884-10, each ADuM250N/ADuM251N/ADuM252N in the RI-16 wide-body (SOIC_IC) package is proof tested by applying an insulation test voltage ≥ 1592 V peak for 1 sec (partial discharge detection limit = 5 pC). The * marking branded on the component designates DIN V VDE V 0884-10 approval.

DIN V VDE V 0884-10 (VDE V 0884-10) INSULATION CHARACTERISTICS

These isolators are suitable for reinforced electrical isolation only within the safety limit data. Protective circuits ensure the maintenance of the safety data. The * marking on packages denotes DIN V VDE V 0884-10 approval.

Table 12.

Description	Test Conditions/Comments	Symbol	Characteristic	Unit
Installation Classification per DIN VDE 0110				
For Rated Mains Voltage ≤ 150 V rms			I to IV	
For Rated Mains Voltage ≤ 300 V rms			I to IV	
For Rated Mains Voltage ≤ 600 V rms			I to III	
Climatic Classification			40/125/21	
Pollution Degree per DIN VDE 0110, Table 1			2	
Maximum Working Insulation Voltage		V_{IORM}	849	V peak
Input to Output Test Voltage, Method B1	$V_{IORM} \times 1.875 = V_{pd\ (m)}$, 100% production test, $t_{ini} = t_m = 1$ sec, partial discharge < 5 pC	$V_{pd\ (m)}$	1592	V peak
Input to Output Test Voltage, Method A		$V_{pd\ (m)}$		
After Environmental Tests Subgroup 1	$V_{IORM} \times 1.5 = V_{pd\ (m)}$, $t_{ini} = 60$ sec, $t_m = 10$ sec, partial discharge < 5 pC		1274	V peak
After Input and/or Safety Test Subgroup 2 and Subgroup 3	$V_{IORM} \times 1.2 = V_{pd\ (m)}$, $t_{ini} = 60$ sec, $t_m = 10$ sec, partial discharge < 5 pC		1019	V peak
Highest Allowable Overvoltage		V_{IOTM}	8000	V peak
Surge Isolation Voltage Basic	$V_{PEAK} = 10$ kV, 1.2 µs rise time, 50 µs, 50% fall time	V_{IOSM}	16,000	V peak
Surge Isolation Voltage Reinforced	$V_{PEAK} = 10$ kV, 1.2 µs rise time, 50 µs, 50% fall time	V_{IOSM}	10,000	V peak
Safety Limiting Values	Maximum value allowed in the event of a failure (see Figure 4)			
Maximum Junction Temperature		T_S	150	°C
Total Power Dissipation at 25°C		P_S	2.78	W
Insulation Resistance at T_S		R_S	$>10^9$	Ω

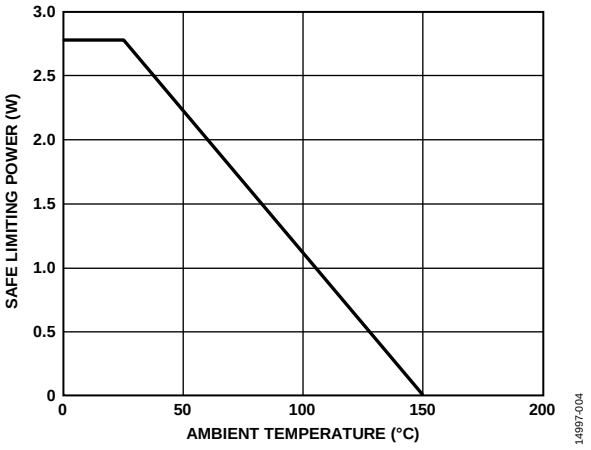

Figure 4. Thermal Derating Curve, Dependence of Safety Limiting Values with Ambient Temperature per DIN V VDE V 0884-10

RECOMMENDED OPERATING CONDITIONS

Table 13.

Parameter	Symbol	Rating
Operating Temperature Range	T_A	−40°C to +125°C
Supply Voltages Range	V_{DD1}, V_{DD2}	1.7 V to 5.5 V
Input Signal Rise and Fall Times		1.0 ms

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C, unless otherwise noted.

Table 14.

Parameter	Rating
Storage Temperature (T_{ST}) Range	−65°C to +150°C
Ambient Operating Temperature (T_A) Range	−40°C to +125°C
Supply Voltages (V_{DD1}, V_{DD2})	−0.5 V to +7.0 V
Input Voltages (V_{IA}, V_{IB}, V_{IC}, V_{ID}, V_{IE})	−0.5 V to V_{DDI}[1] + 0.5 V
Output Voltages (V_{OA}, V_{OB}, V_{OC}, V_{OD}, V_{OE})	−0.5 V to V_{DDO}[2] + 0.5 V
Average Output Current per Pin[3]	
Side 1 Output Current (I_{O1})	−10 mA to +10 mA
Side 2 Output Current (I_{O2})	−10 mA to +10 mA
Common-Mode Transients[4]	−150 kV/µs to +150 kV/µs

[1] V_{DDI} is the input side supply voltage.
[2] V_{DDO} is the output side supply voltage.
[3] See Figure 4 for the maximum rated current values for various temperatures.
[4] Refers to the common-mode transients across the insulation barrier. Common-mode transients exceeding the absolute maximum ratings may cause latch-up or permanent damage.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Table 15. Maximum Continuous Working Voltage[1]

Parameter	Rating	Constraint
AC Voltage		
Bipolar Waveform		
Basic Insulation	849 V peak	50-year minimum insulation lifetime
Reinforced Insulation	819 V peak	Lifetime limited by package creepage maximum approved working voltage per IEC 60950-1
Unipolar Waveform		
Basic Insulation	1698 V peak	50-year minimum insulation lifetime
Reinforced Insulation	943 V peak	Lifetime limited by package creepage maximum approved working voltage per IEC 60950-1
DC Voltage		
Basic Insulation	1157 V peak	Lifetime limited by package creepage maximum approved working voltage per IEC 60950-1
Reinforced Insulation	579 V peak	Lifetime limited by package creepage maximum approved working voltage per IEC 60950-1

[1] Refers to the continuous voltage magnitude imposed across the isolation barrier. See the Insulation Lifetime section for more details.

Truth Table

Table 16. ADuM250N/ADuM251N/ADuM252N Truth Table (Positive Logic)

V_{Ix} Input[1, 2]	V_{DDI} State[2]	V_{DDO} State[2]	Default Low (N0), V_{Ox} Output[1, 2, 3]	Default High (N1), V_{Ox} Output[1, 2, 3]	Test Conditions/Comments
L	Powered	Powered	L	L	Normal operation
H	Powered	Powered	H	H	Normal operation
L	Unpowered	Powered	L	H	Fail-safe output
X[4]	Powered	Unpowered	Indeterminate	Indeterminate	Output unpowered

[1] L means low, H means high, and X means don't care.
[2] V_{Ix} and V_{Ox} refer to the input and output signals of a given channel (A, B, C, D, or E). V_{DDI} and V_{DDO} refer to the supply voltages on the input and output sides of the given channel, respectively.
[3] N0 refers to the ADuM250N0/ADuM251N0/ADuM252N0 models, N1 refers to the ADuM250N1/ADuM251N1/ADuM252N1 models. See the Ordering Guide section.
[4] Input pins (V_{Ix}) on the same side as an unpowered supply must be in a low state to avoid powering the device through its ESD protection circuitry.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS



Figure 5. ADuM250N Pin Configuration

Table 17. ADuM250N Pin Function Descriptions

Pin No.[1]	Mnemonic	Description
1	V_{DD1}	Supply Voltage for Isolator Side 1.
2	V_{IA}	Logic Input A.
3	V_{IB}	Logic Input B.
4	V_{IC}	Logic Input C.
5	V_{ID}	Logic Input D.
6	V_{IE}	Logic Input E.
7	NIC	No Internal Connection. Leave this pin floating.
8	GND_1	Ground 1. Ground reference for Isolator Side 1.
9	GND_2	Ground 2. Ground reference for Isolator Side 2.
10	NIC	No Internal Connection. Leave this pin floating.
11	V_{OE}	Logic Output E.
12	V_{OD}	Logic Output D.
13	V_{OC}	Logic Output C.
14	V_{OB}	Logic Output B.
15	V_{OA}	Logic Output A.
16	V_{DD2}	Supply Voltage for Isolator Side 2.

[1] Reference the AN-1109 Application Note for specific layout guidelines.



Figure 6. ADuM251N Pin Configuration

Table 18. ADuM251N Pin Function Descriptions

Pin No.[1]	Mnemonic	Description
1	V_{DD1}	Supply Voltage for Isolator Side 1.
2	V_{IA}	Logic Input A.
3	V_{IB}	Logic Input B.
4	V_{IC}	Logic Input C.
5	V_{ID}	Logic Input D.
6	V_{OE}	Logic Output E.
7	NIC	No Internal Connection. Leave this pin floating.
8	GND_1	Ground 1. Ground reference for Isolator Side 1.
9	GND_2	Ground 2. Ground reference for Isolator Side 2.
10	NIC	No Internal Connection. Leave this pin floating.
11	V_{IE}	Logic Input E.
12	V_{OD}	Logic Output D.
13	V_{OC}	Logic Output C.
14	V_{OB}	Logic Output B.
15	V_{OA}	Logic Output A.
16	V_{DD2}	Supply Voltage for Isolator Side 2.

[1] Reference the AN-1109 Application Note for specific layout guidelines.



Figure 7. ADuM252N Pin Configuration

Table 19. ADuM252N Pin Function Descriptions

Pin No.[1]	Mnemonic	Description
1	V_{DD1}	Supply Voltage for Isolator Side 1.
2	V_{IA}	Logic Input A.
3	V_{IB}	Logic Input B.
4	V_{IC}	Logic Input C.
5	V_{OD}	Logic Output D.
6	V_{OE}	Logic Output E.
7	NIC	No Internal Connection. Leave this pin floating.
8	GND_1	Ground 1. Ground reference for Isolator Side 1.
9	GND_2	Ground 2. Ground reference for Isolator Side 2.
10	NIC	No Internal Connection. Leave this pin floating.
11	V_{IE}	Logic Input E.
12	V_{ID}	Logic Input D.
13	V_{OC}	Logic Output C.
14	V_{OB}	Logic Output B.
15	V_{OA}	Logic Output A.
16	V_{DD2}	Supply Voltage for Isolator Side 2.

[1] Reference the AN-1109 Application Note for specific layout guidelines.

TYPICAL PERFORMANCE CHARACTERISTICS

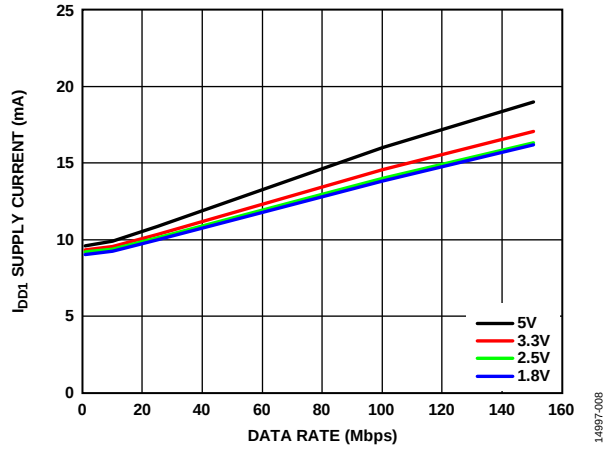

Figure 8. ADuM250N I_{DD1} Supply Current vs. Data Rate at Various Voltages

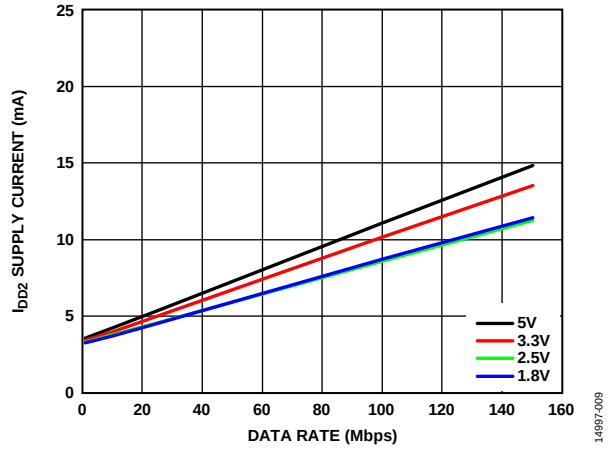

Figure 9. ADuM250N I_{DD2} Supply Current vs. Data Rate at Various Voltages

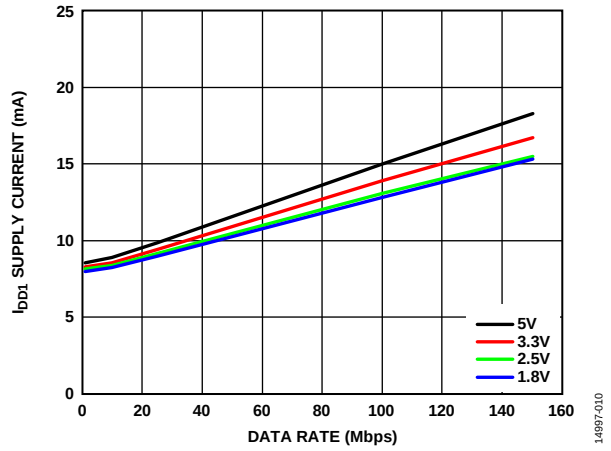

Figure 10. ADuM251N I_{DD1} Supply Current vs. Data Rate at Various Voltages

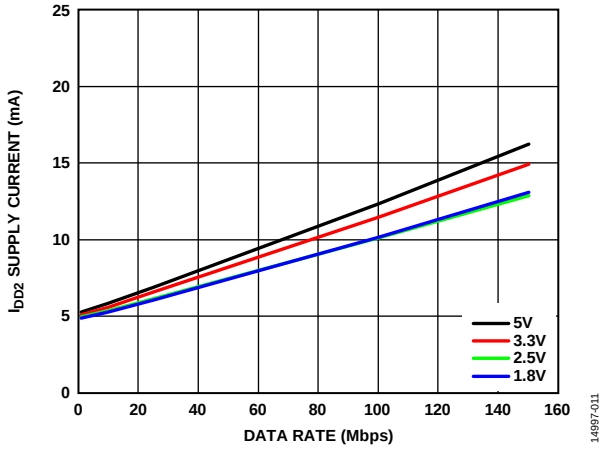

Figure 11. ADuM251N I_{DD2} Supply Current vs. Data Rate at Various Voltages

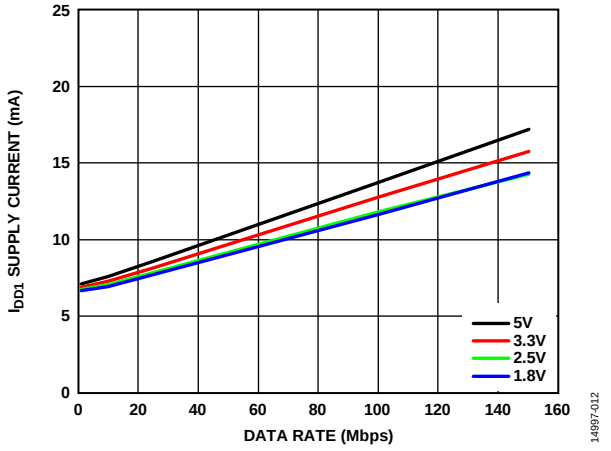

Figure 12. ADuM252N I_{DD1} Supply Current vs. Data Rate at Various Voltages

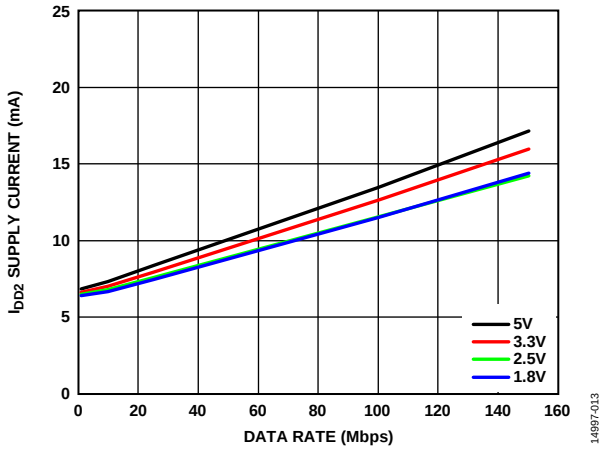

Figure 13. ADuM252N I_{DD2} Supply Current vs. Data Rate at Various Voltages

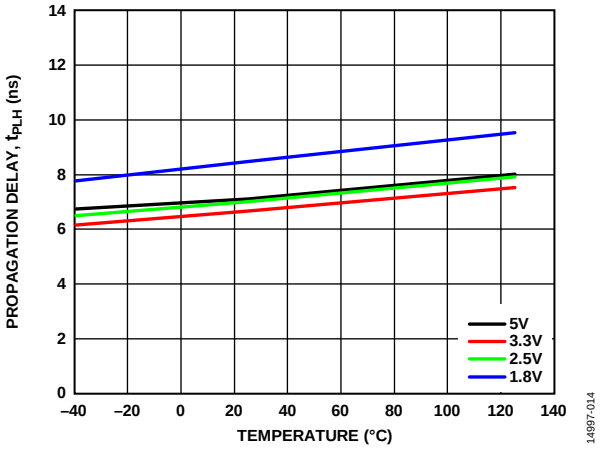

Figure 14. Propagation Delay, t_{PLH} vs. Temperature at Various Voltages

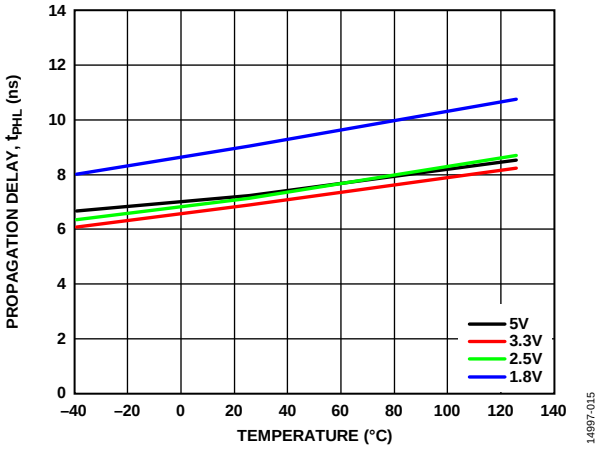

Figure 15. Propagation Delay, t_{PHL} vs. Temperature at Various Voltages

THEORY OF OPERATION

The ADuM250N/ADuM251N/ADuM252N use a high frequency carrier to transmit data across the isolation barrier using *i*Coupler chip scale transformer coils separated by layers of polyimide isolation. Using an on/off keying (OOK) technique and the differential architecture shown in Figure 16 and Figure 17, the ADuM250N/ADuM251N/ADuM252N have very low propagation delay and high speed. Internal regulators and input/output design techniques allow logic and supply voltages over a wide range from 1.7 V to 5.5 V, offering voltage translation of 1.8 V, 2.5 V, 3.3 V, and 5 V logic. The architecture is designed for high common-mode transient immunity and high immunity to electrical noise and magnetic interference. Radiated emissions are minimized with a spread spectrum OOK carrier and other techniques.

Figure 16 shows the waveforms for models of the ADuM250N0/ADuM251N0/ADuM252N0 that have the condition of the fail-safe output state equal to low, where the carrier waveform is off when the input state is low. If the input side is off or not operating, the fail-safe output state of low sets the output to low. For the ADuM250N1/ADuM251N1/ADuM252N1 that have a fail-safe output state of high, Figure 17 illustrates the conditions where the carrier waveform is off when the input state is high. When the input side is off or not operating, the fail-safe output state of high sets the output to high. See the Ordering Guide for the model numbers that have the fail-safe output state of low or the fail-safe output state of high.

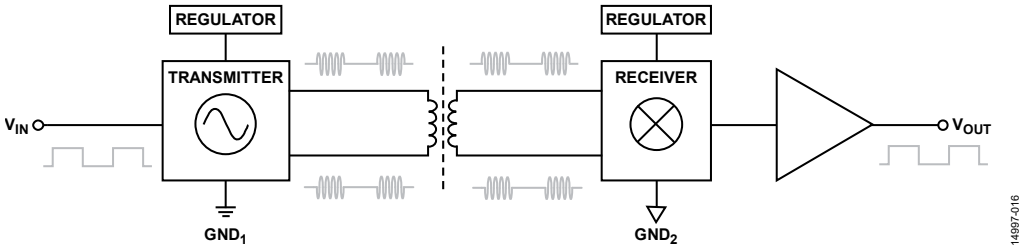

Figure 16. Operational Block Diagram of a Single Channel with a Low Fail-Safe Output State

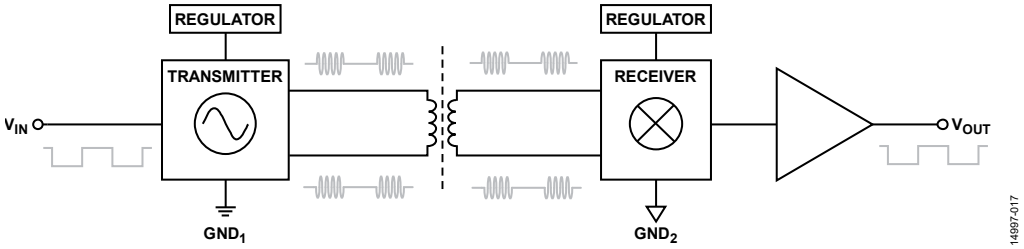

Figure 17. Operational Block Diagram of a Single Channel with a High Fail-Safe Output State

APPLICATIONS INFORMATION

PCB LAYOUT

The ADuM250N/ADuM251N/ADuM252N digital isolators require no external interface circuitry for the logic interfaces. Power supply bypassing is strongly recommended at the input and output supply pins (see Figure 18). Bypass capacitors are connected between Pin 1 and Pin 8 for V_{DD1} and between Pin 9 and Pin 16 for V_{DD2}. The recommended bypass capacitor value is between 0.01 µF and 0.1 µF. The total lead length between both ends of the capacitor and the input power supply pin must not exceed 10 mm.

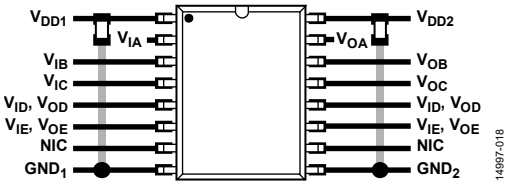

Figure 18. Recommended Printed Circuit Board Layout

In applications involving high common-mode transients, ensure that board coupling across the isolation barrier is minimized. Furthermore, design the board layout such that any coupling that does occur equally affects all pins on a given component side. Failure to ensure this can cause voltage differentials between pins exceeding the Absolute Maximum Ratings of the device, thereby leading to latch-up or permanent damage.

See the AN-1109 Application Note for board layout guidelines.

PROPAGATION DELAY RELATED PARAMETERS

Propagation delay is a parameter that describes the time it takes a logic signal to propagate through a component. The propagation delay to a Logic 0 output may differ from the propagation delay to a Logic 1 output.

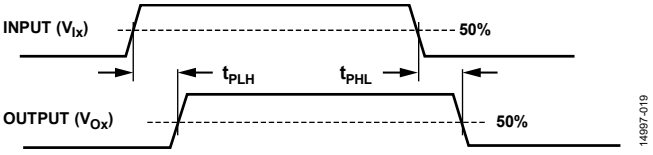

Figure 19. Propagation Delay Parameters

Pulse width distortion is the maximum difference between these two propagation delay values and is an indication of how accurately the timing of the input signal is preserved.

Channel matching is the maximum amount the propagation delay differs between channels within a single ADuM250N/ADuM251N/ADuM252N component.

Propagation delay skew is the maximum amount the propagation delay differs between multiple ADuM250N/ADuM251N/ADuM252N components operating under the same conditions.

JITTER MEASUREMENT

Figure 20 shows the eye diagram for the ADuM250N/ADuM251N/ADuM252N. The measurement was taken using an Agilent 81110A pulse pattern generator at 150 Mbps with pseudorandom bit sequences (PRBS) 2(n − 1), n = 14, for 5 V supplies. Jitter was measured with the Tektronix Model 5104B oscilloscope, 1 GHz, 10 GSPS with the DPOJET jitter and eye diagram analysis tools. The result shows a typical measurement on the ADuM250N/ADuM251N/ADuM252N with 490 ps p-p jitter.

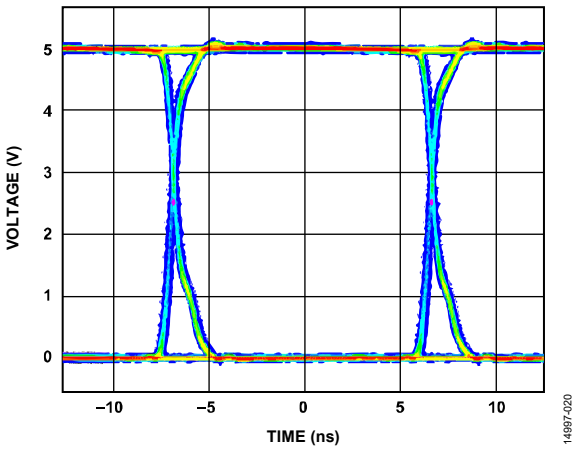

Figure 20. ADuM250N/ADuM251N/ADuM252N Eye Diagram

INSULATION LIFETIME

All insulation structures eventually break down when subjected to voltage stress over a sufficiently long period. The rate of insulation degradation is dependent on the characteristics of the voltage waveform applied across the insulation as well as on the materials and material interfaces.

The two types of insulation degradation of primary interest are breakdown along surfaces exposed to the air and insulation wear out. Surface breakdown is the phenomenon of surface tracking, and the primary determinant of surface creepage requirements in system level standards. Insulation wear out is the phenomenon where charge injection or displacement currents inside the insulation material cause long-term insulation degradation.

Surface Tracking

Surface tracking is addressed in electrical safety standards by setting a minimum surface creepage based on the working voltage, the environmental conditions, and the properties of the insulation material. Safety agencies perform characterization testing on the surface insulation of components that allows the components to be categorized in different material groups. Lower material group ratings are more resistant to surface tracking and, therefore, can provide adequate lifetime with smaller creepage. The minimum creepage for a given working voltage and material group is in each system level standard and is based on the total rms voltage across the isolation, pollution degree, and material group. The material group and creepage for the ADuM250N/ADuM251N/ADuM252N isolators are presented in Table 9.

Insulation Wear Out

The lifetime of insulation caused by wear out is determined by its thickness, material properties, and the voltage stress applied. It is important to verify that the product lifetime is adequate at the application working voltage. The working voltage supported by an isolator for wear out may not be the same as the working voltage supported for tracking. The working voltage applicable to tracking is specified in most standards.

Testing and modeling have shown that the primary driver of long-term degradation is displacement current in the polyimide insulation causing incremental damage. The stress on the insulation can be broken down into broad categories, such as: dc stress, which causes very little wear out because there is no displacement current, and an ac component time varying voltage stress, which causes wear out.

The ratings in certification documents are usually based on 60 Hz sinusoidal stress because this reflects isolation from line voltage. However, many practical applications have combinations of 60 Hz ac and dc across the barrier as shown in Equation 1. Because only the ac portion of the stress causes wear out, the equation can be rearranged to solve for the ac rms voltage, as is shown in Equation 2. For insulation wear out with the polyimide materials used in these products, the ac rms voltage determines the product lifetime.

$$V_{RMS} = \sqrt{V_{AC\ RMS}{}^2 + V_{DC}{}^2} \quad (1)$$

or

$$V_{AC\ RMS} = \sqrt{V_{RMS}{}^2 - V_{DC}{}^2} \quad (2)$$

where:
V_{RMS} is the total rms working voltage.
$V_{AC\ RMS}$ is the time varying portion of the working voltage.
V_{DC} is the dc offset of the working voltage.

Calculation and Use of Parameters Example

The following example frequently arises in power conversion applications. Assume that the line voltage on one side of the isolation is 240 $V_{AC\ RMS}$ and a 400 V_{DC} bus voltage is present on the other side of the isolation barrier. The isolator material is polyimide. To establish the critical voltages in determining the creepage, clearance, and lifetime of a device, see Figure 21 and the following equations.

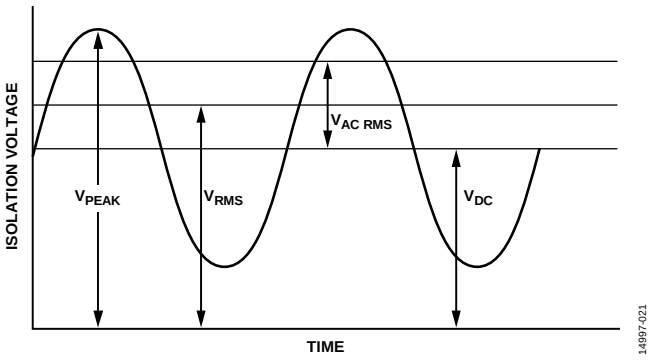

Figure 21. Critical Voltage Example

The working voltage across the barrier from Equation 1 is

$$V_{RMS} = \sqrt{V_{AC\ RMS}{}^2 + V_{DC}{}^2}$$

$$V_{RMS} = \sqrt{240^2 + 400^2}$$

$$V_{RMS} = 466\ \text{V}$$

This V_{RMS} value is the working voltage used together with the material group and pollution degree when looking up the creepage required by a system standard.

To determine if the lifetime is adequate, obtain the time varying portion of the working voltage. To obtain the ac rms voltage, use Equation 2.

$$V_{AC\ RMS} = \sqrt{V_{RMS}{}^2 - V_{DC}{}^2}$$

$$V_{AC\ RMS} = \sqrt{466^2 - 400^2}$$

$$V_{AC\ RMS} = 240\ \text{V rms}$$

In this case, the ac rms voltage is simply the line voltage of 240 V rms. This calculation is more relevant when the waveform is not sinusoidal. The value is compared to the limits for working voltage in Table 15 for the expected lifetime, less than a 60 Hz sine wave, and it is well within the limit for a 50-year service life.

Note that the dc working voltage limit in Table 15 is set by the creepage of the package as specified in IEC 60664-1. This value can differ for specific system level standards.

OUTLINE DIMENSIONS

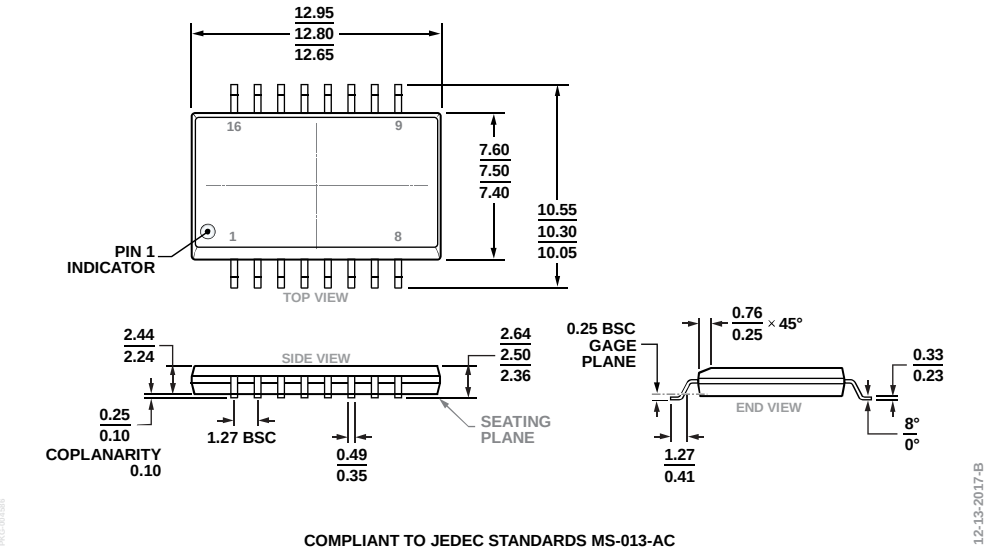

COMPLIANT TO JEDEC STANDARDS MS-013-AC

Figure 22. 16-Lead Standard Small Outline Package, with Increased Creepage [SOIC_IC]
Wide Body
(RI-16-2)
Dimensions shown in millimeters

ORDERING GUIDE

Model[1, 2]	Temperature Range	No. of Inputs, V_{DD1} Side	No. of Inputs, V_{DD2} Side	Withstand Voltage Rating (kV rms)	Fail-Safe Output State	Package Description	Package Option
ADuM250N1BRIZ	−40°C to +125°C	5	0	5.0	High	16-Lead SOIC_IC	RI-16-2
ADuM250N1BRIZ-RL	−40°C to +125°C	5	0	5.0	High	16-Lead SOIC_IC	RI-16-2
ADuM250N0BRIZ	−40°C to +125°C	5	0	5.0	Low	16-Lead SOIC_IC	RI-16-2
ADuM250N0BRIZ-RL	−40°C to +125°C	5	0	5.0	Low	16-Lead SOIC_IC	RI-16-2
ADuM251N1BRIZ	−40°C to +125°C	4	1	5.0	High	16-Lead SOIC_IC	RI-16-2
ADuM251N1BRIZ-RL	−40°C to +125°C	4	1	5.0	High	16-Lead SOIC_IC	RI-16-2
ADuM251N0BRIZ	−40°C to +125°C	4	1	5.0	Low	16-Lead SOIC_IC	RI-16-2
ADuM251N0BRIZ-RL	−40°C to +125°C	4	1	5.0	Low	16-Lead SOIC_IC	RI-16-2
ADuM252N1BRIZ	−40°C to +125°C	3	2	5.0	High	16-Lead SOIC_IC	RI-16-2
ADuM252N1BRIZ-RL	−40°C to +125°C	3	2	5.0	High	16-Lead SOIC_IC	RI-16-2
ADuM252N0BRIZ	−40°C to +125°C	3	2	5.0	Low	16-Lead SOIC_IC	RI-16-2
ADuM252N0BRIZ-RL	−40°C to +125°C	3	2	5.0	Low	16-Lead SOIC_IC	RI-16-2

[1] Z = RoHS Compliant Part.
[2] The EVAL-5CH6CHSOICEBZ is a universal board that can be used to evaluate the ADuM150N, ADuM151N, ADuM152N, ADuM160N, ADuM161N, ADuM162N, ADuM163N, ADuM250N, ADuM251N, ADuM252N, ADuM260N, ADuM261N, ADuM262N, and ADuM263N products. This is an unpopulated board. Users must purchase the device intended for evaluation.

©2016–2019 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
D14997-0-8/19(A)

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А