

## HT-200 HIGH TEMPERATURE HEAT SHRINK TUBING

HT-200 heat-shrinkable tubing is a very flexible, highly flame-resistant, high-clarity, high-temperature, chemical-resistant tubing made from a fluoropolymer material. This Raychem tubing provides very-thin-wall insulation and strain relief of multipin connectors, solder joints and other delicate electrical connections and terminations. It is well-suited for applications that require dense packing of components or visual inspection of covered components such as downhole sensors. It is especially suitable for applications requiring superior chemical and solvent resistance. Its high temperature performance meets or exceeds military and industrial standards. HT-200 meets NASA outgassing requirements making it suitable for use in space applications such as satellites.

### KEY FEATURES

- 2:1 shrink ratio for all standard sizes
- Tough, very flexible, very-thin-wall insulation
- High flame-resistance meeting the requirements of ASTM D2671, Procedure C.
- High temperature performance that meets or exceeds military and industrial standards
- Low recovery temperature helps protect temperature-sensitive substrates
- Protection from most industrial solvents, fuels, and chemicals
- Meets NASA outgassing requirements

### APPLICATIONS

- Downhole oil and gas exploration tools
- Military and commercial aircraft
- Satellites
- Automotive engines
- Industrial equipment
- Battery covers

# HT-200 High Temperature Heat Shrink Tubing

## Quick Reference Guide

### ELECTRICAL

- Provides excellent electrical insulation
- Not recommended for use as a primary insulator at temperatures exceeding 135°C (275°F)

### MECHANICAL

- Tough fluoropolymer material provides abrasion and cut-through resistance
- Provides strain relief when installed on delicate electrical connections and terminations

### TEMPERATURE RATING

- Full recovery temperature: 130°C (266°F)
- Operating temperature range: -70°C to 200°C (-94°F to 392°F)


### STANDARDS AND SPECIFICATIONS

- RW-1200
- SAE AS23053/18 Class 3

### ORDERING INFORMATION

- Color: Clear (-X) Standard; other colors available on request
- Standard packaging: On spools (-SP), varying lengths (consult TE for details)
- Ordering description: Specify product name, size, color and packaging; for example, HT-200-3/16-X-SP.

### HT-200 DIMENSIONS

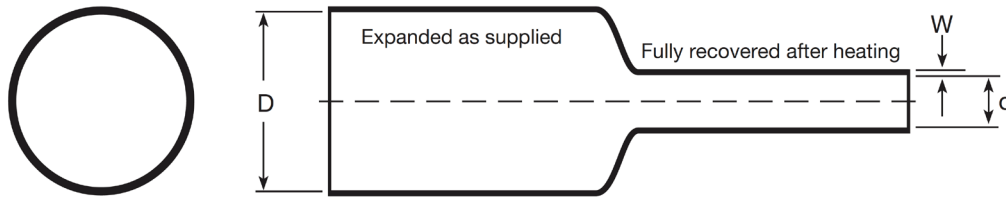

Size	Expanded I.D. (D)		Maximum Recovered I.D. (d)		Nominal Recovered Jacket Wall (W)	
	in.	mm.	in.	mm.	in.	mm.
3/64	.046	1.17	.023	.58	.010 ± .002	.25 ± .051
1/16	.063	1.60	.031	.79	.010 ± .002	.25 ± .051
3/32	.093	2.36	.046	1.17	.010 ± .002	.25 ± .051
1/8	.125	3.18	.062	1.58	.010 ± .002	.25 ± .051
3/16	.187	4.75	.093	2.36	.010 ± .002	.25 ± .051
1/4	.250	6.35	.125	3.18	.012 ± .003	.30 ± .076
3/8	.375	9.53	.187	4.75	.012 ± .003	.30 ± .076
1/2	.500	12.70	.250	6.35	.012 ± .003	.30 ± .076
3/4	.750	19.05	.375	9.53	.017 ± .003	.43 ± .076
1	1.000	25.40	.500	12.70	.019 ± .003	.48 ± .076

# HT-200 High Temperature Heat Shrink Tubing

## Quick Reference Guide

### PROPERTY REQUIREMENTS

Property	Unit	Requirement	Test Method
<b>PHYSICAL</b>			
Dimensions	Inch (mm)	As shown on HT-200 Dimensions table	ASTM D2671 <sup>NOTE 1</sup>
Longitudinal Change	Percent	+0, -10 maximum	
Tensile Strength	psi (MPa)	1500 (10.3) minimum	RW-1200, Section 4.3.1
Ultimate Elongation	Percent	250 minimum	ASTM D2671
Concentricity (Expanded)	Percent	70 minimum	ASTM D2671
Secant Modulus (Expanded)	psi (MPa)	2.5 x 10 <sup>4</sup> (172) maximum	ASTM D2671
Specific Gravity		2.0 maximum	ASTM D2671
Low Temperature Flexibility 4 hours at -70°C ± 2°C (-94 ± 4°F)		No cracking	AMS-DTL-23053, Paragraph 4.6.7.1
Heat Shock 4 hours at 300 ± 3°C (482 ± 5°F)		No dripping, flowing or cracking	RW-1200, Table 2 ASTM D2671
Heat Resistance 168 hours at 250 ± 3°C (437 ± 5°F) Followed by tests for: Tensile Strength Ultimate elongation	psi (MPa) Percent	1200 (8.3) minimum 200 minimum	AMS-DTL-23053, Paragraph 4.6.9  RW-1200, Section 4.3.1 ASTM D2671
Vacuum Outgassing TML (Total Mass Loss) VCM (Volatile Condensable Material)	Percent Percent	1.0 maximum 0.1 maximum	NASA SP-R-0022A
Clarity Stability 24 hours at 200 ± 3°C (392 ± 5°F)		Marking legible through tubing wall (Clear only)	AMS-DTL-23053
<b>ELECTRICAL</b>			
Dielectric Strength	Volts/mil (V/mm)	500 (19,700) minimum	ASTM D2671 <sup>NOTE 2</sup>
Volume Resistivity	Ohm-cm	1 X 10 <sup>13</sup> minimum	ASTM D2671
<b>CHEMICAL</b>			
Copper Mirror Corrosion 16 hours at 175 ± 2°C (347 ± 4°F)		Non-corrosive	ASTM D2671, Procedure A
Flammability		Self extinguishing within 15 seconds, 25% maximum flag burn	ASTM D2671, Procedure C
Fungus Resistance		Rating of 0	ASTM G21
Water Absorption 24 hours at 23 ± 3°C (73 ± 5°F)	Percent	0.1 maximum	ASTM D2671
Fluid Resistance 24 hours at 24 ± 3°C (75 ± 5°F) JP-8 Fuel (MIL-DTL-83133) Hydraulic Fluid (MIL-PRF-5606) Lubricating Oil (MIL-PRF-23699) Lubricating Oil (MIL-PRF-7808) SKYDROL 500 Hydraulic Fluid Salt Water (5% NaCl, A-A-694) De-icing Fluid (AMS 1424) Water Followed by tests for: Tensile Strength Ultimate Elongation	psi (MPa) Percent	1200 (8.3) minimum 250	AMS-DTL-23053, Paragraph 4.6.11          ASTM D2671

NOTE 1: Condition the specimens for 3 minutes at 200 ± 3°C (392 ± 5°F) and cool to room temperature before final measurements.

NOTE 2: Recover the specimen on the metal mandrels for 10 minutes, minimum, at 175 ± 2°C (347 ± 4°F) or until the tubing is completely shrunk on the mandrels.

# HT-200 High Temperature Heat Shrink Tubing

## Quick Reference Guide

### PRODUCT OFFERING

Material Description	Material Number
HT-200-3/64-X-SP	CV4354-000
HT-200-1/16-X-SP	CV4355-000
HT-200-3/32-X-SP	CV4356-000
HT-200-1/8-X-SP	CV4357-000
HT-200-3/16-X-SP	CV4358-000

Material Description	Material Number
HT-200-1/4-X-SP	CV4359-000
HT-200-3/8-X-SP	CV4360-000
HT-200-1/2-X-SP	CV4361-000
HT-200-3/4-X-SP	CV4362-000
HT-200-1-X-SP	CV4363-000

NOTE : Samples of each part number in these tables are available from inventory.

### TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/South America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

### te.com

Raychem, TE Connectivity, TE, and TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2017 TE Connectivity Ltd. family of companies. All Rights Reserved.

1-1773915-7 04/17 Revised

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А