

MAX17633BEVKIT# Evaluation Kit

Evaluates: MAX17633 5V Output-Voltage Application

General Description

The MAX17633BEVKIT# 5V output evaluation kit (EV kit) provides a proven design to evaluate the MAX17633B high-voltage, high-efficiency, synchronous step-down DC-DC converter. The EV kit is preset for 5V output at load currents of 3.5A and features a 500kHz switching frequency for optimum efficiency and component size. The EV kit features an adjustable input undervoltage lock-out, adjustable soft-start, open-drain $\overline{\text{RESET}}$ signal, and external frequency synchronization. EV kit specifications, settings, features and benefits are highlighted. For full MAX17633B IC features, benefits and parameters, refer to MAX17633 datasheet.

Features

- Wide 6.5V to 36V Input Range
- Programmed 5V Output, 3.5A Load Current
- 500kHz Switching Frequency
- EN/UVLO Input, Resistor-Programmable UVLO Threshold
- Programmed 1ms Soft-Start Time
- Selectable PWM, PFM, and DCM Modes
- Open-Drain $\overline{\text{RESET}}$ Output Pulled Up To 5V of INTVCC
- Provision for External Frequency Synchronization
- Overcurrent and Overtemperature Protection
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

Quick Start

Recommended Equipment

- One MAX17633BEVKIT# EV kit
- One 0V to 36V DC, 5A power supply
- Load capable of sinking 3.5A current
- Digital voltmeter (DVM)

Equipment Setup and Test Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation:

Caution: Do not turn on power supply until all connections are complete.

- 1) Set the input power supply at a voltage between 6.5V and 36V. Disable the power supply.
- 2) Connect the positive terminal of the input power supply to the VIN PCB pad and the negative terminal to the nearest PGND pad. Connect the positive terminal of the 3.5A load to the VOUT pad and the negative terminal to the nearest PGND pad.
- 3) Connect a DVM across the VOUT pad and the nearest PGND pad.
- 4) Verify that shunts are not installed on jumper JU1 (see [Table 1](#) for details).
- 5) Select the shunt position on jumper JU2 according to the intended mode of operation (see [Table 2](#) for details).
- 6) Turn on the input power supply.
- 7) Enable the load.
- 8) Verify that the DVM displays 5V.

Detailed Description of Hardware

The MAX17633BEVKIT# is designed to demonstrate the salient features of the MAX17633B. The EV kit includes an EN/UVLO pad and jumper JU1 to enable the output at a desired input voltage. The MODE/SYNC pad allows an external clock interface to synchronize the device. Jumper JU2 allows selection of a particular mode of operation based on light-load performance requirements. An additional RESET pad is available for monitoring the status of the output voltage.

Setting the Switching Frequency

Switching frequency selection must consider input-voltage range, desired output voltage, $t_{ON(MIN)}$, and $t_{OFF(MIN)}$ of the MAX17633B and ambient temperature. To optimize converter size and efficiency of the EV kit, a switching frequency of 500kHz is chosen for 5V-programmed output. Resistor R5 connected between RT and SGND pins, programs the desired switching frequency. R5 resistor is kept open for a default 500kHz switching frequency. To program the switching frequency, the R5 resistor is calculated as follows:

$$R5 = \frac{21000}{f_{SW}} - 1.7$$

where R5 is in kΩ and f_{SW} is in kHz.

Soft-Start Programming

The EV kit offers an adjustable soft-start function to limit inrush current during startup. The soft-start time is adjusted by changing the value of C3, the external capacitor from the SS pin to SGND. The selected output capacitance (C_{SEL}) and the output voltage (V_{OUT}) determine the minimum value of C3, as shown by the following equation:

$$C3 \geq 28 \times 10^{-6} \times C_{SEL} \times V_{OUT}$$

The soft-start time (t_{SS}) is related to the soft-start capacitor C3 by the following equation:

$$t_{SS} = \frac{C3}{5.55 \times 10^{-6}}$$

For example, in order to program a 1ms soft-start time, C3 should be 5600pF.

Enable/Undervoltage-Lockout (EN/UVLO) Programming

The device offers an adjustable input undervoltage-lockout level, where output is enabled at the minimum desired input-voltage level. For always-enable operation, a shunt should be installed across pins 1-2 on jumper JU1, which pulls up the EN/UVLO to VIN. In order to disable the output, install a shunt across pins 2-3 on JU1, which pulls down the EN/UVLO pin to VSGND. See Table 1 for JU1 settings. Set the input voltage level (input undervoltage-lockout level) above which the device turns on with the resistive voltage-divider R1 and R2 connected between VIN and SGND.

Choose R1 to be 3.32MΩ and then calculate R2 as follows:

$$R2 \geq \frac{4033.8}{(V_{INU} - 1.215)}$$

where V_{INU} is the input voltage at that the device requires to turn on.

Table 1. Regulator Enable (EN/UVLO) Description (JU1)

SHUNT POSITION	EN/UVLO PIN	MAX17633B EV KIT OUTPUT
1-2	Connected to VIN	Enabled
Not Installed*	Connected to the center node of resistor-divider R1 and R2	Enabled, UVLO level set through the R1 and R2 resistors
2-3	Connected to SGND	Disabled

*Default position

MODE Selection (MODE/SYNC)

The device’s MODE/SYNC pin can be used to select among forced PWM, DCM, or PFM modes of operation at light loads. The logic state of the MODE/SYNC pin is latched when the VCC and EN/UVLO voltages exceed the respective UVLO rising thresholds and all internal voltages are ready to allow LX switching. State changes on the MODE/SYNC pin are ignored during normal operation. Refer to the MAX17633 IC datasheet for more information on the PWM, DCM, and PFM modes of operation. [Table 2](#) shows the EV kit jumper (JU2) settings that can be used to configure the desired mode of operation.

External Clock Synchronization (MODE/SYNC)

The internal oscillator of the MAX17633B can be synchronized to an external clock signal through the MODE/ SYNC pin in DCM and PWM modes of operation. The synchronization to an external clock is not supported in PFM mode of operation. The external synchronization clock frequency must be between $1.1 \times f_{SW}$ and $1.4 \times f_{SW}$, where f_{SW} is the frequency of operation as set by R5 resistor. The minimum external clock high pulse width should be greater than 50ns and minimum external low pulse width should be greater than 160ns. The source impedance of the external SYNC signal source should be below 25kΩ for reliable operation.










Table 2. MODE/SYNC Description (JU2)


SHUNT POSITION	MODE/SYNC PIN	MAX17633B EV KIT OUTPUT
1-2	Connected to INTVCC	DCM mode of operation
2-3*	Connected to SGND	PWM mode of operation
Not Installed	Unconnected	PFM model of operation

*Default position

Hot Plug-In and Long Input Cables

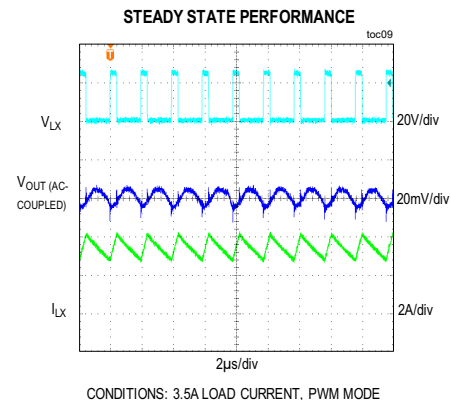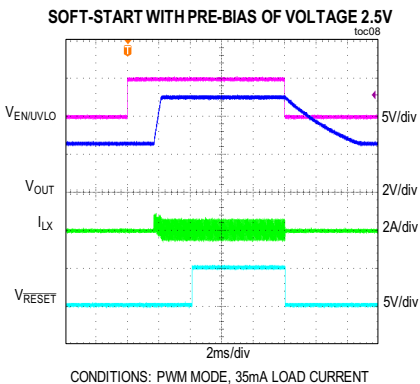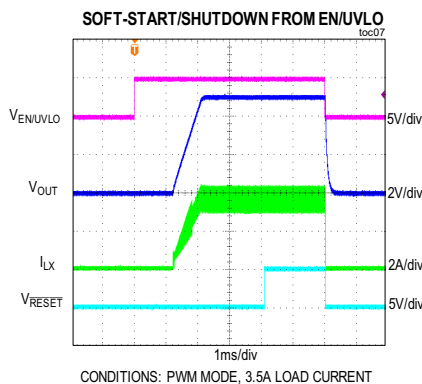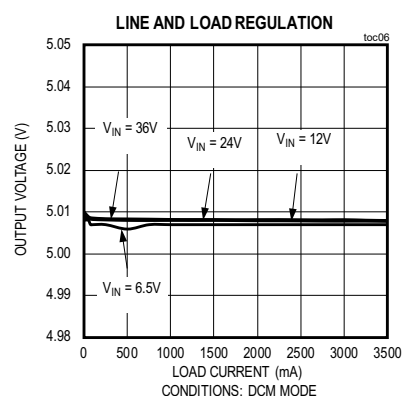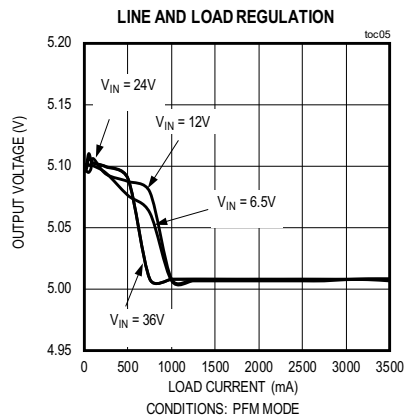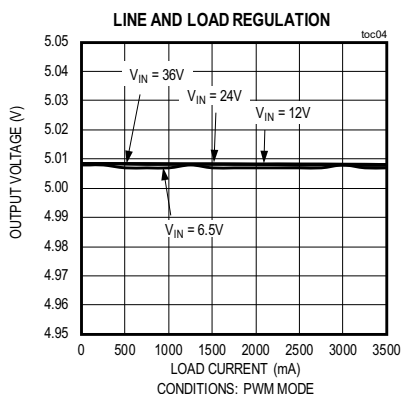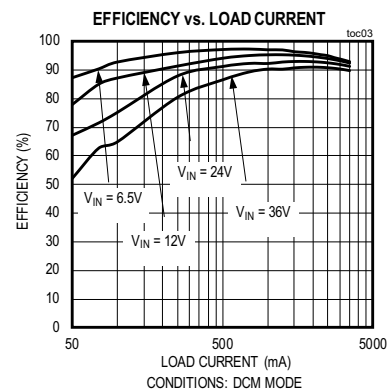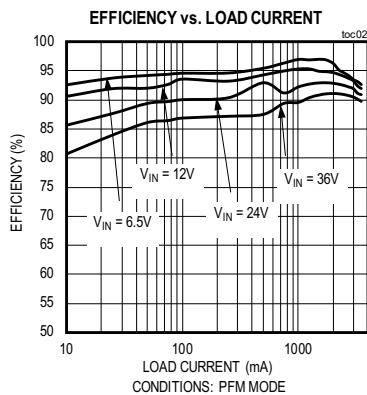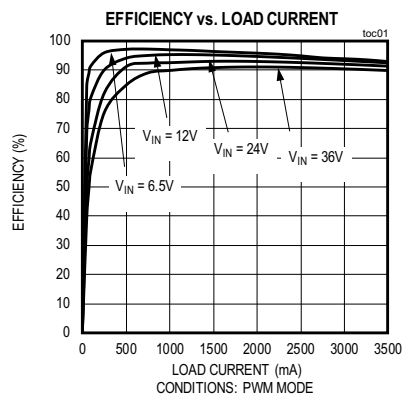The MAX17633BEVKIT# PCB layout provides an optional electrolytic capacitor (C6, 10μF/50V). This capacitor limits the peak voltage at the input of the MAX17633B when the DC input source is “Hot-Plugged” to the EV kit input terminals with long input cables. The equivalent series resistance (ESR) of the electrolytic capacitor dampens the oscillations caused by interaction of the inductance of the long input cables, and the ceramic capacitors at the power module input.

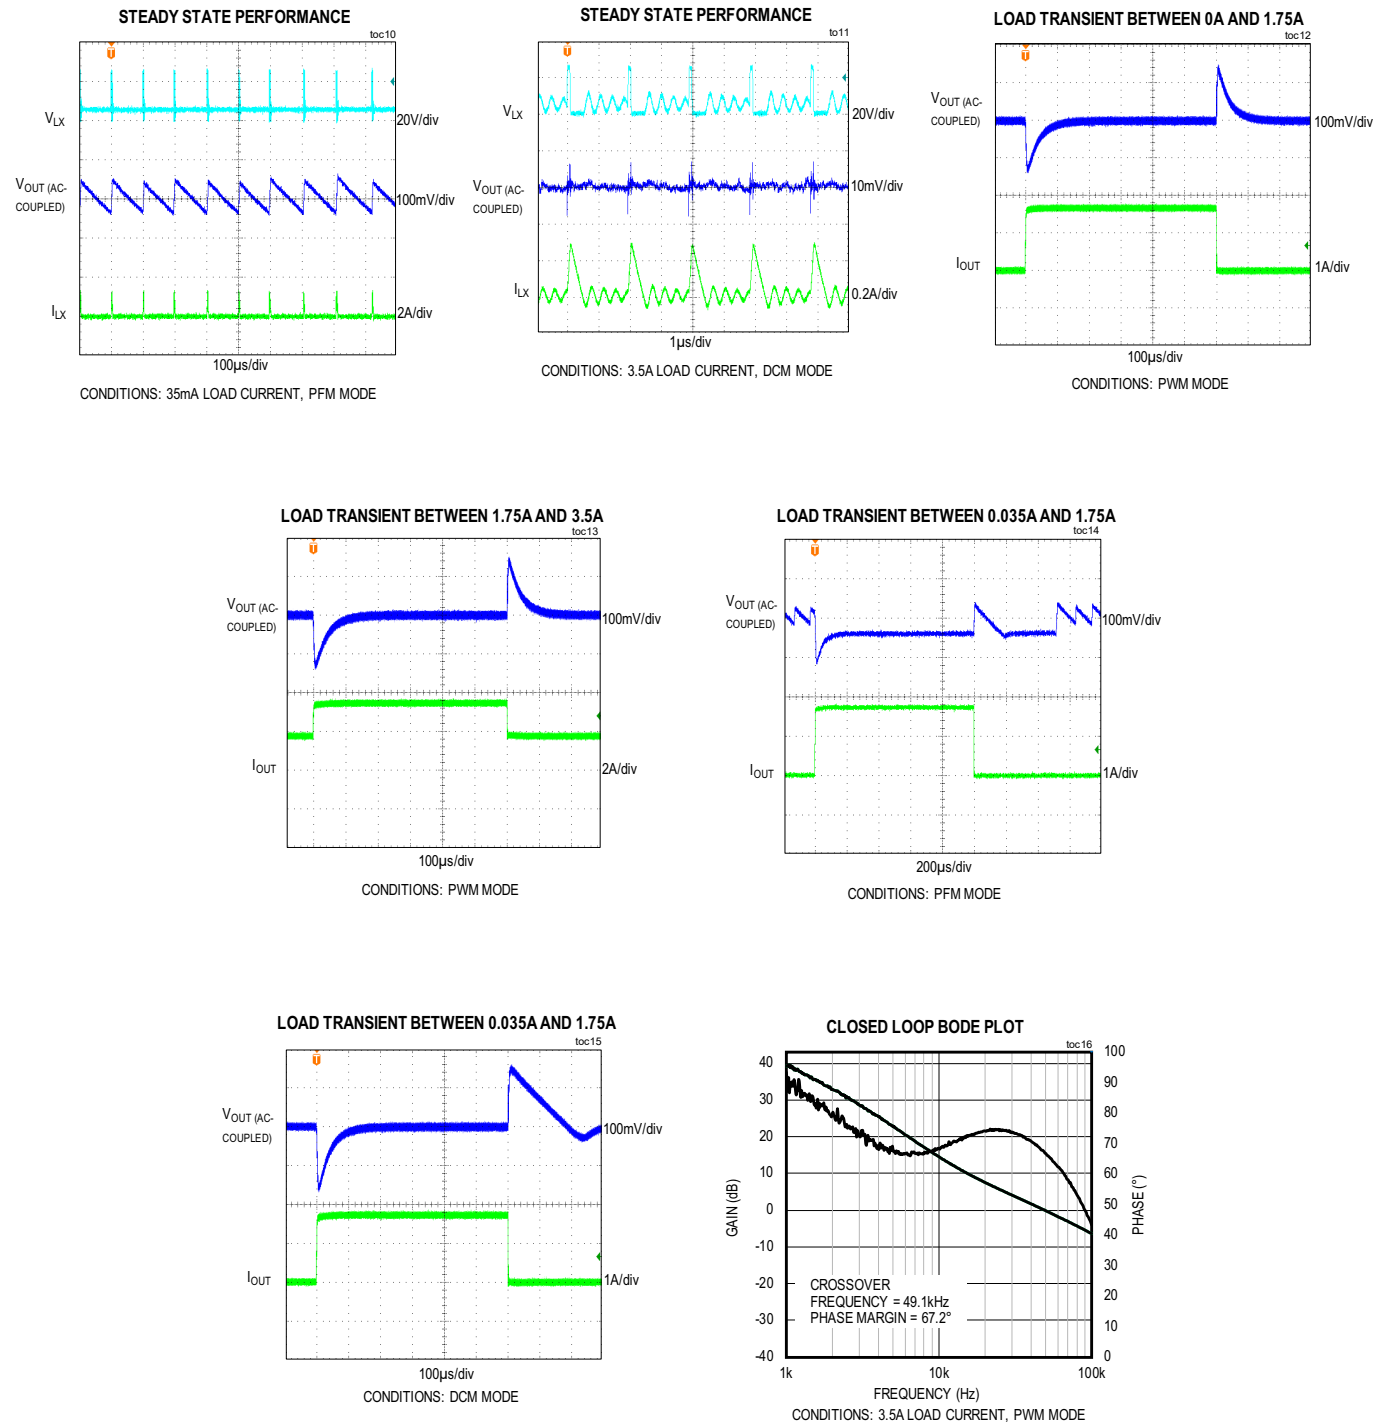MAX17633B EV Kit Performance Report(V_{IN} = 24V, L = 6.8μH (XAL5050-682ME), f_{SW} = 500kHz, unless otherwise noted.)

MAX17633B EV Kit Performance Report (continued)(V_{IN} = 24V, L = 6.8μH (XAL5050-682ME), f_{SW} = 500kHz, unless otherwise noted.)

MAX17633BEVKIT# Evaluation Kit

Evaluates: MAX17633
5V Output-Voltage Application

Ordering Information

PART	TYPE
MAX17633BEVKIT#	EV Kit

#Denotes RoHS compliant.

Component Suppliers

SUPPLIER	WEBSITE
Coilcraft, Inc.	www.coilcraft.com
Murata Americas	www.murata.com
Panasonic Corp.	www.panasonic.com
TDK Corp.	www.component.tdk.com
Venkel Ltd.	www.venkel.com
SullinsCorp	www.sullinscorp.com
Taiyo Yuden	www.t-yuden.com
Vishay Dale	www.vishay.com

Note: Indicate that you are using the MAX17633B IC when contacting these component suppliers.

MAX17633BEVKIT# Evaluation Kit

Evaluates: MAX17633
5V Output-Voltage Application

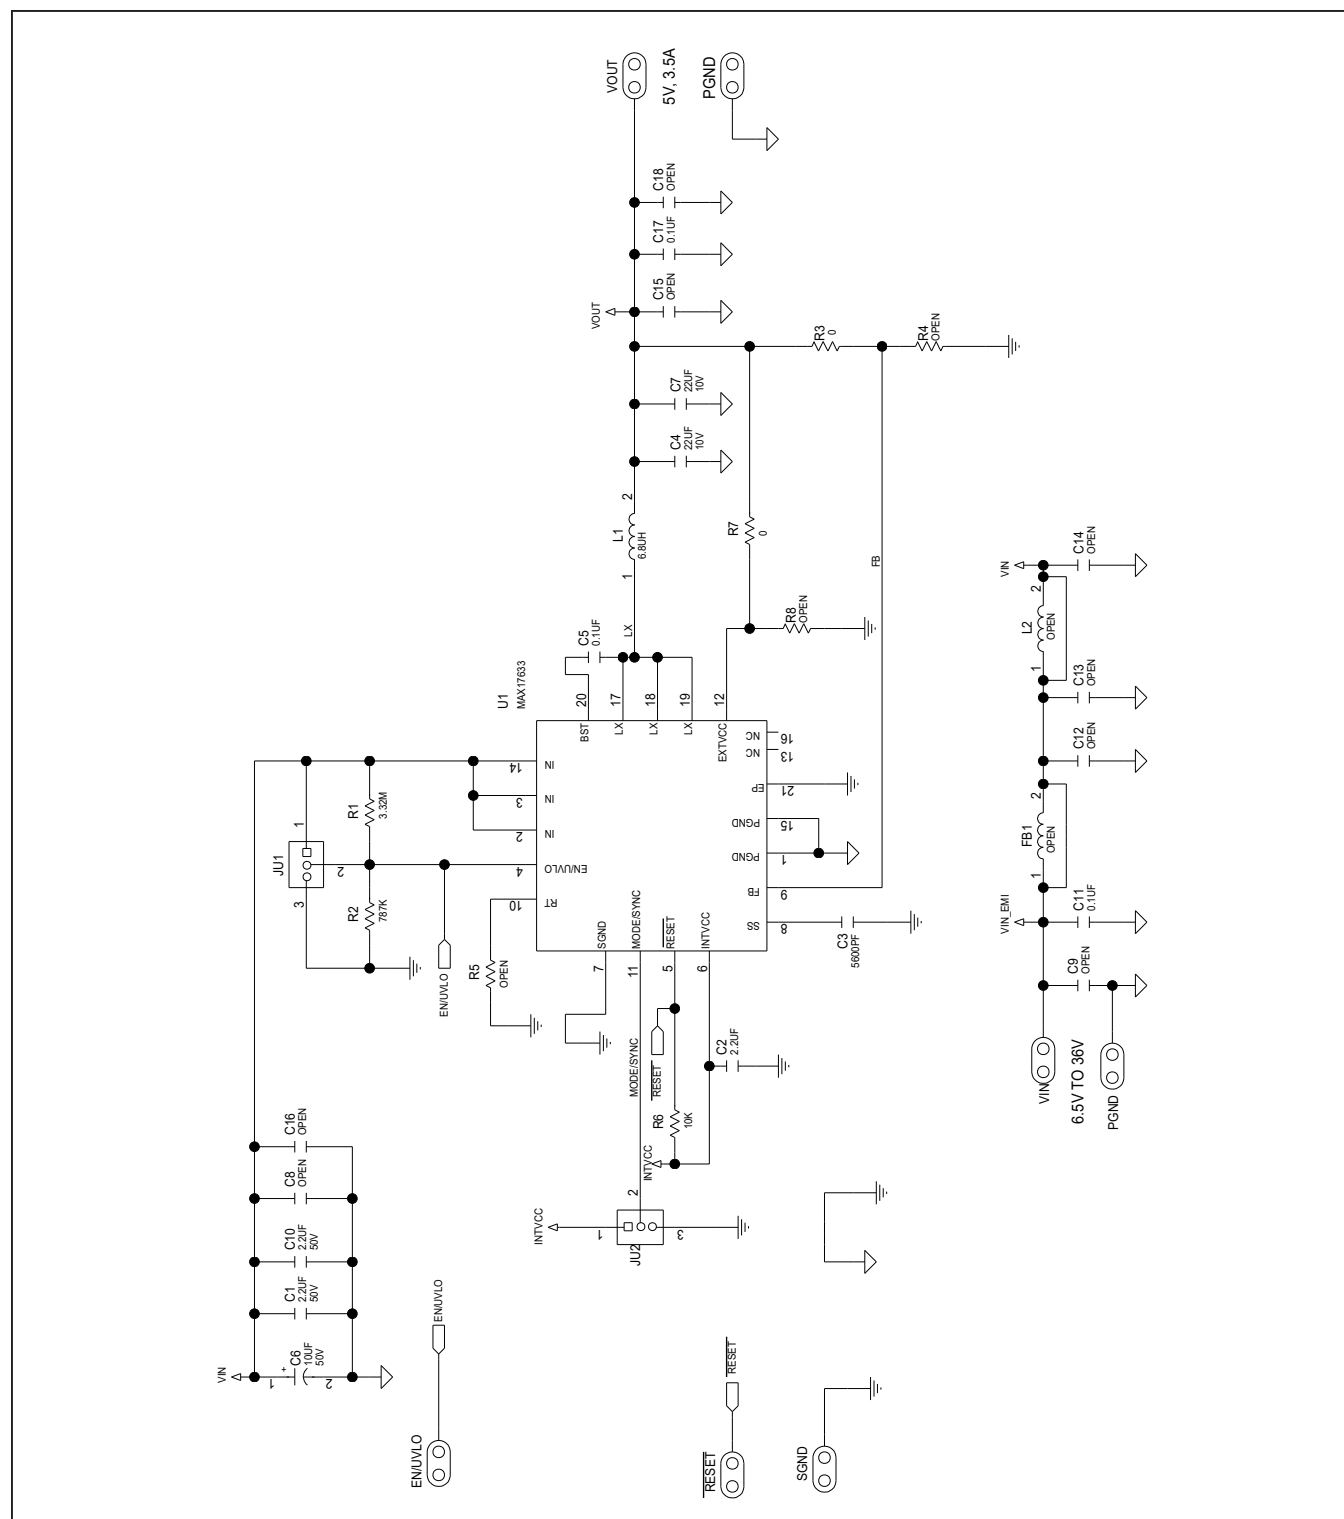
MAX17633B EV Kit Bill of Materials

S.NO	Ref Designator	Value	Description	Package	Manufacturer Part No.	Manufacturer	Qty
1	C1, C10	2.2UF	SMT Capacitor-X7R/50V	1206	GRM31CR71H225KA88	Murata	2
2	C2	2.2UF	SMT Capacitor-X7R/6.3V	0603	CGA3E1X7R0J225K080	TDK	1
3	C3	5600PF	SMT Capacitor-X7R/25V	0402	GRM155R71E562KA01	Murata	1
4	C4, C7	22UF	SMT Capacitor-X7R/10V	1210	GRM32ER71A226K	Murata	2
5	C5	0.1UF	SMT Capacitor-X7R/16V	0402	GCM155R71C104KA55	Murata	1
6	C6	10UF	SMT Aluminum-Electrolytic-X7R/50V	6.6mm x 6.6mm x 6.1mm	EEE-FK1H100P	Panasonic	1
7	C11	0.1UF	SMT Capacitor-X7R/100V	0603	CC0603KRX7R0BB104	Yageo	1
8	C17	0.1UF	SMT Capacitor-X7R/25V	0402	GRM155R71E104KE14	Murata	1
9	JU1,JU2	-	3-pin header	-	GRPB031VWVN-RC	SULLINS	2
10	L1	6.8UH	SMT Inductor	5.48mm x 5.28mm x 5.1mm	XAL5050-682ME	Coilcraft	1
11	R1	3.32M	SMT Resistor	0402	Generic	Generic	1
12	R2	787K	SMT Resistor	0402	Generic	Generic	1
13	R7,R3	0R	SMT Resistor	0402	Generic	Generic	1
14	R6	10K	SMT Resistor	0402	Generic	Generic	1
15	U1	4.5V-36V, 3.5A	Buck Converter	20-Pin TQFN 4mmx4mm	MAX17633BATP+	MAXIM INTEGRATED	1


MAX17633BEVKIT# Evaluation Kit

Evaluates: MAX17633 5V Output-Voltage Application

MAX17633B EV Kit Schematic




MAX17633B EV Kit PCB Layout

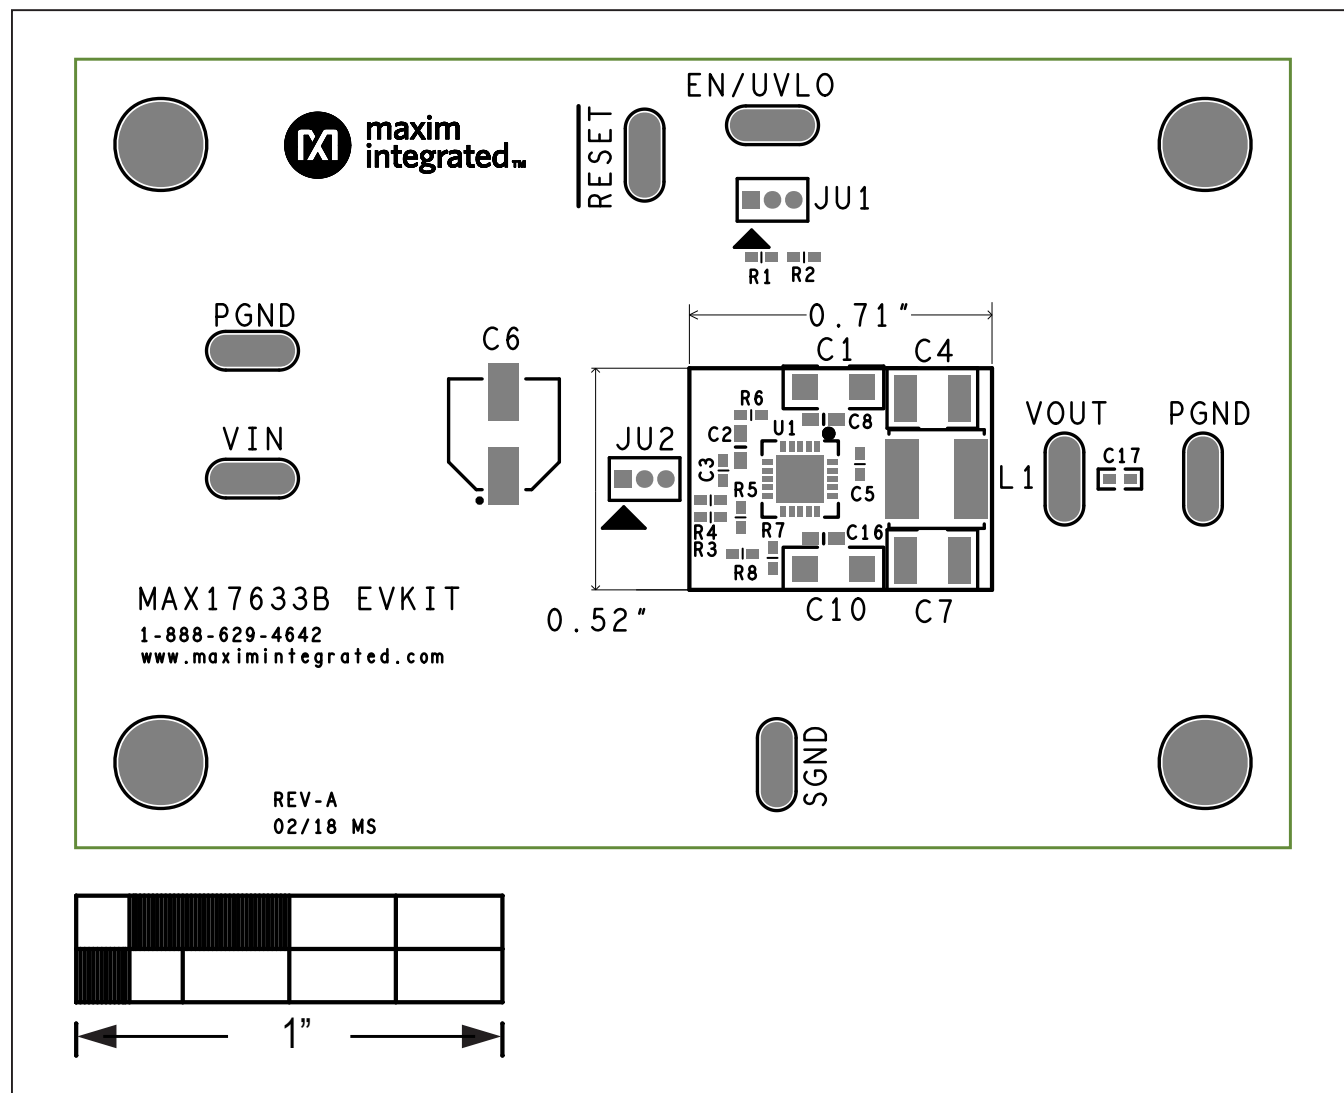


MAX17633B EV Kit — Top Silkscreen

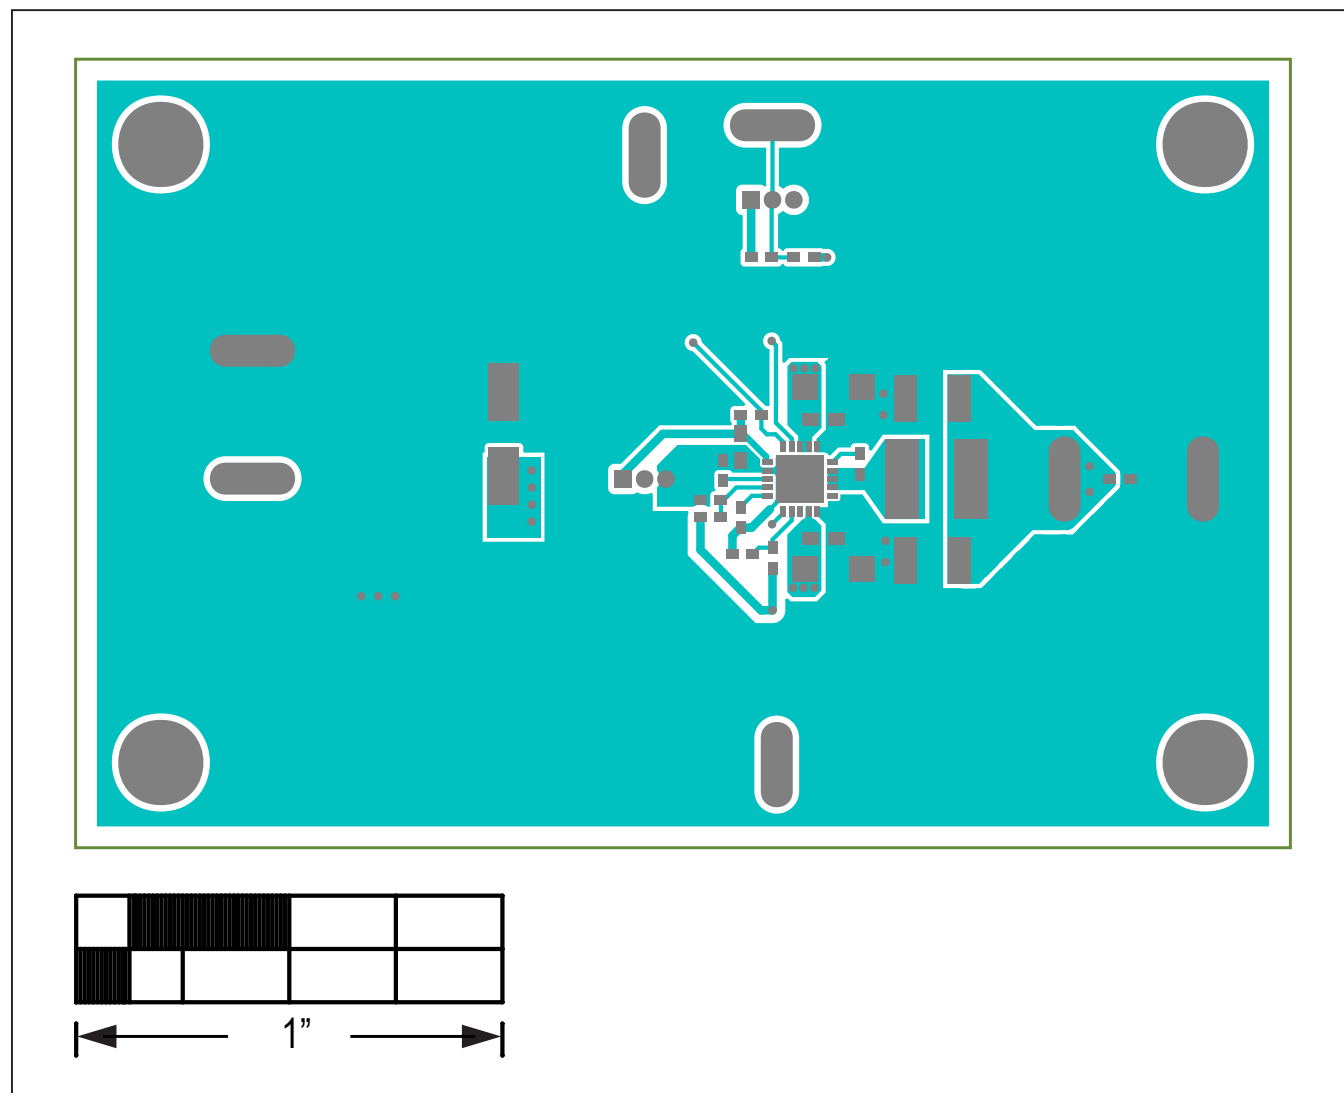MAX17633B EV Kit PCB Layout (continued)




MAX17633B EV Kit — Top

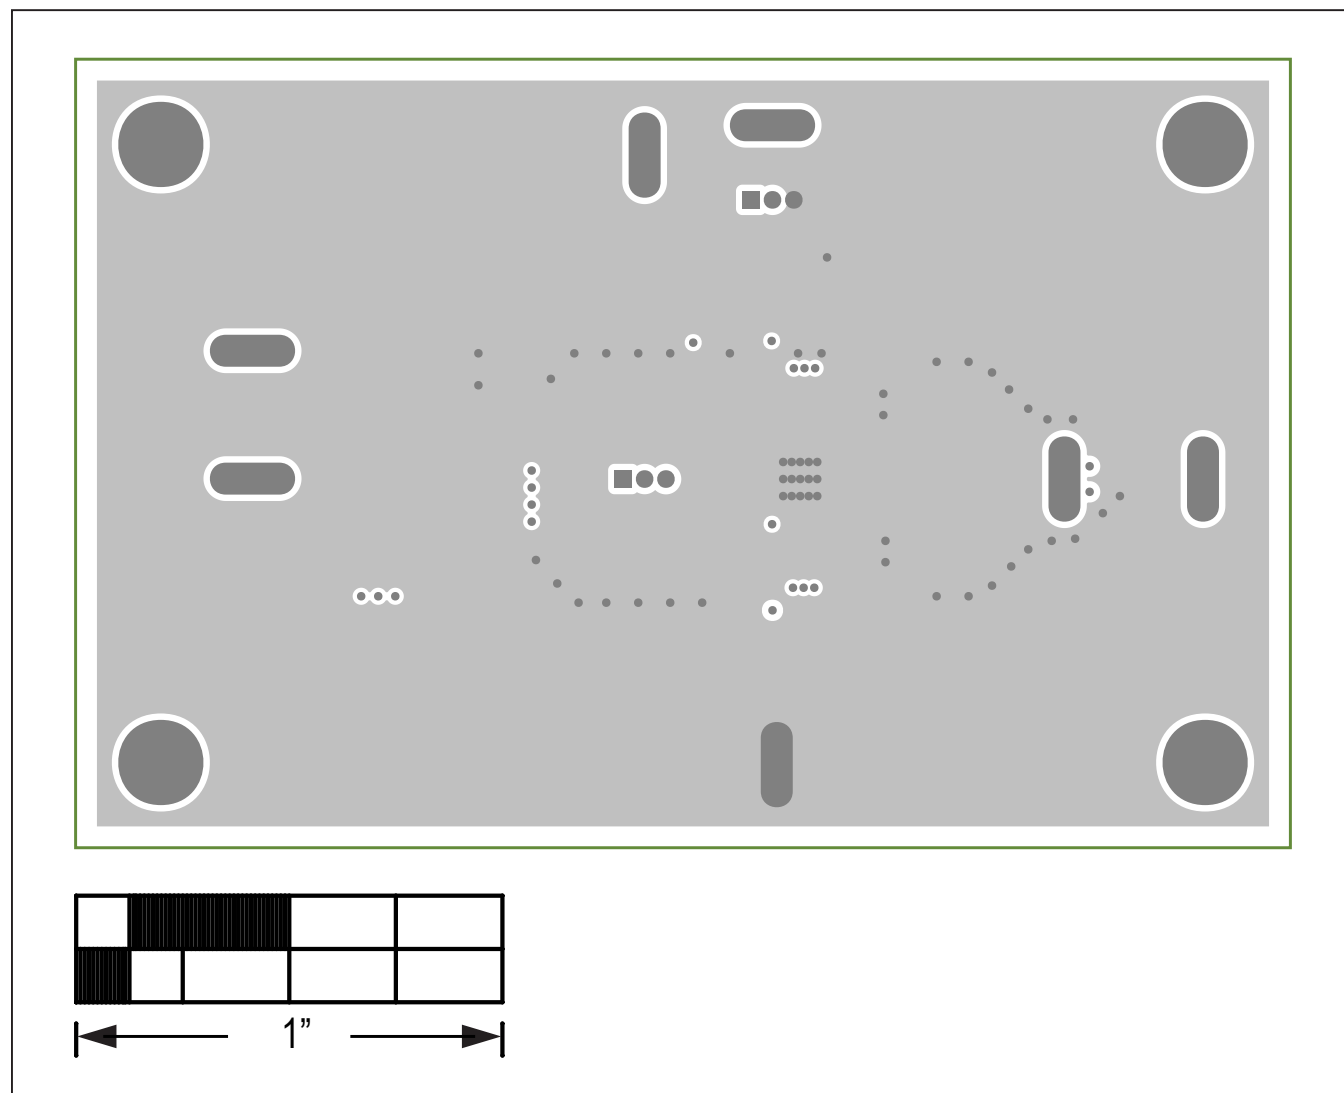MAX17633B EV Kit PCB Layout (continued)




MAX17633B EV Kit — Layer2 GND

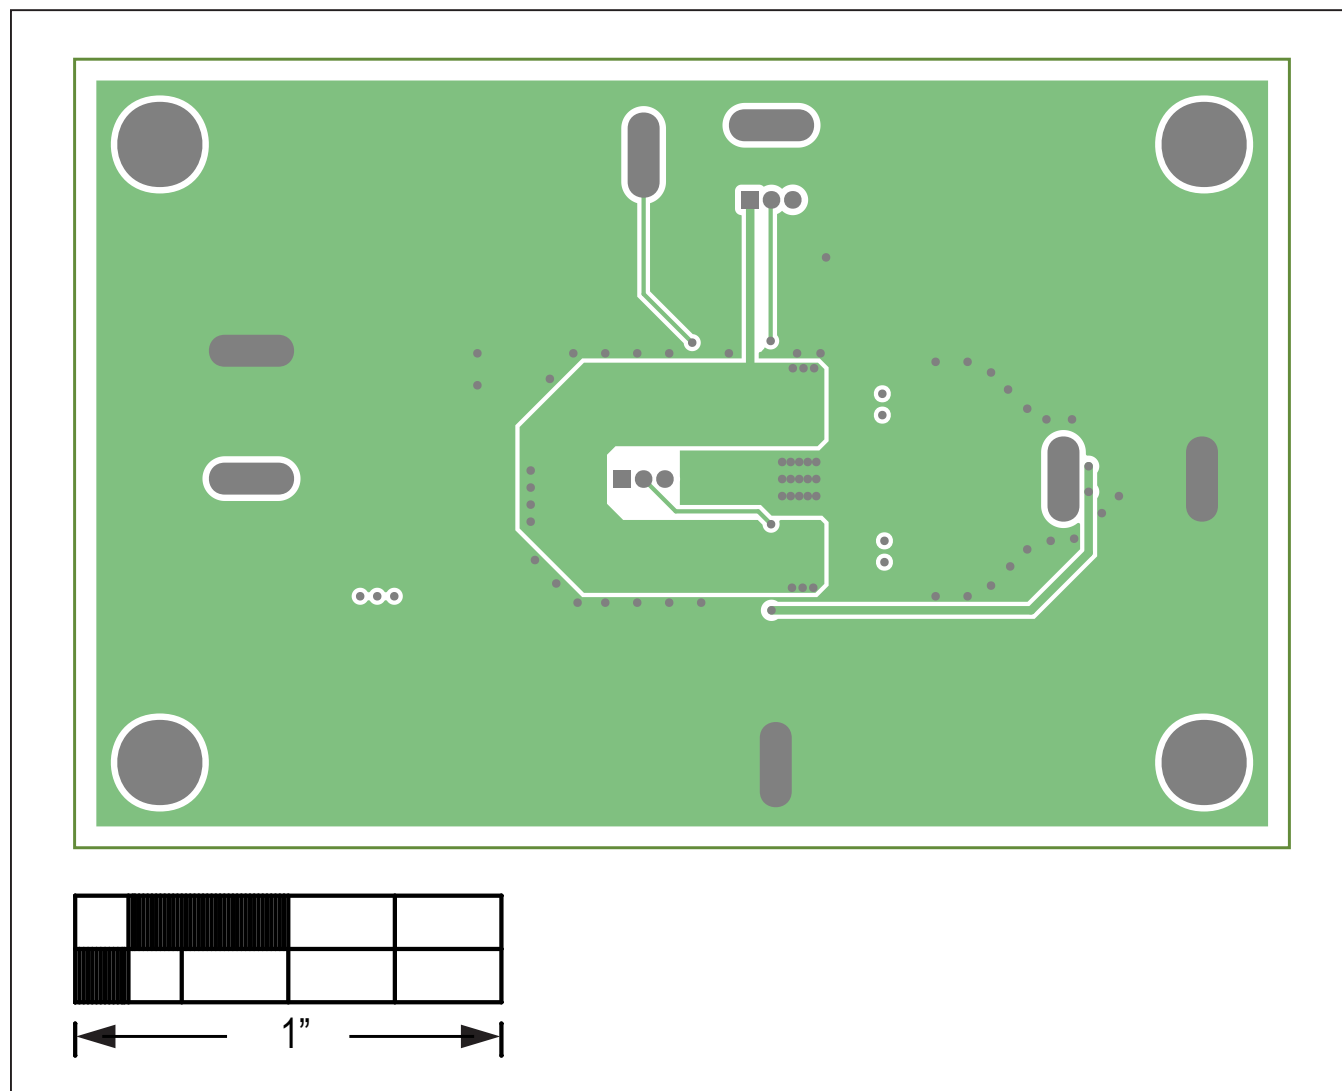MAX17633B EV Kit PCB Layout (continued)




MAX17633B EV Kit — Layer3 GND

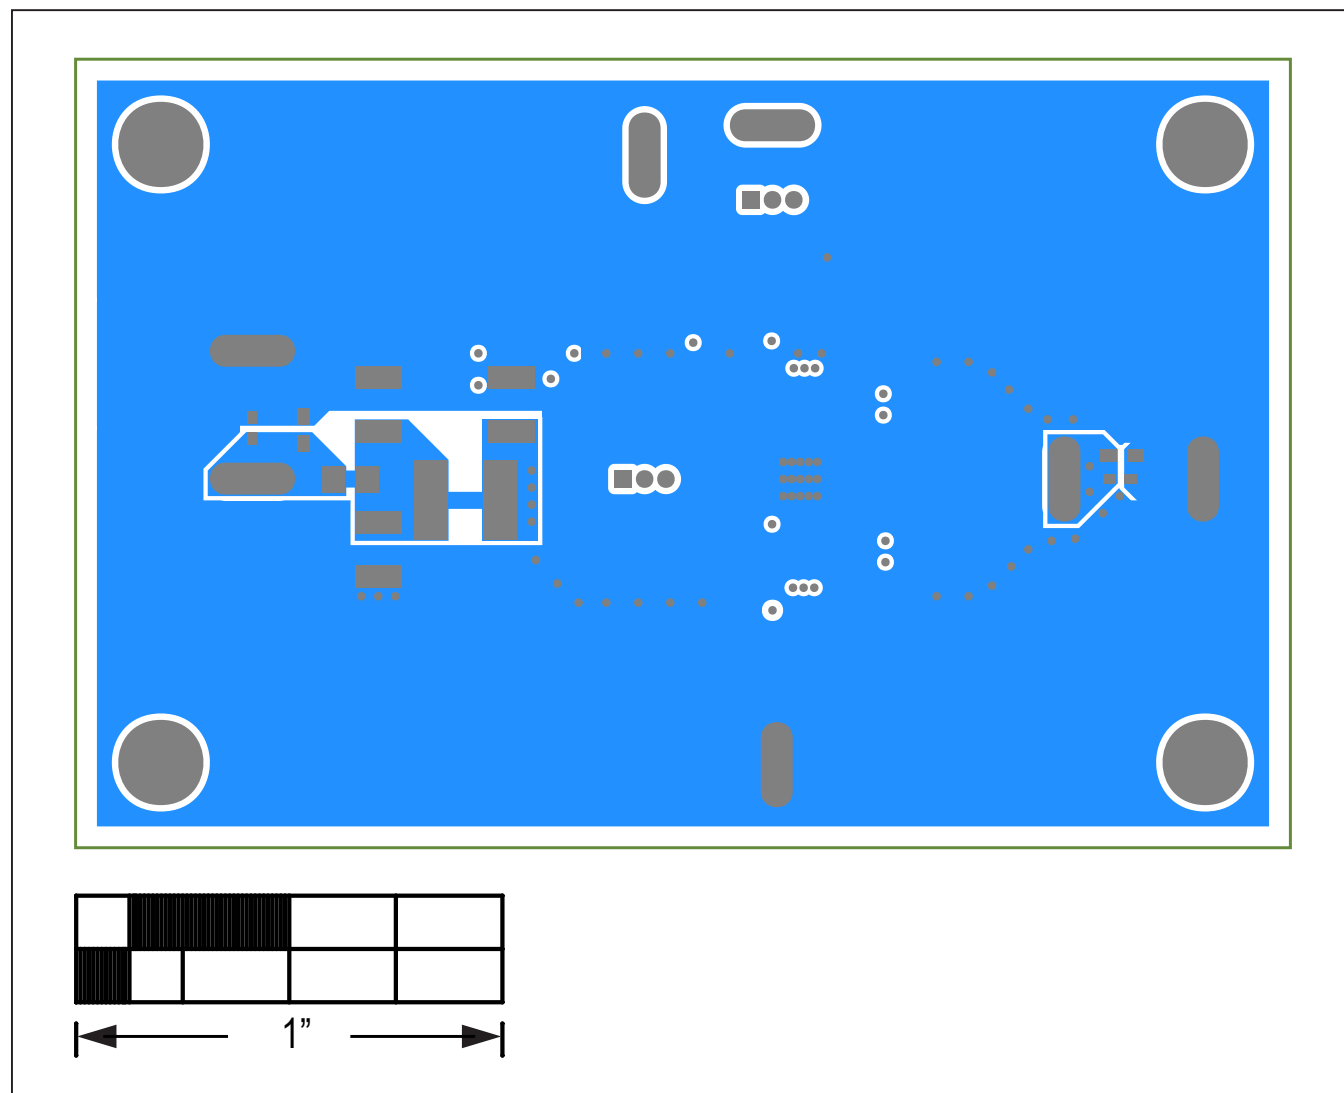MAX17633B EV Kit PCB Layout (continued)



MAX17633B EV Kit — Bottom

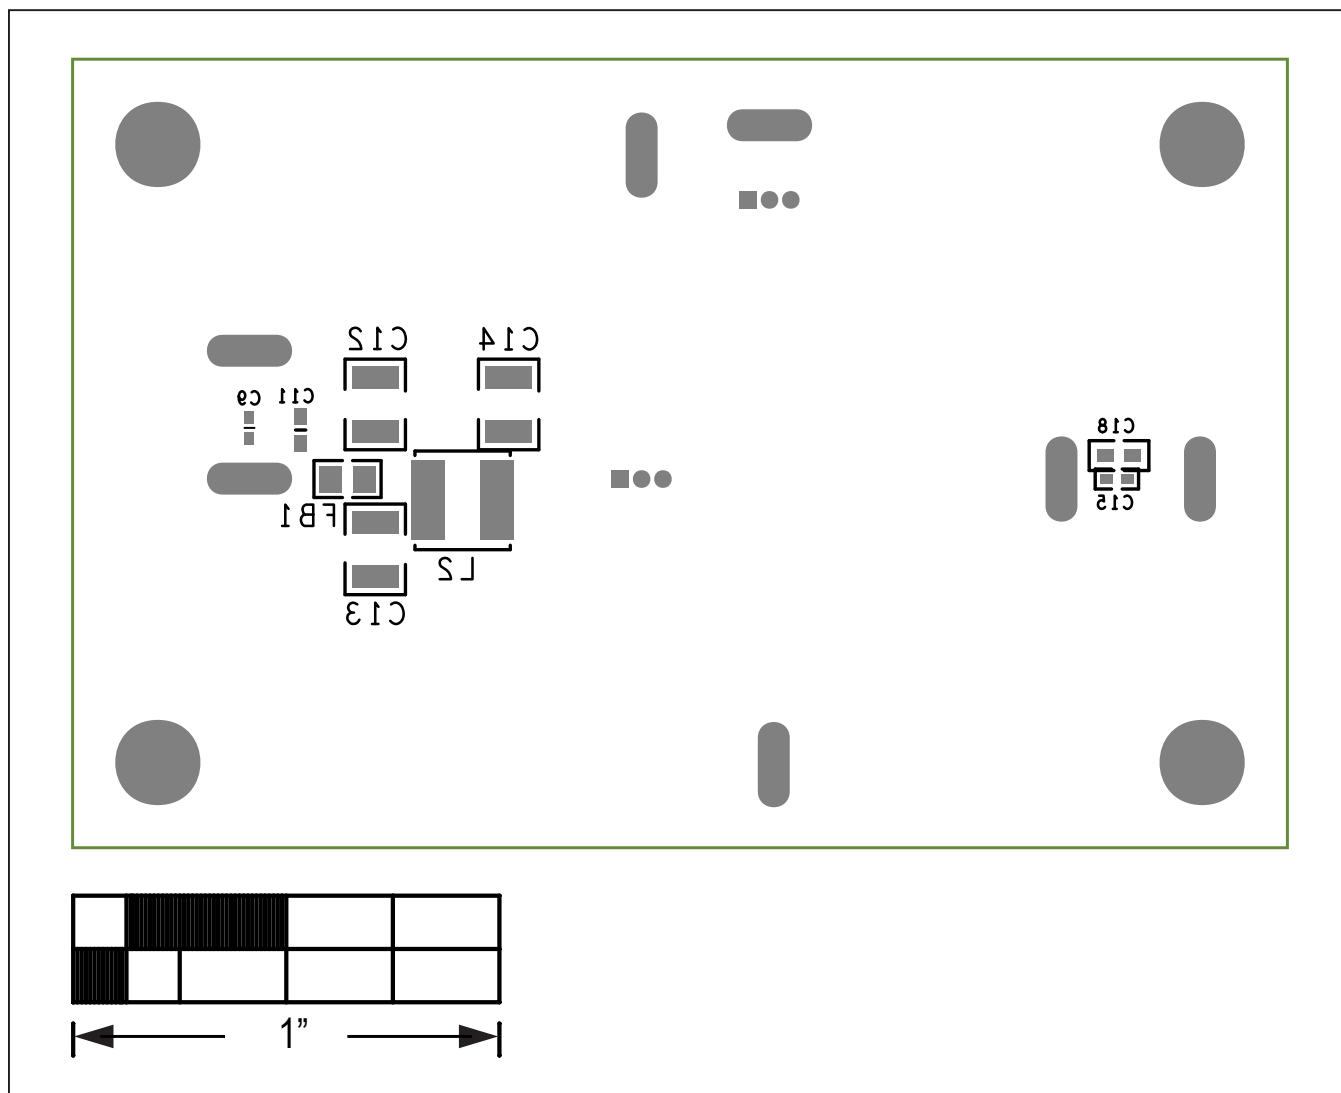MAX17633B EV Kit PCB Layout (continued)



MAX17633B EV Kit — Bottom Silkscreen

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	5/18	Initial release	—
1	8/18	Updated part number to MAX17633BEVKIT# and <i>Bill of Materials</i> .	1–14

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А