

# Inductors for Power Supply Circuit

Wound/STD • magnetic shielded

## VLM series

Type:           VLM10555-2  
                  VLM10555-3  
                  VLM13580-D1

Issue date:     September 2011

- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Inductors for Power Supply Circuit

## Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

### VLM Series VLM10555-2


#### FEATURES

- Low loss and large current capability design.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Magnetic coupling type core with low magnetic flux leakage and a three-terminal structure.
- Available for automatic mounting in tape and reel package.

#### APPLICATIONS

Note book type and mobile computers, amusement equipment, DVD players, VRMs, plasma displays, etc.


#### SHAPES AND DIMENSIONS



Dimensions in mm




#### RECOMMENDED PC BOARD PATTERN



Dimensions in mm

#### CIRCUIT DIAGRAM



#### ELECTRICAL CHARACTERISTICS

| Part No.            | Inductance (μH) | Inductance tolerance (%) | Test frequency (kHz) | DC resistance (mΩ) |      | Rated current(A)*                      |        | Based on temperature rise typ. |
|---------------------|-----------------|--------------------------|----------------------|--------------------|------|----------------------------------------|--------|--------------------------------|
|                     |                 |                          |                      | [±15%]             | typ. | Based on inductance change max. (typ.) |        |                                |
| VLM10555T-1R8M8R8-2 | 1.8             | ±20                      | 100                  | 5.6                | 5.6  | 18(20)                                 | 14(16) | 8.8                            |
| VLM10555T-2R5M8R0-2 | 2.5             | ±20                      | 100                  | 6.7                | 6.7  | 15(17)                                 | 12(14) | 8                              |
| VLM10555T-3R3M7R2-2 | 3.3             | ±20                      | 100                  | 8.3                | 8.3  | 12(14)                                 | 10(12) | 7.2                            |
| VLM10555T-4R3M7R2-2 | 4.3             | ±20                      | 100                  | 8.3                | 8.3  | 9(11)                                  | 7(9)   | 7.2                            |


\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


• Test equipment WK 3260B PRECISION MAGNETICS ANALYZER, WK 3265B 25A DC BIAS UNIT, or equivalent

#### TYPICAL ELECTRICAL CHARACTERISTICS

##### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

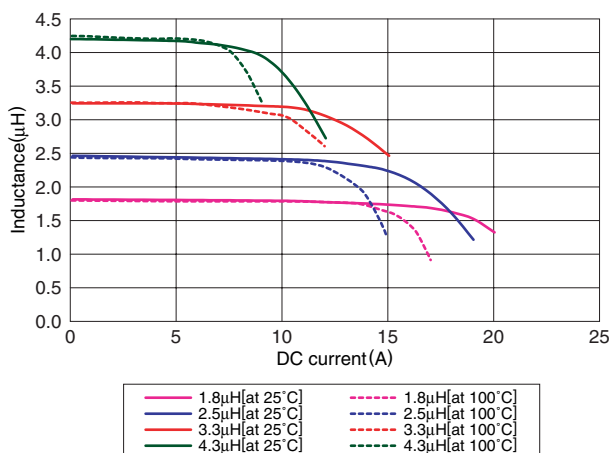

##### TEMPERATURE RISE CHARACTERISTICS

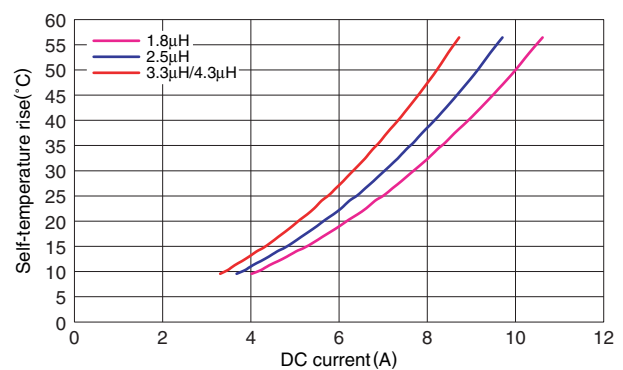

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

# Inductors for Power Supply Circuit

## Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

### VLM Series VLM10555-3


#### FEATURES

- Low loss and large current capability design.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Magnetic coupling type core with low magnetic flux leakage and a three-terminal structure.
- Available for automatic mounting in tape and reel package.

#### APPLICATIONS

Note book type and mobile computers, amusement equipment, DVD players, VRMs, plasma displays, etc.


#### SHAPES AND DIMENSIONS



Dimensions in mm




#### RECOMMENDED PC BOARD PATTERN



Dimensions in mm

#### CIRCUIT DIAGRAM



#### ELECTRICAL CHARACTERISTICS

| Part No.            | Inductance (nH) | Inductance tolerance (%) | Test frequency (kHz) | DC resistance (mΩ) |      | Rated current(A)*               |    | Based on temperature rise typ. |
|---------------------|-----------------|--------------------------|----------------------|--------------------|------|---------------------------------|----|--------------------------------|
|                     |                 |                          |                      | max.               | typ. | Based on inductance change max. |    |                                |
| VLM10555T-R33M180-3 | 330             | ±20                      | 100                  | 1.2                | 0.95 | 34                              | 30 | 18                             |
| VLM10555T-R45M110-3 | 450             | ±20                      | 100                  | 2.6                | 2.2  | 40                              | 34 | 11                             |
| VLM10555T-R56M120-3 | 560             | ±20                      | 100                  | 2.5                | 2.1  | 34                              | 26 | 12                             |
| VLM10555T-R70M120-3 | 700             | ±20                      | 100                  | 2.5                | 2.1  | 26                              | 21 | 12                             |
| VLM10555T-1R2M100-3 | 1200            | ±20                      | 100                  | 3.2                | 2.7  | 18                              | 15 | 10                             |


\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


• Test equipment WK 3260B PRECISION MAGNETICS ANALYZER, WK 3265B 25A DC BIAS UNIT, or equivalent

#### TYPICAL ELECTRICAL CHARACTERISTICS

##### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

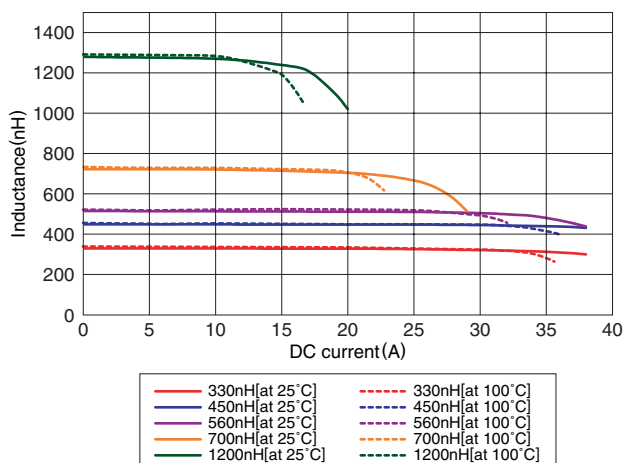

##### TEMPERATURE RISE CHARACTERISTICS

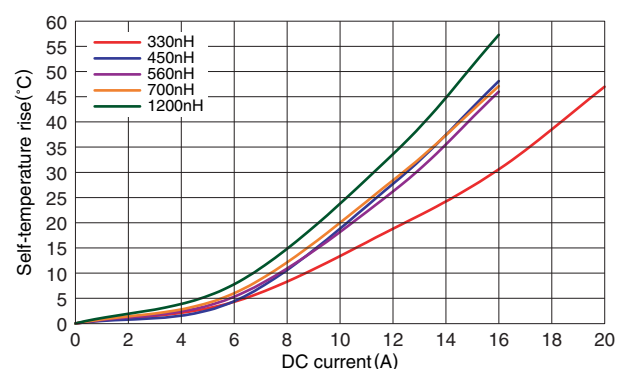

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

# Inductors for Power Supply Circuit Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

## VLM Series VLM13580-D1


### FEATURES

- Low loss and large current capability design.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Magnetic coupling type core with low magnetic flux leakage and a three-terminal structure.
- Available for automatic mounting in tape and reel package.


### APPLICATIONS

Mobile computers etc.


### SHAPES AND DIMENSIONS

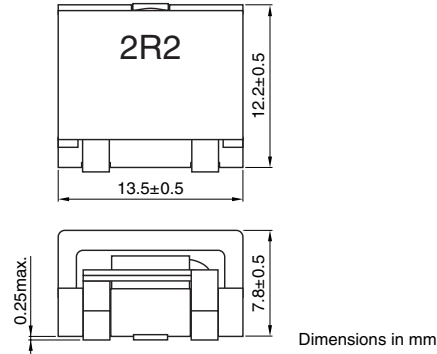

### RECOMMENDED PC BOARD PATTERN



### CIRCUIT DIAGRAM



### ELECTRICAL CHARACTERISTICS

| Part No.          | Inductance (μH) | Inductance tolerance (%) | Test frequency (kHz) | DC resistance (mΩ) |      | Rated current(A)*               |                                                              |                            |
|-------------------|-----------------|--------------------------|----------------------|--------------------|------|---------------------------------|--------------------------------------------------------------|----------------------------|
|                   |                 |                          |                      | [±15%]<br>max.     | typ. | Based on inductance change max. | Based on temperature rise typ.<br>Self-temperature rise 20°C | Self-temperature rise 40°C |
| VLM13580T-R82M-D1 | 0.82            | ±20                      | 100                  | 2                  | 1.7  | 36                              | 12.6                                                         | 18.5                       |
| VLM13580T-1R5M-D1 | 1.5             | ±20                      | 100                  | 2.5                | 2.1  | 26                              | 11.7                                                         | 17.2                       |
| VLM13580T-2R2M-D1 | 2.2             | ±20                      | 100                  | 3.9                | 3.3  | 20                              | 10.5                                                         | 14.8                       |
| VLM13580T-3R3M-D1 | 3.3             | ±20                      | 100                  | 4.5                | 3.8  | 18                              | 8.4                                                          | 11.7                       |


\* Rated current: Value obtained when current flows and the temperature has risen to 20°C or 40°C or when DC current flows and the initial value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +150°C (Including self-temperature rise)


• Test equipment WK 3260B PRECISION MAGNETICS ANALYZER, WK 3265B 25A DC BIAS UNIT, or equivalent

### TYPICAL ELECTRICAL CHARACTERISTICS

#### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

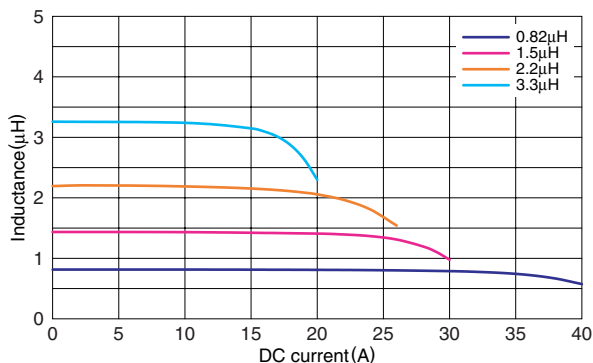

#### TEMPERATURE RISE CHARACTERISTICS

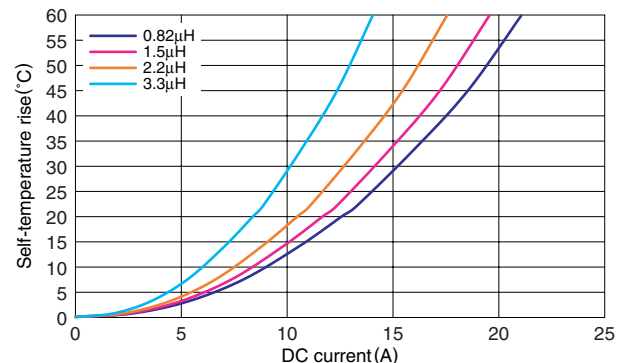

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А