

Metallized Polypropylene (PP) - Capacitors for DC-Link Applications

Special Features

- Very high volume/capacitance ratio
- Self-healing, internal safety disconnecter
- Versatile and safe contact configurations by screwable plates
- Dry construction without electrolyte or oil
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EC
- Customer-specific capacitances or voltages on request

Typical Applications

As intermediate circuit capacitor e.g. in high power converter technology

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

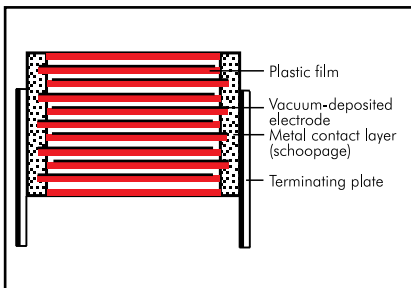

Encapsulation:

Solvent resistant, flame-retardant plastic case with resin seal (optional screw fixing) or moulded version (without screw fixing), UL 94 V-0.

Terminations:

Tinned plates, customized plate configurations are possible.

Marking:

Colour: Black. Marking: Gold.

Electrical Data

Capacitance range:

85 μ F to 4500 μ F

Rated voltages:

400 VDC, 800 VDC, 1600 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, ($\pm 5\%$ available subject to special enquiry)

Operating temperature:

-55° C to $+85^{\circ}$ C

Insulation resistance at $+20^{\circ}$ C:

$\geq 30\,000$ sec ($M\Omega \times \mu$ F)

(mean value: 100 000 sec)

Measuring voltage: 100 V/1 min.

Dissipation factors at $+20^{\circ}$ C:

See General Data.

Test voltage: 1.1 U_r , 2 sec

Dielectric absorption:

0.05 %

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+75^{\circ}$ C for DC voltages.

Reliability:

Operational life > 100 000 hours at 40° C

Failure rate < 36 fit ($10.75 \times U_r$ and 40° C)

Specific dissipation:

See General Data.


Mounting Recommendation

Excessive mechanical strain, e.g. pressure or shock onto the capacitor body, is to be avoided during mounting and usage of the capacitors. When fixing the capacitor the screw torque is to be limited to max. 5 Nm.

Packing

Transportation-safe packing in cardboard boxes.

For further details and graphs please refer to Technical Information.

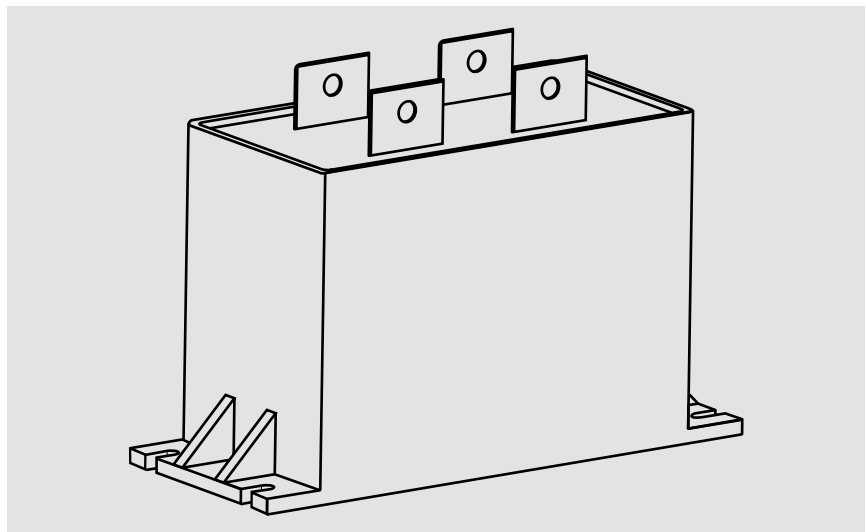

Continuation

General Data


Capacitance			Size	Electrical parameters										Part number
400VDC	400VDC	800VDC	182x94x H in mm	$I_{max.}$ A		I_{rms} (1 kHz)* A		ESR (1 kHz)* mΩ		k_T W/K	$\tan \delta^*$ [x 10 ⁻⁴]			
V1	V2	V2		V1	V2	V1	V2	V1	V2		100 Hz	1 kHz		
2x 250 μF	500 μF	125 μF	49	5000	1250	65.4	32.7	1.43	5.73	0.613	8	45	DCH3G06250_00	
2x 500 „	1000 „	250 „	77	10000	2500	103.5	51.7	0.72	2.87	0.767	8	45	DCH3G06500_00	
2x 750 „	1500 „	375 „	105	15000	3750	139.0	69.5	0.48	1.91	0.922	8	45	DCH3G06750_00	
2x 1000 „	2000 „	500 „	133	20000	5000	173.3	86.7	0.36	1.43	1.076	8	45	DCH3G07100_00	
2x 1250 „	2500 „	625 „	161	25000	6250	196.7	98.3	0.32	1.27	1.231	11	50	DCH3G07125_00	
2x 1500 „	3000 „	750 „	189	30000	7500	228.5	114.3	0.27	1.06	1.385	11	50	DCH3G07150_00	
2x 1750 „	3500 „	875 „	217	35000	8750	248.1	124.1	0.25	1.00	1.540	11	55	DCH3G07175_00	
2x 2000 „	4000 „	1000 „	245	40000	10000	278.3	139.2	0.22	0.88	1.695	14	55	DCH3G07200_00	
2x 2250 „	4500 „	1125 „	285	45000	11250	298.7	157.4	0.21	0.76	1.893	14	60	DCH3G07225_00	

Capacitance			Size	Electrical parameters										Part number
800VDC	800VDC	1600VDC	182x94x H in mm	$I_{max.}$ A		I_{rms} (1 kHz)* A		ESR (1 kHz)* mΩ		k_T W/K	$\tan \delta^*$ [x 10 ⁻⁴]			
V1	V2	V2		V1	V2	V1	V2	V1	V2		100 Hz	1 kHz		
2x 170 μF	340 μF	85 μF	49	3740	935	61.2	30.6	1.64	6.55	0.613	7	35	DCH4L06170_00	
2x 340 „	680 „	170 „	77	7480	1870	96.8	48.4	0.82	3.28	0.767	7	35	DCH4L06340_00	
2x 510 „	1020 „	255 „	105	11220	2805	129.9	65.0	0.55	2.18	0.922	7	35	DCH4L06510_00	
2x 680 „	1360 „	340 „	133	14960	3740	162.1	81.0	0.41	1.64	1.076	7	35	DCH4L06680_00	
2x 850 „	1700 „	425 „	161	18700	4675	181.3	90.7	0.37	1.50	1.231	10	40	DCH4L06850_00	
2x 1020 „	2040 „	510 „	189	22440	5610	210.7	105.3	0.31	1.25	1.385	10	40	DCH4L07102_00	
2x 1190 „	2380 „	595 „	217	26180	6545	226.2	113.1	0.30	1.20	1.540	10	45	DCH4L07119_00	
2x 1360 „	2720 „	680 „	245	29920	7480	253.7	126.9	0.26	1.05	1.695	12	45	DCH4L07136_00	
2x 1530 „	3060 „	765 „	285	33660	8415	269.8	134.9	0.26	1.04	1.893	12	50	DCH4L07153_00	

* General guide


Customized solutions can be realized on request.

The capacitors will be delivered without interconnection.



Insulated in the sense of a breakdown voltage of $2 \times U_r$ between the individual capacitors.

External wiring versions (to be implemented by user):

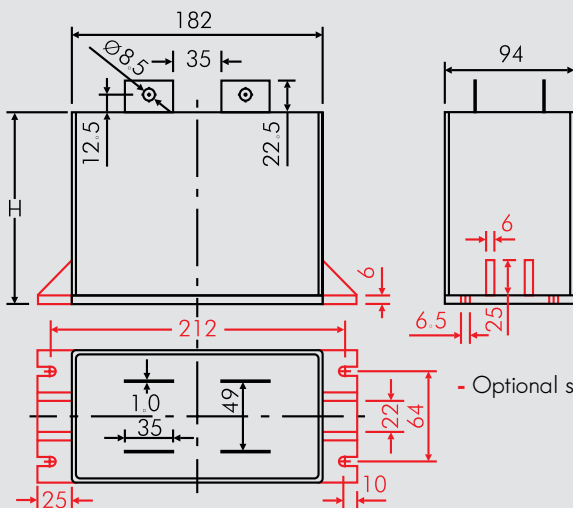

- Optional screw fixing

Part number completion:					
W	Size		Part number code for digit 11-12		
	H	L	moulded	boxed	box with screw fixing
94	49	182	H0	I0	J0
94	77	182	H1	I1	J1
94	105	182	H2	I2	J2
94	133	182	H3	I3	J3
94	161	182	H4	I4	J4
94	189	182	H5	I5	J5
94	217	182	H6	I6	J6
94	245	182	H7	I7	J7
94	285	182	H8	I8	J8

Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: none = 00

Rights reserved to amend design data without prior notification.



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6-2		

<p>Type description:</p> <p>SMD-PET = SMDT SMD-PPS = SMDI FKP 02 = FKP0 MKS 02 = MKS0 FKS 2 = FKS2 FKP 2 = FKP2 MKS 2 = MKS2 MKP 2 = MKP2 FKS 3 = FKS3 FKP 3 = FKP3 MKS 4 = MKS4 MKP 4 = MKP4 MKP 10 = MKP1 FKP 4 = FKP4 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X2 R = MKXR MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 3 = DCP3 DC-LINK MKP 4 = DCP4 DC-LINK MKP 4S = DCPS DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCH_ DC-LINK HY = DCHY SuperCap C = SCSC SuperCap MC = MC_ SuperCap C60 = SCSC SuperCap R = SCSR SuperCap MR = MRPP</p>	<p>Rated voltage:</p> <p>2.5 VDC = A1 4 VDC = A2 14 VDC = A3 28 VDC = A4 40 VDC = A5 5 VDC = A6 50 VDC = B0 63 VDC = C0 100 VDC = D0 160 VDC = E0 250 VDC = F0 400 VDC = G0 450 VDC = H0 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = 0W 275 VAC = 1W 300 VAC = 2W 400 VAC = 3W 440 VAC = 4W 500 VAC = 5W ...</p>	<p>Capacitance:</p> <p>22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 µF = 2100 0.022 µF = 2220 0.047 µF = 2470 0.1 µF = 3100 0.22 µF = 3220 0.47 µF = 3470 1 µF = 4100 2.2 µF = 4220 4.7 µF = 4470 10 µF = 5100 22 µF = 5220 47 µF = 5470 100 µF = 6100 220 µF = 6220 1 F = A010 2.5 F = A025 50 F = A500 100 F = B100 110 F = B110 600 F = B600 1200 F = C120 ...</p>	<p>Size:</p> <p>4.8x3.3x3 Size 1812 = KA 4.8x3.3x4 Size 1812 = KB 5.7x5.1x3.5 Size 2220 = QA 5.7x5.1x4.5 Size 2220 = QB 7.2x6.1x3 Size 2824 = TA 7.2x6.1x5 Size 2824 = TB 10.2x7.6x5 Size 4030 = VA 12.7x10.2x6 Size 5040 = XA 15.3x13.7x7 Size 6054 = YA 2.5x7x4.6 PCM 2.5 = 0B 3x7.5x4.6 PCM 2.5 = 0C 2.5x6.5x7.2 PCM 5 = 1A 3x7.5x7.2 PCM 5 = 1B 2.5x7x10 PCM 7.5 = 2A 3x8.5x10 PCM 7.5 = 2B 3x9x13 PCM 10 = 3A 4x9x13 PCM 10 = 3C 5x11x18 PCM 15 = 4B 6x12.5x18 PCM 15 = 4C 5x14x26.5 PCM 22.5 = 5A 6x15x26.5 PCM 22.5 = 5B 9x19x31.5 PCM 27.5 = 6A 11x21x31.5 PCM 27.5 = 6B 9x19x41.5 PCM 37.5 = 7A 11x22x41.5 PCM 37.5 = 7B 94x49x182 DCH_ = H0 94x77x182 DCH_ = H1 ...</p> <p>Version code:</p> <p>Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A2 = 2A ...</p>	<p>Tolerance:</p> <p>20% = M 10% = K 5% = J 2.5% = H 1% = E ...</p> <p>Packing:</p> <p>AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ...</p> <p>Pin length (untaped)</p> <p>3.5 ±0.5 = C9 6-2 = SD 16 ±1 = P1 ...</p>
---	---	---	--	---

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А